Remote server

BY：Kenzo

Konfigurasi network di debian
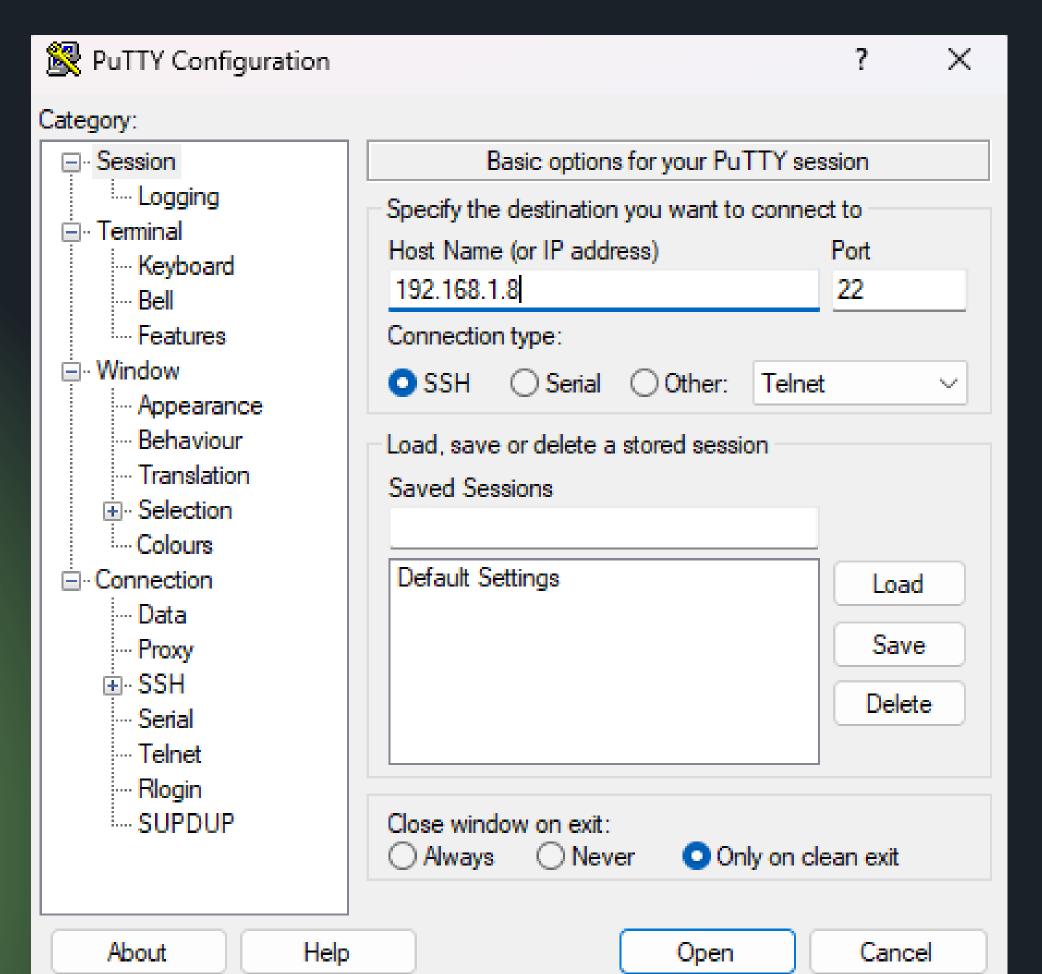
Expert

Network

| Adapter 1 | Adapter 2 | Adapter 3 | Adapter 4 |

Enable Network Adapter

Attached to: Bridged Adapter

Name: Qualcomm Atheros QCA9377 Wireless Network Adapter

Adapter Type: Intel PRO/1000 MT Desktop (82540EM)

Promiscuous Mode: Allow All

MAC Address: 080027260BF9

☑ Cable Connected

Serial Ports

| Port 1 | Port 2 | Port 3 | Port 4 |

Enable Serial Port

Invalid settings detected ⚠️   OK   Cancel

```
n12:/home/vboxuser# systemctl restart netw
```
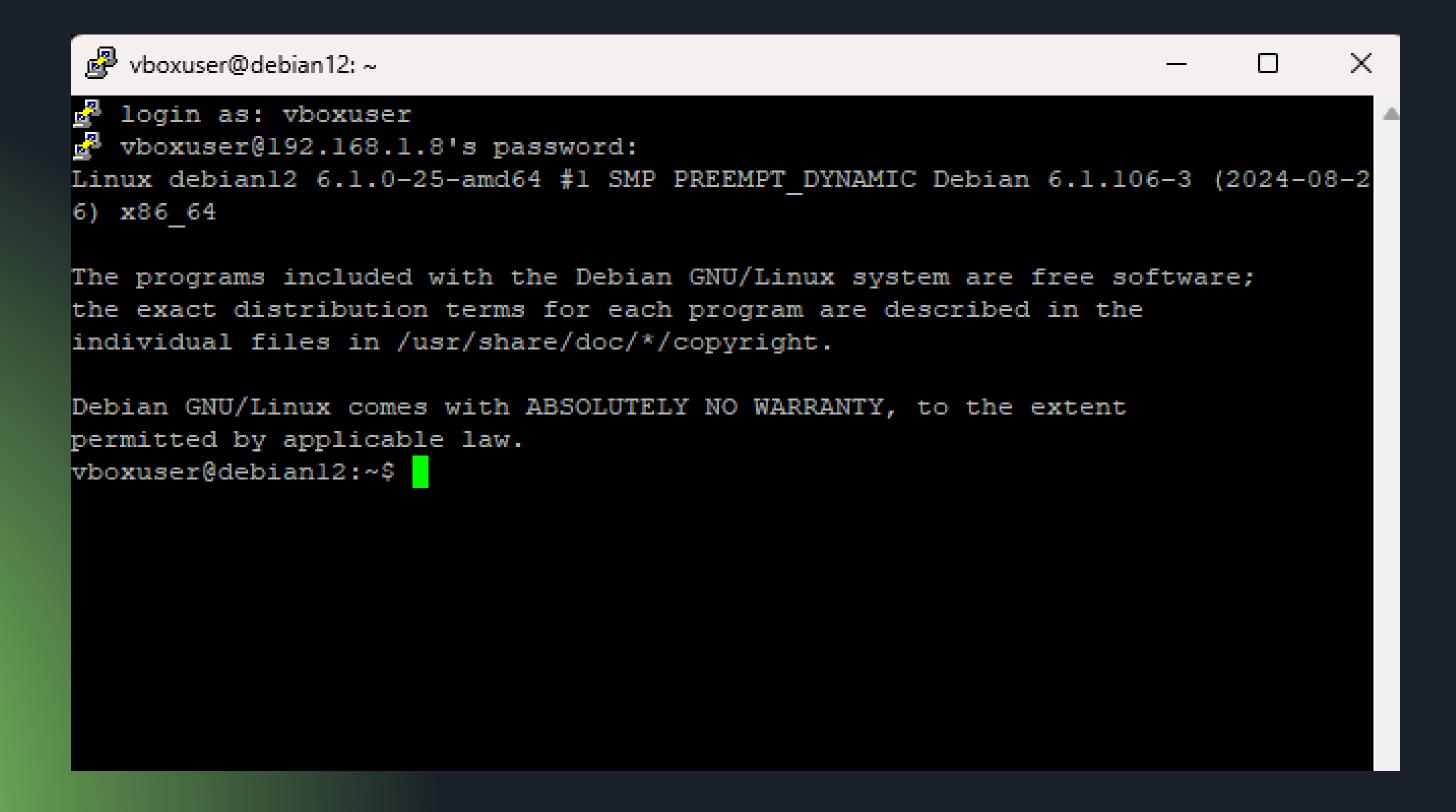
Ubah menjadi bridge adapter,lalu restart networking

install ssh server

```
root@debian12:/home/vboxuser# apt install ssh
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
```

login di putty

tampilan bila berhasil


```
vboxuser@debian12: ~

login as: vboxuser
vboxuser@192.168.1.8's password:
Linux debian12 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-2
6) x86_64


The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.


Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
vboxuser@debian12:~$
```

Terimakasih