



## Model : KVF-100P

KINAIR Mixed Flow In-line Ducted Fans have plastic housing, high efficient motor, quiet wind wheel and are durable.

### Duty Point

|                 |                       |
|-----------------|-----------------------|
| Airflow         | 50.0 LPS (L/s)        |
| Static Pressure | 92.3 Pa               |
| Temperature     | 20 °C                 |
| Altitude        | 0 m                   |
| Density         | 1.2 kg/m <sup>3</sup> |

### Operating Point

|                  |                |
|------------------|----------------|
| Airflow          | 50.0 LPS (L/s) |
| Static Pressure  | 92.3 Pa        |
| Dynamic Pressure | 24.3 Pa        |
| Total Pressure   | 117 Pa         |
| Shaft Power      | 0.028 kW       |
| Outlet Velocity  | 6.4 m/s        |
| Fan Speed        | 2200 rpm       |
| SFP              | 0.56 W/(l/s)   |


### Construction

|          |        |
|----------|--------|
| Diameter | 100 mm |
| Weight   | 2.8 kg |

### Motor Characteristics

|           |          |
|-----------|----------|
| Poles     | 2P       |
| Power     | 0.028 kW |
| Frequency | 50 Hz    |
| Voltage   | 220V     |

### Performance Curves

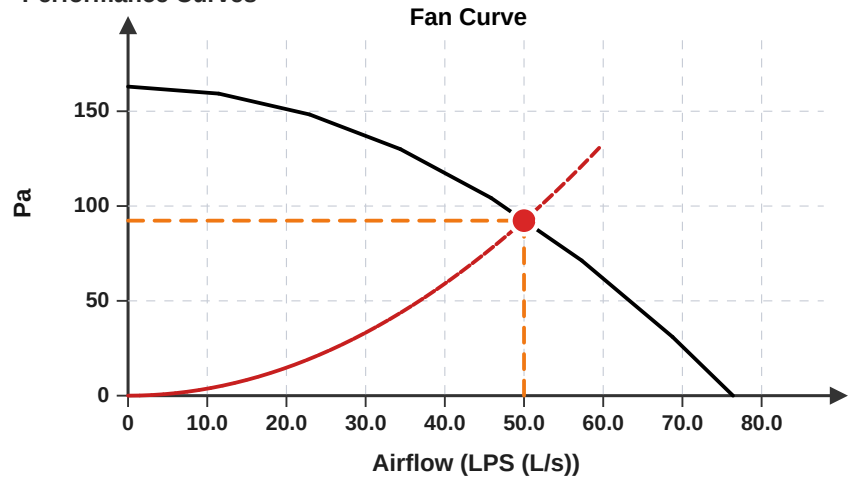

### Sound Data


| Parameter           | At Source  | At 3m      |
|---------------------|------------|------------|
| Overall Sound Level | 32.0 dB(A) | 11.5 dB(A) |
| Estimated NC Rating | -          | NC-5       |

NC rating estimated from overall value at distance.



Model : KVF-100P

Technical Drawing

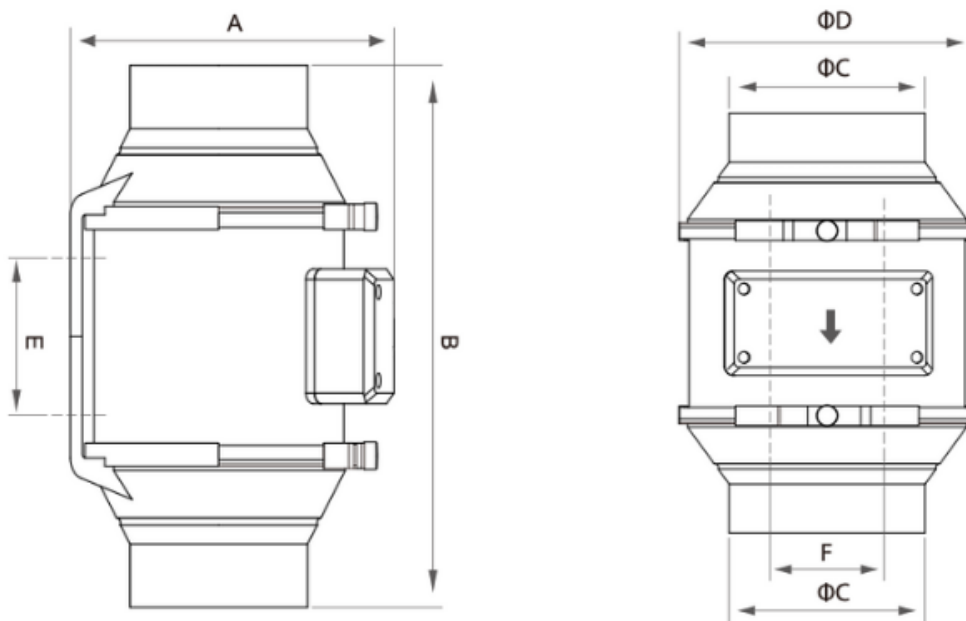

## Dimensions (mm)

| Size | A   | B   | C   | D   | E    | F    |
|------|-----|-----|-----|-----|------|------|
| 100  | 215 | 257 | 100 | 177 | 59.5 | 79.5 |



Catalogue