PokéMart Data Loading — Snowflake Implementation

Database, warehouse, table, file format, stage, CSV loading, and verification.

1. Create the database and schema

```
CREATE DATABASE MITHUN_POKEMART_DB;

CREATE SCHEMA IF NOT EXISTS
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA;

USE SCHEMA MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA;
```

2. Create and use the warehouse

```
CREATE WAREHOUSE IF NOT EXISTS MITHUN_POKEMART_WH
    WAREHOUSE_SIZE = 'XSMALL'
    AUTO_SUSPEND = 60
    AUTO_RESUME = TRUE
    INITIALLY_SUSPENDED = TRUE;

USE WAREHOUSE MITHUN_POKEMART_WH;
```

3. Create the orders table

```
CREATE TABLE IF NOT EXISTS
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_ORDERS (
    ORDER_ID NUMBER(10,0),
    ORDER_DATE DATE,
    PRODUCT_NAME VARCHAR(150),
    PRODUCT_TYPE VARCHAR(50),
    CATEGORY VARCHAR(50),
    QUANTITY NUMBER(10,0),
    UNIT_PRICE NUMBER(10,2),
    PAYMENT_METHOD VARCHAR(50),
    CITY VARCHAR(50),
    TOTAL_AMOUNT NUMBER(12,2)
);

DESCRIBE TABLE
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_ORDERS;
```

4. Create the CSV file format

```
CREATE FILE FORMAT IF NOT EXISTS
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_CSV_FORMAT
    TYPE = CSV
    SKIP_HEADER = 1
    FIELD_OPTIONALLY_ENCLOSED_BY = '"'
    EMPTY_FIELD_AS_NULL = TRUE;

DESCRIBE FILE FORMAT
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_CSV_FORMAT;
```

5. Create the internal stage

```
CREATE STAGE IF NOT EXISTS
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_STAGE
    FILE_FORMAT =
        MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_CSV_FORMAT;

DESCRIBE STAGE
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_STAGE;

LIST @MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_STAGE;
```

6. Load the CSV into the table

```
COPY INTO
    MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_ORDERS
FROM
    @MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_STAGE
FILE_FORMAT = (
    FORMAT_NAME =
        'MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_CSV_FORMAT'
)
ON_ERROR = 'ABORT_STATEMENT';
```

7. Verify the loaded data

```
SELECT *
FROM MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_ORDERS;

SELECT COUNT(*) AS TOTAL_ORDERS
FROM MITHUN_POKEMART_DB.MITHUN_POKEMART_SCHEMA.MITHUN_POKEMART_ORDERS;
```

Load result


CSV file	mithun_pokemart_orders.csv
Rows parsed	10
Rows loaded	10
Errors seen	0
Final table count	10

The CSV was uploaded to the internal stage through Snowflake's Upload Files interface. The COPY INTO command completed successfully and all 10 rows were loaded.

Execution screenshots


Screenshots captured during the implementation, in execution order.

1. Database creation

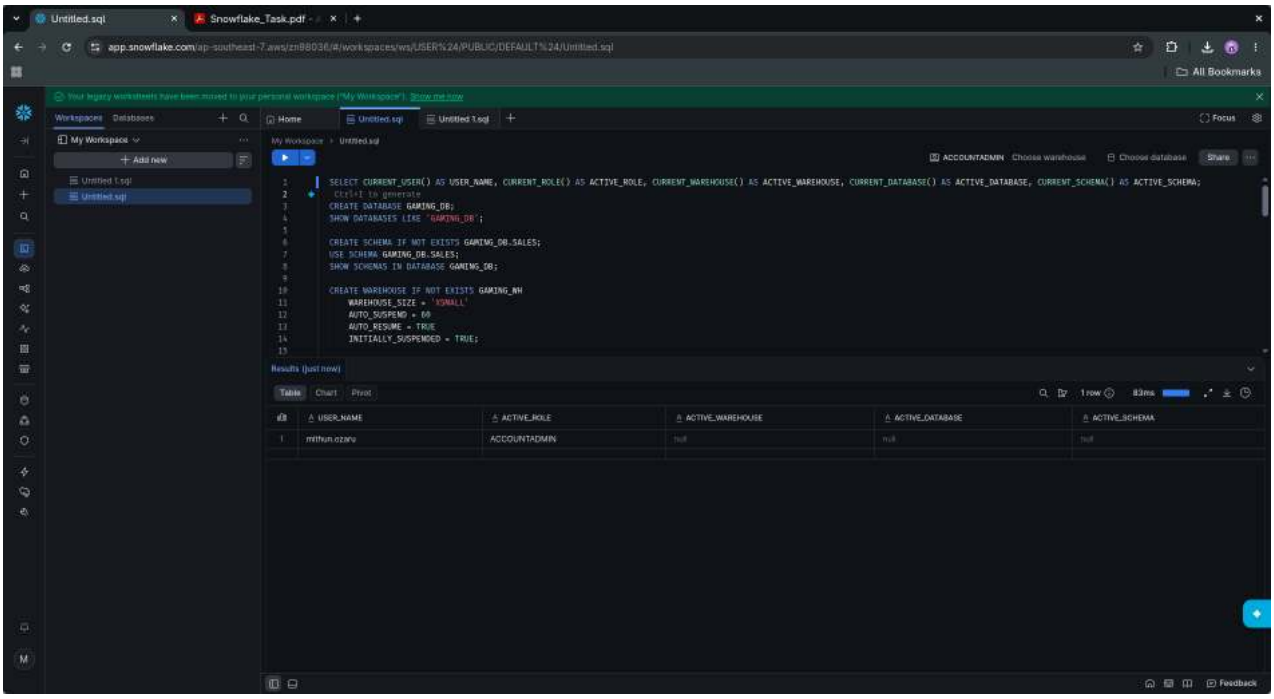


Database creation

2. Schema creation

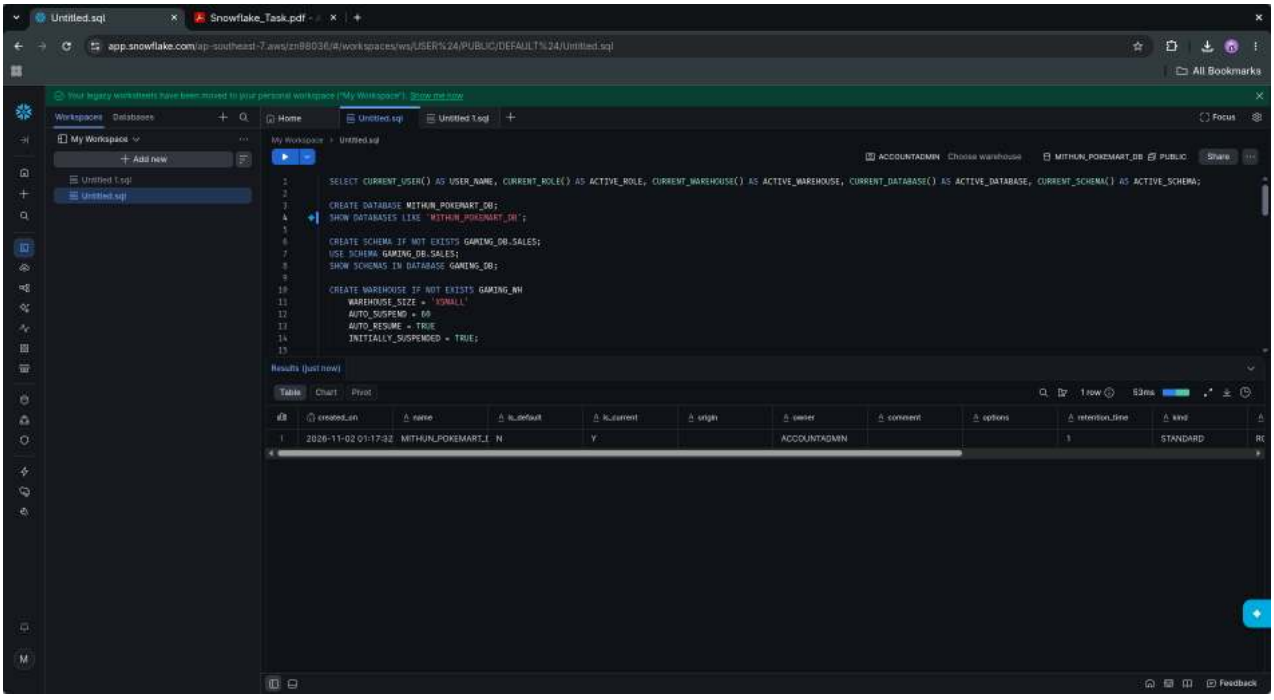


Schema creation

3. Schema verification

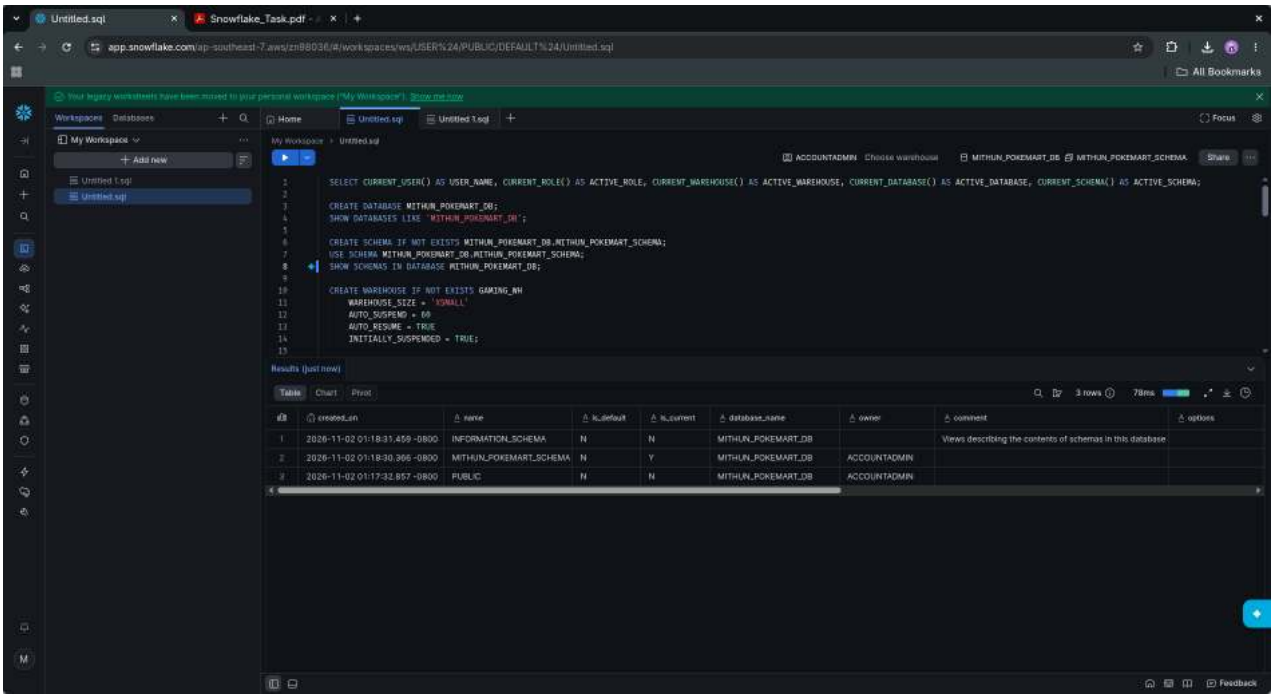


Schema verification

4. Warehouse creation and configuration

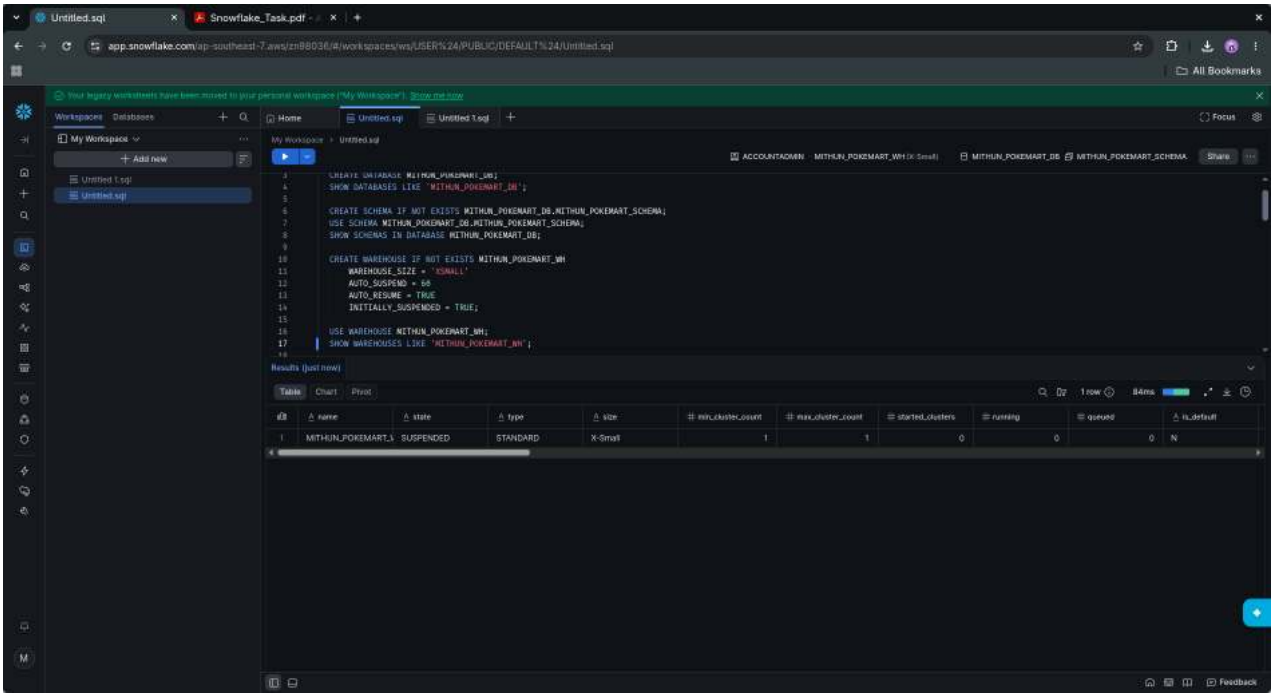


Warehouse creation and configuration

5. Active warehouse verification

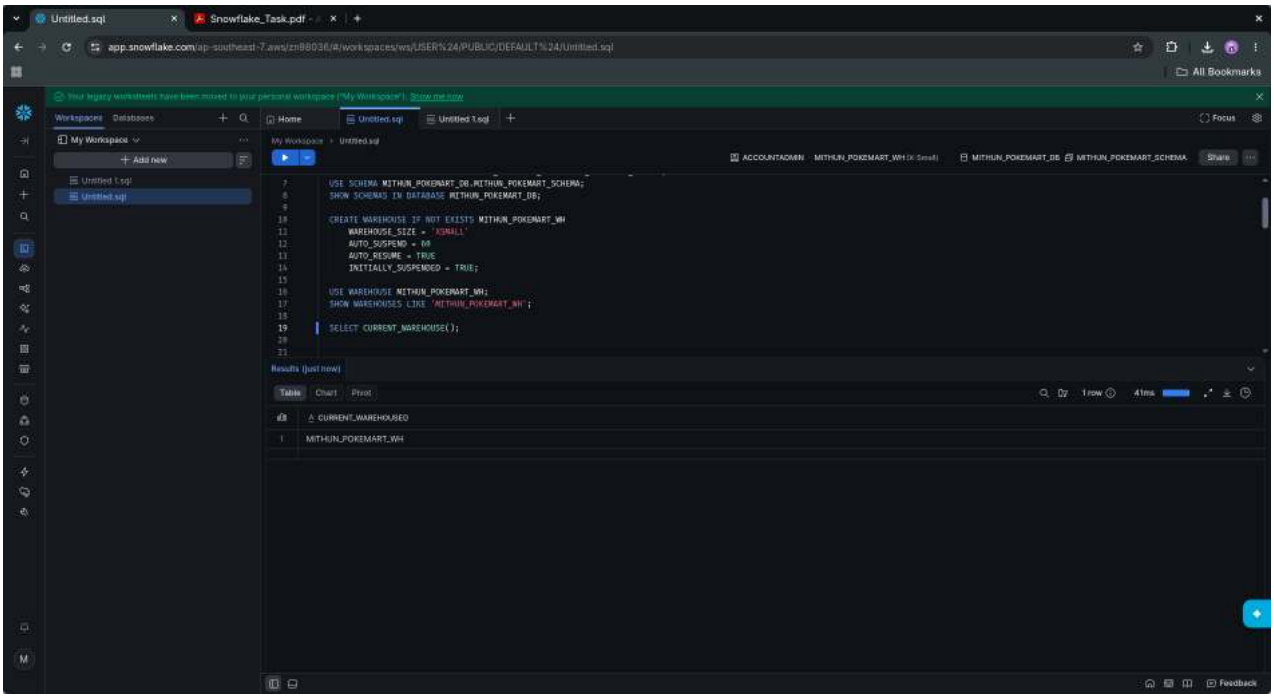


Active warehouse verification

6. Orders table creation and structure

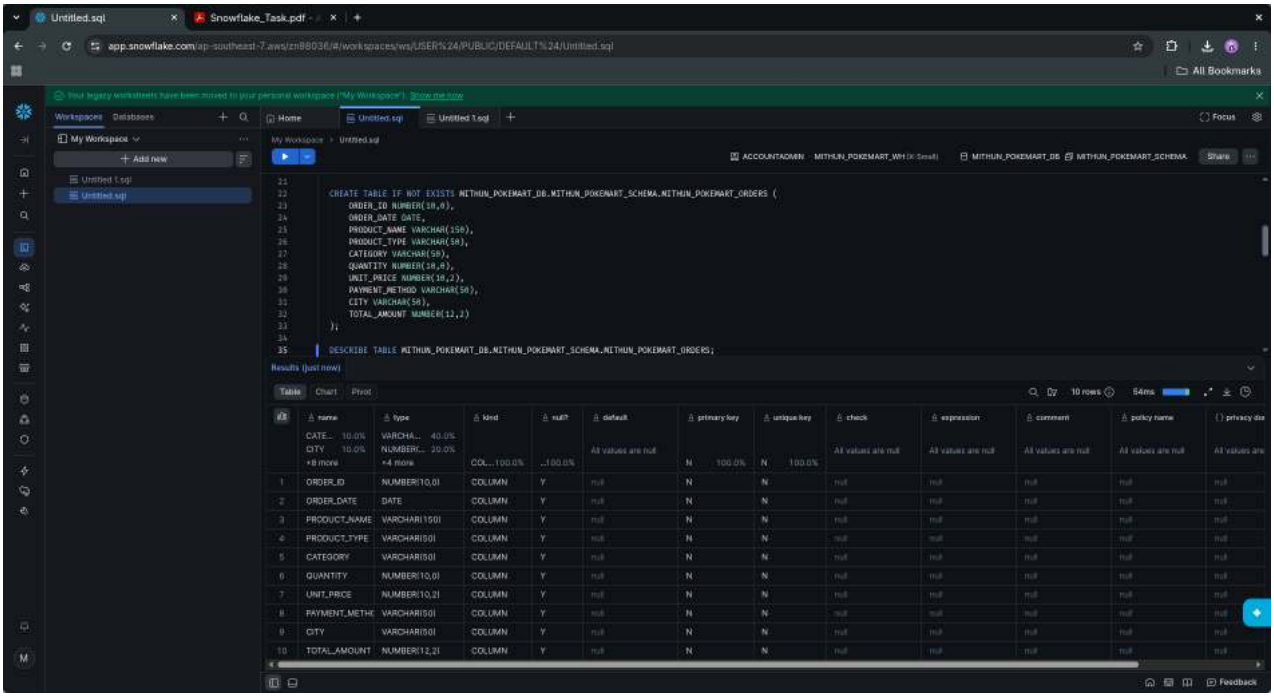


Orders table creation and structure

7. CSV file format configuration

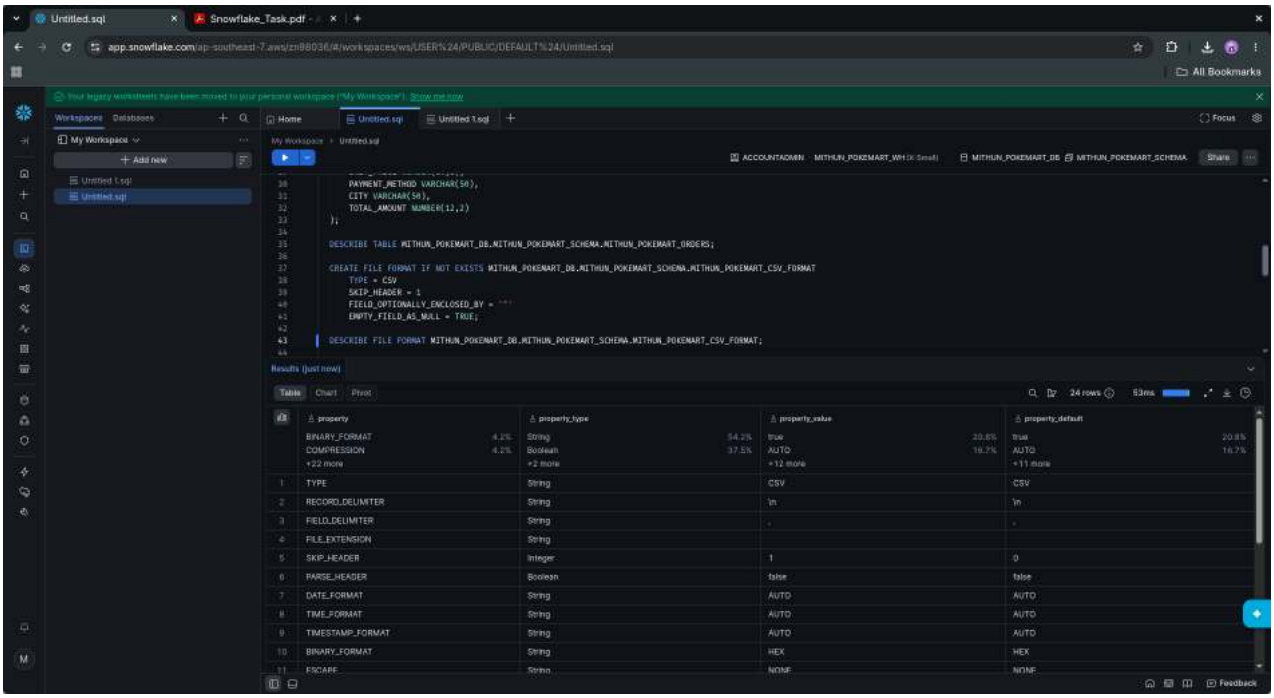


CSV file format configuration

8. Stage configuration

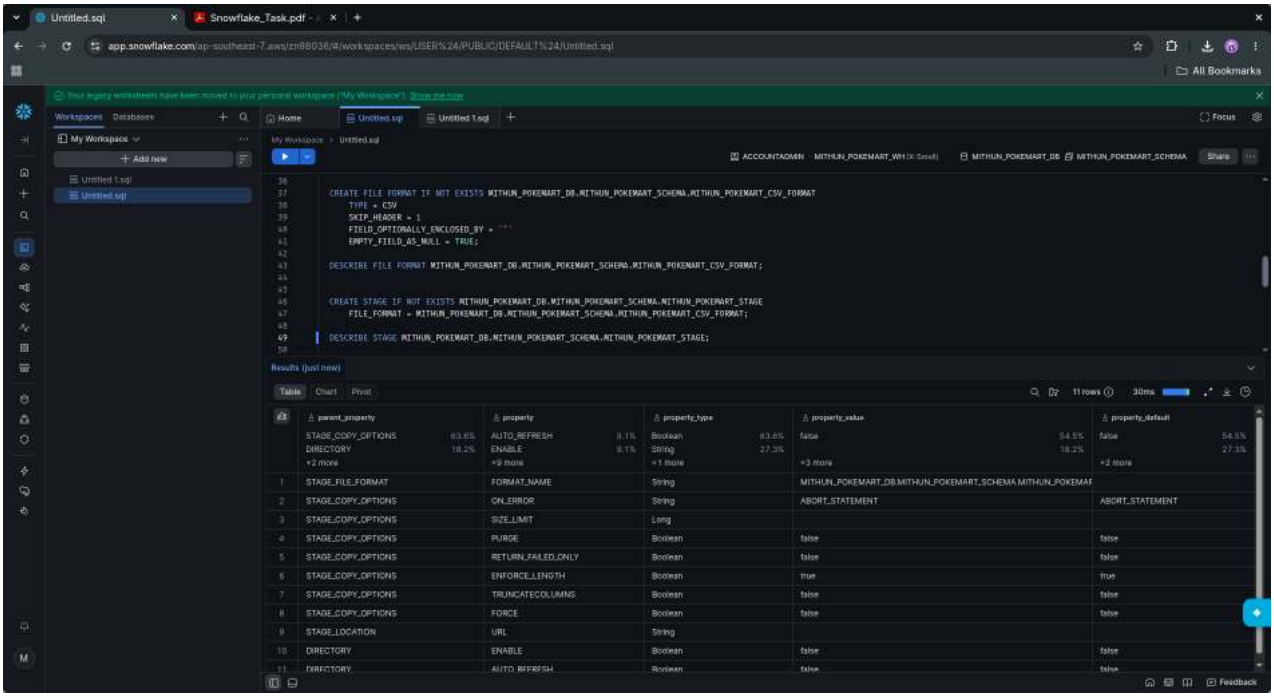


Stage configuration

9. CSV uploaded to the internal stage

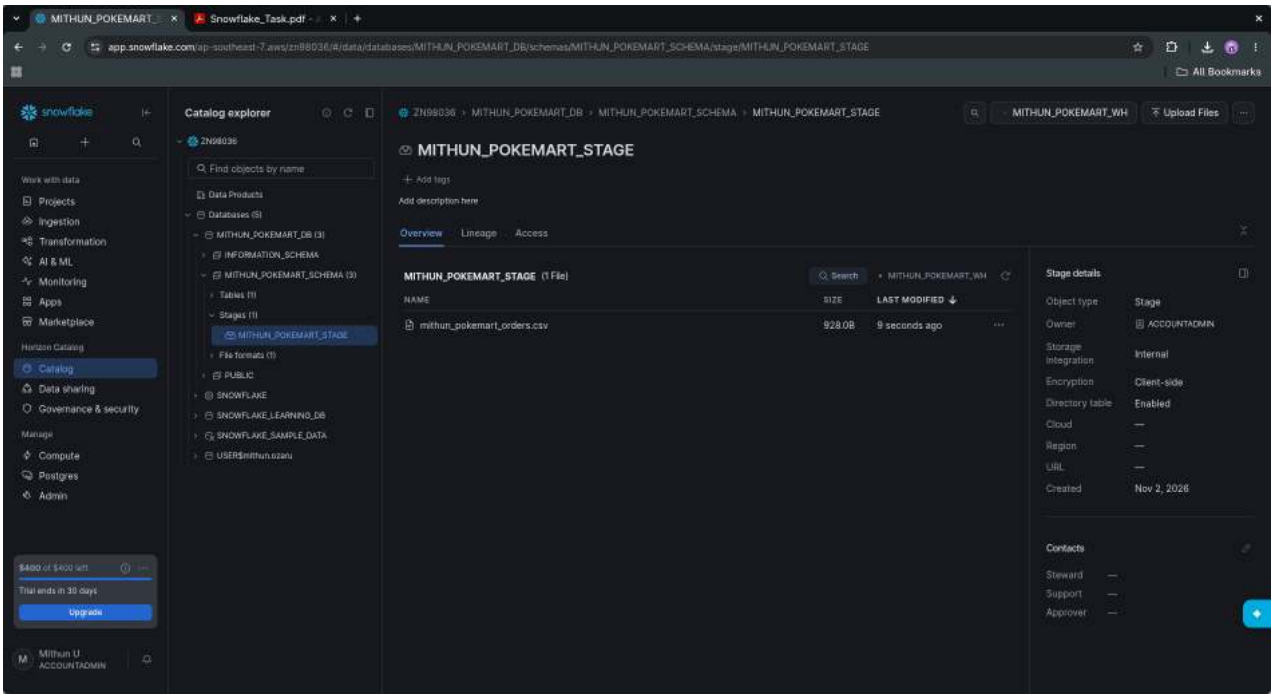


CSV uploaded to the internal stage

10. Stage file listing

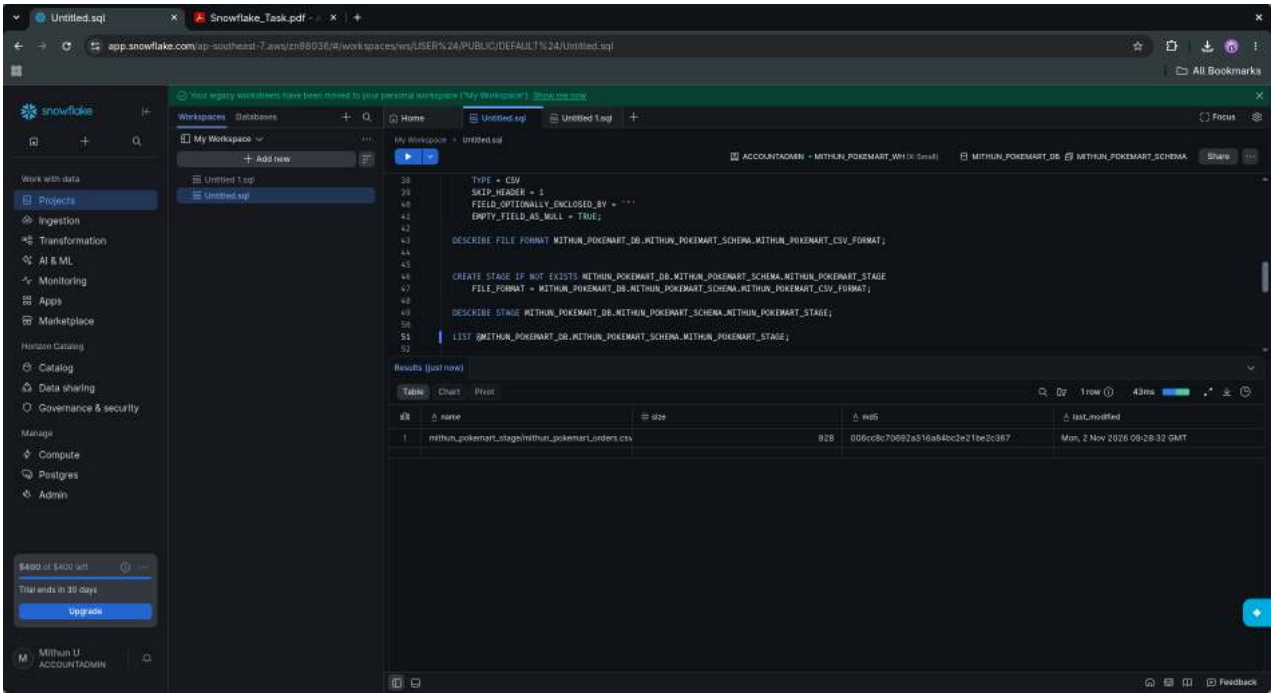


Stage file listing

11. COPY INTO load result — 10 rows loaded

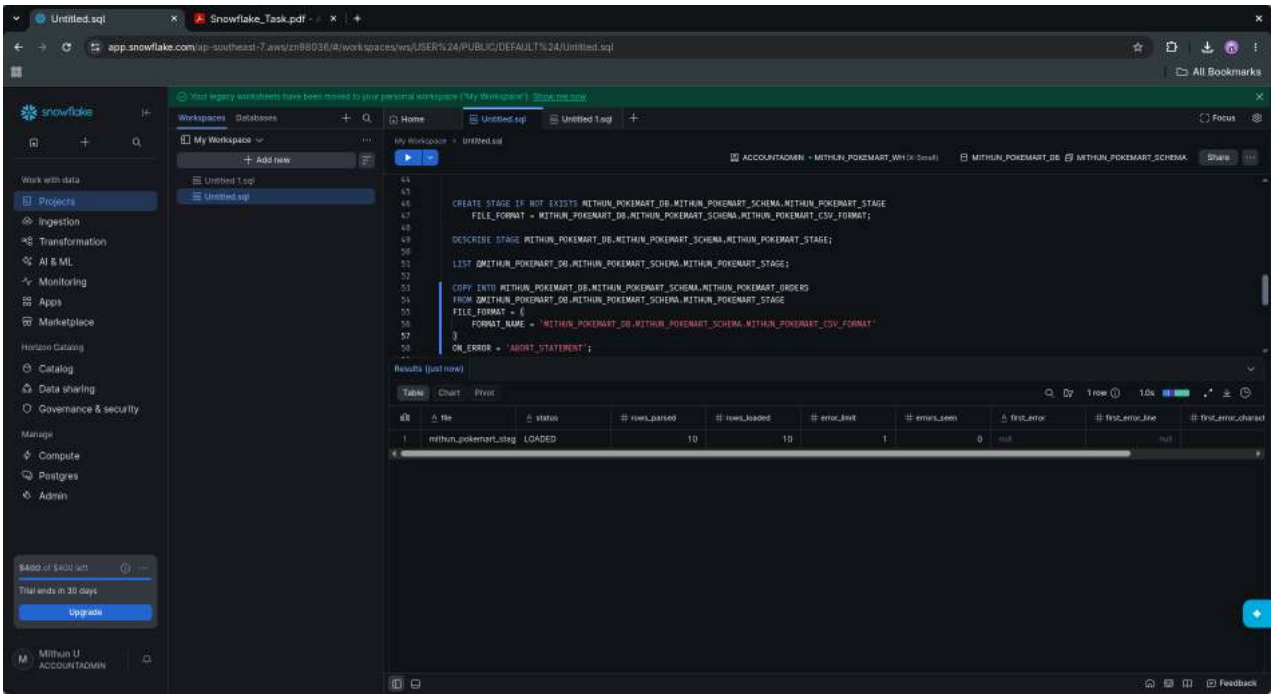


COPY INTO load result — 10 rows loaded

12. Orders table contents

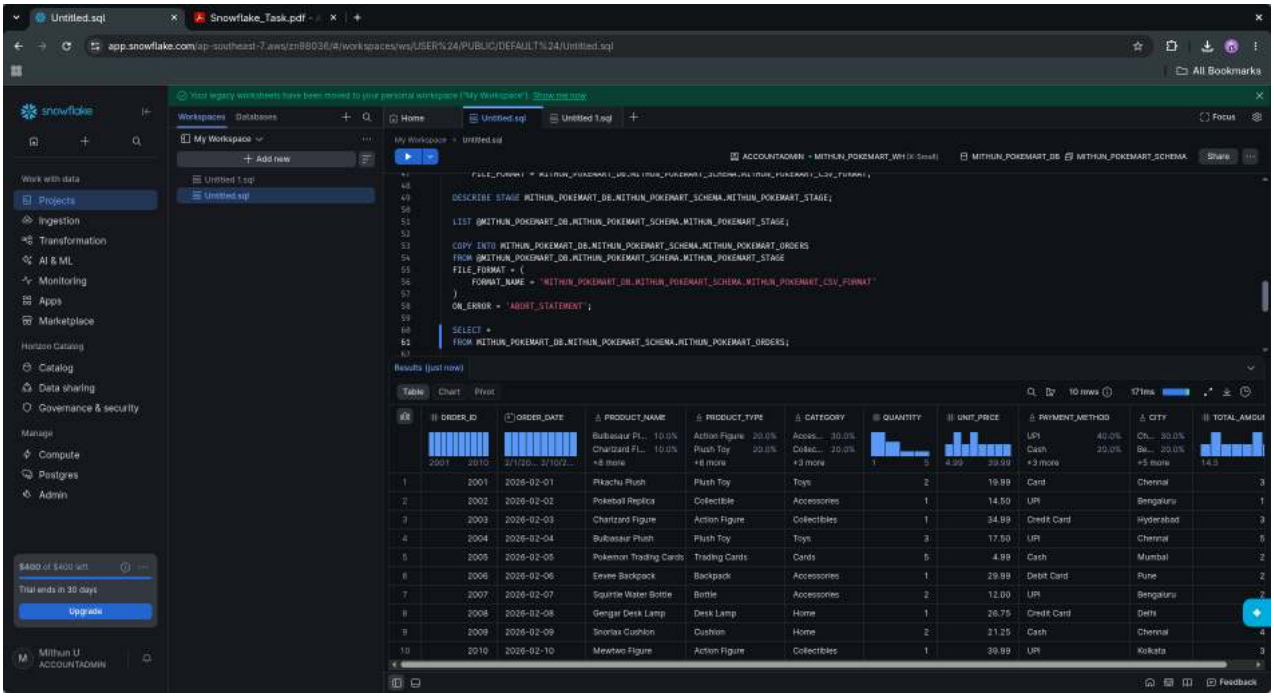

Orders table contents

13. Final COUNT(*) verification — 10 orders

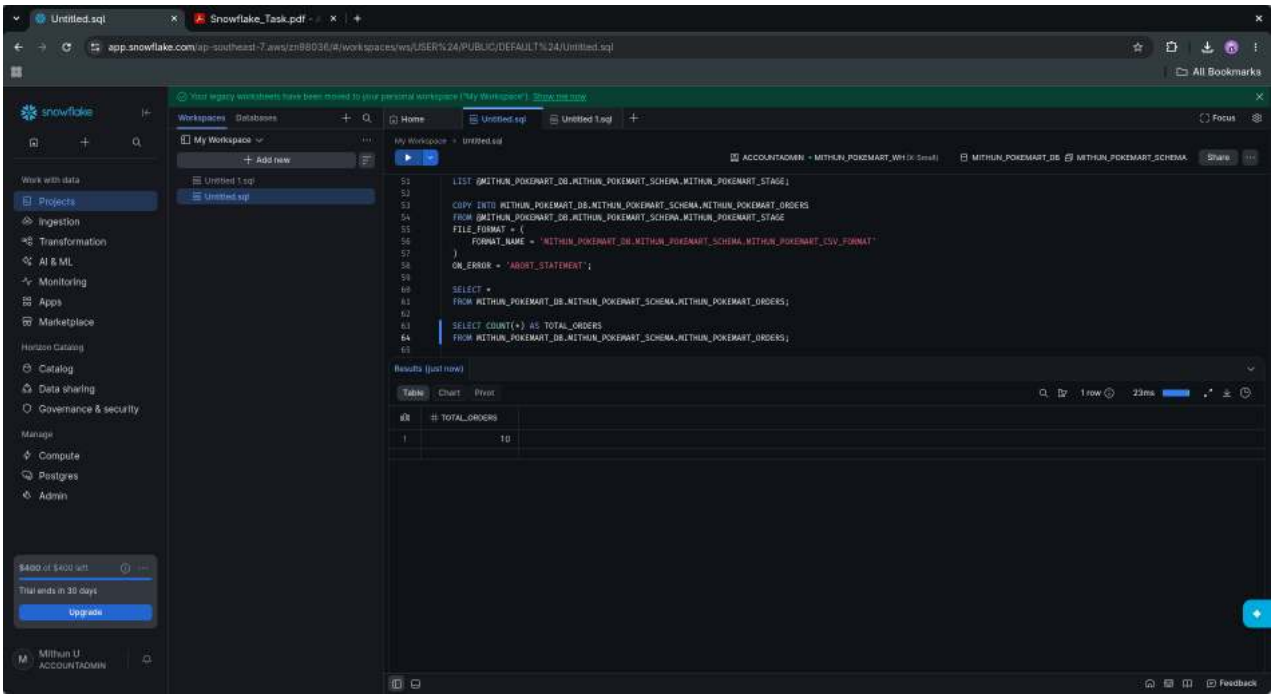

Final COUNT(*) verification — 10 orders