3.1 Exercise 1: Using Internal CSS Use the provided CSS code as Internal CSS to style the <h1>tag.

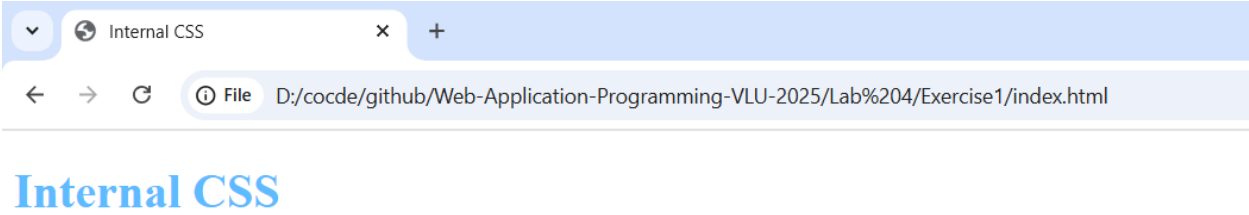

3.2 Exercise 2: Practicing Internal CSS

Use Internal CSS to style the <h1> tag with color red and the tag with color green.

Internal CSS is defined within a <style> tag in the HTML file.

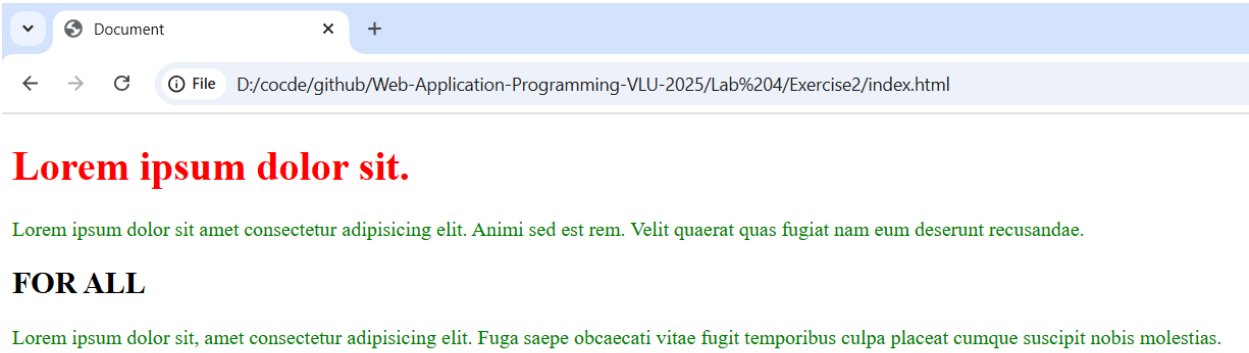

3.3 Exercise 3: Using External CSS

Link the style.css file to index.html to style the <h1> tag.

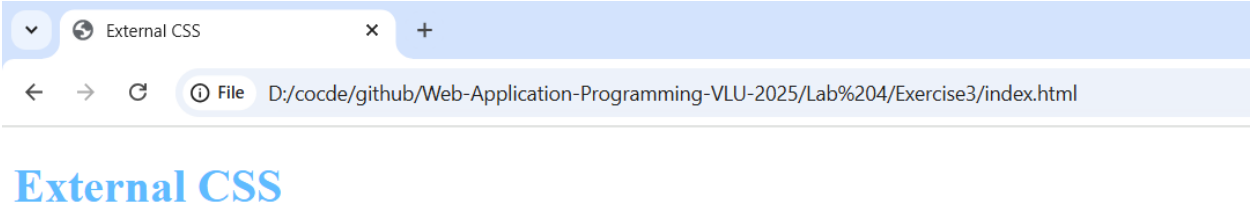

3.4 Exercise 4: Practicing External CSS

The index.html file includes elements with ID and class attributes. Use CSS to:

1. Set color red and font-size 24px for the tag with id="heading".

2. Set color green for tags with class="paragraph".

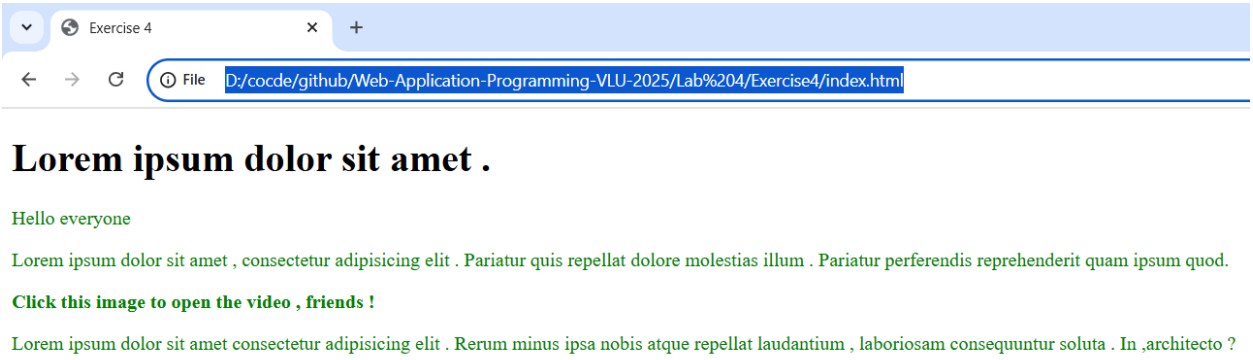

3.5 Exercise 5: Using Basic CSS Properties

Set the font size of the <p> tag to 16px.

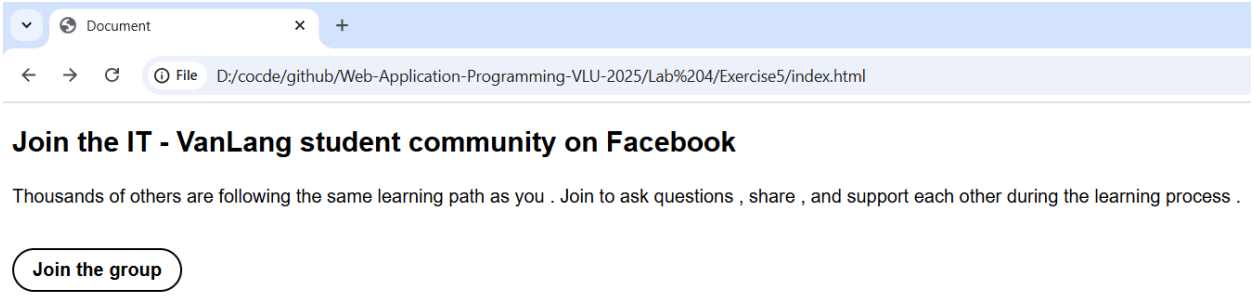

Click Join the group

3.6 Exercise 6: Using Font-Weight Property

Add the font-weight property with a value of normal or 400 to make the <h1> text normal, overriding its default bold (700) value.

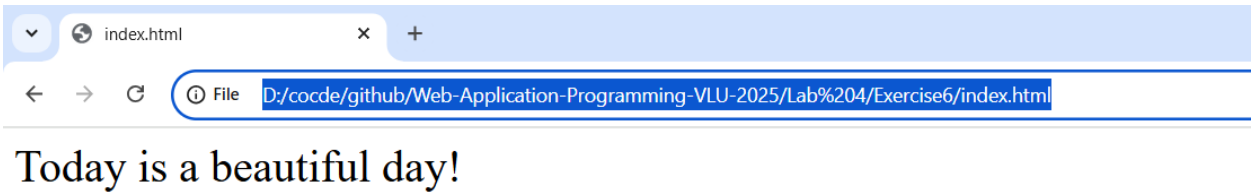

3.7 Exercise 7: Removing Text Decoration

Remove the underline from the <a> tag using the text-decoration property with a value of none.

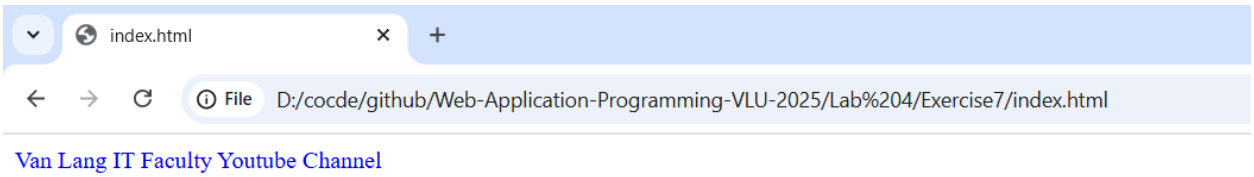

3.8 Exercise 8: Practicing CSS Selectors

Style the second <h2> title (inside <div class="post-item") with color red and font-size 28px. Ensure "Title 1" and "Title 3" are unaffected.

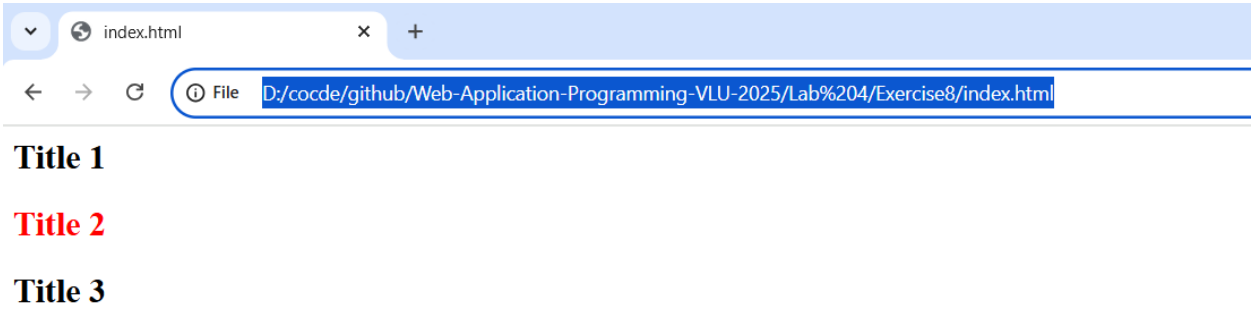

3.9 Exercise 9: Practicing CSS Specificity

Override the red color of the <h1> tag with #333 using CSS specificity.

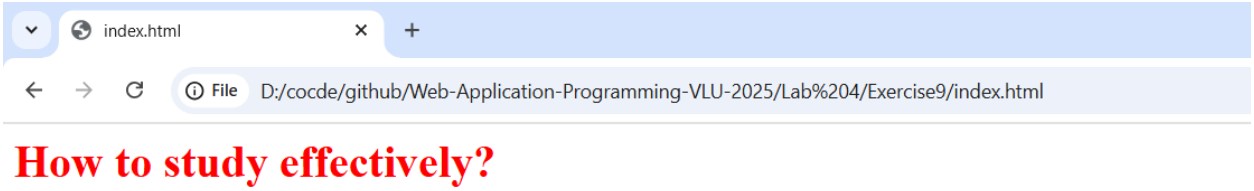

3.10 Exercise 10: Resetting Default Margins

Browsers apply default CSS properties, including margin. The body tag has a default margin: 8px, causing spacing around elements. Reset CSS to remove default margins and padding for all tags.

3.11 Exercise 11: Practicing CSS Reset

Reset CSS to remove default margins and padding for a page with <h1>, <p>, and <ul> tags, which have default margins and padding.

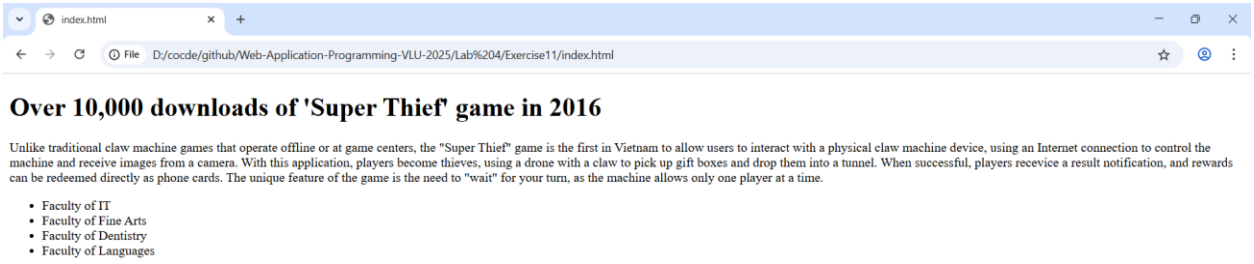

3.12 Exercise 12: Using var() Function

Style the <h1> tag with a color from the –heading-color variable and the <p> tag with a color from the –text-color variable.

3.13 Exercise 13: Using rgba() Function

Style the .box-2 class with a background color using rgba() with values: Red: 0, Green: 0, Blue: 0, Alpha: 0.5.

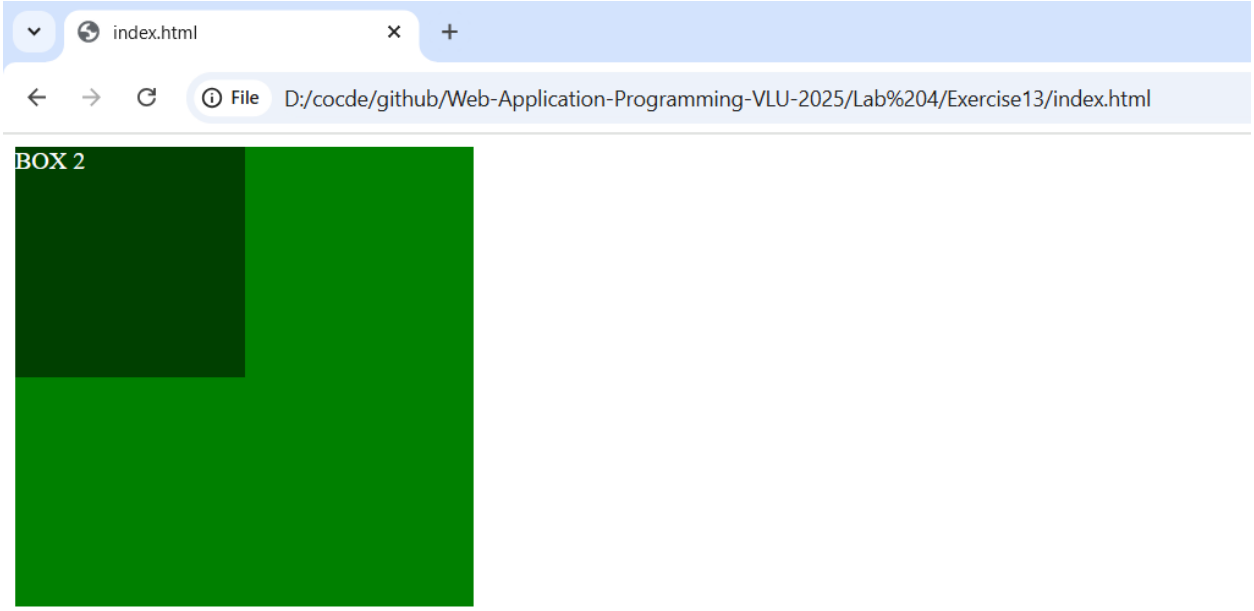

3.14 Exercise 14: Using :hover Pseudo-Class

Style an <a> tag displayed as a button to have a background color of rgba(240, 81, 35, 0.8) when hovered, creating a hover effect. Ensure accessibility with a focus state.

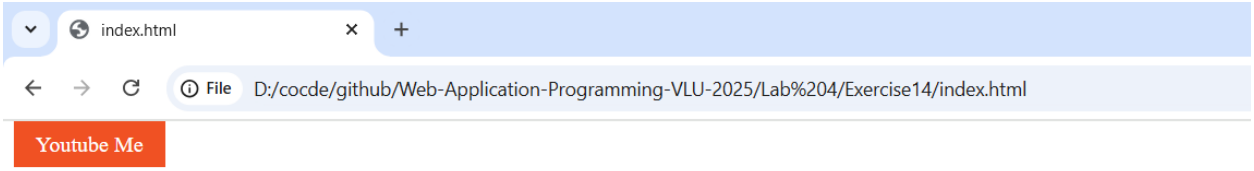

Click Youtube Me

3.15 Exercise 15: Using Pseudo-Elements

For a with a purple background, use the ::after pseudo-element to create a yellow rectangle with width 150px and height 100px.

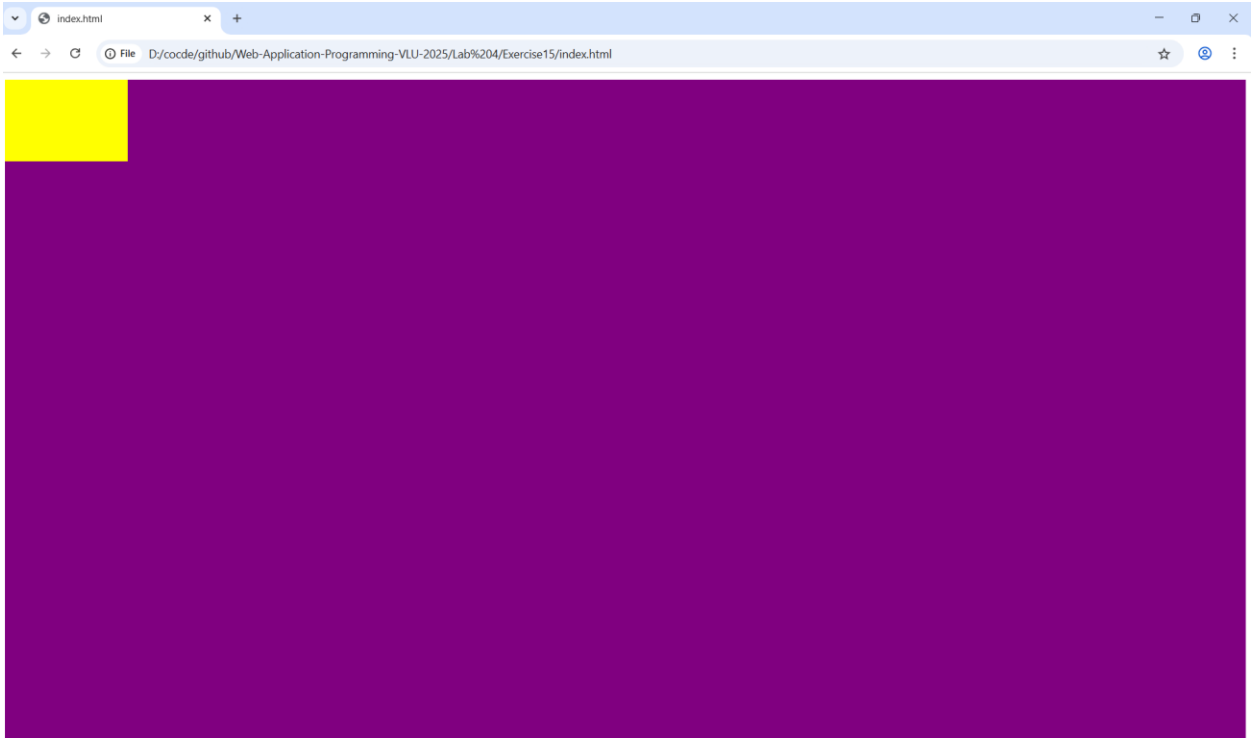

3.16 Exercise 16: Practicing Padding

Add 16px padding to all four sides of a containing paragraphs to improve aesthetics.



3.17 Exercise 17: Practicing Padding for Buttons

Add padding of 8px top/bottom and 16px left/right to a "Join Group" button to enhance its appearance.

Click Join Group

3.18 Exercise 18: Practicing Border

Add a 2px solid border with color #333 to a "Register Now" button to make it more visually appealing.

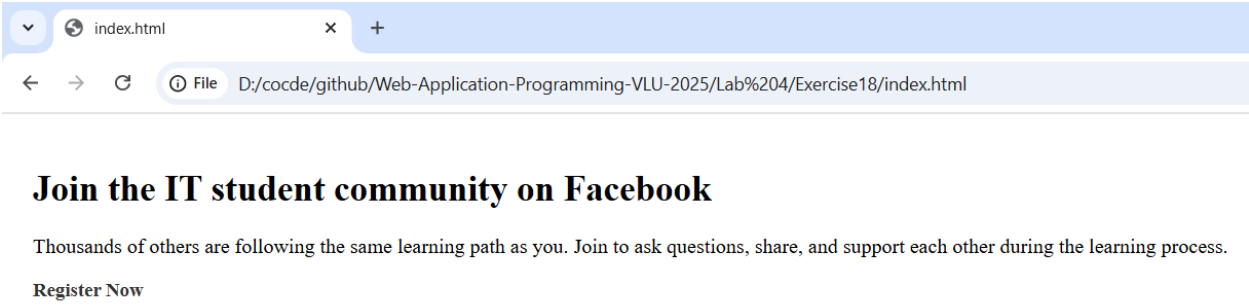

Click Register Now

3.19 Exercise 19: Practicing Margin

Adjust margins for a list of posts to improve spacing:

1. Add 32px margin-top to .posts-list.

2. Add 16px margin-bottom to .post-item.

3. Add 10px margin-top to .post-item .desc.

4. Add 12px margin-top to .post-item .min-read.

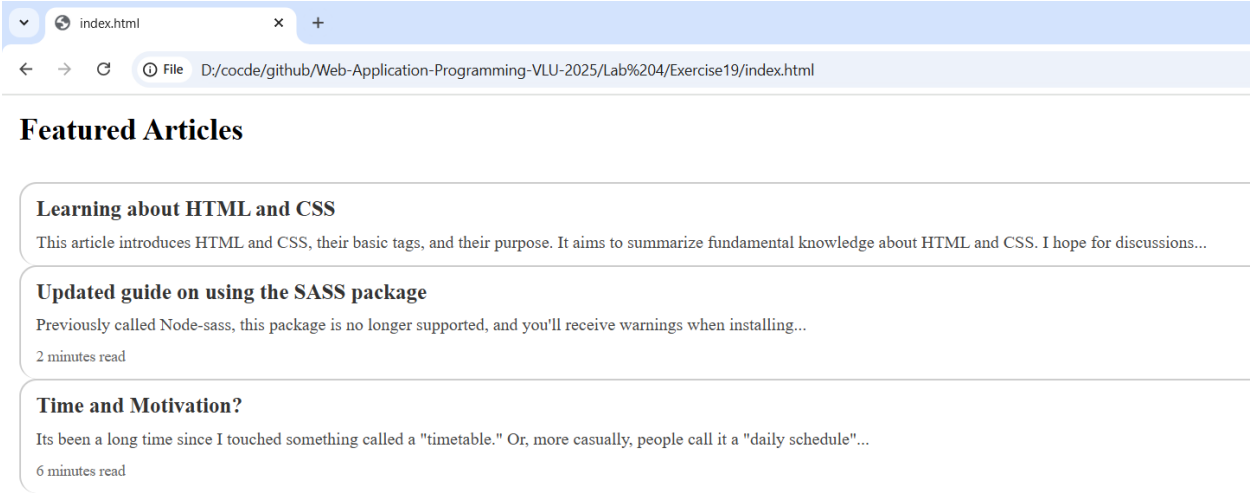

3.20 Exercise 20: Using Box-Sizing

Create a 100px square with a purple background and 16px padding on all sides. Use the appropriate box-sizing value to ensure the size remains 100px despite padding

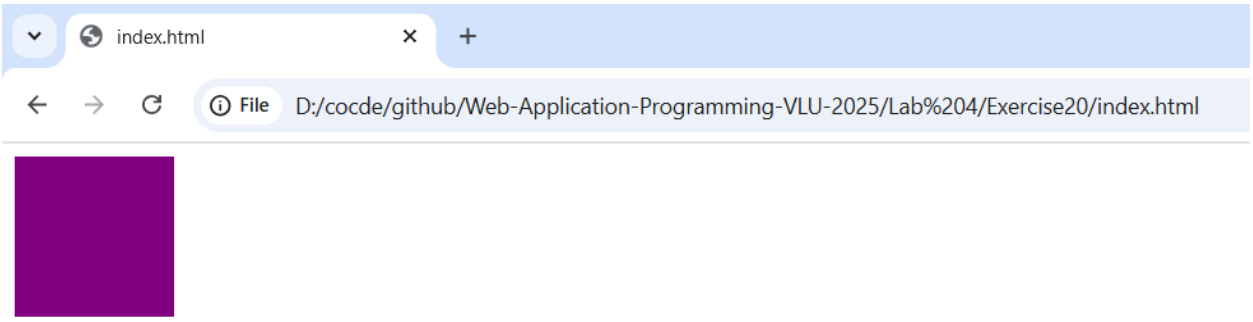

3.21 Exercise 21: Using Background-Image

Set a background image with the following requirements:

• Image URL: https://online.vlu.edu.vn/Content/logo/banner-yersin.jpg .

• Background size: 150px.

• Repeat vertically.

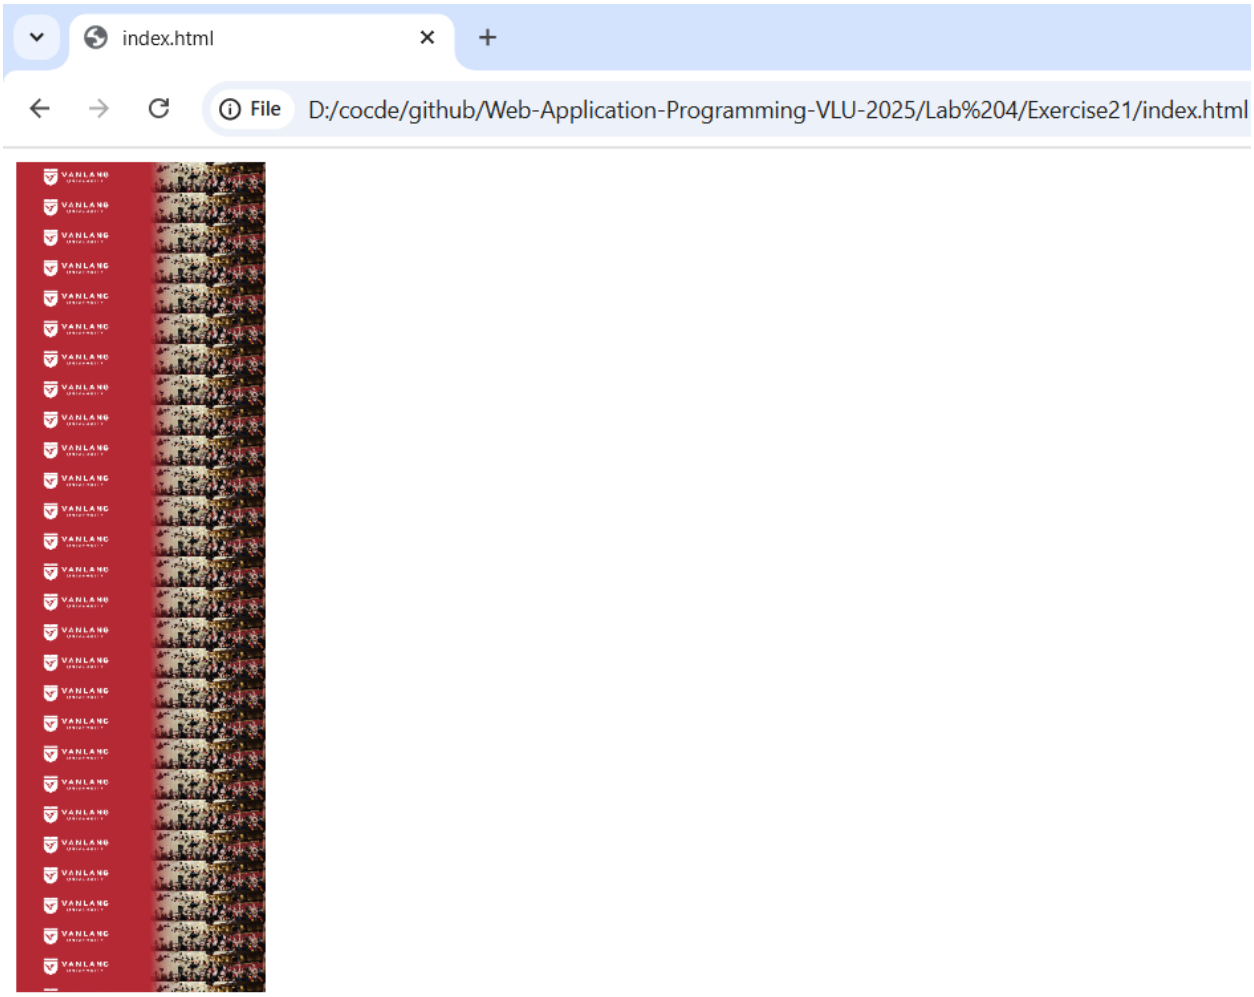

3.22 Exercise 22: Using Background-Size

For a .box class with a background image, use background-size to ensure the image is fully displayed.

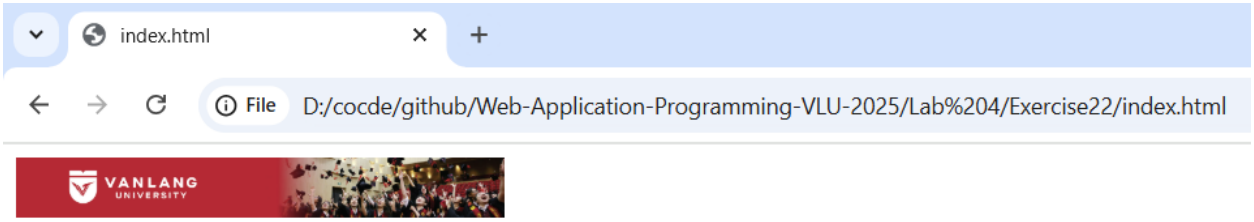

3.23 Exercise 23: Using Background Shorthand

Use the shorthand syntax for the background property to set a background color, image, position, repeat, and size.

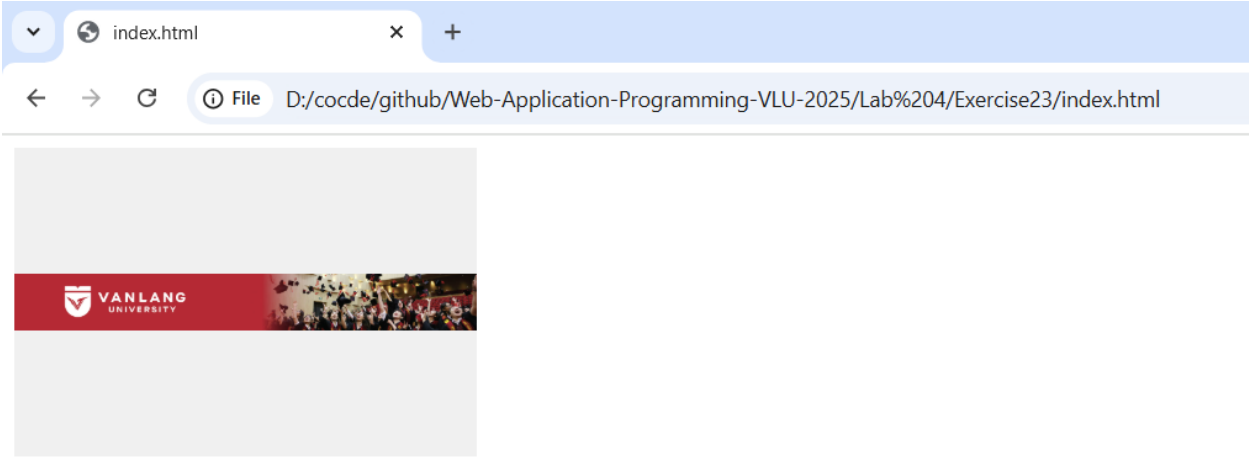

3.24 Exercise 24: Practicing Position Relative

Position a red square to overlap half of a blue square using position: relative.

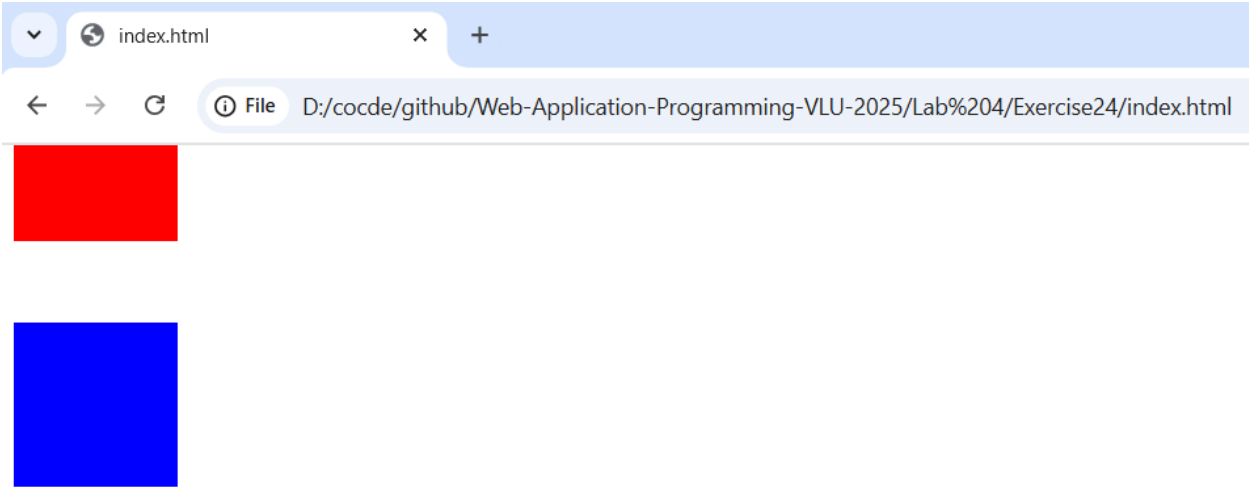

3.25 Exercise 25: Practicing Position Absolute

Make the .box-child square cover the entire .box square using position: absolute.

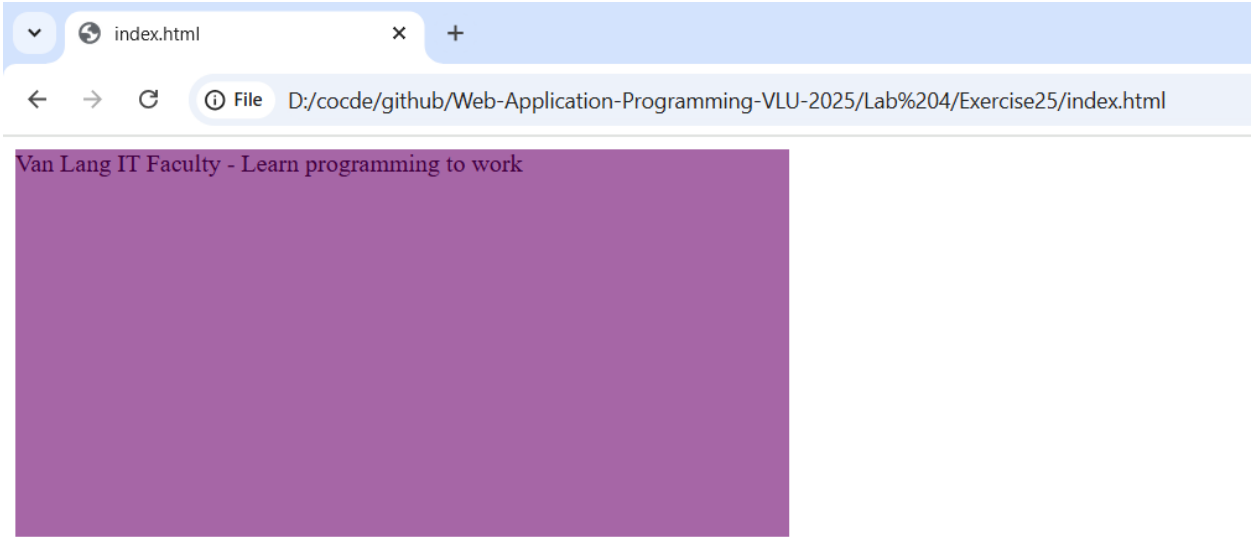

3.26 Exercise 26: Practicing Position Fixed

Fix the header to the top of the CONTENT and BROWSER tabs.

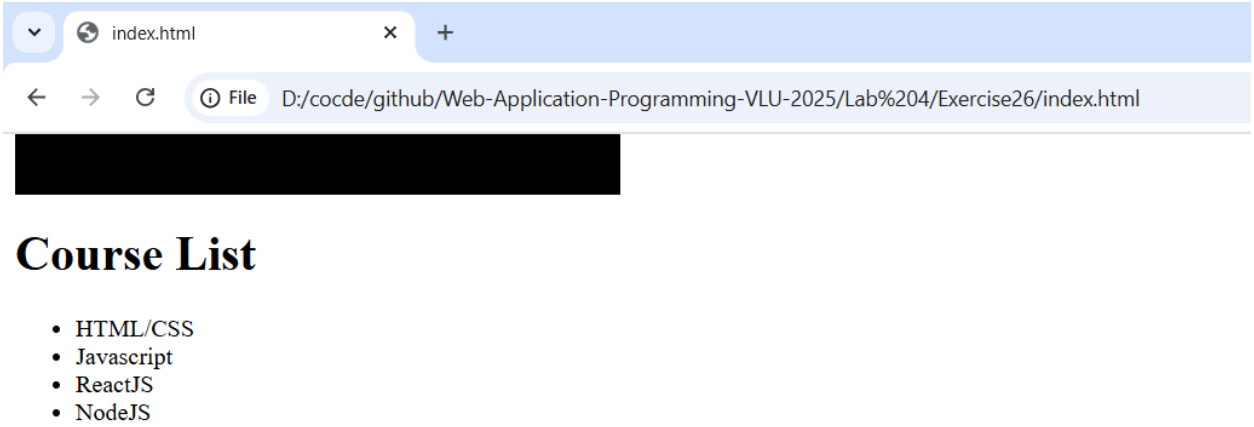

3.27 Exercise 27: Practicing Position Sticky

Make the header stick to the top using position: sticky.

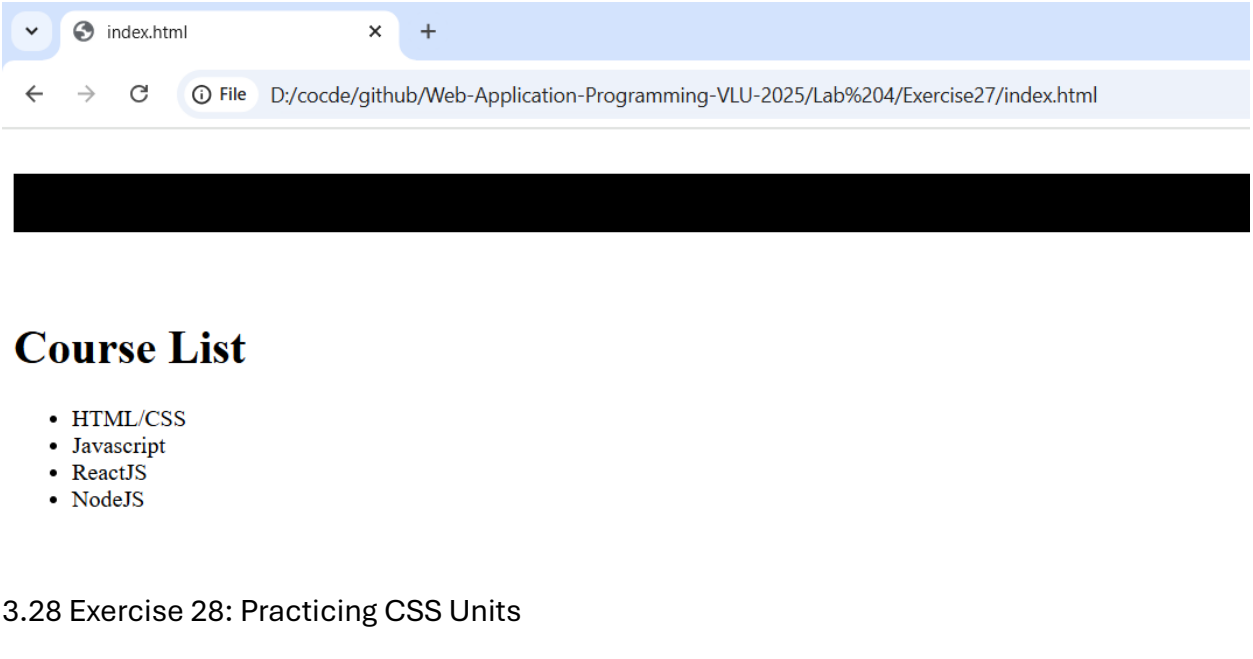

3.28 Exercise 28: Practicing CSS Units

Use different CSS units (px, rem, vw, vh) to style a container and its child elements.

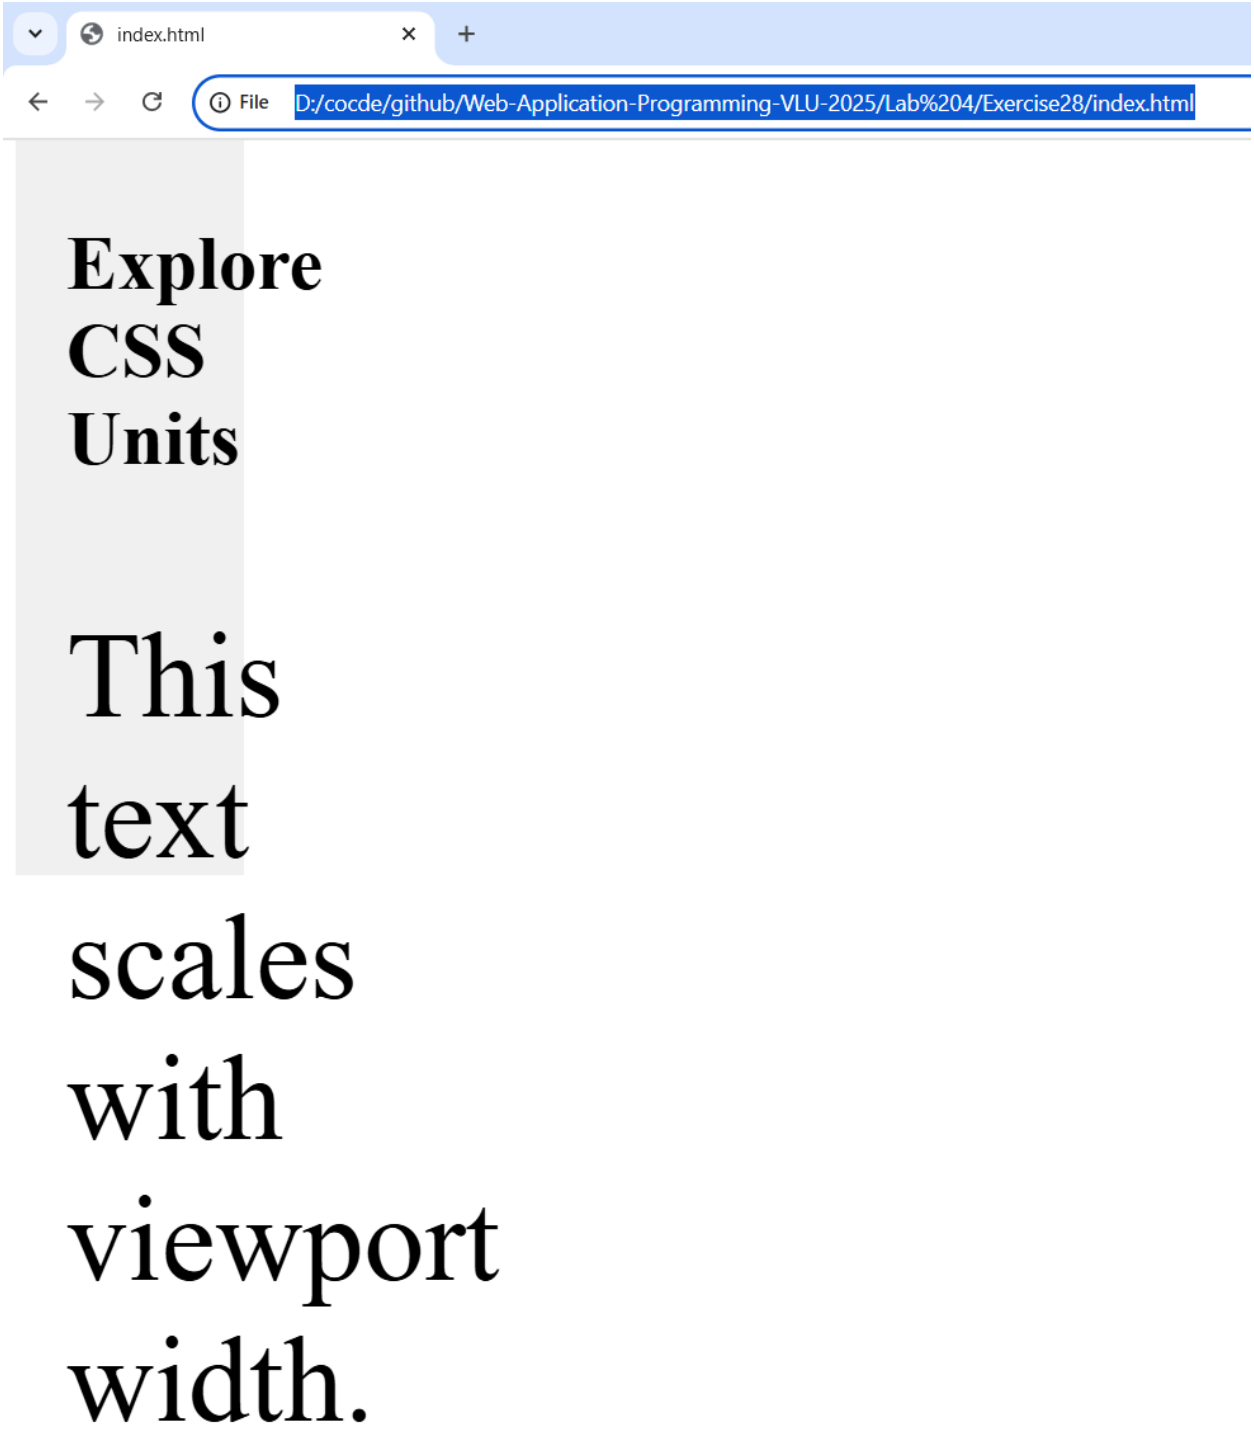

3.29 Exercise 29: Practicing Flexbox

Create a flexible layout using Flexbox to align items horizontally.

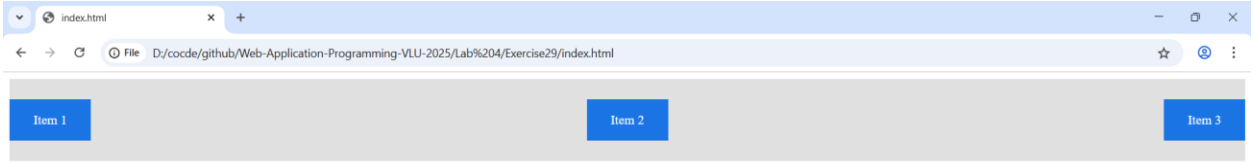

3.30 Exercise 30: Practicing CSS Grid

Create a two-column layout using CSS Grid.

3.31 Exercise 31: Practicing Media Queries

Use media queries to make a box responsive for mobile devices.

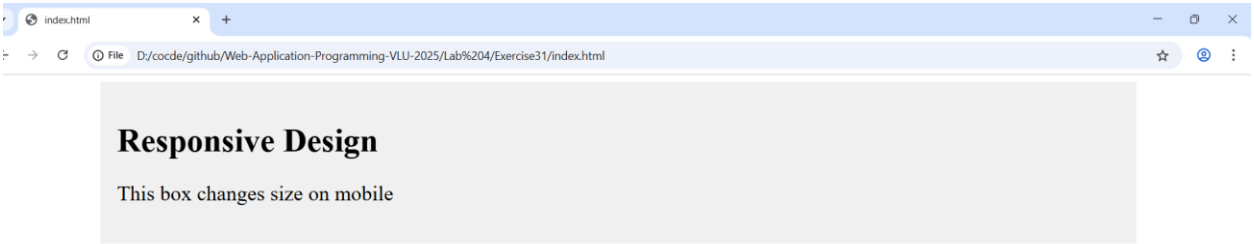

3.32 Exercise 32: Practicing CSS Transitions and Animations

Apply a transition and a keyframe animation to a box for interactive effects. Pause the animation on hover to avoid conflicts.

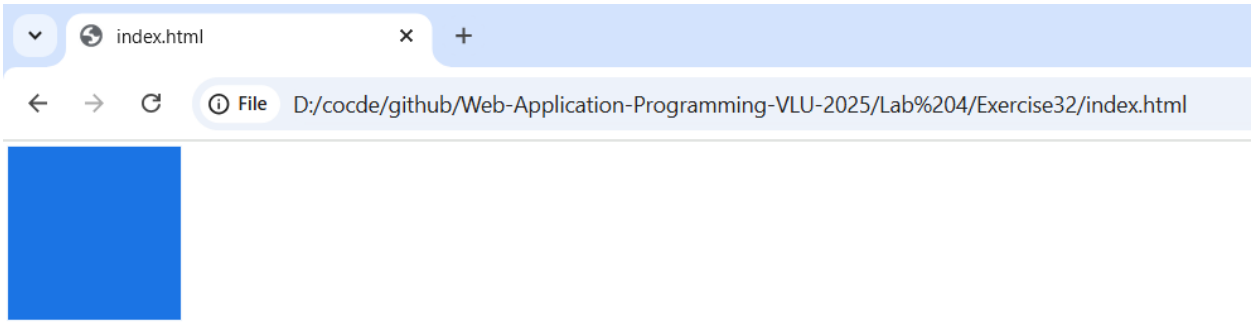

3.33 Exercise 33: Practicing Pseudo-Classes

Use :first-child, :last-child, and :nth-child to style list items.

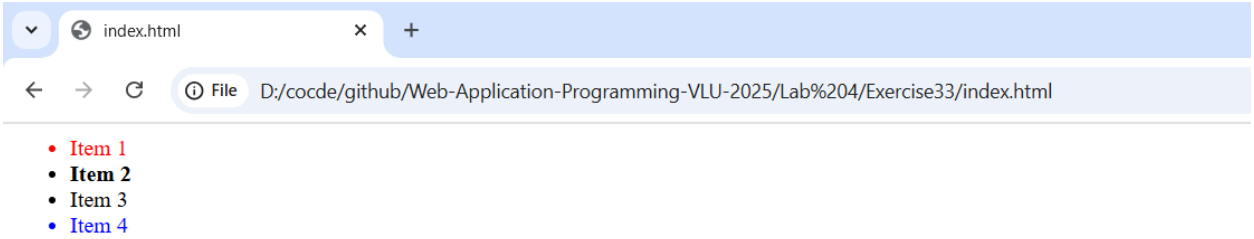

4 Additional Exercises

Bt1: web for reading newspaper on mobile phone

Bài tập 1

127.0.0.1:5500/Lab%204/AdditionalExercises1/index.html

Thêm 142 người chết vì virus corona tại TQ, tổng cộng 68.500 ca nhiễm

Ủy ban Y tế Quốc gia (NHC) Trung Quốc ngày 16/2 công bố thêm 2.009 ca nhiễm mới được ghi nhận trong 24h qua tại đại lục, nâng tổng số ca nhiễm trên cả nước lên 68.500 trường hợp.

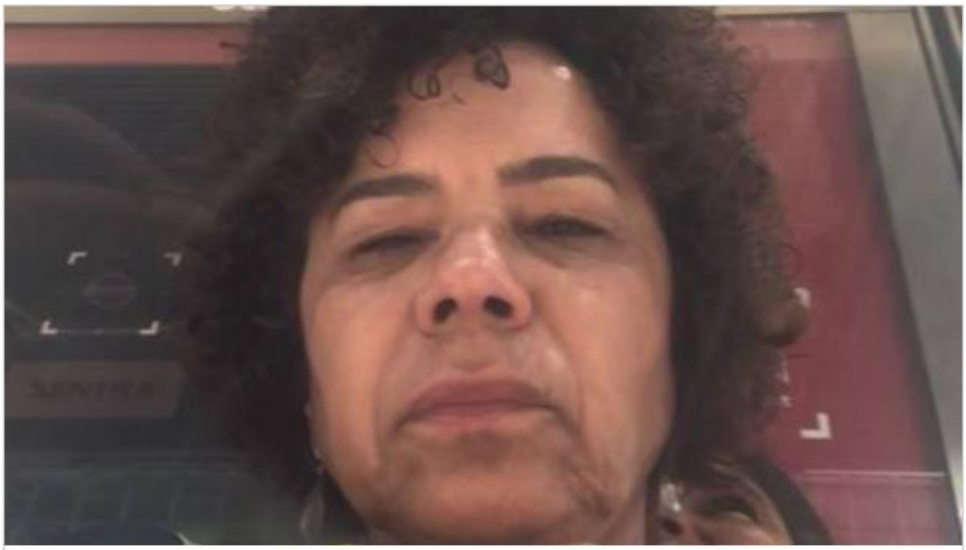

Bt2:iformation and ...

Bt3:the about and menu

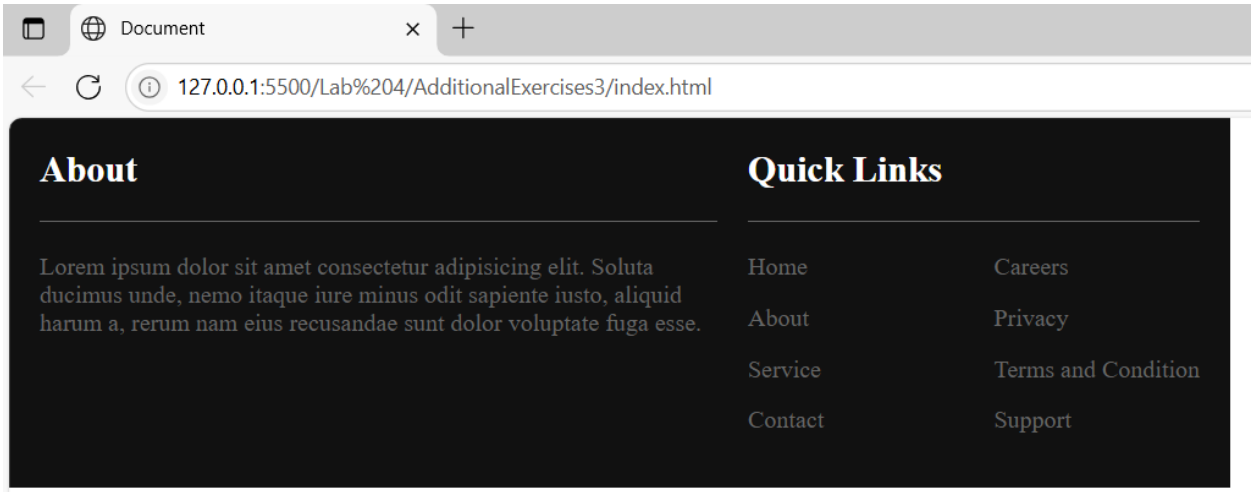

Bt4: web for reading newspaper on computer

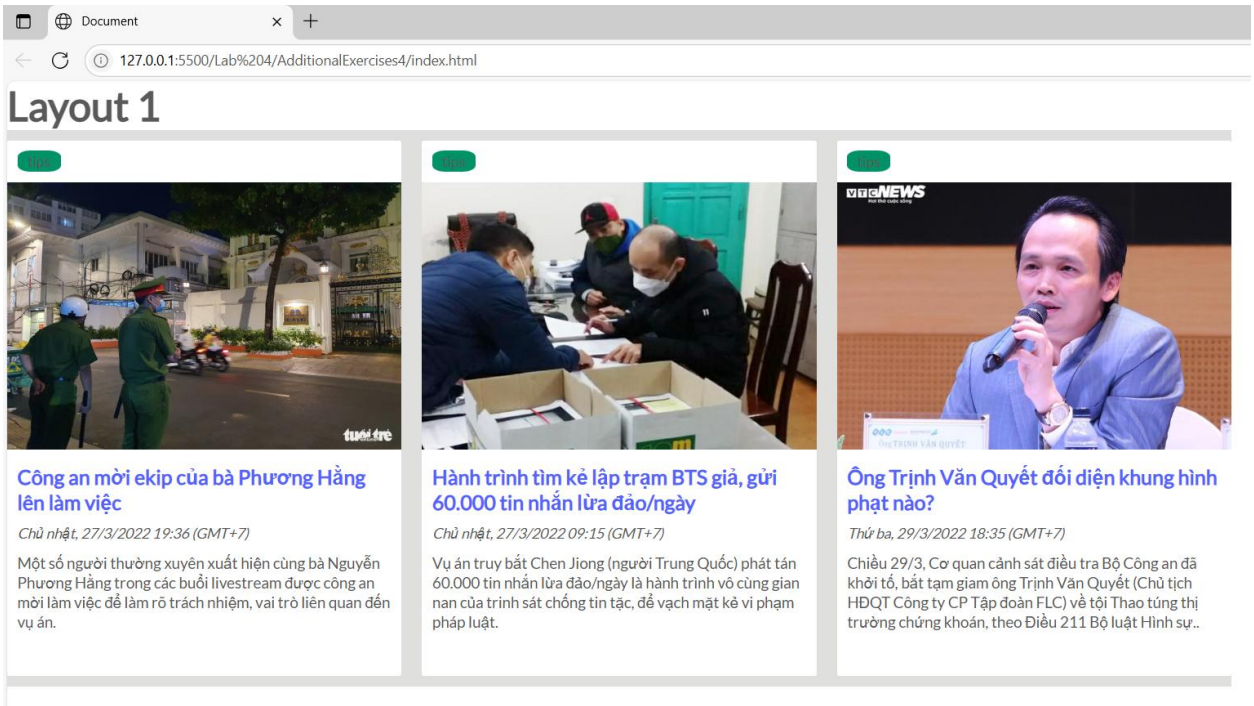

Bt5: Web sales

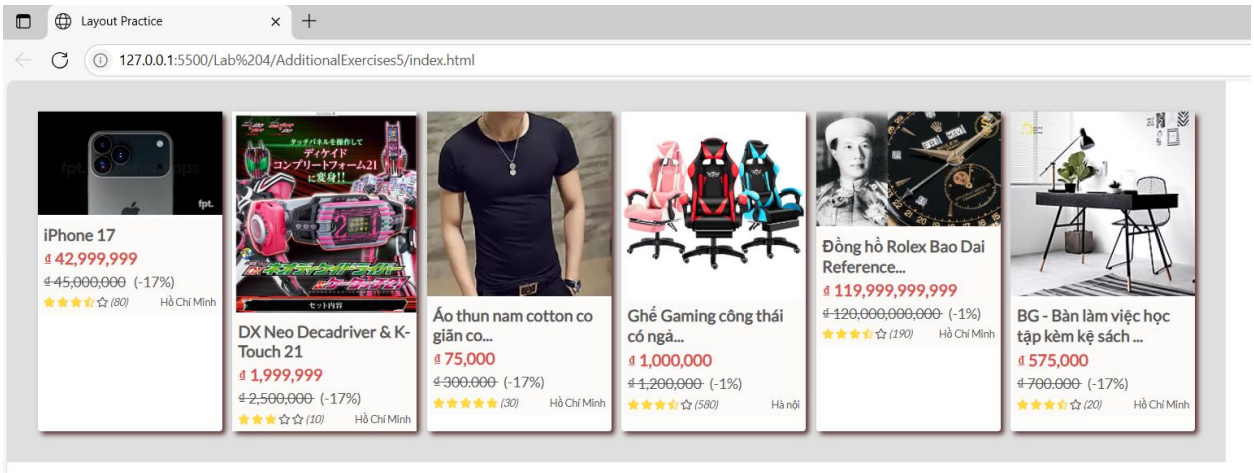
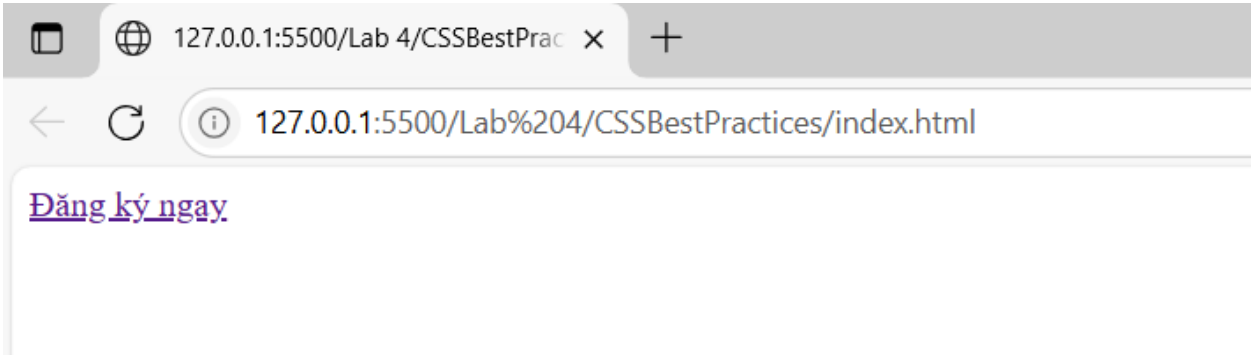
CSS Best Practices: Sign up now button