
# **CS201 Midter Past Paper**

# REPLY BY BY\_RANA\_ABUBAKAR\_KHAN ON JUNE 23, 2018 AT 9:44PM

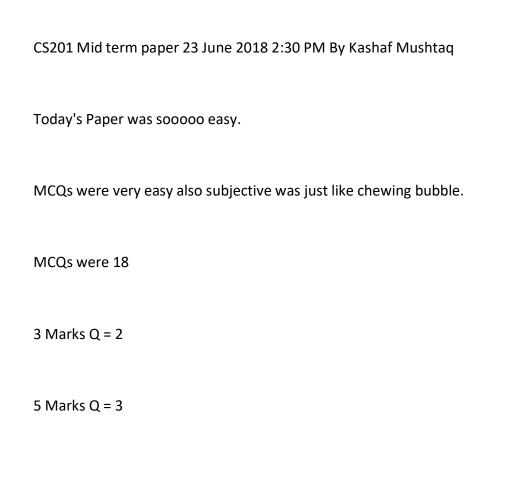

```
Q.1 Write the code of the following arrays; Marks(3)
 1. float array length 8
 2. float array length 8 to pointer
Q.2 Find the error in the following. Marks(3)
 {
 int number;
 if(number/2==0)
  cout"The number is even:";
 else()
cout"The number is odd:";
getch();
```

```
Q.3 Write a program in C++ to calculate the Average Price of the book. Marks(5)
   calculations given the. Inputs ly kr display krwana tha.
                              pdfelement
Q.4 Give the output of the following
 {
 int It=1 nt=o s;
 int number=8;
 if(nt<number/2)
 {
  coutIt"\t";
   s=nt+lt
```

}

nt=It

}

Q.5 Write a code to find the product. Defelement

product= number \*2^5

input ly kr output show krwani the.

# CS201 MIDTERM PAPER SHARED BY STUDENT

REPLY BY BY\_RANA\_ABUBAKAR\_KHAN ON JUNE 23, 2018 AT 10:19PM

current papr cs201 file 1 23 june spring 2018

Today cs201 paper

- 1. General syntax of switch statement
- 2. Applications softwares with examples

- 3. Output of program having arrays
- 4. To write a program arrays of 10 elements. Sorting. Find minimum and maximum numbr

For mcqs just study past papers and read handouts once

#### CS201 MIDTERM PAPER SHARED BY STUDENT

#### REPLY BY BY RANA ABUBAKAR KHAN ON DECEMBER 9, 2017 AT 12:50PM

Today cs201 paper.z

How many dimensions in n dimension array.

Loop is also called..reptative...Structure

access array in random which approach is best

=< ,<= ,>= are called ..relational... operators

#include is called.. preprocessor directive..

Not example of int data ..-4.0..

All element of data must be of .....same type..

Analysis is the .. first..step

Array are ..call by reference...

Move to next iteration of loop .. continue statement .. is used

A hierchy of classes which are used to deal with console and disk file.. iOS..

.. functions..are good for code reusability.

Bitwise and work same like.. logical.. and but on bits

SUBJECTIVE.

Write 2d array with five rows and six column and also write pointer to above array.?

Why we comment liberally in programs does they affect on performance...?

A do while loop executive ho many times at least and a while loop?

Then 2 program likhi thy inline output likhi thy ak array main say tha aur doses open file...

#### CS201 MIDTERM PAPER SHARED BY STUDENT

## CS201 9/12/2017 \_ 2:30PM PAPER

cs201 aj 2:30 ka mera paper

MCQS mostly moaz ki file sy thy



```
r long q
```

```
main(){
int x = 10

const int *ptr = &x;
*ptr = 5;
}
```

dosra Q aesy tha

Write down the output of the code given below:

```
Hint:
Size of char is 1 byte
Size of int is 2 byte
Size of float is 4 byte
#include <iostream.h>
union mytypes_t {
char c;
                                pdfelement
int i;
float f;
} mytypes;
int main(){
mytypes.c = 'H';
mytypes.i = 15;
cout sizeof(mytypes)endl;
mytypes.i = 15;
mytypes.c = 'H';
cout sizeof(mytypes)endl;
system("PAUSE");
return 0;
}
```

r baqi yad nahi

# REPLY BY BY\_RANA\_ABUBAKAR\_KHAN ON DECEMBER 10, 2017 AT 9:51PM

```
cs201 mera ajka paper MCQS 90% Moaz ki file sy thy
short Q: Write down the output of the code given below:
Hint:
Size of char is 1 byte
                                 pdfelement
Size of int is 2 byte
Size of float is 4 byte
#include <iostream.h>
union mytypes t {
char c;
int i;
float f;
} mytypes;
int main(){
mytypes.c = 'H';
mytypes.i = 15;
cout sizeof(mytypes)endl;
mytypes.i = 15;
mytypes.c = 'H';
cout sizeof(mytypes)endl;
```

```
system("PAUSE");
return 0;
}
r 1 or Q: JO 3 marks ka tha wo ye
Identify the errors in the following code segment and give the reason of errors.
main(){
int x = 10
const int *ptr = &x;
*ptr = 5;
}
```

baqi 1 programme likhta tha convert weight wala sai sy baqi yad na

# CS201 MIDTERM PAPER SHARED BY STUDENT

## ON JUNE 3, 2017 AT 6:21PM

```
***CS201***
```

Aik program likhen jismai aik item ka 15% tax display krwana hai. Program mai pehle user sy input lyn phr uska 15% tax display krwana hai

```
***CS201***
```

Aik program bnayen jismai user sy input lyn radius ki or switch statement sy 2 case likhen

- 1. Enter A or a to find area of circle.
- 2. Enter C or c to find Circumference of circle

Formula given thy ....

```
****CS201****
```

Aik 2D array bnayen jismai 4 rows hn or 2 cols or phr usko display krwayen(mene rand() use kia) phr usmai 1st row ky elements display krwayen msln agr aik array hai

23 43. 5. 84.

54. 42. 1. 75

To display ho

23 43 5 84

#### CS201 MIDTERM PAPER SHARED BY STUDENT

#### ON JUNE 3, 2017 AT 7:06PM

#### By amna mughal

todat my cs201 paper

mcqs mostly from moaaz collection (18 marks)

do while loop pe program likhna tha(5 marks)

& operators ke bre me likhna tha(3 marks)

program me highlight lines ko explain krna tha (5 marks)

aik or program e likhna tha wo yad ni(5marks)

program ka out put btana tha(3 marks)

## CS201 MIDTERM PAPER SHARED BY STUDENT

## ON JUNE 4, 2017 AT 11:48AM

5 marks

Write a program using switch statement that should prompt the user to enter radius of circle.

After getting input from user, it should display the following menu to user.

- 1. Press 'A' or 'a' to calculate area
- 2. Press 'C' or 'c' to calculate circumference

When user enters correct choice then corresponding task should be executed.

If user presses key other than above option then message "Option is not available" should be displayed on output screen.

#### Formula for:

Area of Circle:  $3.14 \times \text{radius} \times \text{radius}$ Circumference of Circle:  $2 \times 3.14 \times \text{radiu}$ 

#### CS201 MIDTERM PAPER SHARED BY STUDENT

#### ON JUNE 4, 2017 AT 11:50AM

## Another Paper:

Q1: int\*myarray[]={"amir"} how many memory bytes??

Q2: write the functionality of:

a- int\*constIntptr=&x;

b- constint \*intptr=&x;

Q3:name any three system software and explain how system software controls hardware.?


Q4- What is call by reference & call by value?

Q5- Write a structure program with members base, hypotenuse, and perpendicular?

b=a++;

# REPLY BY MARRI ON JUNE 11, 2017 AT 3:07PM

| Asalamualikum guys my CS201 paper: |
|------------------------------------|
| subjective paper:                  |
| Q19: marks 3 pdfelement            |
| int num[3][2]={12,51,34,54,14,55}; |
| for(int j =0; j<3; j++)            |
| cout(*(*num+j)+1)endl;             |
| Q20: marks 3                       |
| a=3;                               |

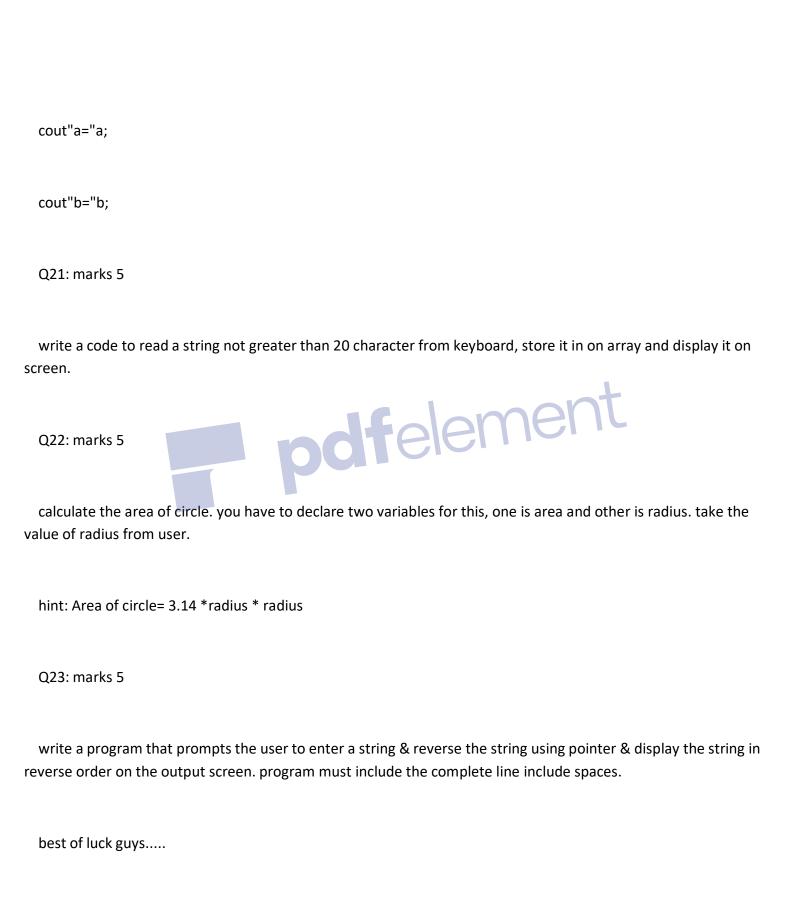

# REPLY BY ALI ALI ON JUNE 11, 2017 AT 6:00PM

| ASSLAM O ALIKUM   |
|---|
| mcqz mostly from past paper.  |
| 1. float array[8] declare krni the and then pointer pas krna tha.                     |
| 2. utilty software kounsy hoty hn example.  |
| 3. net salary caluculate krni the c++ program likh kr dailywages= 1000 aur no of days |
| khud write krny thy salary= dailywages*no of days.                                    |
| 4.string declare krni the "this is my country"  |
| 5. ak program. m, n values batani the after execution of program.                     |
| THANKS  |

# CS201 MID TURM EXAM 17 DEC 2016 BY ABDUL SHAKOOR

| Subjective:   |
|---|
| Q-Write down the general syntax of switch statement.  |
| Q-Write a code segment that displays the diagonal element of a matrix of NxN.  where N can be any number and represents demention of matrix  Q-Mention any two affects in a programme who can occur as a result of an overflow condition.   |
| CS201 MIDTERM PAPER SHARED BY STUDENT   |
| 40 DECEMBED 2046 TIME 2 20 ODJECTIVE DADED  |
| 18 DECEMBER 2016 TIME 2:30 OBJECTIVE PAPER  |
| 1. You can use aGOTOstatement to transfer control elsewhere out of the nested structure.  2 Overflow condition occurs when we try to assign a value to a variable which is  3. Reusing thein program helps to save the memory.  4 When an array is passed to a function, by default it will be passed by  5. There are mainly |

| Watermar | 4 No. |
|----------|-------|

| 9. When the logical operator AND (&&) combines two expressions exp1 and exp2 then the result will be true only |       |  |  |  |  |  |
|--|-------|--|--|--|--|--|
| 10. The left-shift operator can be used to pck two character values into ainteger variation integer variation. | able. |  |  |  |  |  |
| Subjective question  |       |  |  |  |  |  |
| What will be the output of the given progrm code ?   |       |  |  |  |  |  |
| #include   |       |  |  |  |  |  |
| main() {   |       |  |  |  |  |  |
| int num[3][2] = {12, 51, 34, 54, 14, 55};  |       |  |  |  |  |  |
| for(int i=0; i<3; i++) cout*(*(num + i) + 1)/p>  |       |  |  |  |  |  |

#### 19 DECEMBER 2016 MTH 301

objective

- 1. Which of the following has the general equation of the form , where a,b,c,d are real numbers.
- 3. The function is continuous in the region ----- and discontinuous elsewhere.
- 5. The vector is ..... to both.
- 6. Gradient of a scalar function always results in a..... function.
- 7. is called ...... of equation of a plane.

| e١ |  |  | 314 |
|----|--|--|-----|

- 9. If has a relative extremum at a point and both the first partial derivatives of exist at this point, then
- 10. Double integral of a function represents......of the region between the surface defined by the function and the plane which contains its domain.
- 11. The parabola will open upwards if . . . . . . . .

