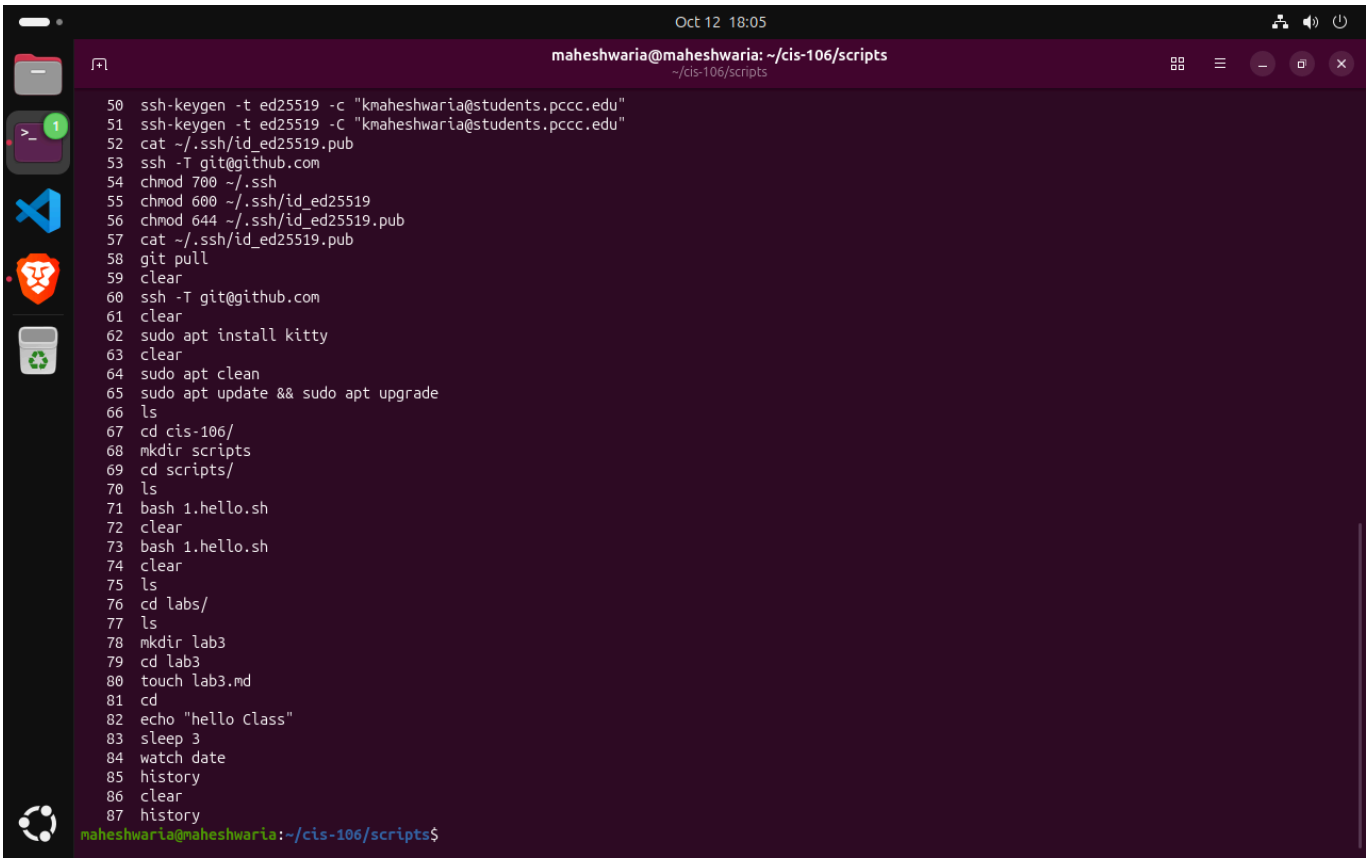
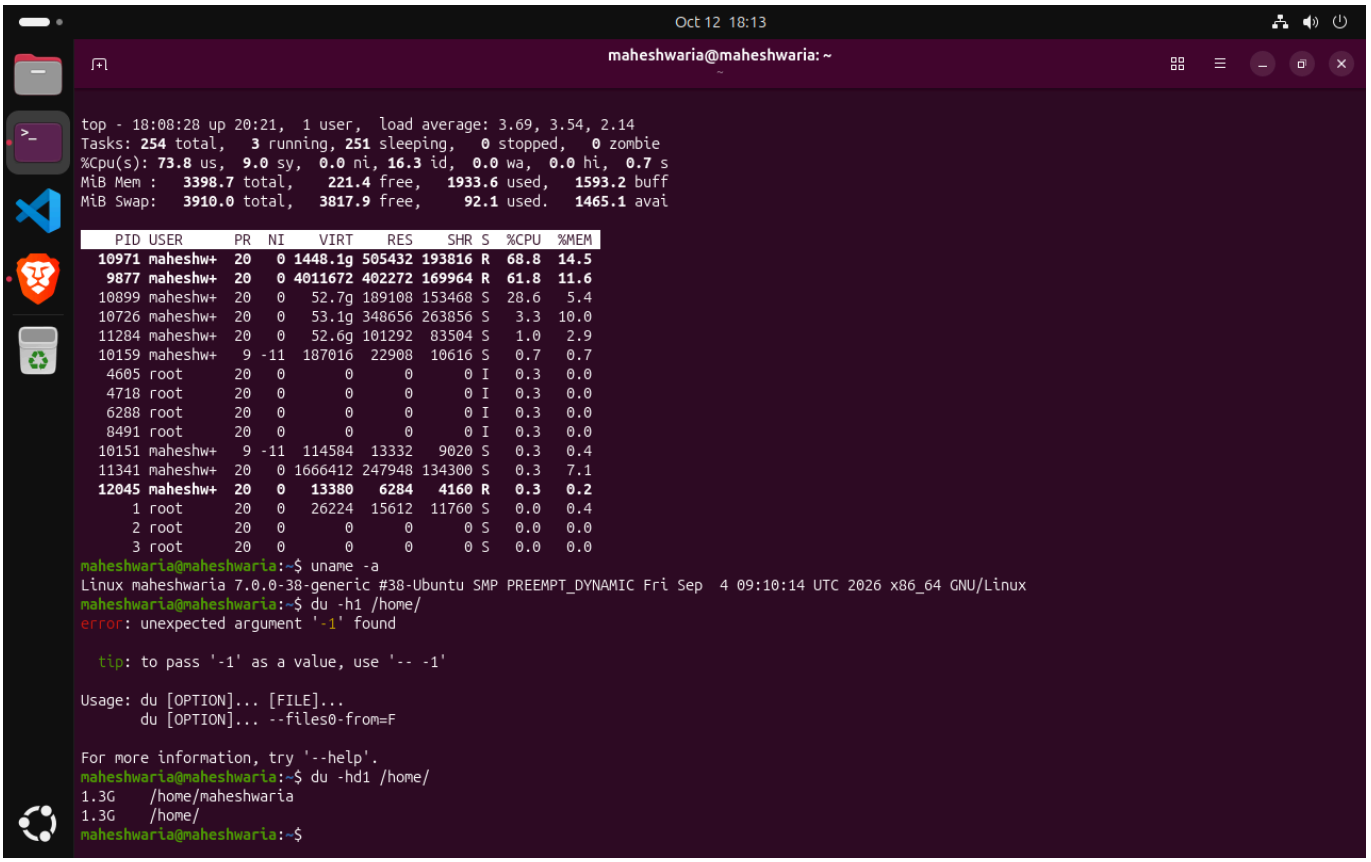
Weekreport 3

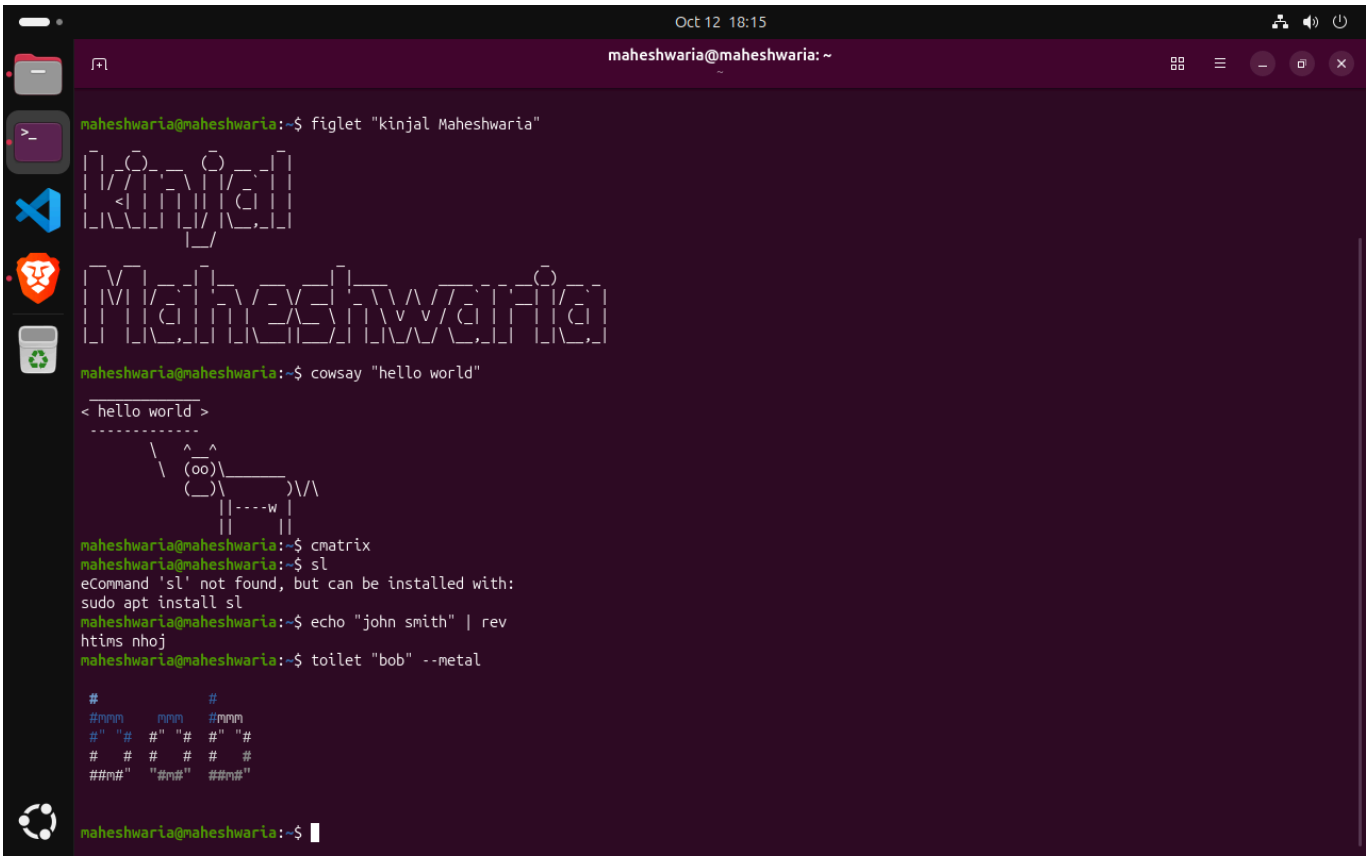
lab 3

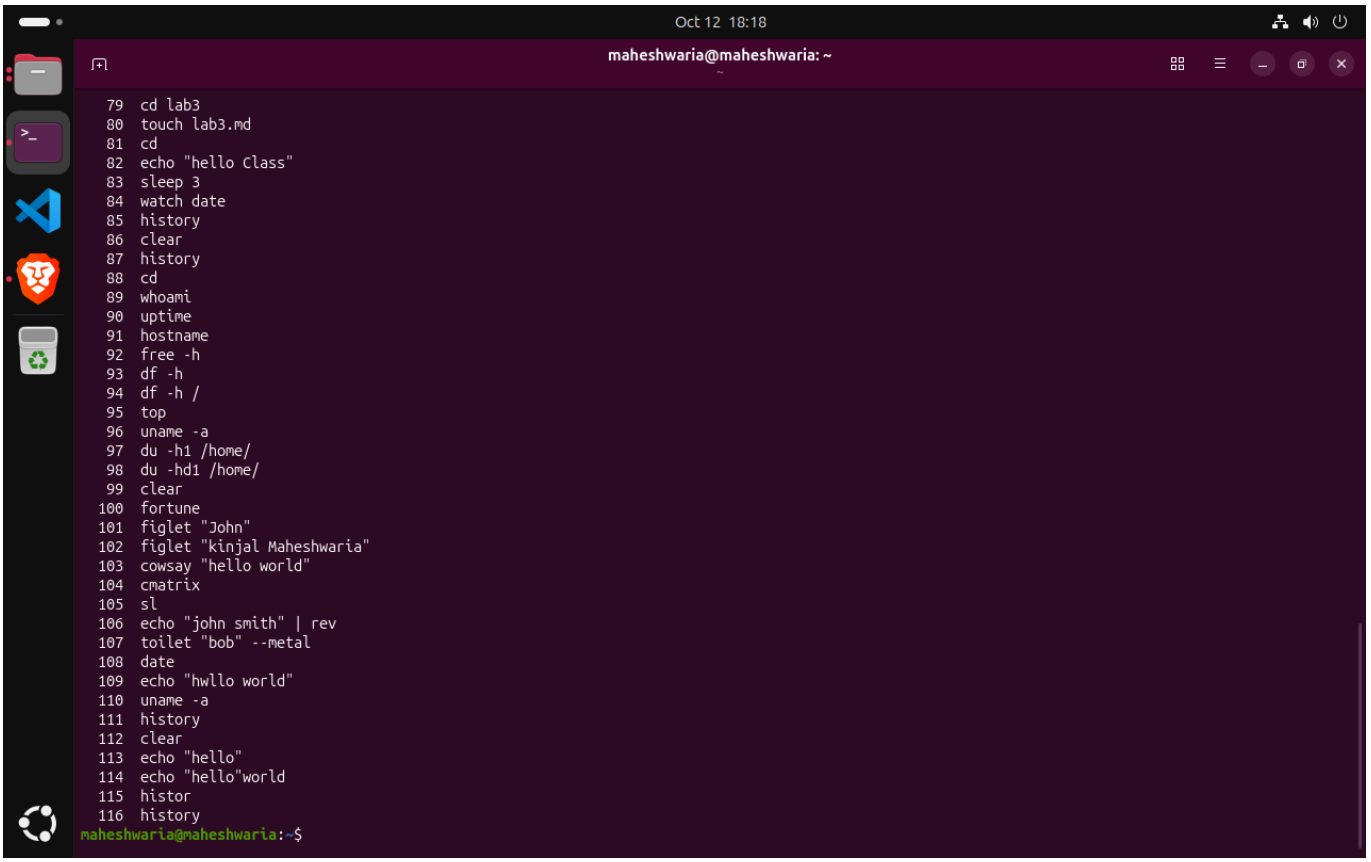
Notes 3

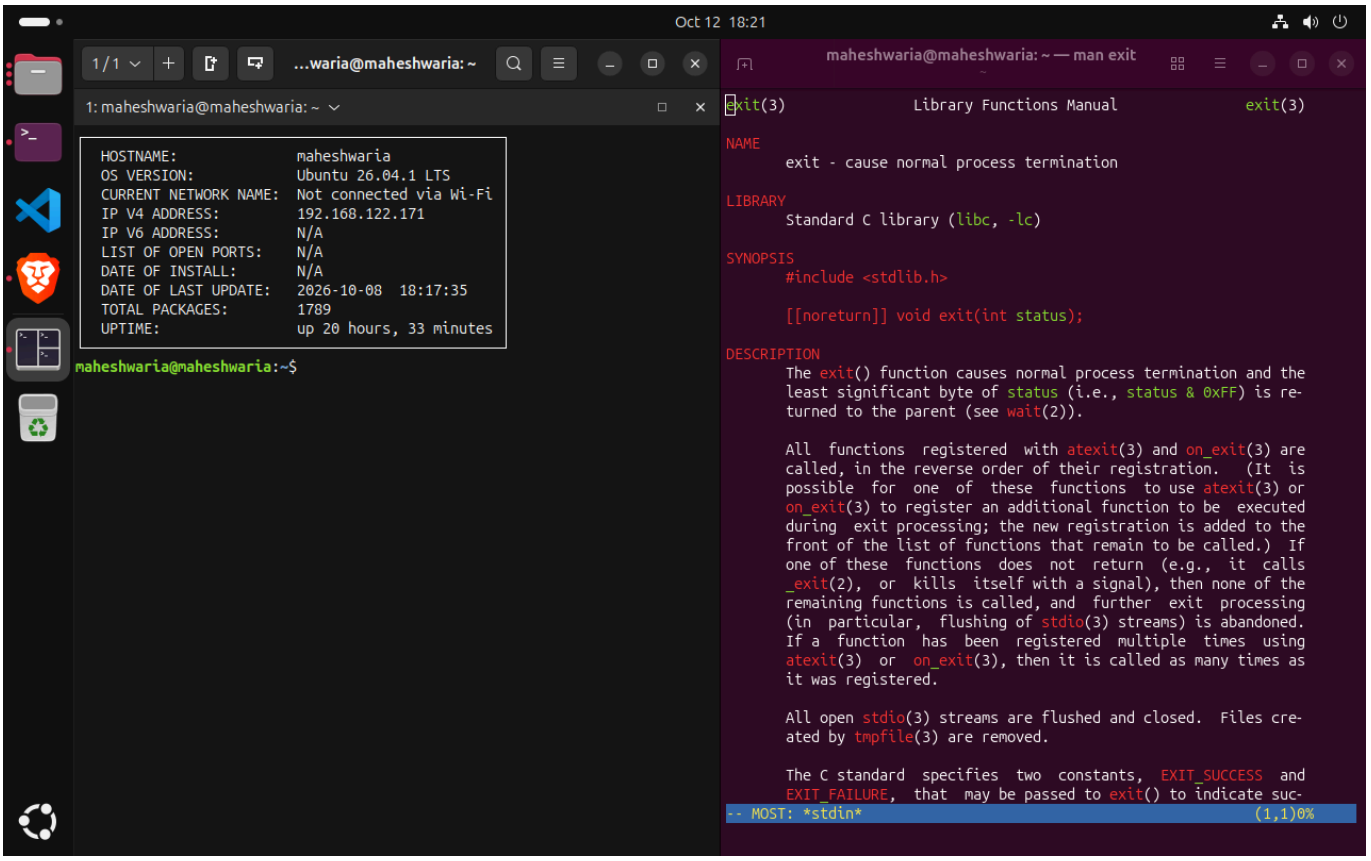
complete wr3 Practices

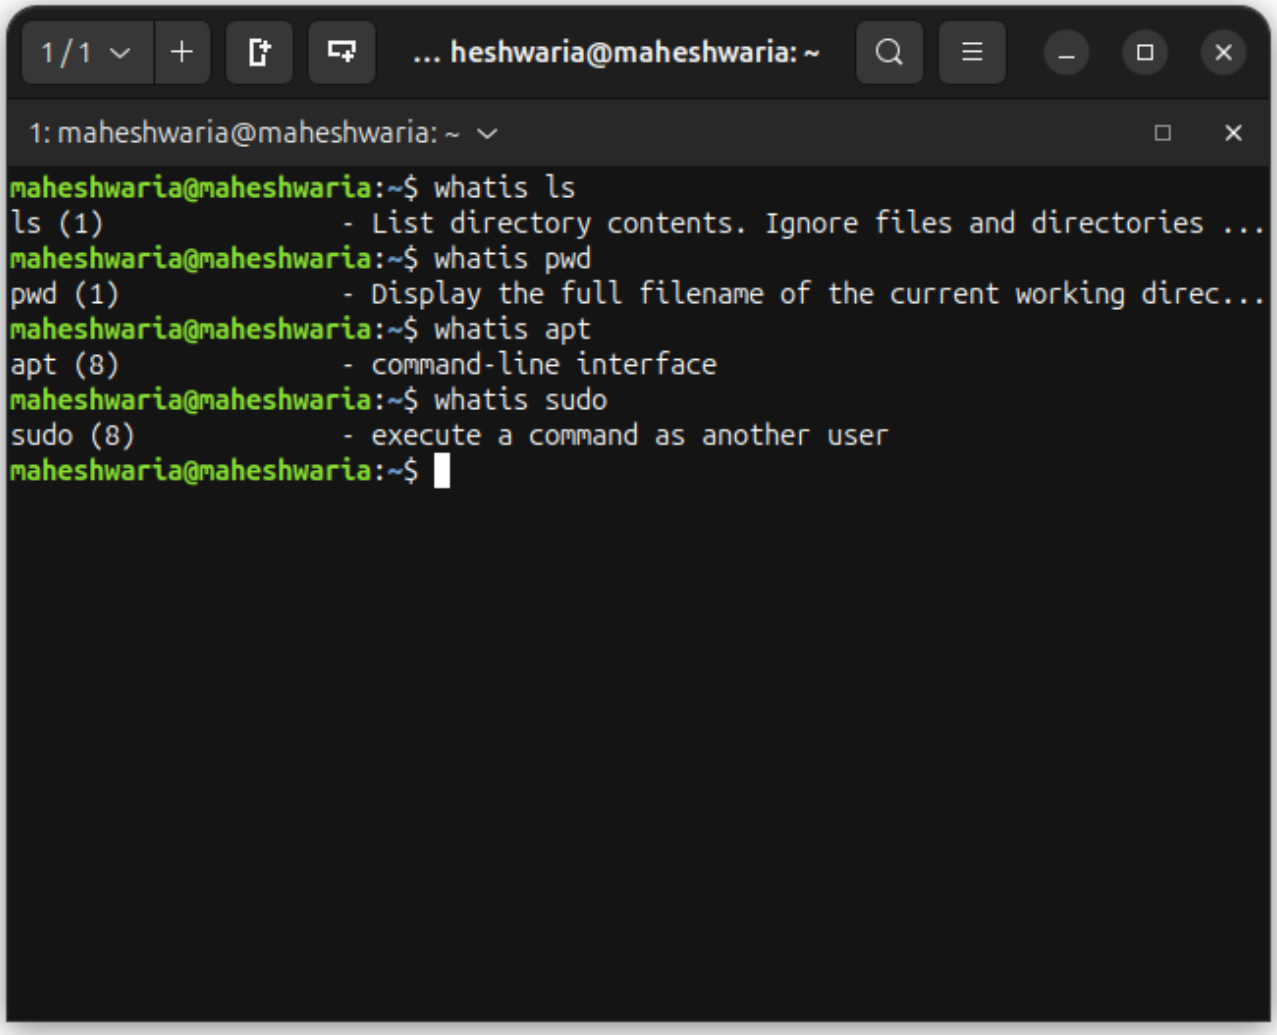


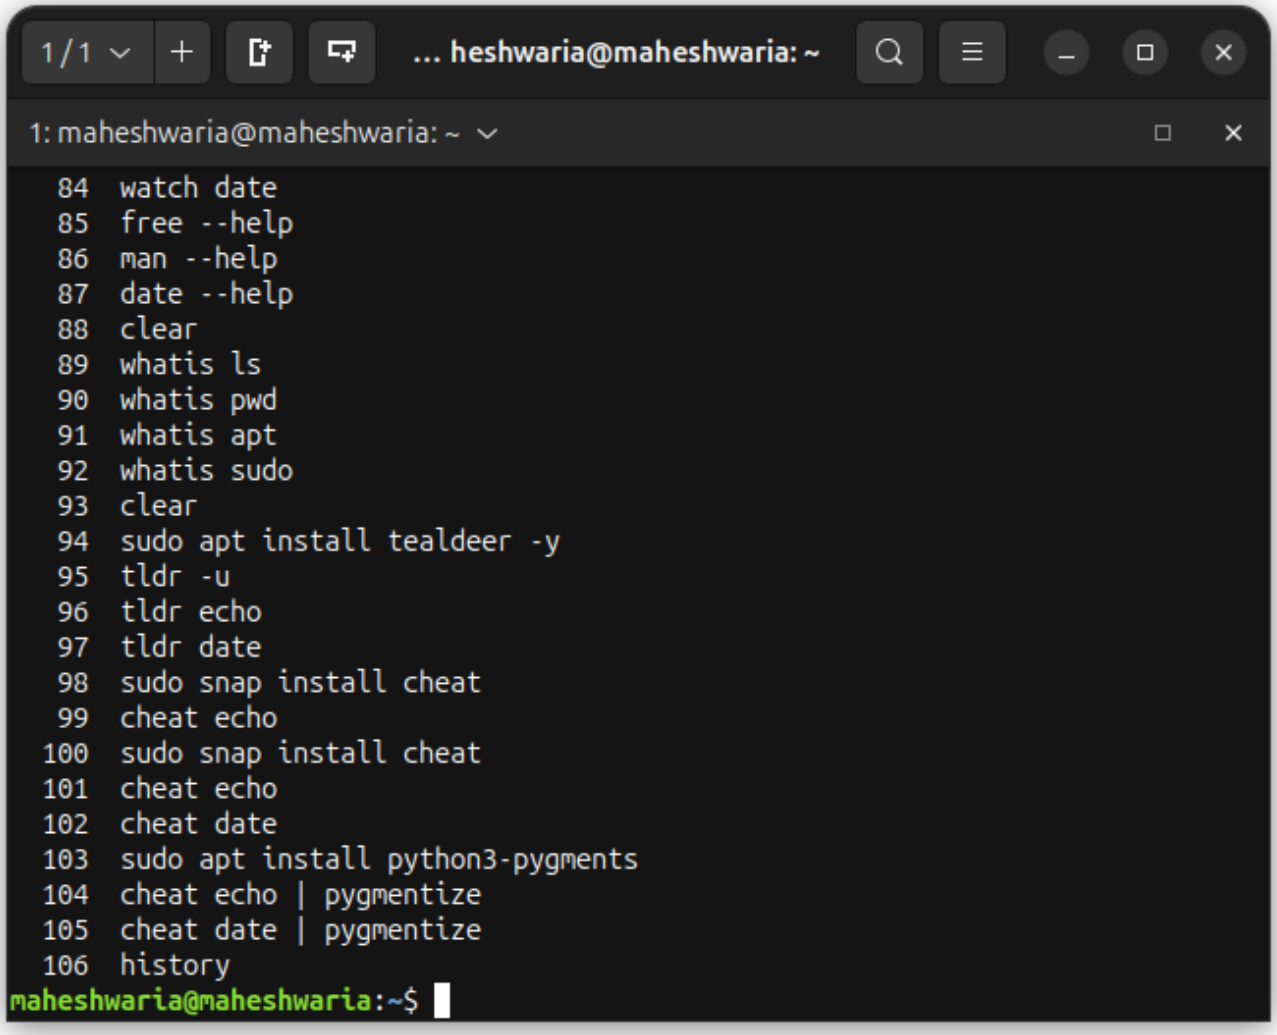

Oct 12 18:13
maheshwaria@maheshwaria: ~
top - 18:08:28 up 20:21, 1 user, load average: 3.69, 3.54, 2.14
Tasks: 254 total, 3 running, 251 sleeping, 0 stopped, 0 zombie
%Cpu(s): 73.8 us, 9.0 sy, 0.0 ni, 16.3 id, 0.0 wa, 0.0 hi, 0.7 s
MiB Mem : 3398.7 total, 221.4 free, 1933.6 used, 1593.2 buff
MiB Swap: 3910.0 total, 3817.9 free, 92.1 used. 1465.1 avai
PID USER PR NI VIRT RES SHR S %CPU %MEM
10971 maheshw+ 20 0 1448.1g 505432 193816 R 68.8 14.5
9877 maheshw+ 20 0 4011672 402272 169964 R 61.8 11.6
10899 maheshw+ 20 0 52.7g 189108 153468 S 28.6 5.4
10726 maheshw+ 20 0 53.1g 348656 263856 S 3.3 10.0
11284 maheshw+ 20 0 52.6g 101292 83504 S 1.0 2.9
10159 maheshw+ 9 -11 187016 22908 10616 S 0.7 0.7
4605 root 20 0 0 0 0 I 0.3 0.0
4718 root 20 0 0 0 0 I 0.3 0.0
6288 root 20 0 0 0 0 I 0.3 0.0
8491 root 20 0 0 0 0 I 0.3 0.0
10151 maheshw+ 9 -11 114584 13332 9020 S 0.3 0.4
11341 maheshw+ 20 0 1666412 247948 134300 S 0.3 7.1
12045 maheshw+ 20 0 13380 6284 4160 R 0.3 0.2
1 root 20 0 26224 15612 11760 S 0.0 0.4
2 root 20 0 0 0 0 S 0.0 0.0
3 root 20 0 0 0 0 S 0.0 0.0
maheshwaria@maheshwaria:~$ uname -a
Linux maheshwaria 7.0.0-38-generic #38-Ubuntu SMP PREEMPT_DYNAMIC Fri Sep 4 09:10:14 UTC 2026 x86_64 GNU/Linux
maheshwaria@maheshwaria:~$ du -h1 /home/
error: unexpected argument '-1' found
tip: to pass '-1' as a value, use '-- -1'
Usage: du [OPTION]... [FILE]...
du [OPTION]... --files0-from=F
For more information, try '--help'.
maheshwaria@maheshwaria:~$ du -hd1 /home/
1.3G /home/maheshwaria
1.3G /home/
maheshwaria@maheshwaria:~$


Oct 12 18:15
maheshwaria@maheshwaria: ~
maheshwaria@maheshwaria:~$ figlet "kinjal Maheshwaria"
maheshwaria@maheshwaria:~$ cowsay "hello world"
< hello world >
maheshwaria@maheshwaria:~$ cmatrix
maheshwaria@maheshwaria:~$ sl
eCommand 'sl' not found, but can be installed with:
sudo apt install sl
maheshwaria@maheshwaria:~$ echo "john smith" | rev
htims nhoj
maheshwaria@maheshwaria:~$ toilet "bob" --metal
maheshwaria@maheshwaria:~$


Oct 12 18:18
maheshwaria@maheshwaria: ~
79 cd lab3
80 touch lab3.md
81 cd
82 echo "hello Class"
83 sleep 3
84 watch date
85 history
86 clear
87 history
88 cd
89 whoami
90 uptime
91 hostname
92 free -h
93 df -h
94 df -h /
95 top
96 uname -a
97 du -h1 /home/
98 du -hd1 /home/
99 clear
100 fortune
101 figlet "John"
102 figlet "kinjal Maheshwaria"
103 cowsay "hello world"
104 cmatrix
105 sl
106 echo "john smith" | rev
107 toilet "bob" --metal
108 date
109 echo "hwllo world"
110 uname -a
111 history
112 clear
113 echo "hello"
114 echo "hello"world
115 histor
116 history
maheshwaria@maheshwaria:~$


Oct 12 18:21
1/1
...waria@maheshwaria: ~
1: maheshwaria@maheshwaria: ~
HOSTNAME: maheshwaria
OS VERSION: Ubuntu 26.04.1 LTS
CURRENT NETWORK NAME: Not connected via Wi-Fi
IP V4 ADDRESS: 192.168.122.171
IP V6 ADDRESS: N/A
LIST OF OPEN PORTS: N/A
DATE OF INSTALL: N/A
DATE OF LAST UPDATE: 2026-10-08 18:17:35
TOTAL PACKAGES: 1789
UPTIME: up 20 hours, 33 minutes
maheshwaria@maheshwaria:~$
maheshwaria@maheshwaria: ~ — man exit
exit(3) Library Functions Manual exit(3)
NAME
exit - cause normal process termination
LIBRARY
Standard C library (libc, -lc)
SYNOPSIS
#include <stdlib.h>
[[noreturn]] void exit(int status);
DESCRIPTION
The exit() function causes normal process termination and the least significant byte of status (i.e., status & 0xFF) is returned to the parent (see wait(2)).
All functions registered with atexit(3) and on_exit(3) are called, in the reverse order of their registration. (It is possible for one of these functions to use atexit(3) or on_exit(3) to register an additional function to be executed during exit processing; the new registration is added to the front of the list of functions that remain to be called.) If one of these functions does not return (e.g., it calls _exit(2), or kills itself with a signal), then none of the remaining functions is called, and further exit processing (in particular, flushing of stdio(3) streams) is abandoned. If a function has been registered multiple times using atexit(3) or on_exit(3), then it is called as many times as it was registered.
All open stdio(3) streams are flushed and closed. Files created by tmpfile(3) are removed.
The C standard specifies two constants, EXIT_SUCCESS and EXIT_FAILURE, that may be passed to exit() to indicate suc-
-- MOST: *stdin* (1,1)0%


1 / 1
... heshwaria@maheshwaria: ~
1: maheshwaria@maheshwaria: ~
maheshwaria@maheshwaria:~$ whatis ls
ls (1) - List directory contents. Ignore files and directories ...
maheshwaria@maheshwaria:~$ whatis pwd
pwd (1) - Display the full filename of the current working direc...
maheshwaria@maheshwaria:~$ whatis apt
apt (8) - command-line interface
maheshwaria@maheshwaria:~$ whatis sudo
sudo (8) - execute a command as another user
maheshwaria@maheshwaria:~$


1 / 1
... heshwaria@maheshwaria: ~
1: maheshwaria@maheshwaria: ~
84 watch date
85 free --help
86 man --help
87 date --help
88 clear
89 whatis ls
90 whatis pwd
91 whatis apt
92 whatis sudo
93 clear
94 sudo apt install tealdeer -y
95 tldr -u
96 tldr echo
97 tldr date
98 sudo snap install cheat
99 cheat echo
100 sudo snap install cheat
101 cheat echo
102 cheat date
103 sudo apt install python3-pygments
104 cheat echo | pygmentize
105 cheat date | pygmentize
106 history
maheshwaria@maheshwaria:~$