717823E229

```
TASK – 7.1


<!DOCTYPE html>
<html>
<body>
hi all
<script >
var p = document.getElementById("one");
console.log(p)
p.textContent="HELLO"
</script>
</body>
</html>
```




HELLO

```
TASK - 7.2

<!DOCTYPE html>
<html>
<body>
    WELCOME
    <button onclick="fun()">Click me</button>
    <script >
    function fun(){
    document.writeln("HI");
    }
</script>
</body>
```

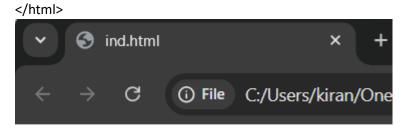


HI



WELCOME

```
Click me
```

```
TASK - 7.3
<!DOCTYPE html>
<html>
<body>
  <h1 id="one">HEY KIRAN!</h1>
<script >
var p=document.getElementById("one");
p.append("COME LET'S GO");
</script>
</body>
</html>
```





HEY KIRAN!COME LET'S GO

```
TASK - 7.4
```

```
<!DOCTYPE html>
<html>
<body>
  <button onclick="toggleVisibility()">Toggle the Visibility</button>
  <div id="myDiv" style="width: 200px; height: 100px; background-color: rgb(226, 173, 230);">
  This is div element!
  </div>
  <script>
  function toggleVisibility() {
  var element = document.getElementById("myDiv");
  element.style.display = (element.style.display === "none" ? "block" : "none");
```

```
}
</script>
</body>
</html>
```

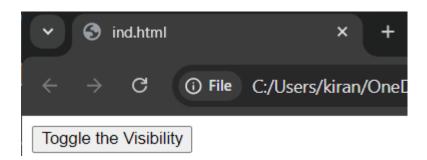




```
Toggle the Visibility
This is div element!
```

TASK 7.5


```
<!DOCTYPE html>
<html>
<body>
  <style>
    .attributee{
      color: rgb(64, 255, 0);
    };
  </style>
  <body>
  <h1 id="Id">Hi Kiran!</h1>
  <button onclick="addAttribute()">Add Element</button>
  <script>
    function addAttribute(){
      document.getElementById("Id").setAttribute("class","attributee");
    }
</script>
```

</body>



Hi Kiran!

Add Element



Hi Kiran!

Add Element