

Ayati Devices

Report no :

Patient ID :

Name :

Report no :

Age :


Perfusion Study

BRIEF EXAMINATION NOTES:


--



PERFUSION IMAGE

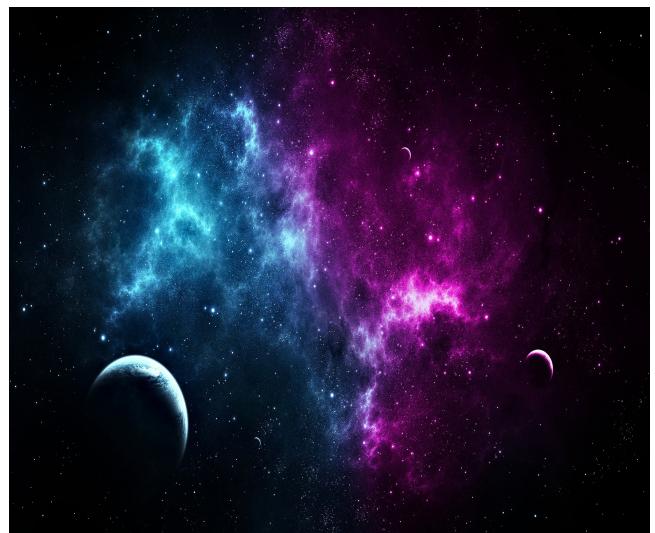

NORMAL IMAGE

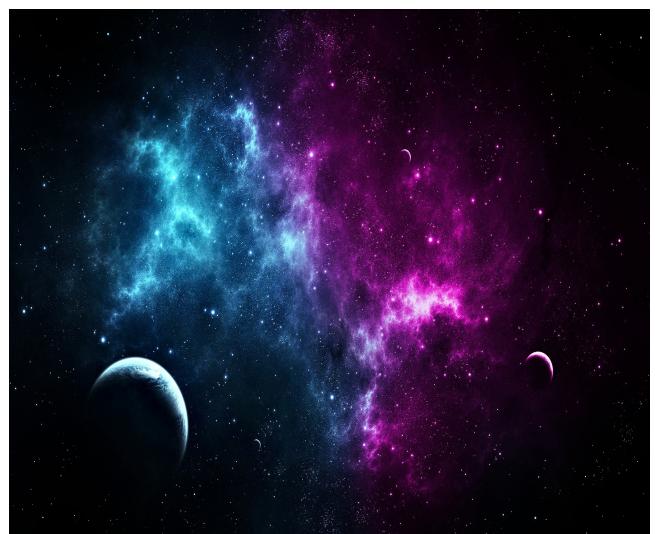

Activities Visual Studio Code ▾ Tue Jan 17, 4:30:22 PM

C/C++ Configurations - Desktop - Visual Studio Code

File Edit Selection View Go Run Terminal Help

EXPLORER ... C pdf_gen.c 2 C/C++ Configurations X

OPEN EDITORS C pdf_gen.c... 2 C/C++ Configurations

DESKTOP C hpdf_real.c C hpdf_shading.c C hpdf_streams.c C hpdf_string.c C hpdf_u3d.c C hpdf_utils.c C hpdf_xref.c C pdf_gen.c 2 C t4.h

~.lock.software deve... C .cprogram.c ~.hello.sh.swp ~.kiran.swp ~.kirna.swp ~.note.swp

> OUTLINE > TIMELINE

Include path

An include path is a folder that contains header files (such as `#include "myHeaderFile.h"`) that are included in your code. Specify a list of paths for the IntelliSense engine to use while searching for included header files. Searching on this page is not recursive. Specify `**` to indicate recursive search. For example, `${workspaceFolder}/**` will search through all subdirectories while `${workspaceFolder}` will not. If on Windows with Visual Studio installed, or if a compiler is installed, specifying the `compilerPath` setting, it is not necessary to list the system include paths in this list.

One include path per line.

```
/home/kiran/Downloads/libharu-master/include  
/home/kiran/Downloads/libharu-master/src  
/home/kiran/Downloads/libharu-master/win-32/
```

Cannot find: /home/kiran/Downloads/libharu-master/win-32/

Defines

A list of preprocessor definitions for the IntelliSense engine to use while parsing files. Optionally, use `=` to set a value.

PROBLEMS 2 OUTPUT DEBUG CONSOLE TERMINAL

kiran@kiran:~/Desktop\$

Chrome VS Code File Explorer Terminal

