

Analysis of Ancestry in Genetic Programming with a Graph Database


David Donatucci
M. Kirbie Dramdahl
Nicholas Freitag McPhee

Division of Science and Mathematics
University of Minnesota, Morris
Morris, Minnesota, USA

25 April 2014
MICS, Verona, WI

The Big Picture

- Genetic programming demonstrated to be effective for a variety of applications.
- Difficult to determine why this is true.
- Databases allow us to examine internal interactions of a run.
- Graph databases more efficient at this task than relational databases.
- Use this knowledge for improving genetic programming.

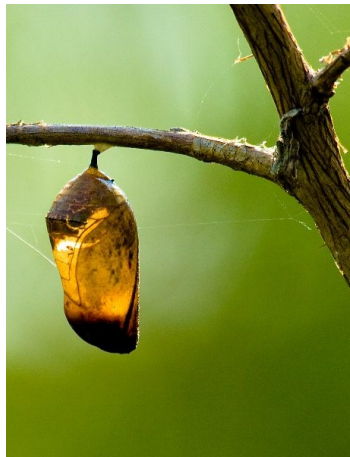

Bluedrakon

<http://tr.im/pWUi>


Outline

- 1 Genetic Programming
- 2 Graph Database
- 3 Experimental Setup
- 4 Results
- 5 Conclusions

Outline

- 1 Genetic Programming
 - GP Overview
 - Symbolic Regression and Fitness
- 2 Graph Database
- 3 Experimental Setup
- 4 Results
- 5 Conclusions

Genetic Programming Overview

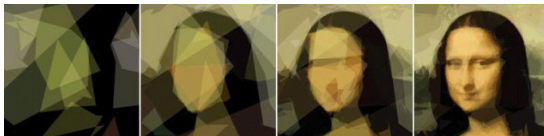

Roger Alsing

<http://io9.com/5106124/a-computer-program-that-taught-itself-to-draw-the-mona-lisa>

- Genetic Programmings is based upon biological principles.
- Individuals form a population.
- Transformations
 - Crossover (XO)
 - Mutation
 - Reproduction
 - Elitism
- Transformations occur over a specified amount of generations.
- Individuals are rated by their fitness.


Transformations

Crossover (XO) sexual reproduction (root and non-root)

Mutation subtrees altered

Reproduction asexual reproduction

Elitism reproduction based on fitness

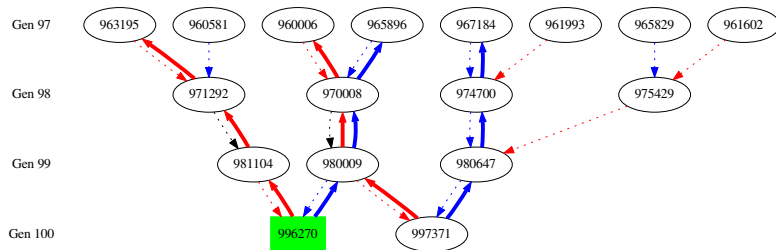

Symbolic Regression and Fitness

We are focusing on symbolic regression problems.

- Collection of test points as input.
- Evolve mathematical formula to fit data.

Fitness determines individual's distance from target function.

- Lower the fitness, the better the individual.
- A zero fitness would exactly match test data.

The goal of GP is to evolve an individual with a fitness as low as possible.

Outline

1 Genetic Programming

2 Graph Database

- Neo4j
- Cypher

3 Experimental Setup

4 Results

5 Conclusions

Neo4j

Neo4j is a graph database.


- Relatively new tool (initial release 2007 popularized in 2010).
- Information is stored like a graph.
- Nodes and relationships.
- Efficient recursive queries compared with traditional databases.

Cypher

Neo4j's query language is Cypher.

Fundamental elements of
Cypher queries:

- START
- RETURN
- MATCH
- WHERE

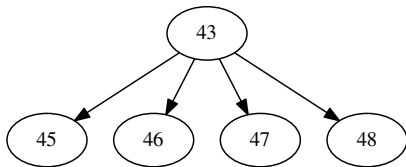

```
START parent=node(43)  
MATCH (parent)-[:PARENTOF]->(child)  
RETURN parent, child;
```

Outline

1 Genetic Programming

2 Graph Database

3 Experimental Setup

- Configurations

4 Results

5 Conclusions

Run Configurations

Target Function $\sin(x)$

Variables x (range from 0.0 to 6.2, incremented by steps of 0.1)

Constants range between -5.0 and 5.0

Operations addition (+), subtraction (-), multiplication (*), protected division (/)

Generation Number 100

Population Size Per Generation 1000 (6 runs) and 10000 (1 run)

Transformation Percentages Crossover (90%), Mutation (1%),
Reproduction (9%)

Elitism best 1%

Fitness Absolute error between target function and individual function.

Outline


- 1 Genetic Programming
- 2 Graph Database
- 3 Experimental Setup
- 4 Results**
 - Questions Asked
 - Fitness Over Time
 - Improved Transformations
 - Common Ancestor
- 5 Conclusions

Questions Asked

- 1 *What does the fitness of the “winning” root parent ancestry line look like over time?*
- 2 *How often do mutations improve fitness? Also, how often do crossovers improve fitness, where the root parent is more fit than the non-root parent, and vice versa?*
- 3 *Do a group of individuals have a common root parent ancestor and what is the latest generation where such an ancestor occurs?*
- 4 *How many individuals in the initial generation have any root parent descendants in the final generation?*

Fitness Over Time

What does the fitness of the “winning” root parent ancestry line look like over time?

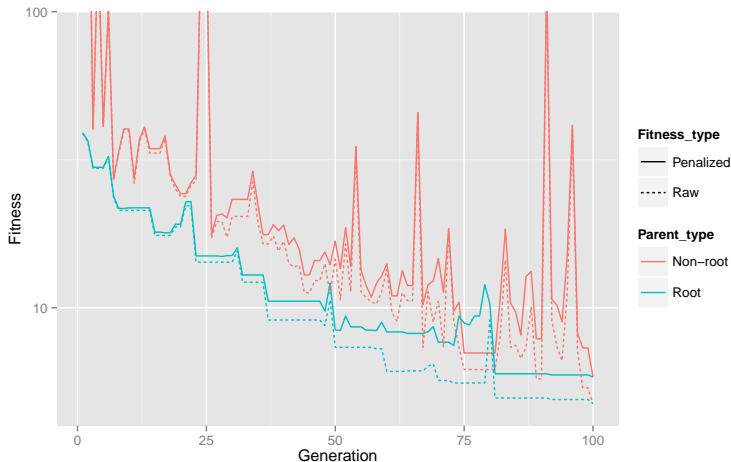


Percentage of Improved Transformations

How often do mutations and crossovers improve fitness?

Results for 10000 Individual Run




Results for Three 1000 Individual Runs

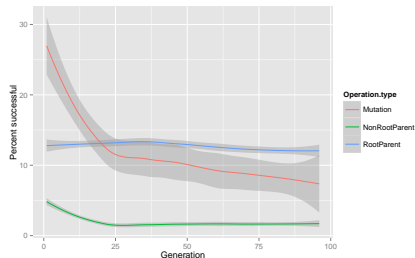

Common Ancestor

Do a group of individuals have a common root parent ancestor and what is the latest generation where such an ancestor occurs?

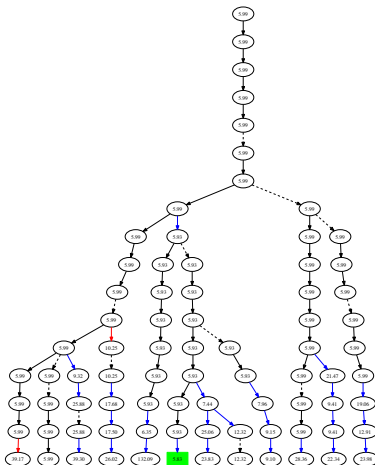

Outline

- 1 Genetic Programming
- 2 Graph Database
- 3 Experimental Setup
- 4 Results
- 5 Conclusions**

Conclusions

- We can gather internal data!
- Provides more in depth information than statistical summaries.
- Support for hypotheses.

Future work

- Trying different setup configurations.
- Enforcing the root parent to have better fitness in XO.
- Dynamically change parameters.

Thanks!

Thank you for your time and attention!

Contacts:

- `donat056@morris.umn.edu`
- `dramd002@morris.umn.edu`
- `mcphee@morris.umn.edu`

Questions?

References