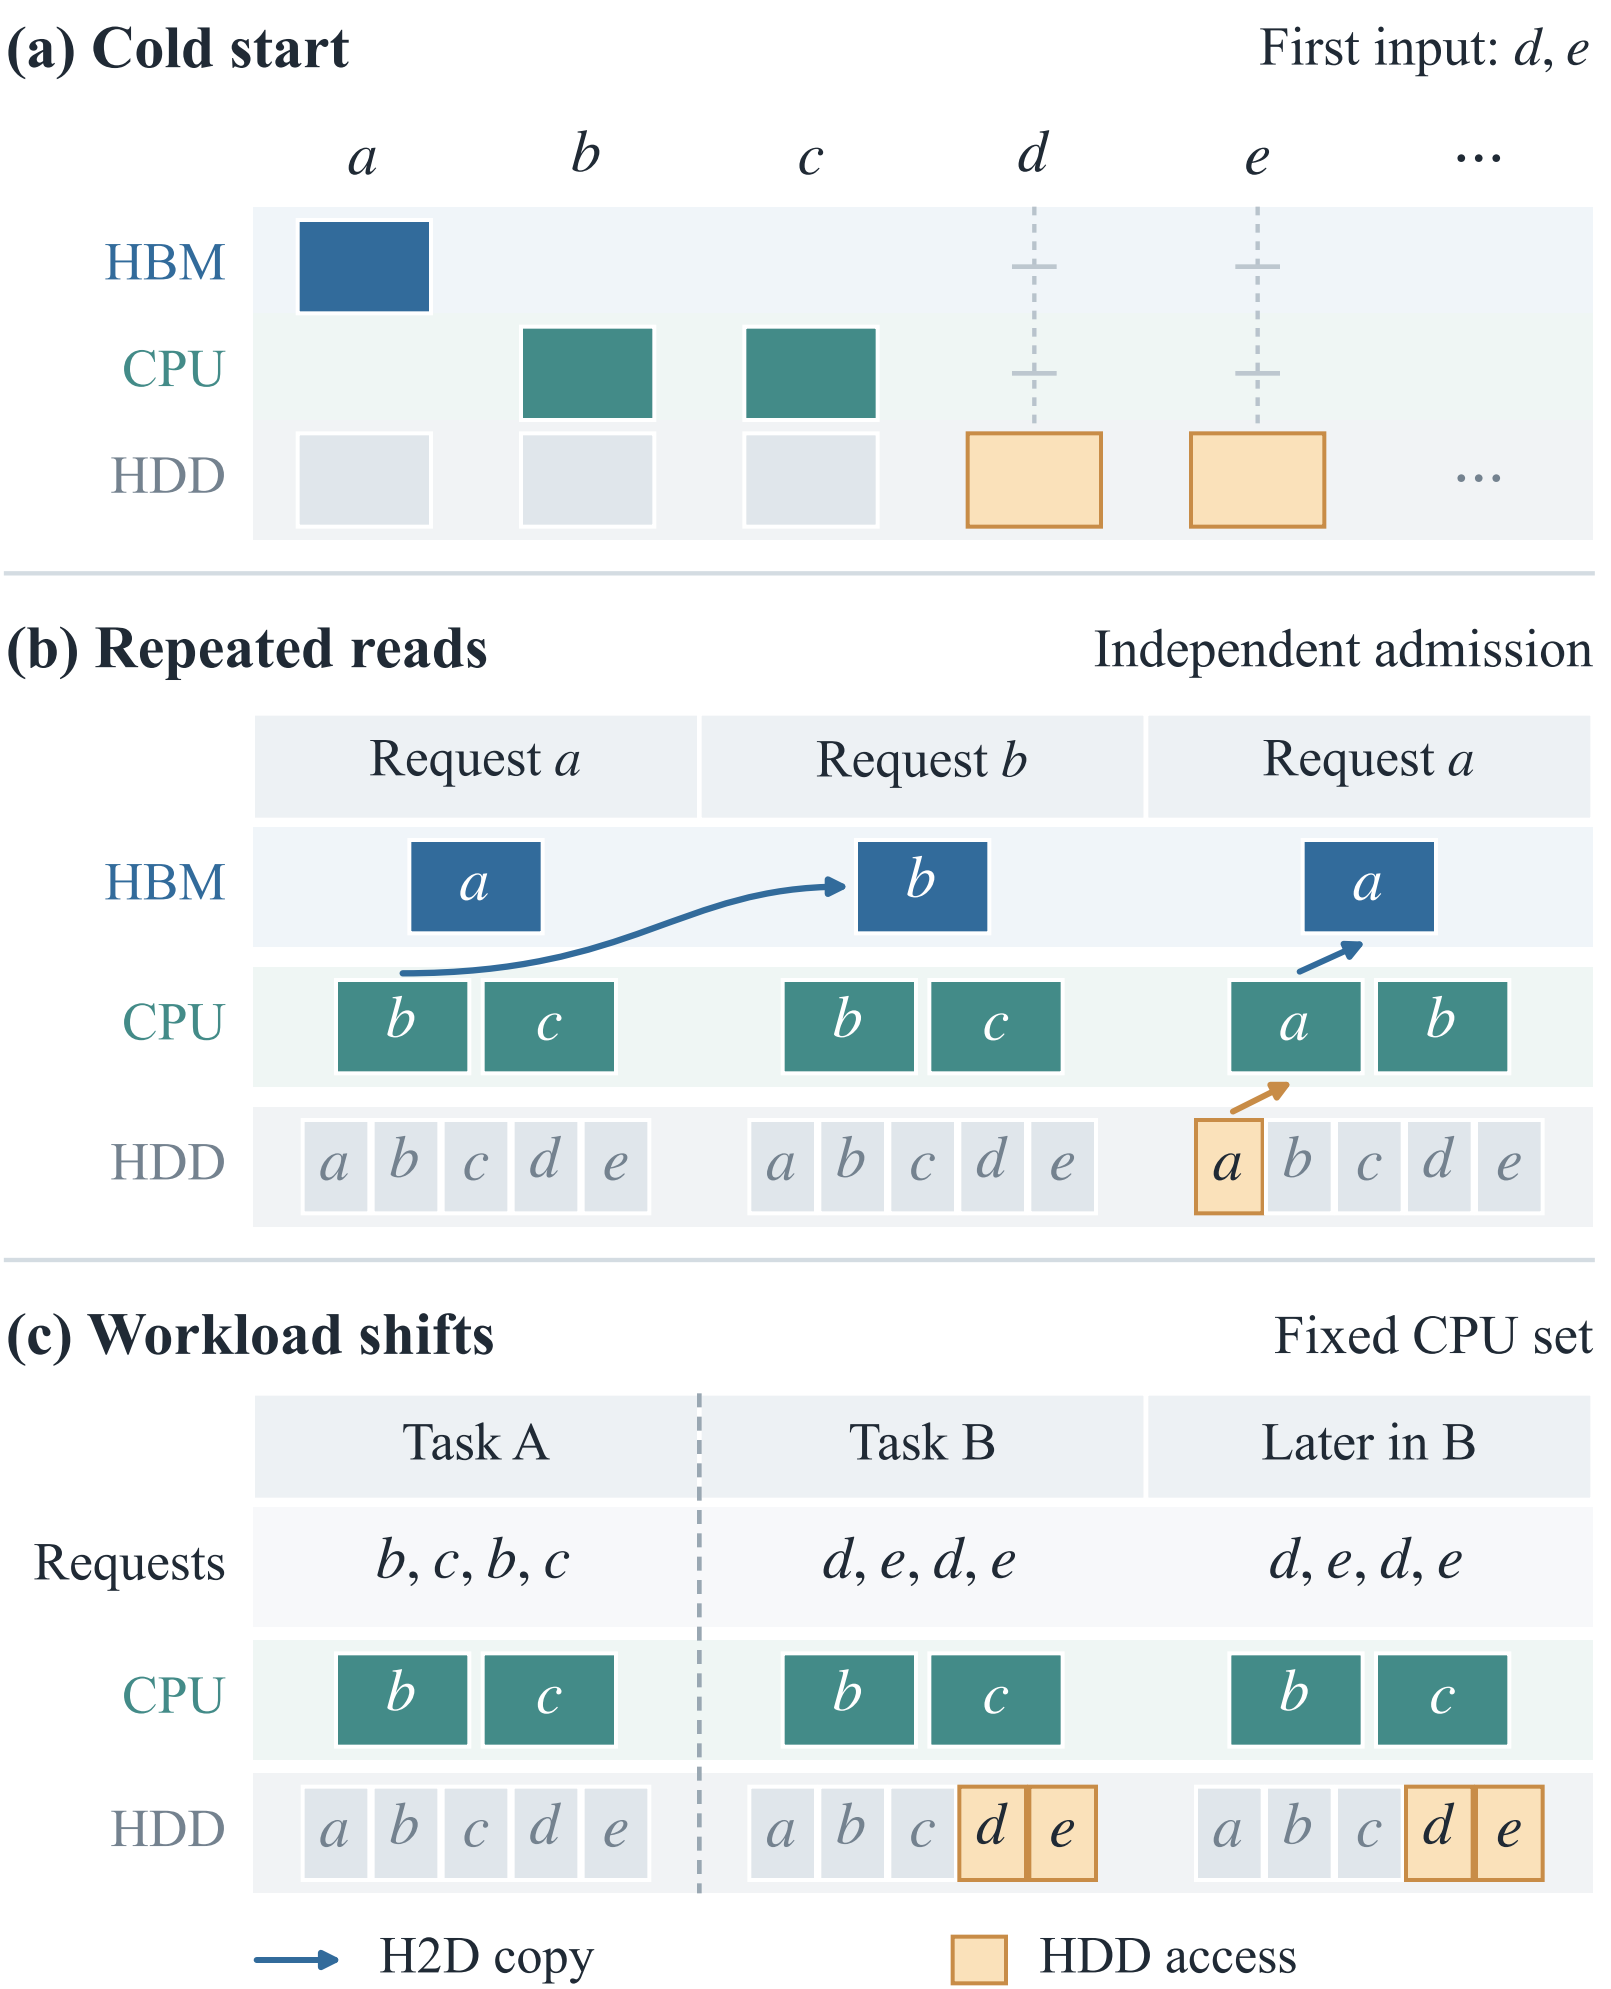
(a) Cold start
First input: d, e
a
b
c
d
e
...
HBM
CPU
HDD
...
(b) Repeated reads
Independent admission
Request a
Request b
Request a
HBM
CPU
HDD
a
b
c
d
e
(c) Workload shifts
Fixed CPU set
Task A
Task B
Later in B
Requests
b, c, b, c
d, e, d, e
d, e, d, e
H2D copy
HDD access