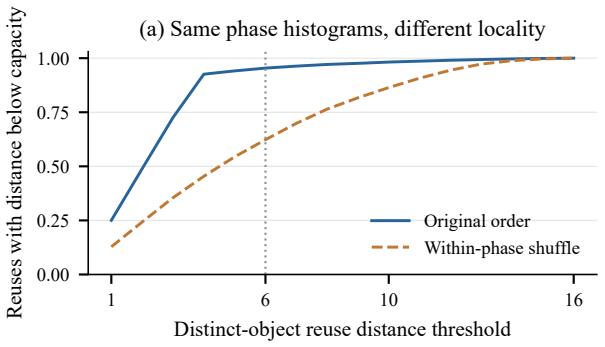
(a) Same phase histograms, different locality
Reuses with distance below capacity
1.00
0.75
0.50
0.25
0.00
1
6
10
16
Distinct-object reuse distance threshold
Original order
Within-phase shuffle

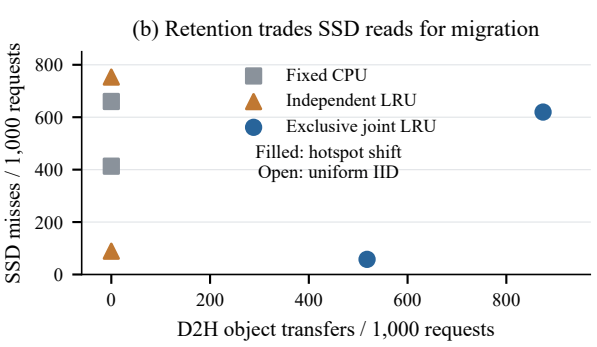
(b) Retention trades SSD reads for migration
SSD misses / 1,000 requests
800
600
400
200
0
0
200
400
600
800
D2H object transfers / 1,000 requests
Fixed CPU
Independent LRU
Exclusive joint LRU
Filled: hotspot shift
Open: uniform IID