Supplementary Material for WEAVE

Anonymous submission

Abstract

This supplement gives the implementation and evaluation details needed to reproduce the experiments reported in the main paper. It consolidates the paper source directory, experiment records, frozen run configurations, training logs, evaluation summaries, and timing records into a path-sanitized description. Machine-specific locations are expressed as variables such as `<REPO_ROOT>`, `<DATA_ROOT>`, `<EXP_ROOT>`, and `<CACHE_ROOT>`; machine-specific paths are not required by the protocol.

Scope and Source of Record

The main paper directory is `aaai2027_v4`. The supplement is aligned with the main-paper Table 1, Figure 5, and the method/ablation narrative current as of the AAAI v4 packet. The formal source of record is:

- `aaai2027_v4/paper.tex`: main claims, tables, and captions.
- `aaai2027_v4/fig_data/dino_main.json`: DINO metric sidecar used by the figure scripts.
- `aaai2027_v4/fig_data/method_probes.json`: model-probe sidecar.
- `experiments/architecture/hf_oriented_internal_early_stop.json`: D5 paper training configuration.
- `runs/submission/hf_oriented_internal_early_stop/config.json`: frozen merged run configuration.
- `runs/submission/hf_oriented_internal_early_stop/logs/training_*.csv`: training and internal-probe log.
- `exp/model_probe/inf_timing/generation_only_timing_summary.json`: generation-only timing record.
- `docs/model_probe/target_hf_delta_eval_summary.json`: aggregate target-HF route probe metrics.

This is an anonymized submission for review purposes only. Distribution, citation, or public sharing of this manuscript is strictly prohibited. Copyright and publication details will appear in the final version if accepted.




Figure 1: Experiment inventory. Results used in the paper are separated from diagnostic and historical runs retained for traceability.

- `docs/reproduction/internal_dynamics_early_stop.csv`: compact internal-dynamics curve.

All paths above are relative to `<REPO_ROOT>/WEAVE`. All artifacts are referred to by logical paths so that the supplement is portable across storage layouts.

Directory Audit and Cleanup Policy

Before writing this supplement, the paper directory and the full experiment tree were audited rather than treated as a single opaque result folder. The audited `exp` tree contained 111 experiment directories, 662 JSON files, 482 CSV files, and 43 log files. The formal supplement only cites records that are needed to reproduce the paper packet. Historical and failed experiments are retained in the ledger as diagnostic context, but they are not used as source-of-truth for the main claims. The source checkout was also audited and found to be an active research worktree rather than a clean release tree: it contained hundreds of uncommitted deletions, modifications, and untracked probe/supplement artifacts. For that reason, this supplement uses committed paper files, frozen run snapshots, and explicit probe summary sidecars as its source of record instead of relying on the ambient working-tree state.

Group	Count	Interpretation
Paper-facing runs	5	`dino_s_break`, `main_table`, `bench_all_3060`, `other5_eval`, and `latent_wct_baseline`. These are the directories used for the submission tables, timing, and supporting zero-shot checks.
Model and infra probes	5	`model_probe`, `infra_diag`, `infra_infer_bench`, `infra_opt`, and `param_sweep`. These diagnose speed, target-HF routes, and inference knobs.
Ablation directories	30	`ablation_*`, `abl_*`, `sty_inject`, and `seed3`. These record component and sensitivity checks but are not the final checkpoint source.
Historical search runs	65	Earlier `630_*`, `710_*`, `r3_*`, `r4_*`, `hp_*`, `evo_*`, and refactor runs. These explain design convergence and were excluded from the main result ledger unless explicitly referenced.

Cleanup rule. Raw records may contain machine-specific cache paths. The public supplement normalizes all locations into four variables:

Variable	Meaning
`<REPO_ROOT>`	Checkout containing `WEAVE`.
`<DATA_ROOT>`	Dataset and latent-cache root.
`<EXP_ROOT>`	Experiment output/checkpoint root.
`<CACHE_ROOT>`	Evaluation feature-cache root.

No absolute paths, host addresses, machine names, or user names are needed to run the protocol.

Paper Directory Contents

The `aaai2027_v4` directory contains the submission source, generated figures, figure sidecars, and build scripts. The 13 files in `fig_data` are treated as figure/data sidecars rather than raw experiment roots:

File	Size	Role
`dino_main.json`	11175	DINO-S/DINO-C sidecar for D5-512, P2A-256, and R5-WikiArt.
`method_probes.json`	16354	Aggregated source for the model-probe figure.
`method_probes_run.log`	16356	Reproducibility log for probe aggregation.
`method_probe_endpoint.csv`	2289	Endpoint/AdaIN ablation values.
`method_probe_frequency.csv`	3645	Frequency/subband probe values.
`method_probe_style_separability.csv`	415	Style-separability probe values.
`swd_loss_separability.json`	1074	SWD-loss diagnostic sidecar.
`curve_metrics_hf.csv`	19824	Baseline curve metrics used for analysis plots.
`teaser_*.png/.jpg`	295598	Teaser visual assets for content, WEAVE, SaMam, Seedream, and StyleID.

The compiled paper figures are regenerated by the following scripts: `gen_figures.ps1`, `plot_page1_summary.py`, `plot_method_probes.py`, and `make_radar_metric_blocks.py`. The supplement does not depend on temporary LaTeX build files such as `paper.aux`, `paper.fls`, or prior compile logs.

Datasets and Evaluation Boards

D5-512. The primary benchmark is Distinct5-WikiArt at 512 px. It contains five WikiArt styles: Early Renaissance, Impressionism, Minimalism, Rococo, and Ukiyo-e. Each style contributes 3600 training images and 150 test images. Evaluation uses all ordered source-target style pairs with 30 content images per source style, giving 750 pairs in total. The 150 same-style pairs are retained as identity calibration rows rather than removed.

P2A-256. The photo-to-art board evaluates transfer at 256 px. It uses the same ordered evaluation logic but with a lower-resolution latent/image cache. It is included to test whether the method remains stable when high-frequency subbands are compressed by resolution.

R5-WikiArt. R5 tests style-family generalization on five WikiArt styles drawn at random and disjoint from D5: Cubism, Expressionism, Pop Art, Romanticism, and Symbolism (`datasets/r5/test`; 30 images per style). Evaluation uses the same ordered 750-pair protocol as D5 ($5 \times 5 \times 30$). R5 is not the same set as Other5 (used only for the zero-shot conditioning table in the main paper), which mixes a different five-family held-out list.

Pairing and calibration. All learned methods use the same ordered pair lists within a board. For D5-512 training, source-target pairing uses the frozen pairing cache `<DATA_ROOT>/wikiart_distinct5_samam_512_latents_ema/train/.latent_`




Figure 2: Reproducibility pipeline. The public protocol is defined by dataset artifacts, the frozen config chain, the ordered evaluation boards, and metric sidecars. Physical drive letters and host details are not part of the experiment definition.

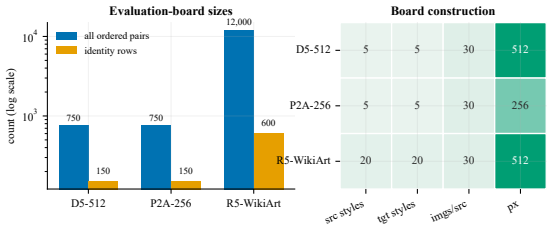


Figure 3: Evaluation-board construction. D5-512, P2A-256, and R5-WikiArt each use a 750-pair board with identity rows retained. R5 is five randomly selected held-out WikiArt styles (Cubism, Expressionism, Pop Art, Romanticism, Symbolism).

`cache/prototype_pairing_top8.pt`. The final paper run disables active top-k filtering at training time (`pairing_cache_active_topk=0`) after loading the cache. Identity rows are used to estimate the no-op style floor and the content ceiling.

Dataset Layout

A reproducible installation should provide the following logical layout. The names are shown as canonical relative roots; exact physical storage locations are intentionally left variable.

Logical path	Contents
`<DATA_ROOT>/wikiart_distinct5_samam_512_latents_ema/train`	Packed 512 px latent training cache for the five D5 styles, plus latent-cache metadata.
`<DATA_ROOT>/wikiart_distinct5_samam_512_latents_ema/train/.latent_cache/packed`	Packed latent tensors consumed by the training dataloader.
`<DATA_ROOT>/wikiart_distinct5_samam_512_classview/test`	D5-512 held-out class-view image tree used by full evaluation.
`<DATA_ROOT>/wikiart_distinct5_512_images/test`	D5-512 image tree used as a style-bank root for reference-feature cache generation.
`datasets/r5/test`	R5-WikiArt held-out test tree (five randomly selected styles).
`<DATA_ROOT>/p2a_256/...`	P2A-256 test/cache roots; use the same ordered-pair protocol and metric scripts as D5.

Expected counts. For D5-512, the evaluation board has 5 source styles, 5 target styles, and 30 content images per source style, for 750 ordered evaluations. For P2A-256, identity-style rows are retained in the board definition but some external baselines only provide the 600 off-diagonal transfers; this is why DINO sidecars record both `n_images` and `n_skipped`. For R5-WikiArt, the board is likewise 750 ordered pairs on five randomly selected held-out WikiArt styles.

Data Preprocessing Contract

Training consumes latent tensors rather than raw images. A correct preprocessing run must:

1. Resize/crop images consistently with the target board resolution.
2. Encode images with the SD1.5 EMA VAE and store the latent scaling factor `0.18215` in the config path.

3. Preserve style subdirectories exactly as listed in the config: `Early_Renaissance`, `Impressionism`, `Minimalism`, `Rococo`, and `Ukiyo_e`.
4. Build or provide the prototype pairing cache used by D5 training.
5. Build CLIP/DINO reference caches under `<CACHE_ROOT>` only from held-out test/style-bank images, not from generated outputs.

The public result is reproducible as long as these logical artifacts match. Their physical drive letters and cache locations are not part of the method.

Dataset integrity checks. The dataloader assumes every style directory contains latent tensors encoded with the same VAE, style labels are derived from directory names, and the train/test split is not mixed. A minimal integrity pass should check style directory names, count consistency, latent tensor shape and scale, absence of generated images in reference caches, and whether the pairing cache was built from training latents rather than held-out test images. If a dataset is moved, only root paths should change; style names, cache names, and board construction should remain byte-identical or be regenerated from the same scripts.

Hardware and Software Environment

All training and timing numbers reported in the paper come from a single consumer-class GPU. The environment is described by role, not by machine identifier:

Component	Value
GPU class	NVIDIA GeForce RTX 3060, 12 GB
Training precision	bfloat16 automatic mixed precision
TF32 matmul	enabled
Device count	1 GPU

The method itself does not depend on a specific software stack version beyond the ranges listed above; any consumer GPU with ≥ 12 GB VRAM and a working PyTorch CUDA build reproduces the reported numbers.

The software stack follows `WEAVE/requirements.txt`: PyTorch $\geq$ 2.3, torchvision $\geq$ 0.18, transformers $4.57 \leq v < 5$, diffusers $0.38 \leq v < 0.39$, LPIPS, torch-metrics, torch-fidelity, Pillow, NumPy, SciPy, scikit-learn, and tqdm. The frozen VAE is the SD1.5 EMA VAE used only for latent encoding/decoding; it contributes 84M frozen parameters and is not trained.

Model and Training Setup

WEAVE trains a compact velocity model in SD1.5 VAE latent space. A single-level Haar DWT splits the latent into LL/LH/HL/HH subbands. The base network has four residual blocks of width 64 and three supervised output heads for LL/LH/HL. The D5 model adds separate pooled target-LH and target-HL encoders whose gated residuals enter only the matching velocity heads. The complete model has 1,037,087 trainable parameters; the frozen VAE is reported separately as $1.04\text{M}^{+84\text{M}}$.

Field	Paper configuration
Config	`experiments/architecture/hf_oriented_internal_early_stop.json`
Base config	`config.json`
Seed	42
Maximum epochs	15; internal stop at epoch 4
Batch size	96
Gradient accumulation	1
Optimizer	AdamW, fused when available
Learning rate	2.0×10^{-4}
Minimum learning rate	1.0×10^{-5}
Schedule	cosine
Weight decay	1.0×10^{-4}
Gradient clipping	1.0
Precision	bf16 AMP
Channels-last layout	enabled
Torch compile	disabled
Workers	0
Checkpoint interval	every epoch
Internal probe batch	4 fixed latents at (t=0.5)

The structure-aligned target is constructed in the wavelet basis. The LL target is a mild content-preserving blend,

$$\begin{aligned}\mathrm{LL}_{target} = {} & 0.7\,\mathrm{LL}_{content} \\ & + 0.3\,\mathrm{AdaIN}(\mathrm{LL}_{content}, \mathrm{LL}_{style}),\end{aligned}$$

while the high-frequency target uses the target-style LH/HL/HH bands. The implementation minimizes the band-weighted velocity-matching loss given in the main paper; no additional edge or low-pass loss is active in the submitted configuration.

Resolved Configuration Details

The frozen merged configuration for the paper run resolves the short public config into the following relevant fields:

Training Log Audit

The D5 paper run contains four logged epochs, each with 52 optimizer steps and effective batch size 96. The wall-clock epoch time sums to 82.80 s. The probe is evaluated after the optimizer and scheduler step, before checkpoint saving, and does not decode images.

Epoch	Loss	Learning rate	Epoch time (s)	Stop event
1	1.3631	2.0000e-4	25.72	no
2	1.3318	1.9792e-4	19.23	no
3	1.3199	1.9179e-4	18.94	no
4	1.2499	1.8186e-4	18.90	yes

The first epoch is slower because caches and kernels are warmed. Later epochs take about 19 s on a single RTX 3060 (12 GB), including the fixed-latent probe.

Field	Value	Relevance
model.contract_family	weave	Selects the WEAVE architecture contract.
model.base_dim	64	Backbone width.
model.time_dim	256	Time embedding width.
model.num_res_blocks	4	Main residual block count.
model.num_hires_blocks	2	High-resolution block count.
model.num_decoder_blocks	2	Decoder block count.
model.target_latent_hf_subband_fusion_enabled	true	Activates orientation-specific target-HF residuals.
model.target_latent_hf_head_fusion_gate_init	0.18	Initial LH/HL route gate.
model.lowpass_mode	dwt_haar	Single-level Haar decomposition.
model.endpoint_adain_mode	spatial_fiber	High-frequency residual statistics matched after every Euler step.
model.endpoint_adain_only_last_step	false	Keeps AdaIN inside all eight integration updates.
model.endpoint_adain_scale	2.0	Inference-time extrapolation toward matched statistics.
model.style_extrap_alpha	0.1	Slight target-statistics extrapolation at inference.
bridge.objective_mode	flow_matching	Noise-regularized endpoint-velocity regression.
bridge.loss_type	mse	Velocity matching loss.
training path	$t \sim \mathcal{U}[0,1]$	Time sampling used by the submitted flow objective.
bridge.bridge_sigma	0.02	Scales the $\sqrt{t(1-t)}$ interpolation perturbation.
bridge.training_target_projection_mode	dwt	Target construction in wavelet space.
bridge.spectral_w_ll/lh/hl/hh	0.3/1.0/1.0/inactive	HH has no velocity head in WEAVE.
bridge.ll_partial_alpha	0.3	Mild LL style-statistics migration.
training.internal_probe_enabled	true	Measures fixed-batch loss-path gradients after each epoch.
training.internal_early_stop_enabled	true	Stops at the first gate/gradient transition.

Table 1: Resolved fields from the frozen paper configuration.

Internal-Dynamics Probe

For a fixed latent minibatch, the implementation performs one backward pass for the LL loss and one for the summed LH/HL loss. Gradients are aggregated over the shared input, attention, AdaLN, and feed-forward modules. The target-HF route and ordinary HF heads are measured separately. The model runs in evaluation mode during the probe, no optimizer step is taken, and `torch.random.fork_rng` restores CPU and CUDA random states.

Epoch	Gate	ΔGate	Shared LL/HF	Route/shared	Route/head
1	0.173068	0.000000	1.4727	0.8323	0.1816
2	0.172264	-0.000803	1.4328	0.6133	0.1907
3	0.172009	-0.000255	1.0868	0.4984	0.2111
4	0.175719	+0.003710	0.1634	0.2370	0.4561

Epoch 4 is the first joint event where the gate derivative is positive and the shared LL/HF ratio contracts by at least 35% from the preceding epoch. A retrospective probe of the complete 15-epoch curve selects the same epoch, whose DINO-S is the curve maximum. Residual alignment to the FM target, however, continues to improve after epoch 4 while DINO-S declines. This separates the proposed transition from ordinary loss-based early stopping: it detects a change in route ownership rather than a plateau in endpoint regression.

The original absolute crossing-at-one rule was scale-sensitive. Replacing it by $\rho_e/(\rho_{e-1}+\epsilon) \leq 0.65$ selects

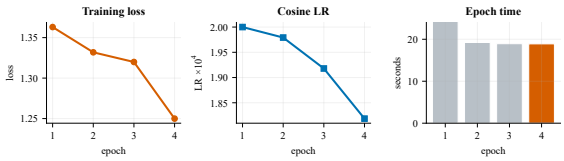


Figure 4: Training dynamics for the selected D5-512 checkpoint. Training stops at epoch 4 when the high-frequency conditioning gates increase and the shared LL/HF gradient ratio contracts sharply relative to the preceding epoch.

epoch 4 for probe batches 2/4/8 and seeds 42/7, and epoch 3 for seed 123. The additional seed-7 and seed-123 checkpoints give (DINO-S, CLIP-S, LPIPS, DINO-C) of (0.4910, 0.7140, 0.2668, 0.8076) and (0.4862, 0.7144, 0.2552, 0.8040), respectively. Thus the event is stable to the tested probe scale and keeps the selected point near the canonical frontier; it is not claimed as an architecture-independent criterion.

Implementation Notes

The implementation is organized around `run.py` for training, `trainer.py` for the optimization loop, `model.py` for the compact velocity network, `wavelet.py` for DWT/IDWT operations, and `utils/run_evaluation.py` for board evaluation. Each training run copies a source snapshot into

the run directory; this is why the paper checkpoint can be audited independently of later code cleanup.

Module	Reproducibility role
`run.py`	Loads resolved config, seeds the run, builds dataloader, launches trainer, and optionally invokes full evaluation.
`trainer.py`	Implements optimization, fixed-batch internal probes, checkpoint snapshots, and epoch logs.
`internal_dynamics.py`	Measures route-specific gradients and applies the gate/gradient transition rule.
`model.py`	Defines the WEAVE velocity backbone, oriented target-HF route, heads, solver hooks, and endpoint operations.
`wavelet.py`	Implements Haar DWT/IDWT and subband packing/unpacking used by training and inference.
`utils/run_evaluation.py`	Generates ordered board outputs, decodes VAE latents, builds/loads caches, computes CLIP/LPIPS, and writes summaries.
`aaai2027_v4/*.py`	Converts sidecars into paper figures and supplement plots.

Implementation details that materially affect reproduction are:

- **Latent scale:** the VAE latent scale factor is `0.18215`.
- **Subband contract:** LL carries structure/color anchor information, while LH/HL/HH carry high-frequency style statistics.
- **Prediction target:** training predicts latent-space velocity/endpoint transport rather than RGB pixels.
- **Output heads:** the compact network supervises LL/LH/HL heads in the audited paper config. HH participates in target/statistics construction and endpoint alignment.
- **Evaluation separation:** generation, VAE decode, CPU image materialization, CLIP/DINO/LPIPS metrics, and CSV writing are timed separately.
- **Cache safety:** reference feature caches are derived from held-out style banks and may be rebuilt; they should not be copied from generated-output folders.

Information-Flow Diagnosis

Closed-form Pixel–Latent Representability

We test whether appearance changes that are simple in RGB remain simple after VAE encoding, without training a network. The test uses 96 source-disjoint requests at 256×256 resolution. For each request, we construct four RGB targets: a channel-wise color shift, AdaIN, WCT, and a channel-wise gamma curve. The target latent is the deterministic posterior-mean encoding of that same transformed image; posterior sampling is not used.

In each representation, we independently solve the optimal cross-channel 1×1 affine map by least squares over all spatial positions of each request. We report its squared endpoint residual divided by the true endpoint-displacement energy. This normalization makes zero displacement equal to one in either representation and avoids comparing raw RGB and latent MSE scales.

RGB target transformation	Pixel NMSE	VAE-latent NMSE
Color shift	0.0072	0.2527
AdaIN	0.0122	0.3138
WCT	0.0143	0.3765
Gamma curve	0.0411	0.2937

The small nonzero RGB residuals arise from clipping and, for the gamma target, from its nonlinearity. The much larger latent residual remains even though the fit is an optimistic per-request oracle. The result therefore isolates a representation effect: VAE compression reduces spatial computation, but a pointwise RGB appearance change need not remain pointwise or affine in latent coordinates.

As a matched nonlinear check, we train the same four-layer 1×1 conditional MLP in both representations for 1,500 optimizer steps and three seeds. Both versions use width 64, SiLU activations, identical request batches and sampled spatial positions, and the same RGB content/style means and standard deviations as conditioning. This is a separate pointwise representation diagnostic, not an image-quality evaluation.

Representation	Endpoint NMSE
Pixel	0.0327 ± 0.0004
VAE latent	0.3126 ± 0.0041

The latent curve plateaus near its closed-form affine residual, whereas Pixel continues toward the target.

Figure 3(b) uses a spatial TinyUNet with approximately 7.6M parameters, 480 training pairs, 30 epochs, and three seeds. All variants use the same global velocity MSE. Pixel and plain latent transport use the RGB-AdaIN endpoint in their respective representations; the third variant changes only the latent endpoint to LL from the source and LH/HL/HH from the style.

Transport setting	Final NMSE	Seeds
Pixel, RGB-AdaIN endpoint	0.0418 ± 0.0029	3
VAE latent, RGB-AdaIN endpoint	0.3542 ± 0.0060	3
VAE latent, spectral endpoint	0.0086 ± 0.0004	3

The frequency-decoupled endpoint is substantially easier for the same network to regress. This is an internal learnability result, not an external image-quality comparison.

Latent Subband Statistics

We apply one-level orthonormal Haar decomposition to 5,000 deterministic SD1.5 EMA-VAE latents from five Distinct5 styles. For each latent, subband energy is normalized by total latent energy. Style separability uses 500 latents (100 per style): the scalar response is the per-image mean absolute coefficient in each band, and the reported η^2 is the one-way ANOVA effect size of the style label.

Band	Mean energy	p5	p95	Style η^2
LL	0.659	0.459	0.904	0.436
LH	0.115	0.032	0.184	0.270
HL	0.125	0.038	0.201	0.375
HH	0.101	0.021	0.171	0.499

Because Haar is orthonormal, the energy shares are directly comparable and sum to one. They show a clear scale imbalance rather than an extreme low-pass collapse. The ANOVA result also rejects a hard semantic assignment of LL to content and HH to style: every band is style-sensitive, with a non-monotonic orientation pattern and the largest effect in HH. These measurements motivate separate frequency routes and partial LL movement; they do not determine the numerical LL blend or loss weight, which are evaluated by ablation.

Terminal frequency dynamics. We also evaluate matched 10-epoch checkpoints with $\lambda_{LL} = 0.3$ and 1.0 on the same fixed batch of four cross-style pairs at $t = 0.5$ (seed 42). The values below are a terminal internal snapshot, not an average over training.

λ_{LL}	LL loss	HF loss	$\|g_{LL}\|_2$	$\|g_{HF}\|_2$
0.3	3.03×10^{-2}	1.144	0.592	1.611
1.0	2.94×10^{-8}	1.144	4.27×10^{-7}	2.113

Uniform weighting reaches a nearly zero LL residual and LL gradient while its HF state is essentially unchanged. The weighted model retains active gradients in both routes. This supports monitoring and weighting bands separately, but a single terminal batch does not by itself identify parameter capacity as the cause.

Boundary of the HH-path diagnostic. Across 50 cross-style pairs, the directly comparable output correlations are 0.0245 ± 0.0108 for an HH-head reconstruction and 0.0238 ± 0.0115 for AdaIN; magnitude correlations are respectively 0.0316 ± 0.0119 and 0.0294 ± 0.0137. Thus this test finds no meaningful increase in output-level target topology from the HH head. Its velocity correlates with the supervised HH displacement (0.2086 ± 0.1275), but AdaIN has no corresponding velocity variable, so these quantities should not be divided into a leakage factor. We therefore treat the HH-head choice as the style–content trade-off reported by the ablation, not as evidence of inevitable geometric leakage.

The probe campaign was designed to answer a narrower question than the main table: whether the model's weak style movement came from a wrong target, insufficient training time, or a disconnected conditioning path. The diagnosis favors the third explanation. The structure-aligned target already asks for style in the high-frequency bands:

$$\begin{aligned} \mathrm{LL}_{target} &= 0.7\,\mathrm{LL}_{content} \\ &\quad + 0.3\,\mathrm{AdaIN}(\mathrm{LL}_{content}, \mathrm{LL}_{style}), \\ \mathrm{LH/HL/HH}_{target} &= \mathrm{LH/HL/HH}_{style}. \end{aligned}$$

Thus the loss is not merely reconstructing the source image. The failure mode is that, in the baseline, the target image latent is used to construct supervision but does not strongly enter the velocity predictor as an image-specific condition.

Route	Signal path	Probe reading
Baseline style memory	`style_id` → style memory → cross-attention	Coarse style prior. Gates stay near 0.056–0.061, but removing this route hurts full metrics, so it is useful but not sufficient.
Global target-token fusion	target latent → all style tokens → backbone	Connected but too global; it over-controls LL and does not improve useful style transfer.
Raw spatial target-HF	target DWT-HF maps → HF residual maps	Has sufficient capacity, but leaks target geometry and collapses content.
Pooled subband target-HF	target DWT-HF → per-subband pooled code → HF residual velocity	Current usable path: stronger style signal without target-coordinate leakage.

The strongest negative control is the raw spatial target-HF route. It raises DINO-S and CLIP-S, which shows that the network can read target-style information when the path is opened. However, the same run reduces DINO-C to 0.4043 and raises LPIPS to 0.5382, so the gain is not a valid style-transfer improvement. It is target-layout leakage. The accepted route therefore compresses target high frequencies into coordinate-free subband codes before they reach the HF velocity heads.

Probe Protocol and Result Ledger

All probe rows below fine-tune from the same `brk_a_ll03_10ep` checkpoint family and are evaluated on the D5-512 board with the canonical DINOv2-small metrics. The rows are diagnostic architecture probes; they are not mixed into the main table unless the corresponding architecture is fully rerun under the paper protocol.

Run	DINO-S	DINO-C	LPIPS	CLIP-S	Off-DINO-S	Verdict
target_hf_delta_ft15, ep6	0.4827	0.7917	0.2950	0.7175	0.3986	Path connected, but modest.
target_hf_delta_ft15, ep15	0.4825	0.7913	0.2991	0.7180	0.3987	Longer fine-tune does not solve the bottleneck.
target_hf_delta_strong_ft6	0.4870	0.7991	0.2955	0.7176	0.4019	First usable HF route.
target_hf_spatial_ft6	0.4901	0.4043	0.5382	0.7483	–	Reject: target geometry leak.
target_hf_subband_ft6	**0.4886**	0.7981	0.2966	**0.7209**	0.4039	Primary current architecture probe.
subband residual ablated	0.4858	0.7888	0.3010	0.7205	0.4033	Same checkpoint, target-HF residuals zeroed at inference.
subband residual 1.25x	0.4873	0.7887	0.3007	0.7201	0.4045	Slight off-style gain but lower balanced metrics.
subband residual 1.5x	0.4875	0.7798	0.3054	0.7211	0.4067	Style-biased; content cost too high.
subband residual HH 1.5x	0.4878	0.7836	0.3034	0.7206	0.4061	HH-only boost still trades content for off-style.
target_hf_hybrid_ft6	0.4858	0.7978	0.2956	0.7197	0.4010	Extra shared/residual mixing does not help.
target_hf_subband_head_ft6	0.4873	0.7987	0.2962	0.7192	0.4021	Safe, but below subband residual.
target_hf_spatial_energy_ft6	0.4861	0.7909	0.2978	0.7204	0.4027	Content cost without headline gain.
target_hf_texture_ft6	0.4860	0.7980	0.2964	0.7182	0.4013	Stationary stats are safe but weak alone.
target_hf_subband_texture_ft6	0.4884	**0.7988**	**0.2960**	0.7194	**0.4043**	Conservative alternate with best off-style/content balance.
target_hf_content_anchor_ft6	0.4844	0.7955	0.2982	0.7173	0.3995	Safe placement, not competitive.
target_hf_multitoken_ft6	0.4836	0.7941	0.2980	0.7187	0.3988	More stationary-stat tokens do not help.
target_hf_subband_deep_energy_ft6	0.4826	0.7949	0.2975	0.7176	0.3977	Deeper energy-normalized residual is worse.
target_hf_subband_film_head_ft6	0.4826	0.7917	0.2996	0.7180	0.3983	Direct FiLM into HF heads disturbs the pretrained field.
target_hf_subband_basis_ft6	0.4828	0.7937	0.2971	0.7183	0.3986	Low-rank content-derived basis is safe but underpowered.
target_hf_subband_pairstats_ft6	0.4838	0.7943	0.2971	0.7183	0.3994	Current-target global HF statistics are too coarse.
target_hf_subband_diraux_ft6	0.4862	0.7939	0.2974	0.7189	0.4021	Direction auxiliary improves the probe but hurts image metrics.
subband residual time windows	0.4866	0.7936	0.2975	0.7194	0.4026	Early/late normalized windows both underperform full residual.
target_hf_subband_nomem_ft6	0.4849	0.7948	**0.2943**	0.7167	0.4013	Removing style memory cleans the probe route but weakens style/content metrics.
target_hf_subband_memres_ft6	0.4866	0.7935	0.2977	0.7192	0.4025	Explicit style-memory prior subtraction is below subband-only.

Two implementation lessons follow from the probes. First, any promoted target-HF architecture should supervise an HH output path when HH appears in the target. Otherwise the target contains information that no model head can directly predict. Second, more training by itself is not the primary lever: the 15-epoch HF-delta curve remains below the 6-epoch subband route. The useful capacity is frequency-specific and route-specific, not merely total wall-clock exposure.

A matched inference-time ablation further checks that the subband route is active rather than incidental. Using the trained subband checkpoint, we zero only the three target-HF subband residual modules during evaluation. This lowers DINO-S from 0.4886 to 0.4858, DINO-C from 0.7981 to 0.7888, and worsens LPIPS from 0.2966 to 0.3010. Thus the learned residual path contributes to both style transfer and content-compatible HF transport; it is not a dead branch and not merely a style-over-content shortcut. Scaling the same residual to 1.25x or 1.5x does not improve the balanced point: off-DINO-S and CLIP-S can increase, but DINO-S, DINO-C, and LPIPS worsen. The useful target-HF route is therefore not simply amplitude-limited; the next architecture needs better residual direction or conditioning rather than a scalar gain. This is supported by a direct residual-direction probe: the residual lowers the training-target HF MSE, but its average cosine to the ideal correction direction is only 0.158 and about 98.2% of its energy is orthogonal to that direction. HH is the most aligned band, yet HH-only amplification still follows the same content-cost trend. A direct training auxiliary that aligns the residual to $\mathrm{stopgrad}(v^{\star}_{\mathrm{HF}} - v_{\mathrm{base}})$ increases the probe cosine to 0.322 and the MSE-improvement fraction to 0.117, but lowers DINO-S to 0.4862 and also worsens DINO-C, CLIP-S, and LPIPS. Therefore the direction gap is real, but a separate residual-direction loss is too intrusive in the current transport field. An inference-only time-window probe also rejects the idea that this residual should be moved to only early or only late ODE steps. With normalized half-trajectory windows, early-only and late-only residuals both give DINO-S around 0.4866 and lower DINO-C around 0.7936, below the full residual. Thus the branch is not merely a late texture patch; it should remain a small full-path correction while its basis or conditioning is improved.

A low-rank content-basis variant further tested whether the target-HF code should only select coefficients over residual bases produced from content features. This design disconnects target spatial coordinates, but it lowers DINO-S to 0.4828 and off-DINO-S to 0.3986. The result indicates that the current bottleneck is not solved by making the residual basis more restrictive; the target-HF route still needs enough image-specific orientation and texture capacity.

A pairwise-statistics variant added coordinate-free statistics of the current HF state, the target HF state, and their difference to the per-subband target-HF code. This tests whether the residual needs an explicit "how far from target statistics" signal. The run remains content-safe but lowers DINO-S to 0.4838 and off-DINO-S to 0.3994. Thus global current-target discrepancy descriptors are too coarse for this route; the simple target-only subband code remains the stronger conditioning signal.

The no-memory probe clarifies the role of the style-memory branch. Disabling generic style-memory cross-attention makes the target-HF path easier to read in gradients and aligns auxiliary HF-statistic gradients with the HF-MSE objective, but full evaluation drops DINO-S, DINO-C, CLIP-S, and off-DINO-S relative to the subband route. The visual grid also shows over-smoothed transfers in the Minimalism target column. Thus the remaining design problem is not to delete style memory; it is to keep style memory as a bounded category-level prior while letting target-HF subband codes carry the image-specific residual style.

A follow-up memory-residualized route tested explicit subtraction of a learned style-memory prior from the per-subband target-HF code. It recovered part of the no-memory loss but still trailed the plain subband route on DINO-S, DINO-C, CLIP-S, LPIPS, and off-DINO-S. This negative result argues against algebraically removing the memory prior; future routes should regularize or measure route usage without perturbing the useful category prior.

Inference Setup

The main paper uses an 8-step Euler solver. Spatial-fiber AdaIN is applied to the high-frequency residual after every solver step. The main D5-512 row uses `runs/submission/hf_oriented_internal_early_stop/epoch_0004.pt`. P2A and R5 use the audited base-WEAVE checkpoints reported before the oriented D5 route was enabled.




Figure 5: Generation-only time for the selected WEAVE checkpoint on a single RTX 3060 (12 GB): 126.00 s for 750 images. Latent caching and metric computation are excluded.

Inference field	Value
ODE solver	Euler
ODE steps	8
Evaluation batch size	2 for D5-512 generation timing
VAE decode batch size	16 in the timing script
Spatial-fiber AdaIN	every Euler step, scale 2.0
Style extrapolation	$\alpha_{\text{extrap}} = 0.1$
Generated-image count for timing	750
Timing column	generation only, metrics excluded

Evaluation Runtime Anatomy

The paper reports the measured generation-only time for the selected D5 checkpoint: 126.00 s for 750 images on one RTX 3060 (12 GB). This timing includes the 8-step trajectory and VAE decoding, but excludes latent caching, metric extraction, and result serialization. We do not reuse component traces from earlier checkpoints because they do not describe the selected model. The latent cache itself is a one-time offline VAE encode of the full D5 training set (5,000 images at 512^2); with our fixed encoder-only ONNX graph under TensorRT ($\approx$37 ms/image) this takes about 3–4 minutes, and is amortized across all runs that reuse the same packed cache.

Inference Variants

The following older base-WEAVE variants share one checkpoint and differ only in inference-time stepwise AdaIN strength. They remain diagnostic operating points and are not the updated main D5 result.

The audited generation-only timing for the selected checkpoint on a single RTX 3060 (12 GB) is:

Timing field	Value
Total generation-only wall clock	126.00 s
Images	750
Wall time per image	168.00 ms

Metrics

DINO-S. DINO-S is the primary style metric. It is the cosine similarity between the DINOv2-small CLS feature of the generated image and the nearest reference feature in the target-style reference pool. The source image is excluded from the reference pool when applicable.

CLIP-S. CLIP-S is the secondary style metric, computed as CLIP ViT-B/32 image-feature cosine similarity to the target-style reference prototype.

DINO-C. DINO-C measures content preservation as DINOv2-small CLS cosine similarity between the generated image and the source image.

LPIPS. LPIPS uses the AlexNet backbone and is reported as a lower-is-better content distance. Radar plots display $1 - \text{LPIPS}$ so all axes point outward for better values.

IDT–TGT Evaluation Guideline

The guideline adds two source-independent reference outputs to the ordinary metric table. For a request with source image x and target style s, define

$$y_{\text{IDT}}(x, s) = x, \qquad y_{\text{TGT}}(x, s) = r_s, \tag{1}$$

where r_s is a fixed image from the held-out reference pool for style s. The D5 implementation selects the first image in the deterministic reference order and reuses it for every source paired with that target style. Thus TGT depends on the requested style but not on source content. It is an evaluation control, not an input to WEAVE or any baseline.

Why two references are needed. IDT represents a no-op: it preserves all source content but makes no requested edit. A method should therefore score above IDT on DINO-S and CLIP-S before a low LPIPS can be read as successful transfer. TGT represents the opposite extreme: it has the requested style but unrelated content. A content-preserving method should have lower LPIPS and higher DINO-C than TGT. The intuitive acceptable region is therefore bracketed by

$$\begin{aligned} M_{\text{style}}(y) &> M_{\text{style}}(y_{\text{IDT}}), \\ \text{LPIPS}(y, x) &< \text{LPIPS}(y_{\text{TGT}}, x), \\ \text{DINO-C}(y, x) &> \text{DINO-C}(y_{\text{TGT}}, x). \end{aligned} \tag{2}$$

We inspect the inequalities separately and do not combine them into a weighted score.

Interpretation and scope. IDT and TGT are empirical anchors, not mathematical bounds: a generated image may score outside either reference because the metrics are imperfect. Crossing IDT in the wrong direction indicates style suppression under that metric. Moving beyond TGT in content distance identifies a content-loss regime relative to a deliberately unrelated target-style image. This is a prompt for visual inspection, not a verdict on the method outside the current board and metric. On D5-512, IDT is (DINO-S 0.419, CLIP-S 0.640, LPIPS 0, DINO-C 1), while TGT is (1.000, 0.855, 0.756, 0.220). TGT reaches DINO-S 1.000 because the selected reference is part of the same target-style feature pool used by that metric; this value is expected and should not be read as model performance.

Using each of the first five deterministic target exemplars changes TGT LPIPS from 0.752 to 0.783 and DINO-C from 0.189 to 0.246. StyleAligned remains beyond every TGT LPIPS anchor (0.869), so the content-collapse diagnosis is not determined by the first exemplar.

Variant	Scale	DINO-S	CLIP-S	LPIPS	Use
`WEAVE-m`	1.5	0.4843	0.7180	0.2925	Balanced diagnostic point.
`WEAVE-s`	1.6	0.4845	0.7179	0.2867	Peak average of DINO-S and CLIP-S.
`WEAVE-q`	2.0	0.4859	0.7075	0.2583	Previous base-WEAVE max-DINO diagnostic.

Table 2: Alternative inference settings evaluated from the same base checkpoint.

Metric Cache and Determinism

Evaluation uses deterministic seeds and cached reference features. Cache entries are logical artifacts under `<CACHE_ROOT>/eval_cache`; they may be rebuilt as long as the image roots and model backbones are unchanged. The full-eval summaries record:

- CLIP backend: HuggingFace transformers backend.
- LPIPS network: AlexNet.
- Reference-cache limit per style: 16 for the paper full-eval records.
- Source-feature cache: one cache per board/image-size setting.
- Metric postprocessing: disabled for the main records.

DINO Sidecar Coverage

The DINO sidecar contains 37 board-method entries. D5-512 and P2A-256 each include 13 methods: Identity, SD-Turbo, StyleAligned, Z-STAR, StyleShot, CUT, SaMST, SaMam, Seedream 4.5, Latent-WCT/WCT, StyleID, AdaIN, and WEAVE as applicable. R5-WikiArt contains 11 entries because not every diagnostic baseline was rerun on the R5 board. The paper table is manually aligned to these sidecars and the CLIP/LPIPS summaries.

Metric interpretation caveats. DINO-S and CLIP-S are style-reference similarities, not human preference labels. DINO-C and LPIPS quantify source preservation, but they penalize different failure modes: LPIPS is sensitive to perceptual pixel/feature distance, whereas DINO-C is a semantic feature similarity. The paper therefore treats the result as a multi-objective operating point. A method with high DINO-S and very high LPIPS is not considered a content-preserving transfer method even if it appears strong on style alone.

Main Results Used by the Paper

The main table reports the following WEAVE rows:

Board	DINO-S	CLIP-S	LPIPS	DINO-C
D5-512 (oriented HF)	0.4918	0.7128	0.2595	0.8102
P2A-256	0.4801	0.6681	0.3116	0.8612
R5-WikiArt	0.5226	0.7747	0.2895	0.7717

Table 3: D5-512 comparison ledger. Higher DINO-S, CLIP-S, and DINO-C and lower LPIPS are better. Dashes mark unavailable or withheld metadata rather than inferred values.

Method	D-S	C-S	LPIPS	D-C	Params	Train	Infer
Identity	0.419	0.640	0.000	1.000	0	free	0 s
Target Style	1.000	0.855	0.756	0.220	0	free	0 s
SD-Turbo	0.484	0.693	0.003	0.922	0^{+1100}	free	5 m
StyleAligned	0.675	0.780	0.869	0.239	0^{+1100}	free	77 m
Z-STAR	0.449	0.784	0.347	0.549	0^{+1100}	free	3 h
StyleShot	0.563	0.787	0.765	0.377	0^{+2400}	free	5.1 h
CUT	0.471	0.714	0.374	0.795	7.0	322.6	5 m
SaMST	0.271	0.618	0.749	0.145	8.3	39.5	10 m
SaMam	0.476	0.590	0.321	0.812	8.8	436.0	17.6 m
Seedream 4.5	0.486	0.720	0.477	0.739	–	API	–
Latent-WCT	0.362	0.673	0.441	0.559	0	free	18 s
WEAVE	**0.492**	0.713	0.260	0.810	1.04^{+84}	1.4	126 s

Table 4: Cross-board comparison ledger for P2A-256 and R5-WikiArt. Higher DINO-S, CLIP-S, and DINO-C and lower LPIPS are better.

Method	P2A-256				R5-WikiArt				Params	Train	Infer
	D-S	C-S	LPIPS	D-C	D-S	C-S	LPIPS	D-C	M	min	750 imgs
Identity	0.416	0.663	0.000	1.000	0.433	0.731	0.000	1.000	0	free	0 s
Target Style	1.000	0.835	0.800	0.169	1.000	0.796	0.747	0.230	0	free	0 s
SD-Turbo	0.341	0.674	0.603	0.279	0.505	0.767	0.449	0.538	0^{+1100}	free	5 m
StyleAligned	0.612	0.768	0.786	0.310	0.649	0.824	0.829	0.315	0^{+1100}	free	77 m
Z-STAR	0.514	0.786	0.332	0.526	0.514	0.822	0.384	0.526	0^{+1100}	free	3 h
StyleShot	0.552	0.774	0.713	0.335	0.484	0.787	0.795	0.380	0^{+2400}	free	5.1 h
CUT	0.539	0.754	0.494	0.702	0.441	0.710	0.620	0.795	7.0	322.6	5 m
SaMST	0.501	0.709	0.398	0.838	0.461	0.667	0.612	0.615	8.3	39.5	10 m
SaMam	0.505	0.677	0.205	0.870	0.503	0.712	0.227	0.925	8.8	436.0	17.6 m
Seedream 4.5	0.517	0.752	0.227	0.785	0.504	0.742	0.486	0.725	–	API	–
Latent-WCT	0.338	0.738	0.585	0.386	0.414	0.710	0.444	0.553	0	free	18 s
WEAVE	0.480	0.668	0.312	0.861	0.523	0.775	0.290	0.772	1.04^{+84}	1.4	126 s

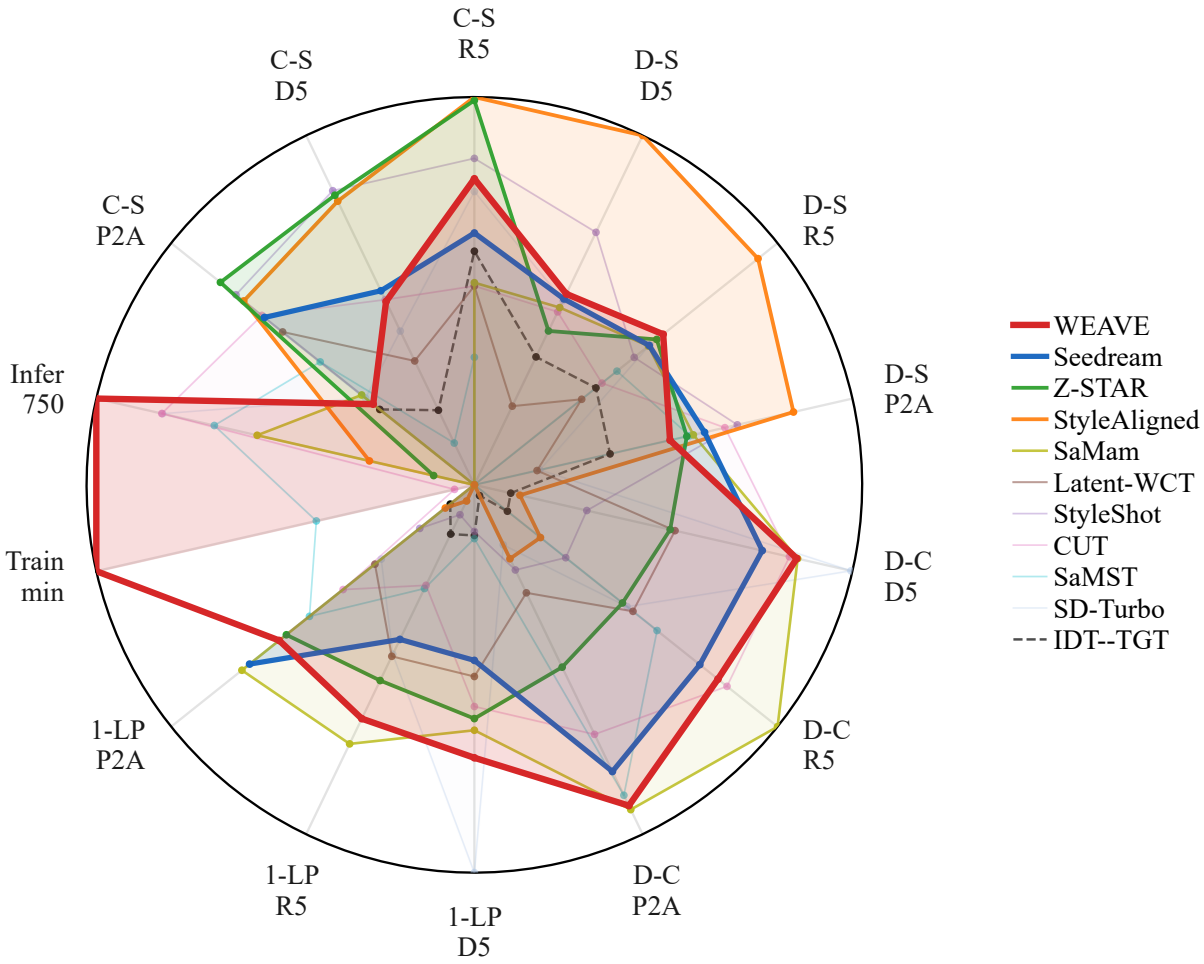


Figure 6: Style, content, and cost across three benchmarks. The dashed boundary uses IDT on style axes and TGT on content axes. Each metric family is min–max normalized once across all reported methods and datasets; speed uses the same normalization after $\log_{10}(1+t)$, where t is seconds. Tables 3 and 4 reports raw values.

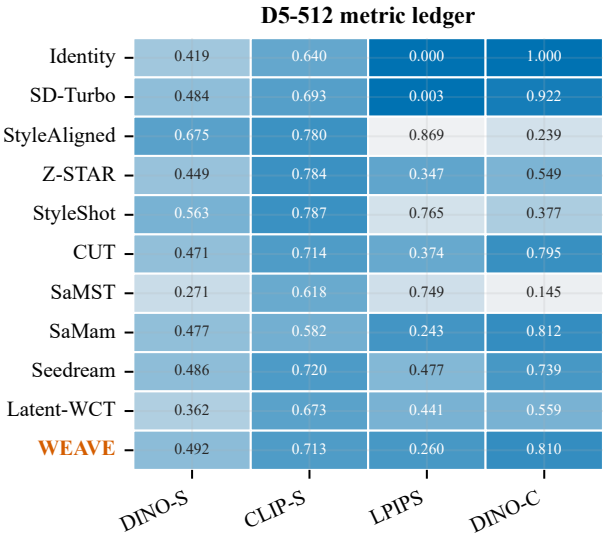


Figure 7: D5-512 metric ledger as a heatmap. LPIPS cells are color-normalized after inversion for readability, while annotations show raw values.

The D5-512 claim is a balanced Pareto claim rather than a winner-on-every-axis claim: StyleAligned reaches higher raw DINO-S but with severe content loss, while WEAVE keeps low LPIPS, high DINO-C, about one million trainable parameters, and a 1.4-minute training time on one RTX 3060. The D5 point uses the oriented route; the other boards retain the base model, as stated in the main-table caption.

Paired Significance Tests on D5

The main paper reports mean metrics only. To check that the ranking in Table 3 is not driven by a few hard pairs, we re-evaluate WEAVE and five close baselines (CUT, StyTR-2, AesPA-Net, SaMam, Seedream 4.5) on the same D5 content–style pairs under a shared per-sample protocol, then run a two-sided paired t-test on each metric with 10,000-resample bootstrap 95% confidence intervals. Table 5 reports the mean difference Δ = WEAVE − baseline; positive Δ is better for DINO-S, CLIP-S, and DINO-C and worse for LPIPS.

CUT, StyTR-2, AesPA-Net, and SaMam use the full 750 pairs. Seedream uses the 720 overlapping pairs for which a matching public source is available. WEAVE exceeds CUT on three of four metrics (DINO-S $+0.012$, CLIP-S $+0.012$, LPIPS -0.072; all $p < 0.001$) and ties on DINO-C. Against SaMam, the two style metrics are statistically indistinguishable (DINO-S $p = 0.056$, CLIP-S $p = 0.055$), so the small

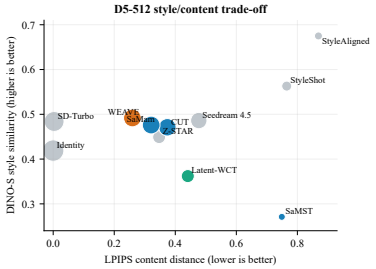


Figure 8: D5-512 style/content trade-off. Marker size grows with DINO-C. WEAVE is not the maximum-style point, but it occupies the low-LPIPS, high-content region among learned methods that clear the identity style floor.

Baseline	DINO-S	CLIP-S	LPIPS	DINO-C
CUT	$+0.012^{***}$	$+0.012^{***}$	-0.072^{***}	-0.006 ns
StyTR-2	-0.018^{***}	-0.004 ns	-0.359^{***}	$+0.042^{***}$
AesPA-Net	-0.037^{***}	-0.019^{***}	-0.311^{***}	$+0.188^{***}$
SaMam	$+0.006$ ns	$+0.004$ ns	-0.012^{*}	-0.023^{***}
Seedream 4.5	-0.008^{*}	-0.014^{***}	-0.153^{***}	$+0.049^{***}$

Table 5: Paired t-test on D5: mean difference Δ = WEAVE − baseline. Positive Δ is better for DINO-S/CLIP-S/DINO-C, worse for LPIPS. ***: $p < 0.001$; **: $p < 0.01$; *: $p < 0.05$; ns: not significant. CUT/StyTR-2/AesPA-Net/SaMam use 750 pairs; Seedream uses 720 overlapping pairs.

style gap in the main table should not be read as a reliable ranking; WEAVE still preserves significantly more content (LPIPS -0.012, $p = 0.021$). Relative to StyTR-2, AesPA-Net, and Seedream, WEAVE trades style affinity for content fidelity (wins on LPIPS and DINO-C, loses on DINO-S/CLIP-S), consistent with the content-preserving operating point in the main paper.

Solver-Step Sensitivity (K)

Table 6 reports a solver-step sweep on the selected D5 checkpoint (`hf_oriented_internal_early_stop/epoch_0004.pt`) over the full 750-pair board, varying only `num_steps` $\in \{2, 4, 8, 16\}$ (seed, VAE, and metric settings fixed). CLIP-S changes by less than 0.001 across the range; LPIPS improves from K=2 to K=4 and then plateaus; generation time grows nearly linearly with K. The main paper uses K=8.

Baseline Accounting

External baselines are separated into three accounting classes:

- **Training-free diffusion/editing baselines:** SD-Turbo, StyleAligned, Z-STAR, StyleShot, Seedream 4.5. Their large frozen backbones are reported with superscript parameter counts in the main table; training is marked as free or API.
- **Learned style-transfer baselines:** CUT, SaMST, SaMam. Their trainable parameter count and training minutes are reported when measured in our runs.

K	CLIP-S ↑	LPIPS ↓	Gen (s)	Wall (s)
2	0.7164	0.2921	4.6	60.3
4	0.7162	0.2875	8.9	55.2
8	0.7167	0.2870	18.0	64.6
16	0.7171	0.2874	36.0	83.1

Table 6: Solver-step sensitivity on D5-750 with the selected paper checkpoint (RTX 3060). Gen is generation-only; Wall includes CLIP/LPIPS. DINO was not re-run here because the metric-only fast path does not materialize PNGs; CLIP-S/LPIPS already show the plateau.

- **Analytic wavelet/statistics baseline:** Latent-WCT. This has zero trained parameters and is included to show that wavelet statistics alone do not explain the WEAVE result.

All methods are evaluated on the same ordered board where outputs are available. Missing or withheld speed/parameter values are marked as unavailable rather than imputed.

Baseline Data Inventory

The baseline ledger contains both measured baselines and externally sourced or API-limited methods. The evaluation convention is:

1. collect generated images under a method/board/run directory;
2. normalize filenames to the ordered source-target board;
3. evaluate CLIP-S, LPIPS, and optional side metrics using the shared evaluator;
4. evaluate DINO-S and DINO-C using the DINO sidecar scripts;
5. record unavailable timings explicitly rather than estimating them from unrelated hardware.

For D5-512, the paper table includes Identity, SD-Turbo, StyleAligned, Z-STAR, StyleShot, CUT, SaMST, SaMam, Seedream 4.5, Latent-WCT, and WEAVE. For P2A-256 and R5-WikiArt, the same naming convention is used, but some entries have fewer available images or omitted timing fields. This is why each sidecar records image counts and skipped counts rather than assuming all methods have a complete board.

Method group	Output source	Notes
Identity	evaluator no-op	Generated by copying/reading source image as output; defines style floor and content ceiling.
Latent-WCT	analytic transform	Zero trained parameters; evaluates whether wavelet statistics alone are sufficient.
CUT / SaMST / SaMam	learned baselines	Trained or re-evaluated where checkpoints/outputs were available; train/infer times are measured on comparable hardware when reported.
SD-Turbo / StyleAligned / Z-STAR / StyleShot	frozen-backbone editing baselines	Large pretrained backbones; no task-specific training counted, but inference wall-clock is reported when outputs were generated in the evaluation run.
Seedream 4.5	API outputs	Parameter count and internal runtime are withheld; metrics are computed from saved outputs on the shared board.
WEAVE	single-RTX-3060 run	Main checkpoint and timing records come from the audited experiment tree.

Ablation Summary

The current evidence supports a compact reading of the method:

$$\begin{aligned} WEAVE = &\ \text{Haar wavelet decomposition} \\ &+\text{endpoint velocity matching} \\ &+\text{stepwise high frequency AdaIN}. \end{aligned}$$

The component ablations and target-HF probes show that stepwise statistics and wavelet-domain transport are active, while learned cross-attention memory acts as a coarse prior rather than the main image-specific style injector. This is why the paper frames WEAVE as a compact wavelet-flow model with an auxiliary style memory, not as a transformer-style memory architecture.

The cross-attention branch is treated as auxiliary. Probe runs show near-closed gates around 0.056–0.061 and weak gradient mass on the style-memory branch, yet the no-memory subband run underperforms the standard subband route. The effective style movement comes mainly from stepwise AdaIN/statistics, flow transport, and coordinate-free target-HF codes; style memory supplies a useful coarse category prior but cannot replace the image-specific HF route.

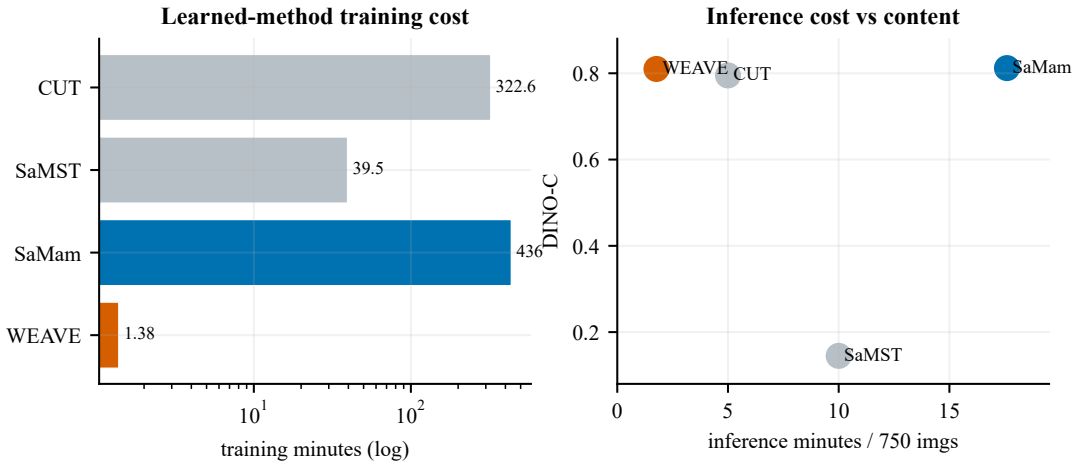


Figure 9: Cost accounting for learned baselines. WEAVE trains in minutes rather than hundreds of minutes and remains in the high-content region at inference.

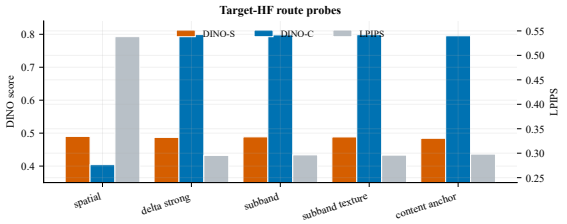


Figure 10: Target-HF route ablation. Spatial target-HF injection raises style but substantially reduces content scores, while pooled/subband target-HF routes preserve content at nearly the same style level.

Ablation Directory Summary

The 30 ablation directories are organized into:

- destructive component removals, including no-flow, no-wavelet, and no-AdaIN, and no-spectral-ODE settings;
- robust/sensitive hyperparameter sweeps, including LL weight, sigma, gate initialization, HH weight, learning rate, loss type, endpoint scale, extrapolation, and ODE step count;
- style-path experiments, including stronger cross-attention, decoder AdaLN/AdaIN, region/global HF injection, and target-HF route variants;
- seed checks for the board metrics.

The consistent outcome is that endpoint-velocity matching, wavelet decomposition, and stepwise high-frequency AdaIN are the active components. Cross-attention and several auxiliary regularizers remain in historical configs for compatibility but are not central contributors to the final result.

Corrected Controls and Stability Checks

The inference-time AdaIN control was rerun from the reported epoch-4 checkpoint after verifying that the active nested configuration field was set to zero. All 20 checked corresponding PNG hashes differ from the full model. Removing AdaIN changes DINO-S from 0.4918 to 0.4821 and CLIP-S from 0.7128 to 0.7005, while DINO-C increases from 0.8102 to 0.8455 and LPIPS decreases from 0.2595 to 0.2258. Thus the operator is active and induces the intended style–content trade-off; the earlier no-effect result is not used.

For the matched training control, changing λ_{LL} from 0.3 to 1.0 changes peak DINO-S only from 0.4917 to 0.4910. The 1.0 run reaches its peak at epoch 3 and the frozen probe selects epoch 5 with regret 6.8×10^{-5}. This supports robustness to a broad nonzero LL weight, not a claim that 0.3 is uniquely optimal. In contrast, removing the source-aligned endpoint yields peak DINO-S 0.4894 with LPIPS 0.3138, and the probe fires eight epochs before that peak; this is the stronger endpoint-specific ablation.

Finally, reference-pool stability is evaluated without regenerating images. For each of 1,000 repetitions and each target style, one size-m subset is sampled without replacement from its 30 held-out references and reused for all 150 requests to that style. The board mean of DINO-S(WEAVE) minus DINO-S(IDT) is positive in all repetitions: mean 0.0298 with 95% interval [0.0204, 0.0394] for $m = 8$, and mean 0.0319 with [0.0225, 0.0380] for $m = 16$. The corresponding per-request positive fractions are about 69%, so this is evidence for a stable board-level conclusion, not an assertion that every source improves.

Alternative VAE Portability

To test whether WEAVE depends on the SD1.5 EMA latent space, we replace its frozen VAE with FLUX.1, FLUX.2, and Qwen-Image and retrain the wavelet-routed model. Only the latent-channel projections are adapted to each VAE; the D5 data, one-level Haar routing, and evaluation board are retained. This cross-VAE experiment uses the learned HH variant, whose style–content trade-off is analyzed below.

The three VAEs all yield comparable style-transfer results,

Frozen VAE	Latent channels	Reported epoch	DINO-S↑	CLIP-S↑	LPIPS↓	DINO-C↑
FLUX.1	16	6	0.4889	0.7134	0.2556	0.7801
FLUX.2	32	29	**0.4918**	**0.7165**	**0.2388**	**0.8728**
Qwen-Image	16	1	0.4775	0.7144	0.2631	0.8251

Table 7: Results after replacing the SD1.5 EMA VAE with recent frozen VAEs on D5. Each row reports the best observed checkpoint for that VAE.

showing that WEAVE does not depend on the older SD1.5 EMA representation and remains effective with newer VAE families. The FLUX.2 run reaches the same DINO-S as the reported SD1.5 result while improving CLIP-S, LPIPS, and DINO-C. Their optimization trajectories nevertheless differ: the fixed internal rule stops FLUX.1 at epoch 6, whereas it does not fire within the Qwen-Image or FLUX.2 schedules (best observed checkpoints at epochs 1 and 29). Frequency routing transfers, but a raw gradient-ratio threshold is not tokenizer-independent. Cross-tokenizer stopping would require normalization by each latent representation's initial gradient scale or trajectory statistics.

HH trade-off with a high-capacity VAE. On FLUX.2, increasing the HH velocity-loss weight from 0 to 20 changes DINO-S from 0.4911 to 0.4870 and CLIP-S from 0.6804 to 0.6740, while DINO-C rises from 0.8763 to 0.8888 and LPIPS falls from 0.2359 to 0.2229. The intermediate weights follow the same trend. Learning HH therefore provides a smooth content–style trade-off rather than a uniformly beneficial or harmful route, consistent with retaining the simpler statistical HH treatment in the main configuration.

Frozen SD1.5 Extension

We test whether the wavelet alignment operator transfers independently of the compact velocity model. The control is a frozen SD1.5 image-to-image pipeline with an empty prompt, strength 0.5, and 20 DDIM steps. The extension applies one-level Haar decomposition to the output latent, aligns the channel-wise moments of LH, HL, and HH to the target-style latent at scale 0.8, leaves LL unchanged, and then applies the inverse transform. No SD1.5 weights are updated.

On the 600 cross-style D5 pairs, the base and extended editors obtain respectively DINO-S 0.3974/0.4080, CLIP-S 0.7221/0.7366, LPIPS 0.3591/0.3630, and DINO-C 0.6589/0.6531. Both style gains are significant under paired t-tests ($p < 10^{-15}$). On all 750 pairs, DINO-S changes from 0.4525 to 0.4613 and CLIP-S from 0.7476 to 0.7594, while LPIPS remains 0.3586/0.3588 and DINO-C changes from 0.6583 to 0.6539. Timing over 720 completed requests gives 4.9 ms per image for the DWT–AdaIN–IDWT operation. The extension therefore isolates the portability of the frequency-domain operator; it is not used to equate the compact model with SD1.5.

Next Architecture Plan

The current best probe does not imply that arbitrary style injection is safe. The next architecture step should raise the capacity of the coordinate-free HF route while keeping target spatial coordinates disconnected from the output. The intended route is:

$$x_{style} \rightarrow \mathrm{DWT}_{HF}$$
$$\rightarrow \text{compact per-subband code}$$
$$\rightarrow \text{orientation-specific HF residual}$$
$$\rightarrow \mathrm{LH/HL/HH}.$$

Design choice	Keep / avoid	Reason
Compact per-subband codes	Keep	Current best route; keeps target coordinates disconnected.
Simple target-HF residual ablation evidence	Keep	Zeroing the residual at inference lowers both style and content metrics, confirming that the route is active.
Orientation-specific residual depth	Keep	LH, HL, and HH carry different stroke/texture directions.
Energy normalization vs. existing HF heads	Keep	Prevents the new route from dominating content structure.
Scalar residual amplification	Avoid	It raises off-style metrics only by spending content budget.
HH-only residual amplification	Avoid	Even the most aligned band does not improve the balanced point when simply scaled.
Direct residual-direction auxiliary	Avoid	It improves the decomposition probe but lowers DINO-S and content metrics, so it competes with the learned transport field.
Time-window residual gating	Avoid	Normalized early/late windows both underperform the full residual, so timing alone is not the bottleneck.
Low-rank content-derived basis	Avoid	It prevents target-coordinate leakage but weakens the target-HF route below the simple subband residual.
Current-target global HF statistics	Avoid	They are train/inference consistent and coordinate-free, but they underperform the target-only subband code.
Stationary-stat multi-token widening	Avoid	A matched probe was worse than subband-only on style and content metrics.
Removing style-memory cross-attention	Avoid	It makes gradient probes cleaner but lowers style/content metrics, so memory should be bounded rather than deleted.
Algebraic memory-prior subtraction	Avoid	It partly recovers from no-memory but remains below the simple subband residual and hurts content.
Raw target HF maps	Avoid	They leak target layout and already failed the content metrics.
LL target-image shortcuts	Avoid	They improve apparent style by spending the content budget.
More gate/epoch tuning first	Avoid	Probe evidence shows route topology, not training length, is the current bottleneck.

Before promoting this route into the main result, the architecture should be rerun on D5-512, P2A-256, and R5-WikiArt with DINO-S as the primary style metric and CLIP-S as a secondary style metric. Any gain that comes with large DINO-C loss or large LPIPS increase should be treated as content collapse rather than a valid style win.

Reproduction Commands

The following commands use sanitized variables. They assume the repository has been checked out under `<REPO_ROOT>` and that the dataset/cache variables point to equivalent storage.

Listing 1: Environment setup

```
cd <REPO_ROOT>/WEAVE
python -m venv .venv
<activate .venv>
pip install torch torchvision --index-url <
    PYTORCH_CUDA_WHEEL_INDEX>
pip install -r requirements.txt
```

Listing 2: Train the D5-512 paper checkpoint

```
cd <REPO_ROOT>/WEAVE
python run.py --config experiments/architecture/
    hf_oriented_internal_early_stop.json
```

Before training on a new machine, replace only storage roots in the config chain:

```
data.data_root = data/train
training.test_image_dir = data/test
training.full_eval_cache_dir = eval_cache
checkpoint.save_dir = runs/submission/
    hf_oriented_internal_early_stop
```

Listing 3: Evaluate a trained checkpoint on D5-512

```
cd <REPO_ROOT>/WEAVE
python scripts/batch_eval_all.py \
  --checkpoint_dir runs/submission/
      hf_oriented_internal_early_stop \
  --config experiments/architecture/
      hf_oriented_internal_early_stop.json \
  --config_override inference.json \
  --epochs 4 --device cuda
```

Listing 4: Evaluate P2A-256 or R5 by swapping roots

```
cd <REPO_ROOT>/WEAVE
python utils/run_evaluation.py \
  <CHECKPOINT>.pt \
  <BOARD_TEST_IMAGE_DIR> \
  <OUTPUT_DIR> \
  --cache_dir <CACHE_ROOT>/eval_cache \
  --clip_hf_cache_dir <CACHE_ROOT>/eval_cache/hf \
  --batch_size <BOARD_BATCH_SIZE> \
  --generation_batch_size <BOARD_BATCH_SIZE> \
  --metric_batch_size <BOARD_BATCH_SIZE> \
  --num_steps 8 \
  --target_chunk_size 1 \
  --vae_decode_batch_size 16 \
  --eval_only_lpips_clip_style \
  --clip_backend hf \
  --eval_lpips_net alex \
  --profile_timing
```

Listing 5: Generation-only timing protocol

```
cd <REPO_ROOT>/WEAVE
```

```
python utils/run_evaluation.py \
  <CHECKPOINT>.pt \
  <TEST_IMAGE_DIR> \
  <OUTPUT_DIR> \
  --cache_dir <CACHE_ROOT>/eval_cache \
  --clip_backend none \
  --eval_disable_lpips \
  --batch_size 2 \
  --generation_batch_size 2 \
  --num_steps 8 \
  --target_chunk_size 1 \
  --vae_decode_batch_size 16 \
  --profile_timing \
  --force_regen
```

End-to-End Checklist

1. Install the Python environment and confirm CUDA sees one RTX 3060-class GPU.
2. Populate <DATA_ROOT> with D5-512 latent training cache and held-out evaluation images.
3. Edit only storage roots in the config chain; keep model, bridge, and training hyperparameters unchanged.
4. Run `python run.py -config` with `experiments/architecture/hf_oriented_internal_early_stop.json`.
5. Verify `epoch_0004.pt`, frozen `config.json`, `internal_dynamics.jsonl`, and training CSV are written.
6. Re-evaluate `epoch_0004.pt` on D5-512 with 8 steps and CLIP/LPIPS enabled.
7. Run the generation-only timing protocol with CLIP and LPIPS disabled.
8. Swap board roots to P2A-256 and R5-WikiArt and rerun the same evaluator.
9. Regenerate figures from `aaai2027_v4/fig_data` and compare table values against `paper.tex`.
10. Confirm no public supplement source contains absolute paths, host endpoints, or usernames.

Sanitized Artifact Ledger

Raw-to-Public Mapping

Raw record class	Public representation	Reason
Checkpoint directories under the experiment tree	<EXP_ROOT>/<run_name>	Checkpoints are portable; absolute paths are not.
Dataset image and latent caches	<DATA_ROOT>/<dataset_name>	Dataset identity matters; physical storage root does not.
Feature caches	<CACHE_ROOT>/eval_cache	Rebuildable from held-out images and metric backbones.
Interactive shell commands and machine identifiers	omitted	They are operational details, not reproducibility requirements.
Temporary audit copies and rendered review PNGs	deleted after verification	They may contain raw paths and are not paper artifacts.

The formal supplement intentionally omits absolute storage paths, host addresses, usernames, and machine identifiers. Those fields exist only in raw run artifacts and are not required for reproducibility once the four storage roots above are supplied.

Known Limits

The current supplement does not report a completed human preference study. It also does not claim exhaustive hyperparameter optimization for every heavyweight baseline. The paper's strongest claim is therefore the measured balance among style movement, content preservation, parameter count, and wall-clock cost under the shared automatic protocol, not universal dominance on every metric axis. The alternative-VAE experiments establish compatibility with several recent latent representations, but do not establish identical optimization dynamics, compute, or optimal stopping across tokenizers.

Table 8: Artifact paths required for reproduction. All entries are logical paths under <REPO_ROOT> or <EXP_ROOT>.

Artifact	Role	Notes
experiments/architecture/hf_oriented_internal_early_stop.json	public config	D5 oriented-HF model and internal stopping rule.
config.json	base config	Dataset board, model defaults, and D5 style list.
runs/submission/hf_oriented_internal_early_stop/config.json	frozen merged config	Run snapshot with all inherited fields resolved.
runs/submission/hf_oriented_internal_early_stop/epoch_0004.pt	checkpoint	Internally selected D5 checkpoint.
runs/submission/hf_oriented_internal_early_stop/logs/training_*.csv	train log	Four epochs, 52 optimizer steps per epoch, and internal-probe columns.
docs/reproduction/internal_dynamics_early_stop.csv	dynamics ledger	Gate and gradient ratios used by the stopping rule.
exp/model_probe/inf_timing/generation_only_timing_summary.json	timing ledger	Oriented-route generation timing for 750 images on RTX 3060.
docs/model_probe/target_hf_delta_eval_summary.json	probe ledger	Aggregate DINO-S, CLIP-S, DINO-C, LPIPS, and off-DINO-S values for target-HF route probes.
docs/713/HANDOFF_2026-07-13.md	handoff note	Human-readable audit, probe diagnosis, run workflow, and next plan.
docs/713/METHOD_EXPLORATION_AND_CKPT_2026-07-13.md	method note	Current checkpoint and method exploration history extracted from older docs.
exp/main_table/p2a_256/full_eval/epoch_0005/summary.json	P2A sidecar	Evaluation summary for the P2A board.
exp/main_table/r5/full_eval/epoch_0005/summary.json	R5 sidecar	Evaluation summary for the R5 board.
aaai2027_v4/fig_data/dino_main.json	figure sidecar	DINO sidecar for paper figure generation and metric audit.
aaai2027_v4/make_radar_metric_blocks.py	figure script	Builds the multi-metric radar figure from table-side data.