


EMP ID: 85010992

EMP NAME: Sai Kirthana Konduru

JDBC Connection Configuration in Apache JMeter

Steps:

Step 1 -Open SQL

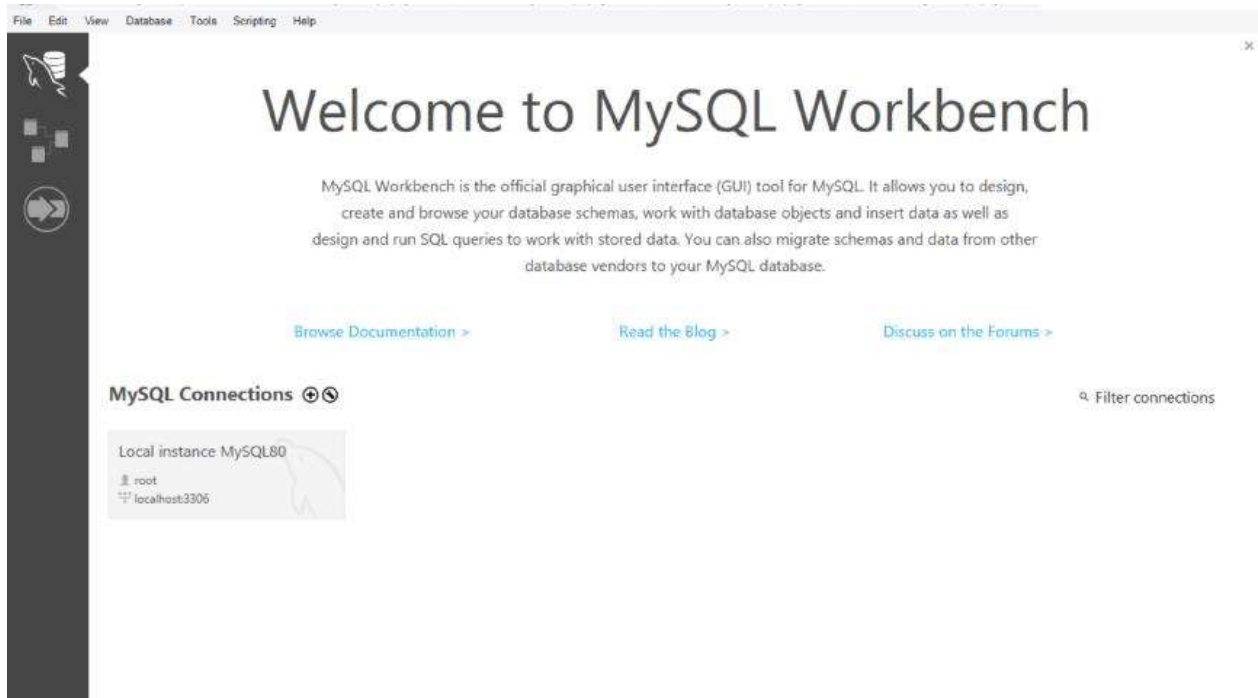

Step 2 - Create Database Selenium Automation

```
1 CREATE DATABASE seleniumautomation;  
2 • USE seleniumautomation;
```

Step 3 – Create Tables

```
CREATE TABLE book_det1
(
    book_no varchar(5) PRIMARY KEY ,
    title varchar(50) NULL,
    sub_code varchar(5) NULL,
    author varchar(50) NULL,
    publisher varchar(50) NULL,
    status varchar(1) NULL,
    yop varchar(4) NULL,
    price int NULL);

insert into book_det1 values('BI001','Clones','Bio','Ian','XYZ','S','1997',700.0000);
insert into book_det1 values('BI002','DNA','Bio','Watson','XYZ','S','unkn',575.0000);
insert into book_det1 values('CH001','Elements','Che','Robert','XYZ','S','1890',250.0000);
insert into book_det1 values('CH002','Nucleus','Che','Hilburn','XYZ','S','1992',350.0000);
insert into book_det1 values('MA001','Calculus','Mat','Newton','PQR','S','UNKN',195.0000);
insert into book_det1 values('MA002','Algebra','Mat','Raman','PQR','S','1990',190.0000);
insert into book_det1 values('MA003','Vectors','Mat','Richard','PQR','S','unkn',200.0000);
insert into book_det1 values('PH001','Chaos','Phy','Feynman','ABC','S','1997',300.0000);
insert into book_det1 values('PH002','Relativity','Phy','Einestein','ABC','S','1902',400.0000);
```

Step 4 – Execute Queries

✓	60	17:29:24	insert into book_det1 values('BI001','Clones','Bio','Ian','XYZ','S','1997',700.0000)	1 row(s) affected	0.000 sec
✓	61	17:29:28	insert into book_det1 values('BI002','DNA','Bio','Watson','XYZ','S','unkn',575.0000)	1 row(s) affected	0.015 sec
✓	62	17:29:31	insert into book_det1 values('CH001','Elements','Che','Robert','XYZ','S','1890',250.0000)	1 row(s) affected	0.000 sec
✓	63	17:29:34	insert into book_det1 values('CH002','Nucleus','Che','Hilburn','XYZ','S','1992',350.0000)	1 row(s) affected	0.000 sec
✓	64	17:29:44	insert into book_det1 values('MA002','Algebra','Mat','Raman','PQR','S','1990',190.0000)	1 row(s) affected	0.015 sec
✓	65	17:29:46	insert into book_det1 values('MA003','Vectors','Mat','Richard','PQR','S','unkn',200.0000)	1 row(s) affected	0.000 sec
✓	66	17:29:50	insert into book_det1 values('PH001','Chaos','Phy','Feynman','ABC','S','1997',300.0000)	1 row(s) affected	0.000 sec
✓	67	17:29:53	insert into book_det1 values('PH002','Relativity','Phy','Einestein','ABC','S','1902',400.0000)	1 row(s) affected	0.000 sec

Step 5 – Download the SQL Connector Jar file from Maven repository.

Home » com.mysql » mysql-connector-j » 9.7.0



MySQL Connector/J » 9.7.0

MySQL Connector/J is a JDBC Type 4 driver, which means that it is pure Java implementation of the MySQL protocol and does not rely on the MySQL client libraries. This driver supports auto-registration with the Driver Manager, standardized validity checks, categorized SQLExceptions, support for large update counts, support for local and offset date-time variants from the java.time package, support for JDBC-4.x XML processing, support for per connection client information and support for the ...

Overview

Dependencies (2)

Changes (0)

Books (40)

CATEGORIES

MySQL Drivers

JDBC Drivers

TAGS

database

sql

jdbc

driver

connector

rdbms

mysql

connection

ORGANIZATION

Oracle Corporation

HOMEPAGE

<http://dev.mysql.com/doc/connector-j/en/>

Inspect URL

LINKS



DATE

Apr 22, 2026

FILES

pom (3 KB)

jar (2.5 MB)

View All

REPOSITORIES

Central

RANKING

#66 in MvnRepository

#1 in MySQL Drivers



#1 in JDBC Drivers



Step 6 – Add the MySQL connection JAR into the JMeter lib folder.

This PC > Local Disk (C:) > Apache JMeter Installation5.6.3 > apache-jmeter-5.6.3 > lib >

Name	Date modified	Type	Size
kotlin-stallion-joko-1.9.10	13-09-2026 09:59	Executable Jar File	1 KB
kotlinx-coroutines-core-jvm-1.7.3	15-09-2026 09:57	Executable Jar File	1,515 KB
kotlinx-coroutines-swing-1.7.3	15-09-2026 09:57	Executable Jar File	10 KB
lets-plot-batik-4.1.0	15-09-2026 09:58	Executable Jar File	1 KB
lets-plot-common-4.1.0	15-09-2026 09:59	Executable Jar File	1 KB
log4j-1.2-api-2.22.1	15-09-2026 09:58	Executable Jar File	349 KB
log4j-api-2.22.1	15-09-2026 09:59	Executable Jar File	328 KB
log4j-core-2.22.1	15-09-2026 09:59	Executable Jar File	1,856 KB
log4j-slf4j-impl-2.22.1	15-09-2026 09:58	Executable Jar File	25 KB
mail-1.5.0-b01	15-09-2026 09:58	Executable Jar File	507 KB
miglayout-core-5.3	15-09-2026 09:57	Executable Jar File	105 KB
miglayout-swing-5.3	15-09-2026 09:57	Executable Jar File	23 KB
mongo-java-driver-2.14.3	15-09-2026 09:59	Executable Jar File	599 KB
mxparser-1.2.2	15-09-2026 09:59	Executable Jar File	29 KB
mysql-connector-j-9.7.0	16-09-2026 12:09	Executable Jar File	2,547 KB

Step 7 - Use config element JDBC Connection Configuration and use sampler JDBC Request and connect with MySQL Server Database.

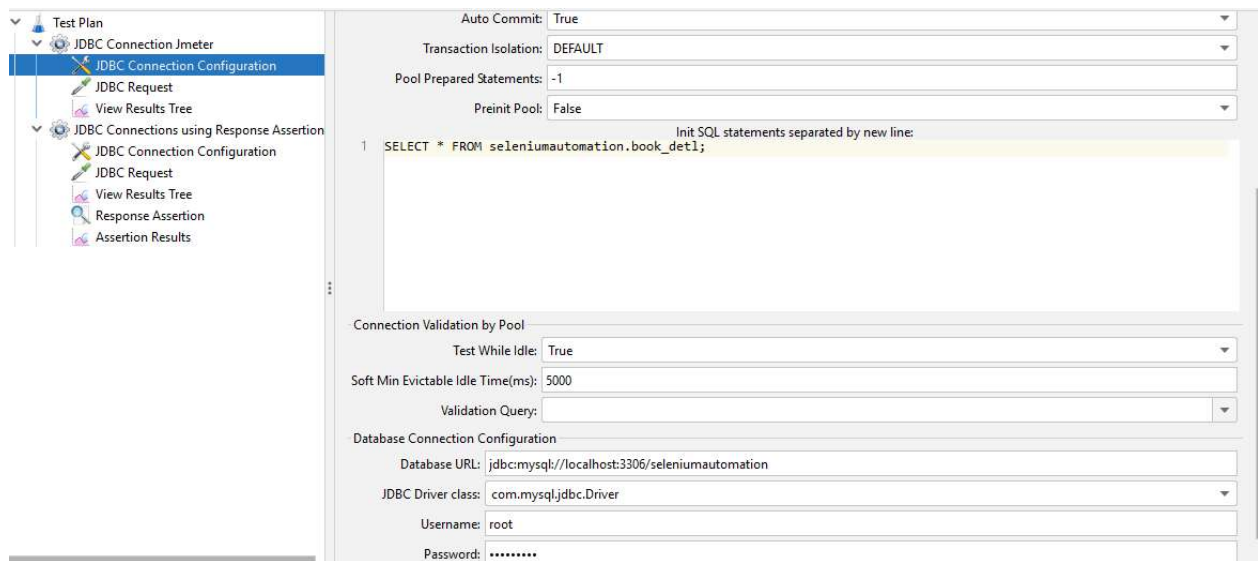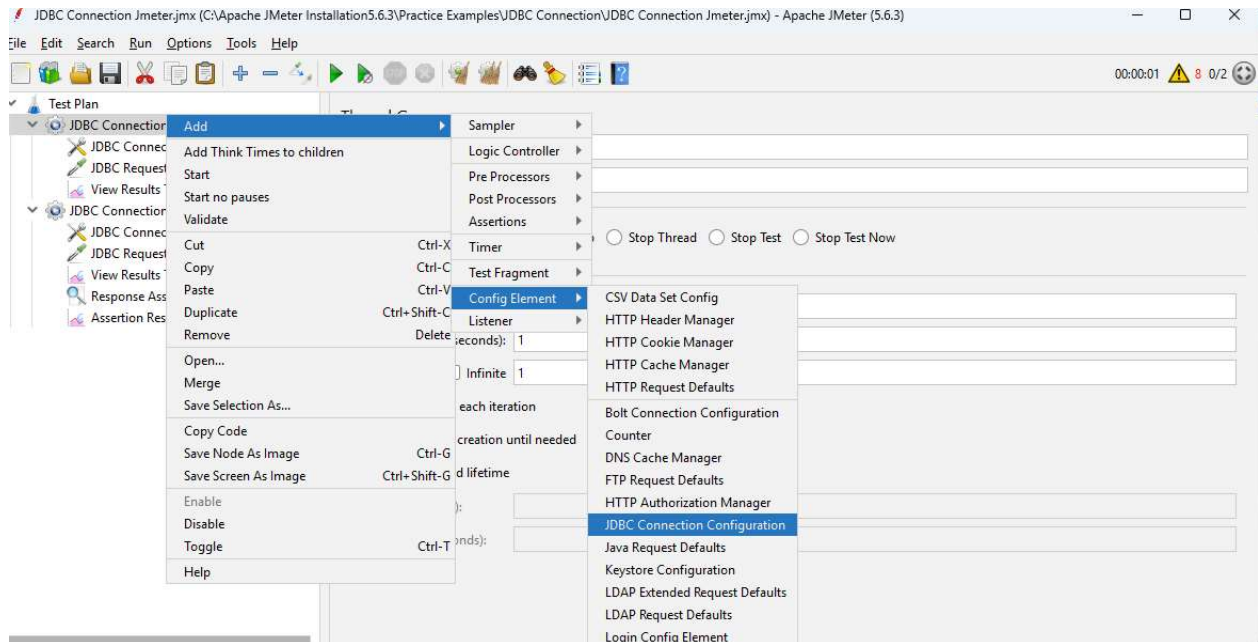

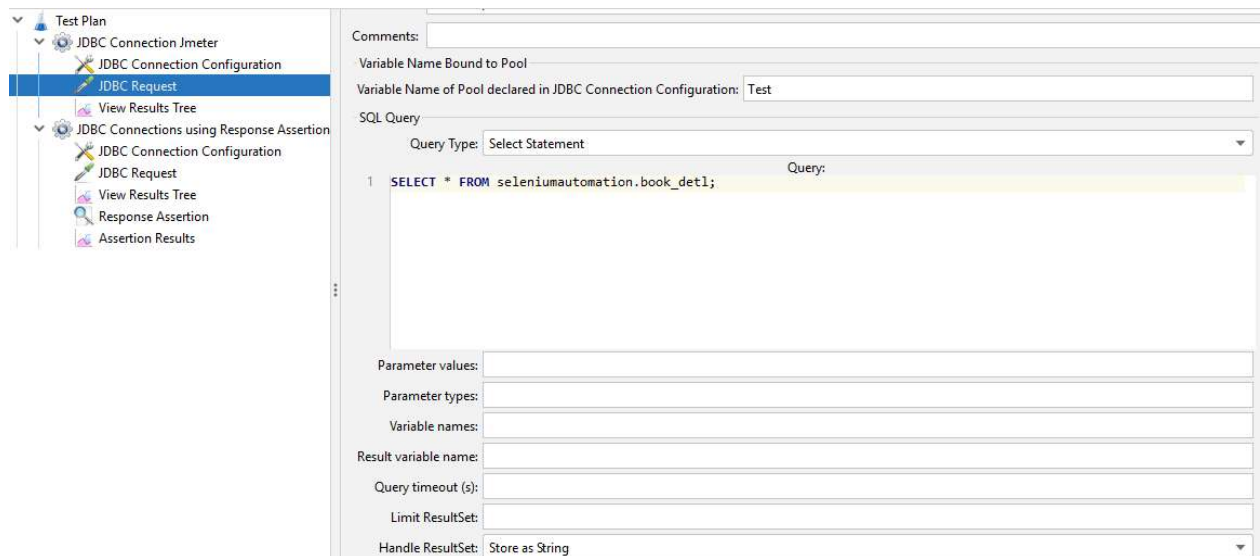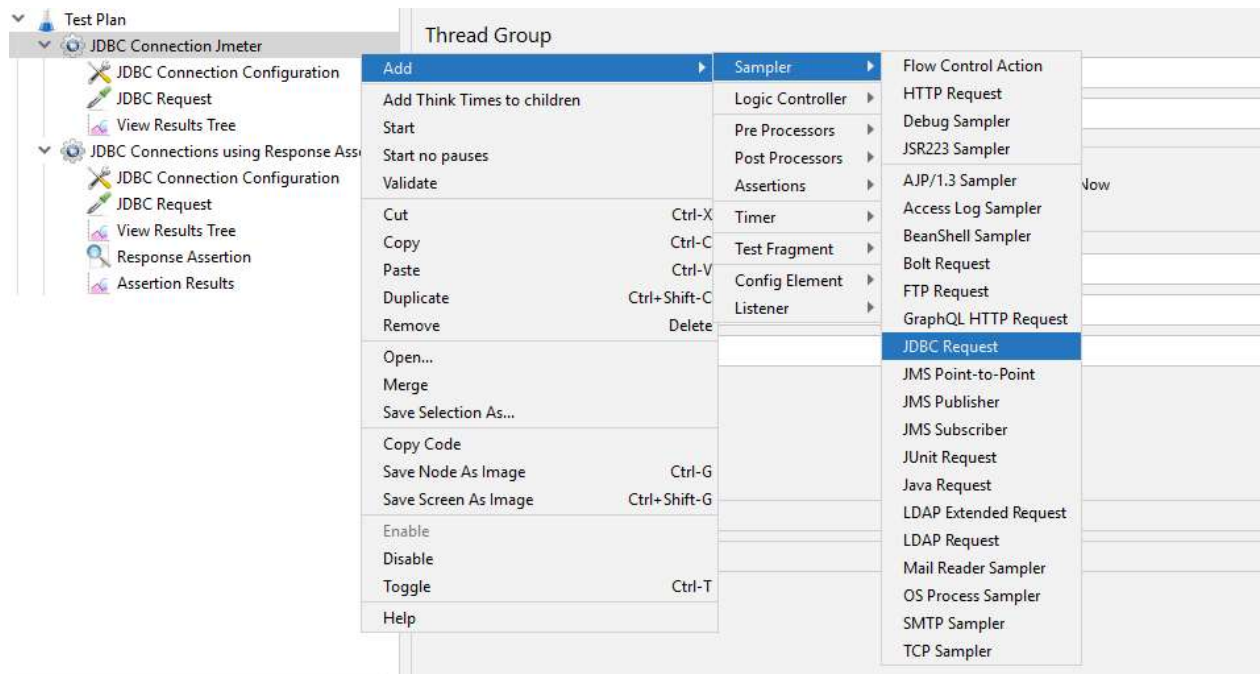

Step 8 - Use response assertion to validate author name=Newton.

The screenshot shows the JMeter interface with the 'Response Assertion' element selected in the left-hand tree. The configuration window for 'Response Assertion' is open on the right. The 'Name' field is set to 'Response Assertion'. The 'Apply to' section has 'Main sample only' selected. The 'Field to Test' section has 'Text Response' selected. The 'Pattern Matching Rules' section has 'Contains' selected. The 'Patterns to Test' list contains one entry: '1 Newton'. The 'Custom failure message' field is empty.

Test Plan

- JDBC Connection Jmeter
 - JDBC Connection Configuration
 - JDBC Request
 - View Results Tree
- JDBC Connections using Response Assertion
 - JDBC Connection Configuration
 - JDBC Request
 - View Results Tree
 - Response Assertion**
 - Assertion Results

Response Assertion

Name: Response Assertion

Comments:

Apply to:

☐ Main sample and sub-samples ☒ Main sample only ☐ Sub-samples only ☐ JMeter Variable Name to use

Field to Test

☒ Text Response ☐ Response Code ☐ Response Message ☐ Response Headers

☐ Request Headers ☐ URL Sampled ☐ Document (text) ☐ Ignore Status

☐ Request Data

Pattern Matching Rules

☒ Contains ☐ Matches ☐ Equals ☐ Substring ☐ Not ☐ Or

Patterns to Test

Patterns to Test
1 Newton

Add Add from Clipboard Delete

Custom failure message

1

Step 9 – Execute the query and check the output in View Results Tree.

The screenshot shows the JMeter interface with the 'View Results Tree' element selected in the left-hand tree. The configuration window for 'View Results Tree' is open on the right. The 'Name' field is set to 'View Results Tree'. The 'Write results to file / Read from file' section has 'Filename' set to 'Log/Display Only: Errors Successes Configure'. The 'Search' field is empty. The 'Response data' tab is selected, showing the 'Response Body' and 'Response headers' sections. The 'Response Body' section displays the query results in a table format.

Test Plan

- JDBC Connection Jmeter
 - JDBC Connection Configuration
 - JDBC Request
 - View Results Tree
- JDBC Connections using Response Assertion
 - JDBC Connection Configuration
 - JDBC Request
 - View Results Tree
 - Response Assertion
 - Assertion Results

View Results Tree

Name: View Results Tree

Comments:

Write results to file / Read from file

Filename: Log/Display Only: Errors Successes Configure

Search: Case sensitive Regular exp. Search Reset

Text

JDBC Request

Response data

Response Body Response headers

book_no	title	sub_code	author	publisher	status	yop	
MA001	Calculus	Mat	Newton	PQR	S	UNKN	1
95							