SIMATS ENGINEERING

CSA43 - INTERNET PROGRAMMING

Name	B KIRTHANAA
Register Number	192324244
Department	Artificial Intelligence and Data Science
Course Code & Title	CSA43 - Internet Programming

EXPERIMENT 11: HOME FINDER – ONLINE REAL ESTATE PLATFORM

Aim:

To design and develop a Home Finder real estate web application using HTML, CSS and JavaScript that provides buyer login, saves and reuses search criteria, searches properties by location, type and budget, displays results on a map, supports agent and company search, shows advertisements and maintains a record of customers who visited the website.

Code (HTML, CSS and JavaScript):

```
<!DOCTYPE html>
<html>
<head>

<title>Home Finder</title>

<style>
*{box-sizing:border-box;margin:0;padding:0;font-family:Arial}
body{background:#f0fdf4;color:#14532d}

header,footer{background:#14532d;color:white;padding:20px;text-align:center}
.wrap{max-width:1000px;margin:20px auto;padding:10px}

.card{background:white;padding:18px;margin:15px 0;border-radius:12px;box-shadow:0 3px 10px #cde8d5}
h2{color:#166534;margin-bottom:12px}

.row{display:flex;gap:10px;flex-wrap:wrap}
input,select{flex:1;padding:10px;border:1px solid #bbf7d0;border-radius:8px}

button{background:#16a34a;color:white;padding:10px 15px;border:0;border-radius:8px;cursor:pointer}

.alt{background:#f59e0b}
.ads,.grid{display:grid;grid-template-columns:repeat(auto-fit,minmax(200px,1fr));gap:12px}
.ads a{background:#fef9c3;padding:12px;text-align:center;color:#854d0e;text-decoration:none;border-radius:8px}
.prop{background:#f7fee7;border-radius:10px;overflow:hidden}
.pimg{background:#4ade80;text-align:center;font-size:40px;padding:20px}
.pbody{padding:12px}

.pbody p{margin:5px 0;font-size:14px}

.price{color:#15803d;font-weight:bold;font-size:20px}
.map{height:240px;background:#dcfce7;position:relative;border-radius:10px}

.pin{position:absolute;font-size:25px;cursor:pointer}

table{width:100%;border-collapse:collapse;margin-top:10px}
th,td{padding:10px;text-align:left;border-bottom:1px solid #ddd}
th{background:#14532d;color:white}

#msg{color:#15803d;margin-top:8px}
```

```
</style>
</head>

<body>
<header><h1>🏠 Home Finder</h1><p id="user">Guest</p></header>
<div class="wrap">
<div class="card">
<h2>Buyer Login</h2>

<div class="row"><input id="uname" placeholder="Username"><input id="pass" type="password"
placeholder="Password"><button onclick="login()">Login</button></div>
<p id="msg"></p>
</div>
<div class="card">

<h2>Sponsored Links</h2>
<div class="ads"><a href="#">🏦 Home Loans</a><a href="#">🛋 Interior Designers</a><a href="#">🚚 Packers &
Movers</a><a href="#">⚖ Legal Help</a></div>
</div>
<div class="card">

<h2>Search Properties</h2>
<div class="row"><input id="loc" placeholder="Location">
<select id="type"><option value="">Any
Type</option><option>House</option><option>Land</option><option>Commercial</option></select>

<input id="max" type="number" placeholder="Max Budget (Lakhs)"></div>
<br><button onclick="search()">Search</button>
<button class="alt" onclick="saveCriteria()">Save Search</button>
<button class="alt" onclick="useSaved()">Load Search</button>
</div>

<div class="card"><h2>Property Listings</h2><div class="grid" id="list"></div></div>
<div class="card"><h2>Map View</h2><div class="map" id="map"></div><p id="mapinfo">Click a pin to view details.</p></div>
<div class="card"><h2>Agents & Companies</h2>

<input id="asearch" placeholder="Search agents..." oninput="agents()">
<table id="atable"></table></div>
<div class="card"><h2>Visitor Records</h2>
<table id="visitors"><tr><th>Customer</th><th>Visited At</th></tr></table></div>
</div>

<footer>© 2026 Home Finder</footer>
<script>

let props=[
{id:1,title:"3BHK Villa",type:"House",loc:"Anna Nagar",price:95,x:30,y:45,agent:"Ravi Kumar"},
{id:2,title:"Residential Plot",type:"Land",loc:"Tambaram",price:48,x:60,y:78,agent:"Meena Iyer"},
{id:3,title:"Shop Space",type:"Commercial",loc:"T Nagar",price:120,x:50,y:35,agent:"Ravi Kumar"},
{id:4,title:"2BHK Apartment",type:"House",loc:"Velachery",price:62,x:70,y:55,agent:"Arun Dev"},
{id:5,title:"Farm Land",type:"Land",loc:"Padur",price:35,x:85,y:85,agent:"Meena Iyer"}
];

let team=[["Ravi Kumar","Prime Estates"],["Meena Iyer","GreenAcre Realty"],["Arun Dev","UrbanNest"]];
let icon={House:"🏠",Land:" 🌾 ",Commercial:" 🏢 "};

let users={},saved={},current="",favs=[];

function login(){
let u=uname.value.trim(),p=pass.value;
if(!u||!p){msg.innerText="Enter username and password";return}
if(users[u]&&users[u]!==p){msg.innerText="Wrong password";return}

users[u]=p;current=u;user.innerText="Welcome "+u;
msg.innerText="Login successful";

let r=visitors.insertRow();r.innerHTML=`<td>${u}</td><td>${new Date().toLocaleString()}</td>`;
}
function search(){
```

```
let l=loc.value.toLowerCase(),t=type.value,m=Number(max.value)||Infinity;
show(props.filter(p=>p.loc.toLowerCase().includes(l)&&(t===""||p.type===t)&&p.price<=m));
}
function saveCriteria(){
if(!current){alert("Please login first");return}
saved[current]={loc:loc.value,type:type.value,max:max.value};
msg.innerText="Search criteria saved";
}

function useSaved(){
let s=saved[current];
if(!s){alert("No saved search");return}
loc.value=s.loc;type.value=s.type;max.value=s.max;search();
}

function show(a){
list.innerHTML=a.map(p=>`
<div class="prop"><div class="pimg">${icon[p.type]}</div><div class="pbody">

<h3>${p.title}</h3><p>${p.type} | ${p.loc}</p><p>Agent: ${p.agent}</p>
<div class="price">₹${p.price} Lakhs</div>
<button onclick="fav(${p.id})">♥ Save</button>

<button class="alt" onclick="visit(${p.id})">Schedule Visit</button>
</div></div>`).join("")||"No properties found";

map.innerHTML=a.map(p=>`<div class="pin" style="left:${p.x}%;top:${p.y}%" onclick="pinInfo(${p.id})">⚲ </div>`).join("");
}
function pinInfo(id){
let p=props.find(x=>x.id===id);

mapinfo.innerText=p.title+" - "+p.loc+", Chennai - ₹"+p.price+" Lakhs";
}
function fav(id){
if(!favs.includes(id))favs.push(id);

alert("Added to favourites");
}

function visit(id){
let p=props.find(x=>x.id===id);
let d=prompt("Enter visit date:");
if(!d)return;


let r=visitors.insertRow();
r.innerHTML=`<td>${p.title} - ${p.loc}</td><td>${d}</td>`;
alert("Visit scheduled successfully");
}


function agents(){
let q=asearch.value.toLowerCase();
let a=team.filter(x=>x.join(" ").toLowerCase().includes(q));
atable.innerHTML="<tr><th>Agent</th><th>Company</th><th>Listings</th></tr>"+
a.map(x=>`<tr><td>${x[0]}</td><td>${x[1]}</td><td>${props.filter(p=>p.agent===x[0]).length}</td></tr>`).join("");
}

show(props);agents();

</script>
</body>
</html>
```

OUTPUT:

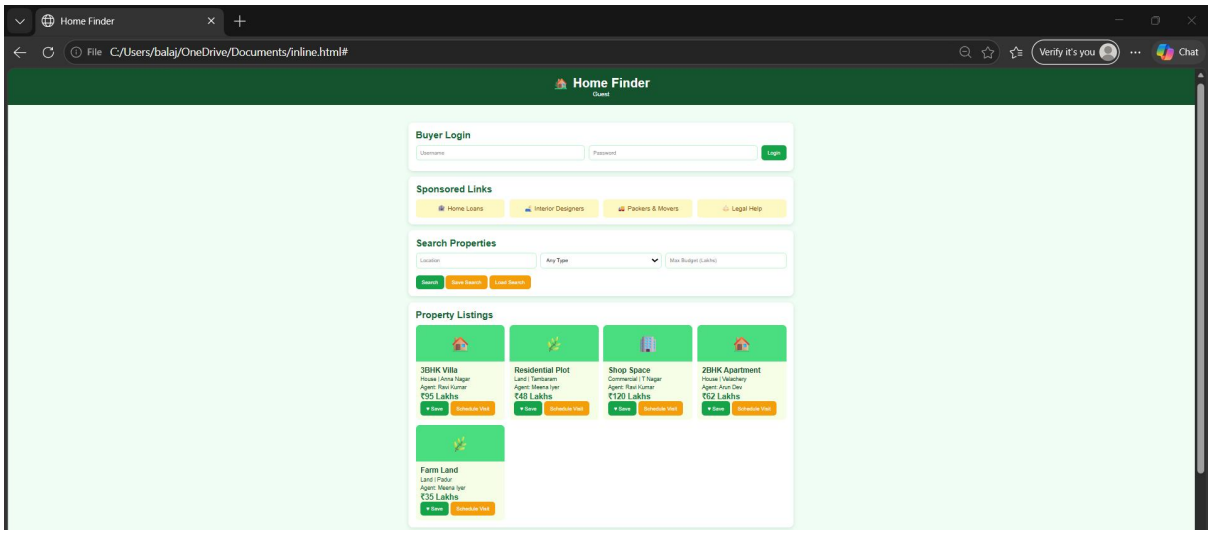

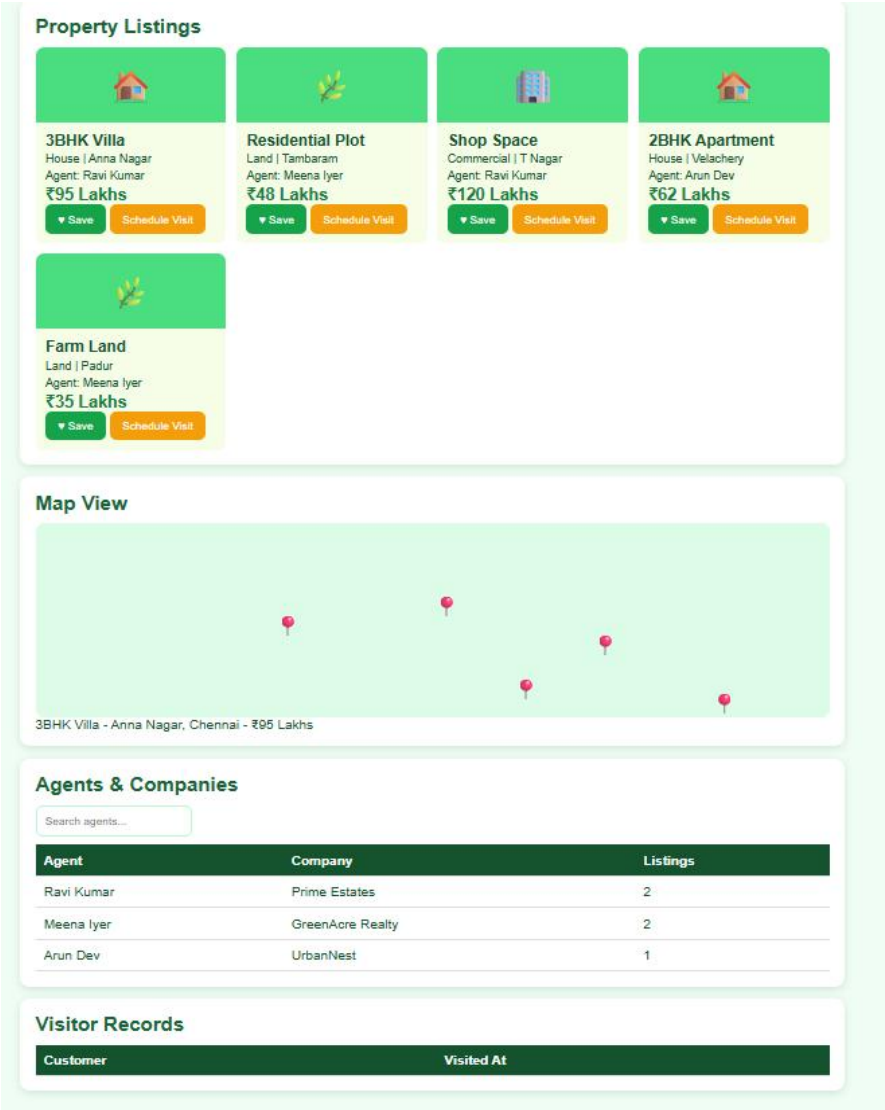

Result:

Thus the Home Finder web application was designed, developed and executed successfully.

EXPERIMENT 12: INSUREEASY – ONLINE INSURANCE MANAGEMENT SYSTEM

Aim:

To develop an online insurance management website using HTML, CSS and JavaScript in which the admin logs in, approves agents and views agent details; agents register, log in, create customers, manage policy details and send SMS alerts; and users log in, manage policy details and receive SMS alerts for premium due dates.

Code (HTML, CSS and JavaScript):

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<title>InsureEasy</title>
<style>
*{box-sizing:border-box;margin:0;padding:0;font-family:Arial}
body{background:#eff6ff;color:#1e3a8a}
header,footer{background:#1e3a8a;color:white;text-align:center;padding:20px}
.tabs{text-align:center;padding:15px}
button{background:#2563eb;color:white;border:0;padding:10px 15px;border-
radius:6px;cursor:pointer;margin:4px}
button.ok{background:green}
button.warn{background:#ea580c}
.wrap{max-width:900px;margin:auto;padding:15px}
.card{background:white;padding:18px;margin-bottom:15px;border-radius:10px;box-shadow:0 3px
10px #ccd6eb}
h2{color:#2563eb;margin-bottom:12px}
.row{display:flex;gap:10px;flex-wrap:wrap;margin-bottom:10px}
input,select{padding:10px;border:1px solid #bfdbfe;border-radius:6px;flex:1;min-width:130px}
.panel{display:none}
.panel.on{display:block}
table{width:100%;border-collapse:collapse;margin-top:10px}
th{background:#1e3a8a;color:white}
th,td{padding:10px;border-bottom:1px solid #ddd;text-align:left}
.note{color:green;margin-top:8px}
.sms{background:#ecfccb;padding:12px;margin:8px 0;border-radius:6px}
</style>
</head>
<body>

<header>
<h1> InsureEasy</h1>
<p>Smart Insurance Management Platform</p>
</header>

<div class="tabs">
<button onclick="tab(0)">Admin</button>
<button onclick="tab(1)">Agent</button>
<button onclick="tab(2)">User</button>
</div>

<div class="wrap">
```

```
<!-- Admin -->
<div class="panel on" id="p0">
<div class="card">
<h2>Admin Login</h2>
<div class="row">
<input id="au" placeholder="Admin ID">
<input id="ap" type="password" placeholder="Password">
<button onclick="adminLogin()">Login</button>
</div>
<p class="note" id="am"></p>
</div>

<div class="card" id="adminArea" style="display:none">
<h2>Approve Agents</h2>
<table id="agentTable"></table>
</div>
</div>

<!-- Agent -->
<div class="panel" id="p1">
<div class="card">
<h2>Agent Register / Login</h2>
<div class="row">
<input id="rn" placeholder="Agent Name">
<button onclick="regAgent()">Register</button>
</div>
<div class="row">
<input id="ln" placeholder="Agent Name">
<button class="ok" onclick="agentLogin()">Login</button>
</div>
<p class="note" id="gm"></p>
</div>

<div id="agentArea" style="display:none">
<div class="card">
<h2>Create Customer</h2>
<div class="row">
<input id="cn" placeholder="Customer Name">
<input id="cm" placeholder="Mobile">
<select id="cp">
<option>Health</option>
<option>Auto</option>
<option>Home</option>
</select>
<input id="cd" type="date">
<button onclick="addCust()">Create</button>
</div>
</div>

<div class="card">
<h2>Customer Policies</h2>
<table id="custTable"></table>
</div>
```

```
</div>
</div>

<!-- User -->
<div class="panel" id="p2">
<div class="card">
<h2>User Login</h2>
<div class="row">
<input id="un" placeholder="Customer Name">
<button onclick="userLogin()">Login</button>
</div>
<p class="note" id="um"></p>
</div>

<div class="card" id="userArea" style="display:none">
<h2>My Policy Details</h2>
<div id="mypol"></div>
<button class="warn" onclick="getSms()">View SMS Alerts</button>
<div id="inbox"></div>
</div>
</div>

</div>

<footer>© 2026 InsureEasy</footer>

<script>
var agents=[{n:"Suresh",s:"Approved"},{n:"Divya",s:"Pending"}];
var custs=[{n:"Arjun",m:"9876543210",p:"Health",d:"2026-12-05",a:"Suresh"}];
var sms=[],me="",usr="";

function tab(i){
for(var k=0;k<3;k++){
document.getElementById("p"+k).className=k===i?"panel on":"panel";
}
}

function adminLogin(){
var ok=au.value==="admin"&&ap.value==="admin";
am.innerText=ok?"Welcome Admin":"Invalid Login";
adminArea.style.display=ok?"block":"none";
if(ok)drawAgents();
}

function drawAgents(){
agentTable.innerHTML="<tr><th>Agent</th><th>Status</th><th>Action</th></tr>";
agents.forEach(function(a,i){
agentTable.innerHTML+="<tr><td>"+a.n+"</td><td>"+a.s+"</td><td>"+(a.s==="Pending"?"<button
onclick='approve("+i+")'>Approve</button>":"-")+"</td></tr>";
});
}

function approve(i){
agents[i].s="Approved";
```

```
drawAgents();
}

function regAgent(){
var n=rn.value.trim();
if(!n)return alert("Enter agent name");
agents.push({n:n,s:"Pending"});
gm.innerText="Registered. Waiting for approval.";
}

function agentLogin(){
var n=ln.value.trim();
var a=agents.find(function(x){return x.n===n});
if(!a)return gm.innerText="Agent not found";
if(a.s!=="Approved")return gm.innerText="Waiting for admin approval";
me=n;
gm.innerText="Welcome "+n;
agentArea.style.display="block";
drawCust();
}

function addCust(){
var n=cn.value.trim(),m=cm.value.trim();
if(!n||!m)return alert("Enter customer details");
custs.push({n:n,m:m,p:cp.value,d:cd.value||"2027-01-10",a:me});
drawCust();
}

function drawCust(){
custTable.innerHTML="<tr><th>Name</th><th>Mobile</th><th>Policy</th><th>Due
Date</th><th>Action</th></tr>";
custs.filter(function(c){return c.a===me}).forEach(function(c){
custTable.innerHTML+="<tr><td>"+c.n+"</td><td>"+c.m+"</td><td>"+c.p+"</td><td>"+c.d+"</td><
td><button class='warn' onclick=\"sendSms('"+c.n+"')\">Send SMS</button></td></tr>";
});
}


function sendSms(n){
var c=custs.find(function(x){return x.n===n});
sms.push({to:n,t:"Your "+c.p+" policy is due on "+c.d+". Please pay on time."});
alert("SMS alert sent to "+c.m);
}


function userLogin(){
var c=custs.find(function(x){return x.n===un.value.trim()});
if(!c)return um.innerText="Customer not found";
usr=c.n;
um.innerText="Welcome "+c.n;
userArea.style.display="block";
mypol.innerHTML="<table><tr><th>Policy</th><th>Due
Date</th><th>Agent</th></tr><tr><td>"+c.p+"</td><td>"+c.d+"</td><td>"+c.a+"</td></tr></table
>";
}
```


```
function getSms(){
var m=sms.filter(function(s){return s.to===usr});
inbox.innerHTML=m.length?m.map(function(s){return "<div class='sms'>📩
"+s.t+"</div>"}).join(""):"No SMS alerts yet.";
}

drawAgents();
</script>
</body>
</html>
```

OUTPUT:

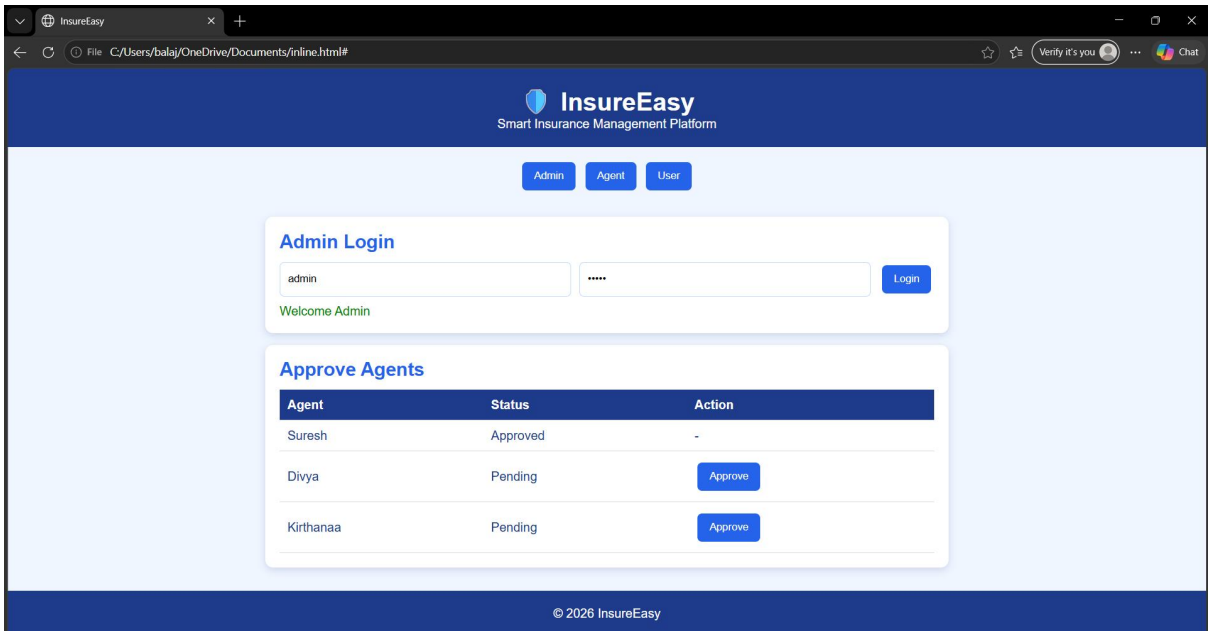

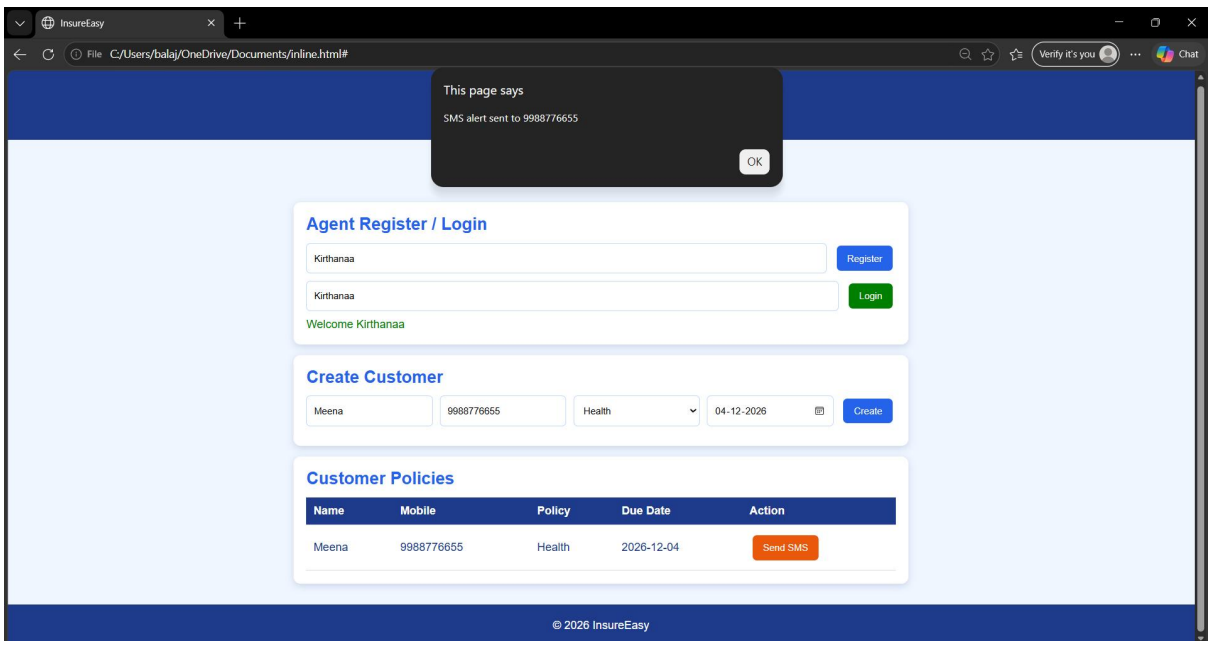

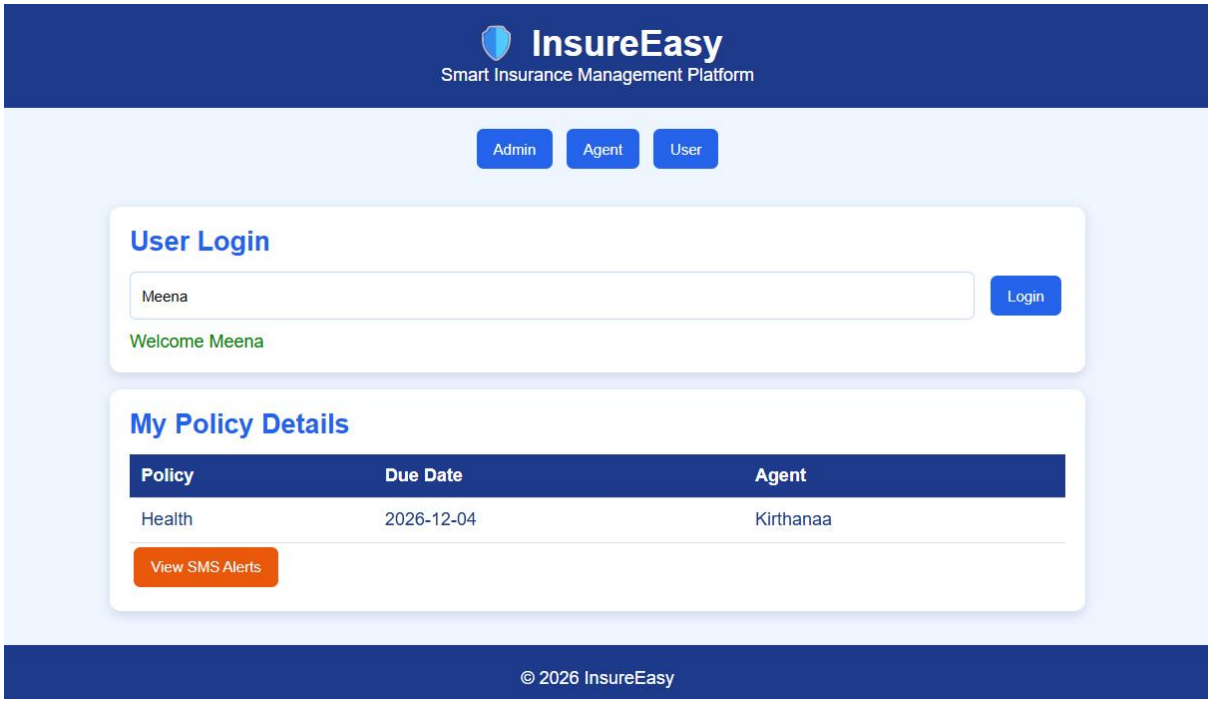

Result:

Thus the InsureEasy online insurance management system was designed, developed and executed successfully.

EXPERIMENT 13: BLOSSOMGIFTS – ONLINE FLOWER AND GIFT SHOP

Aim:

To build a user-friendly online gift shop using HTML, CSS and JavaScript that lists logically categorised products, allows customers to search items, add or remove items in the shopping cart, check out with delivery date and time and view order history, and allows the admin to add items, modify prices, remove items and view customers who checked out.

Code (HTML, CSS and JavaScript):

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<title>BlossomGifts</title>
<style>
*{box-sizing:border-box;margin:0;padding:0;font-family:Arial}
body{background:#fdf2f8;color:#831843}
header,footer{background:#9d174d;color:white;text-align:center;padding:20px}
nav{margin-top:12px}
button{background:#db2777;color:white;border:0;padding:10px 14px;border-radius:6px;cursor:pointer;margin:4px}
.wrap{max-width:900px;margin:auto;padding:15px}
.card{background:white;padding:18px;margin-bottom:15px;border-radius:10px;box-shadow:0 3px 10px #f3d1e2}
h2{color:#be185d;margin-bottom:12px}
.row{display:flex;gap:10px;flex-wrap:wrap;margin-bottom:10px}
input,select{padding:10px;border:1px solid #fbcfe8;border-radius:6px;flex:1;min-width:120px}
.grid{display:grid;grid-template-columns:repeat(auto-fit,minmax(180px,1fr));gap:15px}
.item{border:1px solid #fbcfe8;padding:15px;text-align:center;border-radius:8px}
.img{font-size:40px;margin-bottom:10px}
.price{color:#be185d;font-weight:bold;margin:10px}
table{width:100%;border-collapse:collapse;margin-top:10px}
th{background:#9d174d;color:white}
th,td{padding:10px;border-bottom:1px solid #fbcfe8;text-align:left}
```

```
</style>
</head>
<body>

<header>
<h1>🌸 BlossomGifts</h1>
<p>Make Every Moment Special</p>
<nav>
<button onclick="go('shop')">Shop</button>
<button onclick="go('cart')">Cart</button>
<button onclick="go('admin')">Admin</button>
</nav>
</header>

<div class="wrap">

<div class="card" id="shop">
<h2>Gift Shop</h2>
<div class="row">
<select id="category" onchange="showItems()">
<option>All</option>
<option>Flowers</option>
<option>Gift Baskets</option>
<option>Personalized Gifts</option>
</select>
<input id="search" placeholder="Search gifts" onkeyup="showItems()">
</div>
<div class="grid" id="items"></div>
</div>

<div class="card" id="cart">
<h2>Shopping Cart</h2>
<table id="cartTable"></table>
<p id="total"></p>
<div class="row">
<input id="date" type="date">
<button onclick="checkout()">Checkout</button>
</div>
<p id="msg"></p>
</div>

<div class="card" id="admin">
<h2>Admin Panel</h2>
<div class="row">
<input id="name" placeholder="Gift Name">
<input id="price" type="number" placeholder="Price">
<select id="type">
<option>Flowers</option>
<option>Gift Baskets</option>
<option>Personalized Gifts</option>
</select>
<button onclick="addItem()">Add Gift</button>
</div>
<table id="adminTable"></table>
</div>

</div>

<footer>© 2026 BlossomGifts</footer>

<script>
var gifts=[
{name:"Rose Bouquet",price:699,type:"Flowers",icon:"💐"},
{name:"Lily Bouquet",price:899,type:"Flowers",icon:"🌷"},
{name:"Chocolate Basket",price:999,type:"Gift Baskets",icon:"🍫"},
{name:"Photo Mug",price:399,type:"Personalized Gifts",icon:"☕"}
];

var cart=[];
```

```
function go(id){
document.getElementById(id).scrollIntoView();
}

function showItems(){
var c=document.getElementById("category").value;
var q=document.getElementById("search").value.toLowerCase();

items.innerHTML=gifts.filter(function(g){
return(c==="All"||g.type===c)&&g.name.toLowerCase().includes(q);
}).map(function(g,i){
return "<div class='item'><div class='img'>"+g.icon+"</div><h3>"+g.name+"</h3><p>"+g.type+"</p><div
class='price'>₹"+g.price+"</div><button onclick='addCart("+gifts.indexOf(g)+")'>Add to Cart</button></div>";
}).join("");

showAdmin();
}

function addCart(i){
cart.push(gifts[i]);
showCart();
}

function showCart(){
var sum=0;
cartTable.innerHTML="<tr><th>Gift</th><th>Price</th></tr>"+cart.map(function(g){
sum+=g.price;
return "<tr><td>"+g.name+"</td><td>₹"+g.price+"</td></tr>";
}).join("");
total.innerText="Total: ₹"+sum;
}

function checkout(){
if(!cart.length)return alert("Cart is empty");
if(!date.value)return alert("Select delivery date");

alert("Order placed successfully!");
cart=[];
showCart();
msg.innerText="Your order has been confirmed.";
}

function addItem(){
var n=name.value.trim(),p=Number(price.value);
if(!n||p<=0)return alert("Enter valid gift details");

gifts.push({name:n,price:p,type:type.value,icon:"🎁"});
name.value="";
price.value="";
showItems();
}


function showAdmin(){
adminTable.innerHTML="<tr><th>Gift</th><th>Price</th><th>Action</th></tr>"+gifts.map(function(g,i){
return "<tr><td>"+g.name+"</td><td>₹"+g.price+"</td><td><button onclick='removeItem("+i+")'>Remove</button></td></tr>";
}).join("");
}


function removeItem(i){
gifts.splice(i,1);
showItems();
}

showItems();
showCart();
</script>

</body>
</html>
```

OUTPUT:

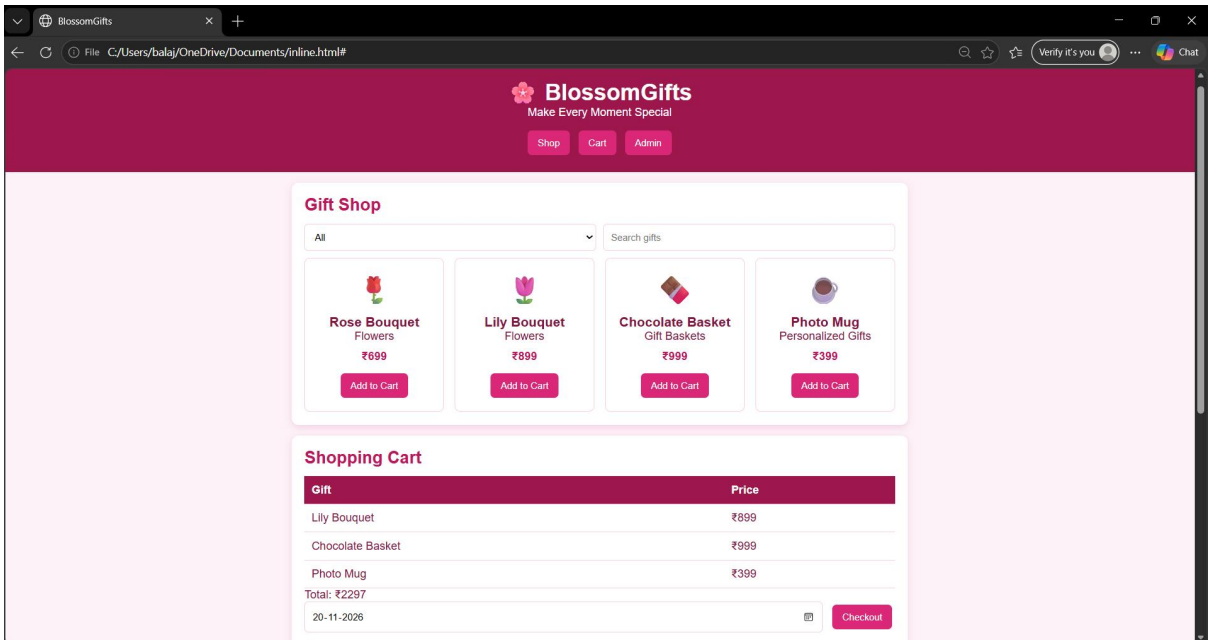

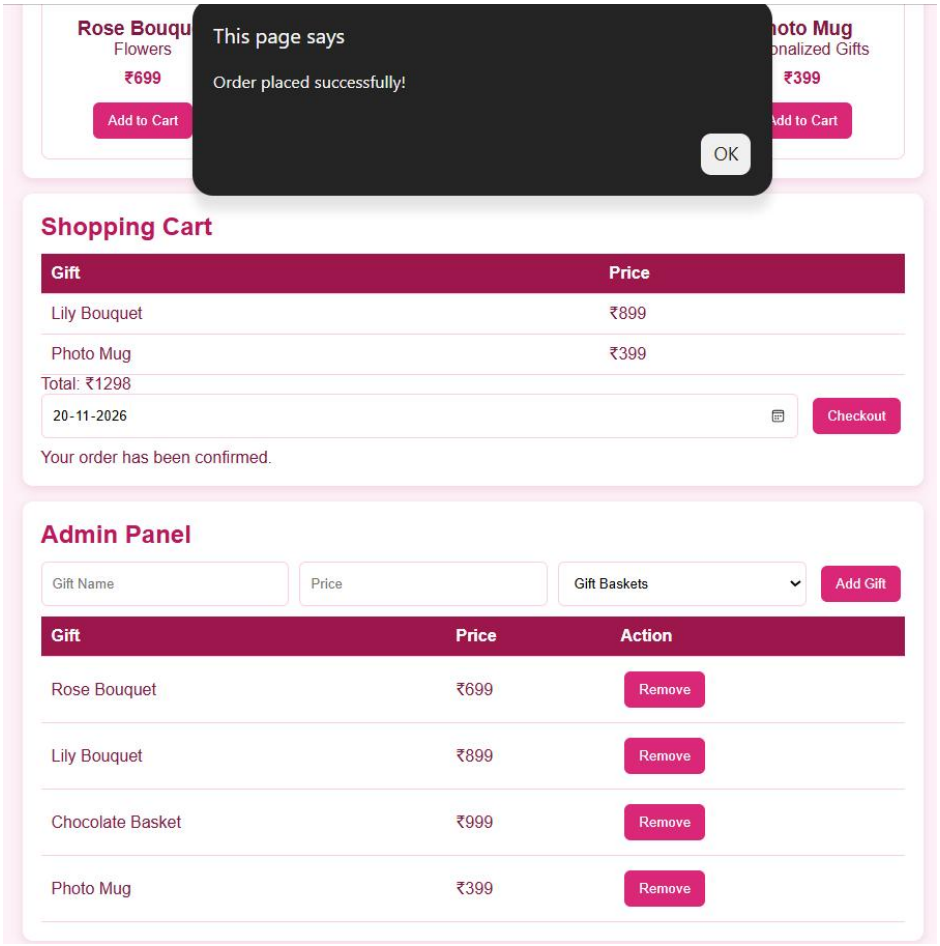

Result:

Thus the BlossomGifts online flower and gift shop web application was designed, developed and executed successfully.

EXPERIMENT 14: RENEWMARKET – SECOND-HAND GOODS MARKETPLACE

Aim:

To develop a second-hand goods marketplace using HTML, CSS and JavaScript that lets buyers browse, search and buy items and sellers create listings, while the administrator manages users, categories, commodities and order logistics status (Shipped / Received).

Code (HTML, CSS and JavaScript):

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<title>ReNewMarket</title>
<style>
*{box-sizing:border-box;margin:0;padding:0;font-family:Arial}
body{background:#f0fdfa;color:#134e4a}
header,footer{background:#115e59;color:white;text-align:center;padding:20px}
.tabs{text-align:center;padding:15px}
button{background:#0d9488;color:white;border:0;padding:10px 14px;border-radius:6px;cursor:pointer;margin:4px}
.del{background:#dc2626}
.wrap{max-width:900px;margin:auto;padding:15px}
.card{background:white;padding:18px;margin-bottom:15px;border-radius:10px;box-shadow:0 3px 10px #c9ece7}
h2{color:#0f766e;margin-bottom:12px}
.row{display:flex;gap:10px;flex-wrap:wrap;margin-bottom:10px}
input,select{padding:10px;border:1px solid #99f6e4;border-radius:6px;flex:1;min-width:120px}
.grid{display:grid;grid-template-columns:repeat(auto-fit,minmax(180px,1fr));gap:15px}
.item{border:1px solid #99f6e4;border-radius:8px;padding:15px;text-align:center}
.img{font-size:40px;margin-bottom:10px}
.price{color:#0f766e;font-weight:bold;margin:10px}
table{width:100%;border-collapse:collapse;margin-top:10px}
th{background:#115e59;color:white}
th,td{padding:10px;border-bottom:1px solid #ccfbf1;text-align:left}
.panel{display:none}
.panel.on{display:block}
</style>
</head>
<body>

<header>
<h1>♻ ReNewMarket</h1>
<p>Buy & Sell Pre-Loved Items</p>
</header>

<div class="tabs">
<button onclick="tab(0)">Marketplace</button>
<button onclick="tab(1)">Categories</button>
<button onclick="tab(2)">Commodities</button>
<button onclick="tab(3)">Orders</button>
</div>

<div class="wrap">

<div class="panel on" id="p0">
<div class="card">
<h2>Browse Second-Hand Goods</h2>
<div class="row">
<input id="q" placeholder="Search items" onkeyup="drawMarket()">
<select id="f" onchange="drawMarket()"></select>
</div>
<div class="grid" id="market"></div>
<p id="msg"></p>
</div>

<div class="card">
<h2>List Your Item</h2>
```

```
<div class="row">
<input id="sn" placeholder="Item name">
<input id="sp" type="number" placeholder="Price">
<select id="sc"></select>
<button onclick="listItem()">Add Item</button>
</div>
</div>
</div>

<div class="panel" id="p1">
<div class="card">
<h2>Category Management</h2>
<div class="row">
<input id="nc" placeholder="New category">
<button onclick="addCat()">Add</button>
</div>
<table id="cTable"></table>
</div>
</div>

<div class="panel" id="p2">
<div class="card">
<h2>Commodity Management</h2>
<table id="iTable"></table>
</div>
</div>

<div class="panel" id="p3">
<div class="card">
<h2>Order Management</h2>
<table id="oTable"></table>
</div>
</div>

</div>

<footer>© 2026 ReNewMarket</footer>

<script>
var cats=["Electronics","Furniture","Clothing","Collectibles"];
var items=[
{n:"Used Laptop",c:"Electronics",p:18000,i:"💻"},
{n:"Study Table",c:"Furniture",p:3500,i:"🪑"},
{n:"Denim Jacket",c:"Clothing",p:700,i:"👕"},
{n:"Vintage Coins",c:"Collectibles",p:2200,i:"🪙"}
];
var orders=[];

function tab(n){
for(var i=0;i<4;i++)
document.getElementById("p"+i).className=i===n?"panel on":"panel";
}

function opts(){
var o=cats.map(function(c){return "<option>"+c+"</option>"}).join("");
sc.innerHTML=o;
f.innerHTML="<option value=''>All Categories</option>"+o;
}

function drawMarket(){
var q=document.getElementById("q").value.toLowerCase();
var c=f.value;

market.innerHTML=items.filter(function(x){
return x.n.toLowerCase().includes(q)&&(c===""||x.c===c);
}).map(function(x){
return "<div class='item'><div class='img'>"+x.i+"</div><h3>"+x.n+"</h3><p>"+x.c+"</p><div class='price'>₹"+x.p+"</div><button
onclick='buy("+items.indexOf(x)+")'>Buy Now</button></div>";
}).join("");
```

```
drawItems();
}

function buy(i){
orders.push({id:"RN"+(101+orders.length),item:items[i].n,status:"Processing"});
msg.innerText=items[i].n+" ordered successfully!";
drawOrders();
}

function listItem(){
var n=sn.value.trim(),p=Number(sp.value);
if(!n||p<=0)return alert("Enter item name and price");
items.push({n:n,c:sc.value,p:p,i:"📦"});
sn.value="";
sp.value="";
drawMarket();
}

function addCat(){
var n=nc.value.trim();
if(!n)return alert("Enter category");
cats.push(n);
nc.value="";
opts();
drawCats();
}

function drawCats(){
cTable.innerHTML="<tr><th>Category</th><th>Action</th></tr>"+cats.map(function(c,i){
return "<tr><td>"+c+"</td><td><button class='del' onclick='delCat("+i+")'>Delete</button></td></tr>";
}).join("");
}

function delCat(i){
cats.splice(i,1);
opts();
drawCats();
}

function drawItems(){
iTable.innerHTML="<tr><th>Item</th><th>Category</th><th>Price</th><th>Action</th></tr>"+items.map(function(x,i){
return "<tr><td>"+x.n+"</td><td>"+x.c+"</td><td>₹"+x.p+"</td><td><button class='del'
onclick='delItem("+i+")'>Delete</button></td></tr>";
}).join("");
}


function delItem(i){
items.splice(i,1);
drawMarket();
}

function drawOrders(){
oTable.innerHTML="<tr><th>Order</th><th>Item</th><th>Status</th></tr>"+orders.map(function(o){
return "<tr><td>"+o.id+"</td><td>"+o.item+"</td><td>"+o.status+"</td></tr>";
}).join("");
}


opts();
drawMarket();
drawCats();
drawOrders();
</script>

</body>
</html>
```

OUTPUT:

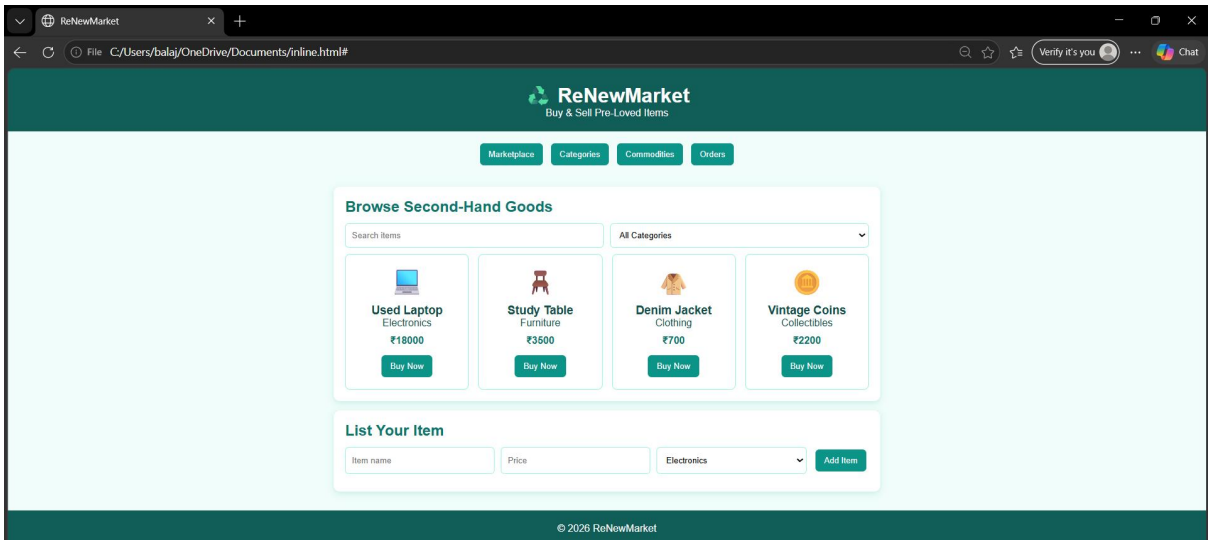
ReNewMarket
File C:/Users/balaj/OneDrive/Documents/inline.html#
Verify it's you
Chat
ReNewMarket
Buy & Sell Pre-Loved Items
Marketplace
Categories
Commodities
Orders
Browse Second-Hand Goods
Search items
All Categories
Used Laptop
Electronics
₹18000
Buy Now
Study Table
Furniture
₹3500
Buy Now
Denim Jacket
Clothing
₹700
Buy Now
Vintage Coins
Collectibles
₹2200
Buy Now
List Your Item
Item name
Price
Electronics
Add Item
© 2026 ReNewMarket


ReNewMarket
Buy & Sell Pre-Loved Items
Marketplace
Categories
Commodities
Orders
Order Management
Order
Item
Status
RN101
Used Laptop
Processing
RN102
Study Table
Processing
RN103
Study Table
Processing
RN104
Denim Jacket
Processing
RN105
Used Laptop
Processing
© 2026 ReNewMarket

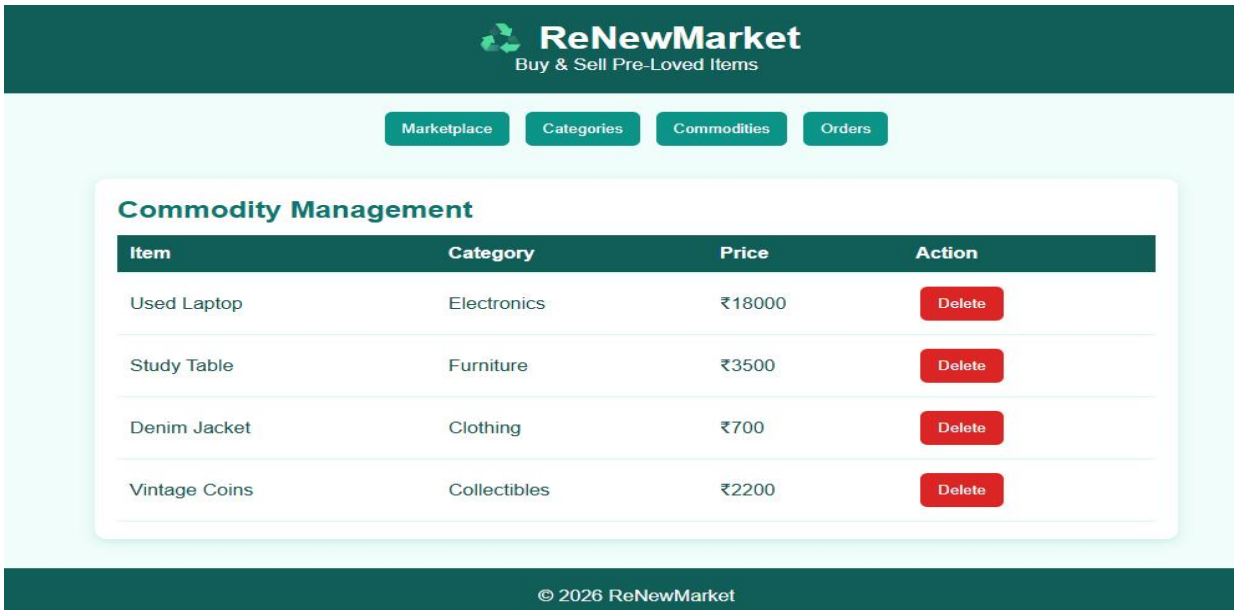
ReNewMarket
Buy & Sell Pre-Loved Items
Marketplace
Categories
Commodities
Orders
Commodity Management
Item
Category
Price
Action
Used Laptop
Electronics
₹18000
Delete
Study Table
Furniture
₹3500
Delete
Denim Jacket
Clothing
₹700
Delete
Vintage Coins
Collectibles
₹2200
Delete
© 2026 ReNewMarket

Result:

Thus the ReNewMarket second-hand marketplace web application was designed, developed and executed successfully.

EXPERIMENT 15: EASYTOLL – ONLINE TOLL PAYMENT SYSTEM

Aim:

To implement an online toll payment website using HTML, CSS and JavaScript where the admin creates toll details and approves toll passes with QR codes, users register, add money to an eWallet, buy toll eTickets, apply for and renew toll passes, and toll gate users scan the QR code, verify the pass ID and ticket and update the toll location.

Code (HTML, CSS and JavaScript):

```
<!DOCTYPE html>
<html>
<head>
<title>EasyToll</title>
<style>
*{box-sizing:border-box;font-family:Arial}
body{background:#f1f5f9;margin:0;color:#1e293b}
header,footer{background:#334155;color:white;text-align:center;padding:18px}
button{padding:10px;background:#f59e0b;border:0;border-radius:5px;cursor:pointer}
input,select{padding:10px;margin:5px}
.card{background:white;padding:15px;margin:15px;border-radius:10px}
.panel{display:none}
.panel.on{display:block}
</style>
</head>
<body>

<header><h1>EasyToll</h1>Skip the Toll Queue</header>

<center>
<button onclick="tab(0)">Admin</button>
<button onclick="tab(1)">User</button>
<button onclick="tab(2)">Toll Gate</button>
</center>

<div class="panel on" id="p0">
<div class="card">
<h2>Admin Login</h2>
<input id="au" placeholder="Admin ID">
<input id="ap" type="password" placeholder="Password">
<button onclick="admin()">Login</button>
<p id="am"></p>
<div id="aa" hidden>
<h3>Add Toll Plaza</h3>
<input id="tn" placeholder="Plaza Name">
<input id="tf" type="number" placeholder="Fare">
<button onclick="addToll()">Add</button>
<div id="tl"></div>
<div id="pl"></div>
</div>
```

```
</div>
</div>

<div class="panel" id="p1">
<div class="card">
<h2>User Register/Login</h2>
<input id="name" placeholder="Name">
<input id="vehicle" placeholder="Vehicle Number">
<button onclick="register()">Register</button>
<button onclick="login()">Login</button>
<p id="um"></p>
<div id="ua" hidden>
<h3>Wallet: ₹<span id="bal">0</span></h3>
<input id="money" type="number" placeholder="Amount">
<button onclick="recharge()">Recharge</button>
<h3>Toll Ticket / Pass</h3>
<select id="plaza"></select>
<button onclick="buy()">Buy Ticket</button>
<button onclick="pass()">Apply Pass</button>
<button onclick="qr()">Show QR</button>
<div id="my"></div>
<div id="q"></div>
</div>
</div>
</div>

<div class="panel" id="p2">
<div class="card">
<h2>Toll Gate Login</h2>
<input id="gu" placeholder="Gate ID">
<input id="gp" type="password" placeholder="Password">
<button onclick="gate()">Login</button>
<div id="ga" hidden>
<input id="sid" placeholder="Ticket/Pass ID">
<button onclick="verify()">Verify</button>
<p id="gm"></p>
</div>
</div>
</div>

<footer>EasyToll © 2026</footer>

<script>
var tolls=[{n:"Sriperumbudur",f:85},{n:"Chengalpattu",f:120}];
var users={},tickets=[],passes=[],cur="";

function tab(n){
document.querySelectorAll(".panel").forEach((p,i)=>p.className=i==n?"panel on":"panel");
}

function admin(){
if(au.value=="admin"&&ap.value=="admin"){
aa.hidden=false;am.innerText="Login successful";
showTolls();
```

```
}else am.innerText="Invalid login";
}

function addToll(){
if(tn.value&&tf.value>0){
tolls.push({n:tn.value,f:+tf.value});
showTolls();plazas();
}
}

function showTolls(){
tl.innerHTML=tolls.map(t=>t.n+" - ₹"+t.f).join("<br>");
pl.innerHTML=passes.map(p=>p.id+" - "+p.u+" - "+p.s+
(p.s=="Pending"?" <button onclick='approve(\""+p.id+"\")'>Approve</button>":"")).join("<br>");
}

function register(){
if(name.value&&vehicle.value){
users[name.value]={v:vehicle.value,w:0};
um.innerText="Registered successfully";
}
}

function login(){
if(users[name.value]){
cur=name.value;ua.hidden=false;
um.innerText="Welcome "+cur;
bal.innerText=users[cur].w;
plazas();showMine();
}else um.innerText="Register first";
}

function plazas(){
plaza.innerHTML=tolls.map((t,i)=>`<option value="${i}">${t.n} ₹${t.f}</option>`).join("");
}

function recharge(){
var a=+money.value;
if(a>0){users[cur].w+=a;bal.innerText=users[cur].w;}
}

function buy(){
var t=tolls[plaza.value];
if(users[cur].w<t.f){alert("Insufficient balance");return;}
users[cur].w-=t.f;
tickets.push({id:"TK"+(tickets.length+1),u:cur,n:t.n,f:t.f,used:false});
bal.innerText=users[cur].w;showMine();
}

function pass(){
passes.push({id:"TP"+(passes.length+1),u:cur,s:"Pending"});
showMine();showTolls();
}
```

```
function approve(id){
passes.find(p=>p.id==id).s="Approved";
showTolls();showMine();
}

function showMine(){
my.innerHTML=passes.filter(p=>p.u==cur).map(p=>p.id+" - "+p.s).join("<br>")+
"<br>"+tickets.filter(t=>t.u==cur).map(t=>t.id+" - "+t.n).join("<br>");
}


function qr(){
var p=passes.find(p=>p.u==cur&&p.s=="Approved");
q.innerText=p?"QR Pass ID: "+p.id:"Pass not approved";
}


function gate(){
if(gu.value=="gate"&&gp.value=="gate")ga.hidden=false;
else gm.innerText="Invalid login";
}

function verify(){
var id=sid.value.toUpperCase();
var p=passes.find(p=>p.id==id);
var t=tickets.find(t=>t.id==id);
if(p&&p.s=="Approved")gm.innerText="Pass Approved";
else if(t&&!t.used){t.used=true;gm.innerText="Ticket Valid";}
else gm.innerText="Invalid or Used Ticket";
}

plazas();
</script>
</body>
</html>
```

OUTPUT:

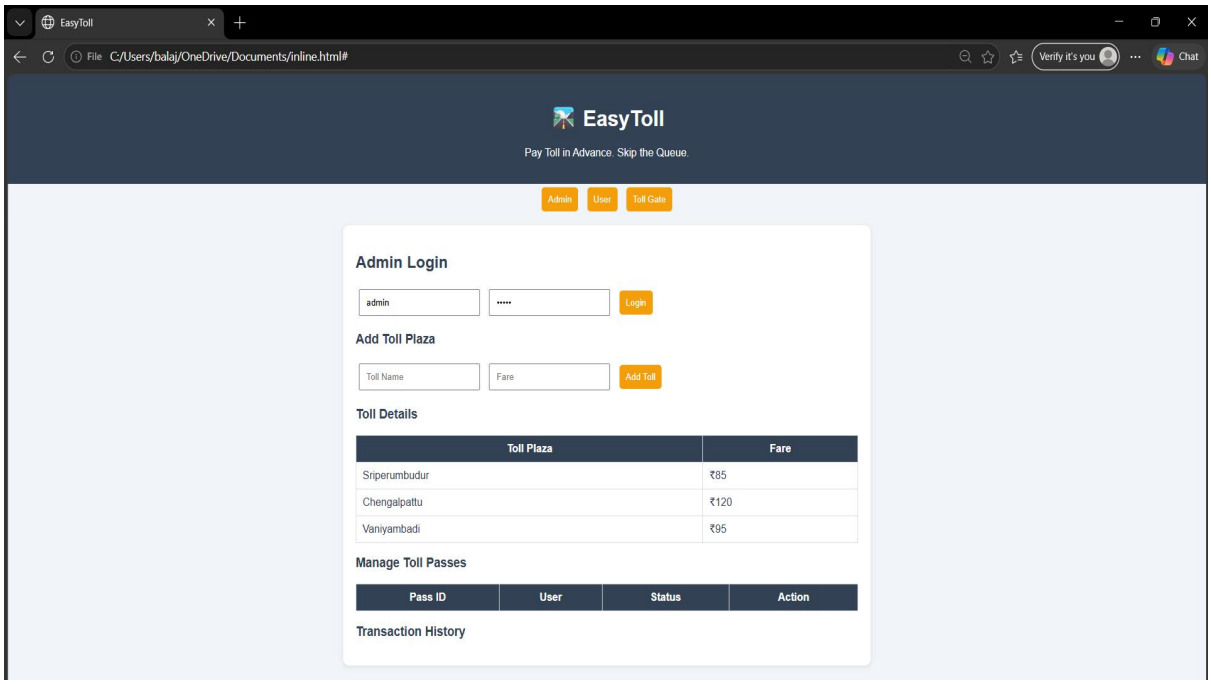

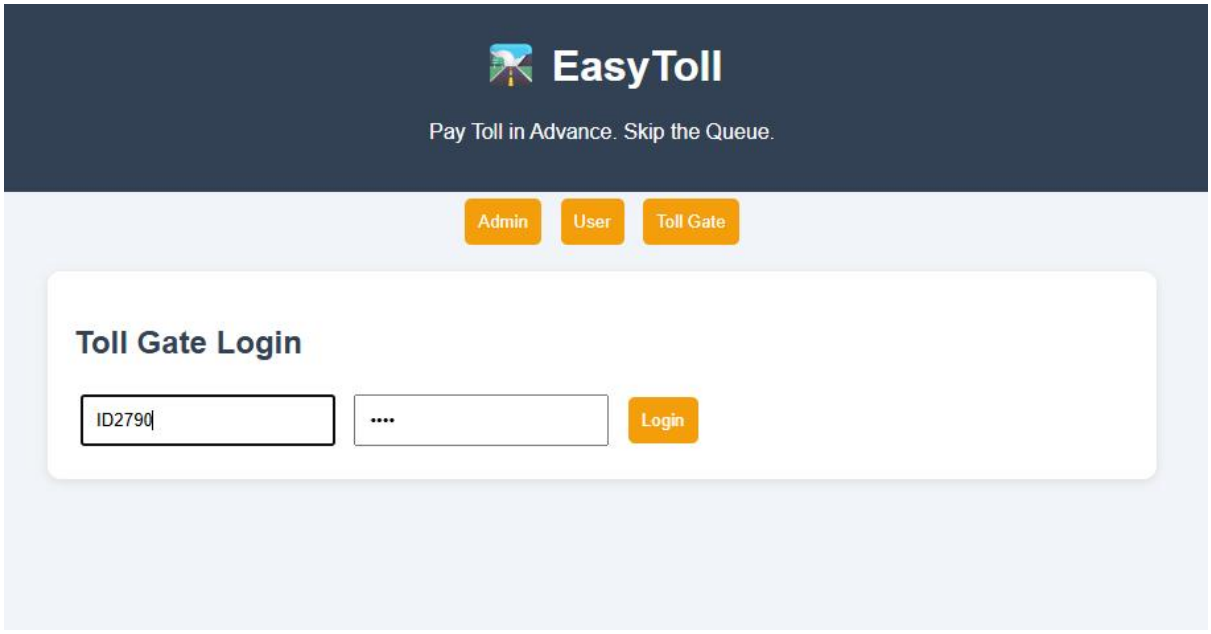

Result:

Thus the EasyToll online toll payment system web application was designed, developed and executed successfully.