LAB EXPERIMENT - 04

Department	AIDS
Course Code / Course Name	ITA1409 - ETHICAL HACKING
Name	B KIRTHANAA
Register Number	192324244

Q4. Execute and Display the Results of ls, cat, and mkdir Commands in Kali Linux Operating System

AIM

To execute and display the results of the ls, cat, and mkdir commands in the Kali Linux operating system and understand their basic functions.

PROCEDURE

1. Open the Kali Linux Terminal and navigate to the home directory.
2. Create a sample directory and files using the mkdir, touch, and echo commands.
3. Execute the ls command to list the files and directories in the current directory.
4. Execute the cat command followed by a file name to display the contents of the file.
5. Execute the mkdir command followed by a directory name to create a new directory, and verify it using ls.
6. Observe and verify the output of all three commands and understand their functions.
7. Capture screenshots of the terminal showing the execution and output of the commands as evidence.

COMMANDS TO EXECUTE

First, create a sample directory and file:

```
mkdir Sample
cd Sample
echo -e "Line 1: Kali Linux\nLine 2: Operating System\nLine 3: ls
command\nLine 4: cat command\nLine 5: mkdir command" > sample.txt
touch notes.txt
```

Then execute:

1. ls Command

The ls command is used to list the files and directories present in the current working directory. The option -l displays the detailed (long) listing with permissions, owner, size, and modification time.

```
ls
ls -l
```

OUTPUT:




2. cat Command

The cat (concatenate) command is used to display the entire contents of a file on the terminal.

```
cat sample.txt
```

OUTPUT:

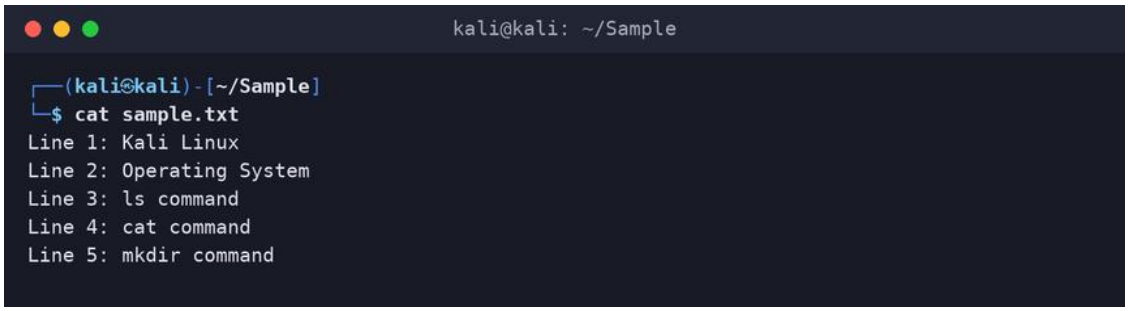


3. mkdir Command

The mkdir (make directory) command is used to create a new directory. The ls command is then used to verify that the directory has been created.

```
mkdir Lab_Files
ls
```

OUTPUT:

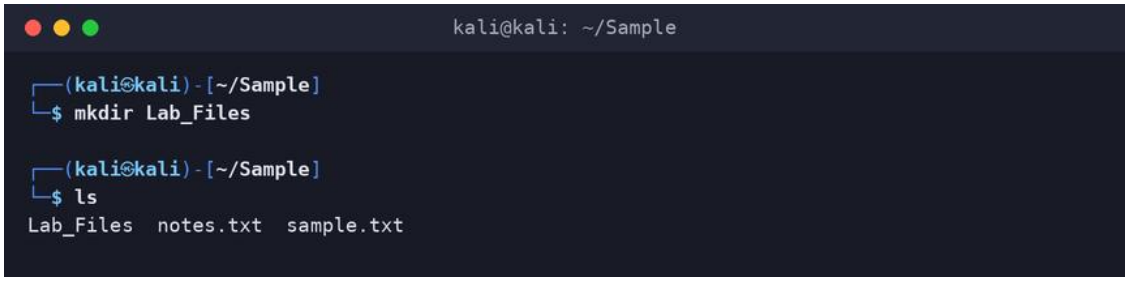

RESULT

The ls, cat, and mkdir commands were successfully executed in Kali Linux. The ls command was used to list the files and directories, the cat command was used to display the contents of a text file, and the mkdir command was used to create a new directory.