# LAB EXPERIMENT - 09

| | |
|---|---|
| **Department** | AIDS |
| **Course Code / Course Name** | ITA1409 - ETHICAL HACKING |
| **Name** | B KIRTHANAA |
| **Register Number** | 192324244 |

**Q9. Execute and Display the Results of Nmap Timing and Performance Commands (Polite IDS Evasion and Normal IDS Evasion) in Kali Linux**

**AIM**

To execute and display the results of the Nmap timing and performance commands for polite and normal IDS evasion in the Kali Linux operating system and understand how timing templates affect scan speed and detection.

**PROCEDURE**

1. Open the Kali Linux Terminal and check that Nmap is installed using nmap --version.
2. Select a target that you are authorized to scan (scanme.nmap.org is used here).
3. Execute the Nmap command with the -T2 timing template for the polite scan.
4. Execute the Nmap command with the -T3 timing template for the normal scan.
5. Compare the scan duration and the ports reported by both commands.
6. Observe and verify the output of both commands and understand their functions.
7. Capture screenshots of the terminal showing the execution and output of the commands as evidence.

**COMMANDS TO EXECUTE**

Open the terminal and execute:

**1. Polite IDS Evasion (-T2)**

The -T2 (polite) timing template slows the scan down to use less bandwidth and target resources, which makes it less likely to trigger an IDS.

**`nmap -T2 scanme.nmap.org`**

**OUTPUT:**





### 2. Normal IDS Evasion (-T3)

The -T3 (normal) timing template is the default Nmap speed and runs the scan at a balanced pace without any added delay.

**`nmap -T3 scanme.nmap.org`**

**OUTPUT:**

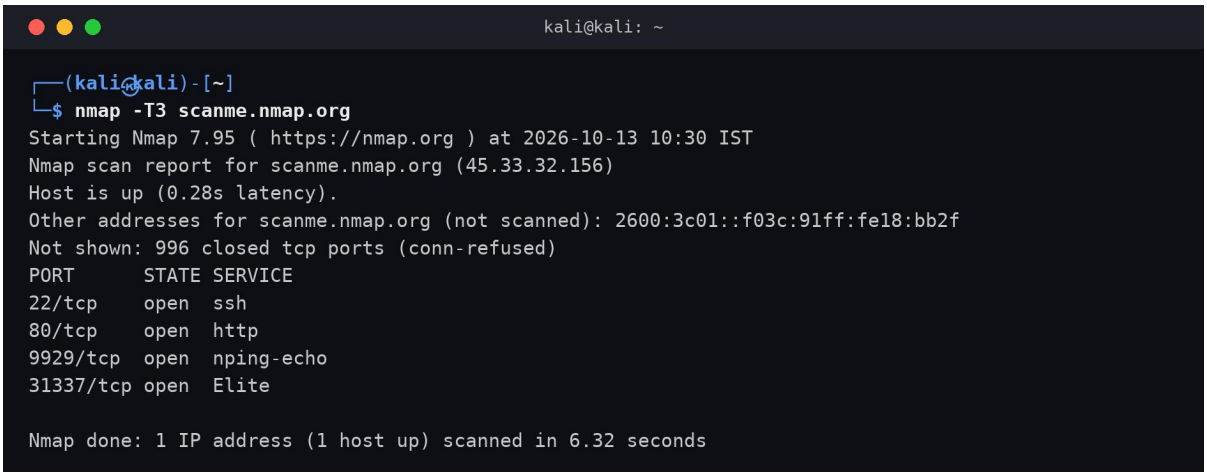


**NMAP TIMING TEMPLATES**

| Template | Name | Description |
|---|---|---|
| -T0 | Paranoid | Very slow; used for IDS evasion |
| -T1 | Sneaky | Slow; used for IDS evasion |
| -T2 | Polite | Slows down to use less bandwidth and target resources |

| | | |
|---|---|---|
| -T3 | Normal | Default speed; balanced scan |
| -T4 | Aggressive | Fast scan on a reliable network |
| -T5 | Insane | Fastest; may miss open ports |

**OBSERVATION**

The polite scan (-T2) took about 41.87 seconds because Nmap waits longer between probes, while the normal scan (-T3) finished in about 6.32 seconds. Slower timing sends fewer packets per second, so it is harder for an IDS to detect.

**RESULT**

The Nmap timing commands were successfully executed in Kali Linux. The polite scan (-T2) ran slowly to reduce network load and the chance of IDS detection, while the normal scan (-T3) completed faster at the default speed, and both reported the same open ports.