


PIZZA SALES SQL QUERIES

A. KPI's

1. Total Revenue:

```
select sum(total_price) as Total_Revenue from pizza_sales;
```

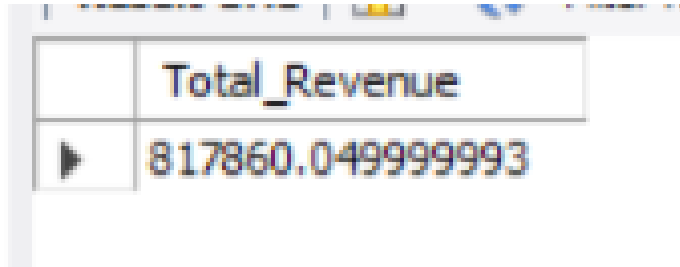


A screenshot of a SQL query result in a web application. The interface includes a 'Result Grid' tab, a table icon, a refresh icon, and a 'Filter Rows:' input field. The table has one column labeled 'Total_Revenue' and one row with the value '817860.0499999993'.

Total_Revenue
817860.0499999993

2. Average Order Value

```
select (SUM(total_price) / COUNT(DISTINCT(order_id))) as  
Avg_Order_Value from pizza_sales;
```

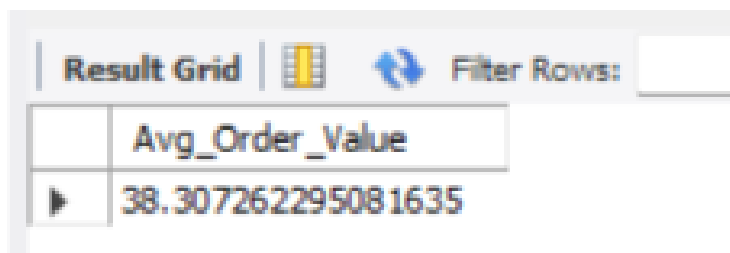

A screenshot of a SQL query result in a web application. The interface includes a 'Result Grid' tab, a table icon, a refresh icon, and a 'Filter Rows:' input field. The table has one column labeled 'Avg_Order_Value' and one row with the value '38.307262295081635'.

Avg_Order_Value
38.307262295081635

3. Total Pizzas Sold

```
select SUM(quantity) as Total_Pizzas_Sold from pizza_sales;
```




A screenshot of a SQL query result in a web application. The interface includes a 'Result Grid' tab, a table icon, a refresh icon, and a 'Filter Rows:' input field. The table has one column labeled 'Total_Pizzas_Sold' and one row with the value '49574'.

Total_Pizzas_Sold
49574

4. Total Orders

```
select count(DISTINCT order_id) as Total_Orders from pizza_sales;
```

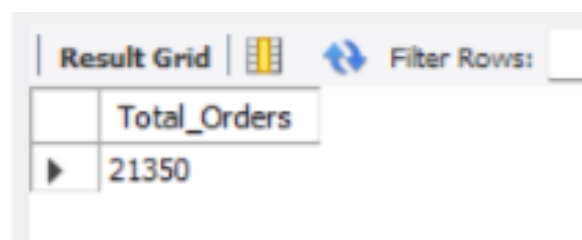


A screenshot of a SQL query result in a web application. The interface includes a 'Result Grid' tab, a table icon, a refresh icon, and a 'Filter Rows:' input field. The table has one column labeled 'Total_Orders' and one row with the value '21350'.

Total_Orders
21350

5. Average Pizzas Per Order

```
select CAST(CAST(sum(quantity) AS DECIMAL(10,2)) /  
CAST(count(DISTINCT order_id) AS DECIMAL(10,2)) AS DECIMAL(10,2)) as  
Avg_Pizzas_Per_Order from pizza_sales;
```

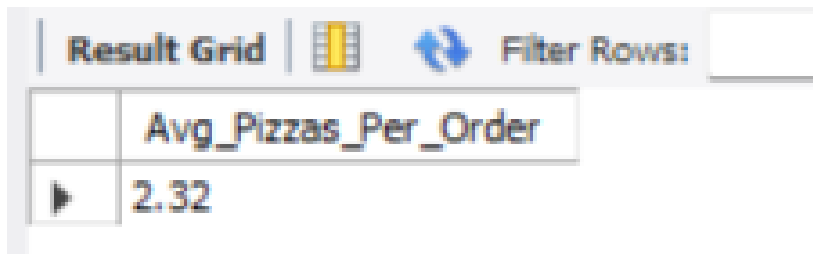


The screenshot shows a database interface with a 'Result Grid' tab. The grid contains a single column labeled 'Avg_Pizzas_Per_Order' and a single row with the value '2.32'. Above the grid, there are icons for a table, a refresh button, and a 'Filter Rows:' input field.

	Avg_Pizzas_Per_Order
▶	2.32

B. Daily Trend for Total Orders

```
SELECT DAYNAME(order_date) AS order_day, COUNT(DISTINCT order_id) AS  
total_orders  
FROM pizza_sales  
GROUP BY DAYNAME(order_date);
```

Output:

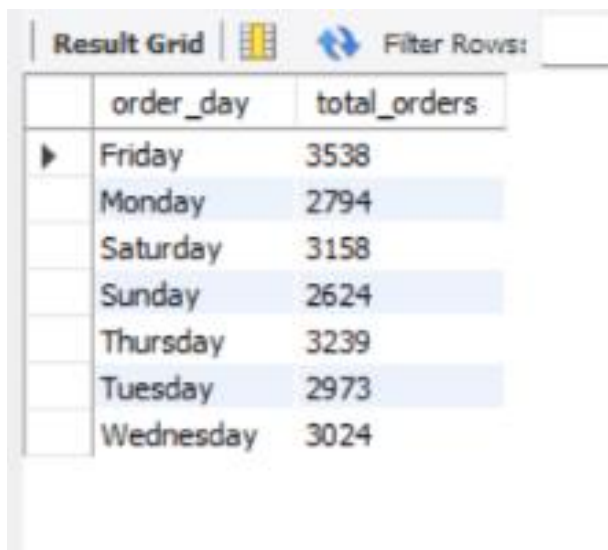

The screenshot shows a database interface with a 'Result Grid' tab. The grid contains two columns: 'order_day' and 'total_orders'. The rows list the days of the week and their corresponding total orders. Above the grid, there are icons for a table, a refresh button, and a 'Filter Rows:' input field.

	order_day	total_orders
▶	Friday	3538
	Monday	2794
	Saturday	3158
	Sunday	2624
	Thursday	3239
	Tuesday	2973
	Wednesday	3024

C. Hourly Trend for Orders

```
select hour(order_time) as Order_Hours , count(DISTINCT order_id) as  
Total_Orders  
from pizza_sales  
group by hour(order_time)  
order by hour(order_time);
```

Output

Result Grid   Filter Rows:		
	Order_Hours	Total_Orders
▶	9	1
	10	8
	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198
	22	663
	23	28

D. % of Sales by Pizza Category

```
select pizza_category , cast(sum(total_price) as DECIMAL(10,2)) as  
Total_Sales, cast(sum(total_price)*100 /  
  
(select sum(total_price) from pizza_sales) as DECIMAL(10,2)) as PCT  
from pizza_sales  
  
group by pizza_category;
```


Output

Result Grid   Filter Rows:			
	pizza_category	Total_Sales	PCT
▶	Classic	220053.10	26.91
	Veggie	193690.45	23.68
	Supreme	208197.00	25.46
	Chicken	195919.50	23.96

E. % of Sales by Pizza Size

```
select pizza_size, cast(sum(total_price) as DECIMAL(10,2)) as  
Total_Sales ,cast(sum(total_price)*100 /  
(select sum(total_price) from pizza_sales) as DECIMAL(10,2)) as PCT  
from pizza_sales  
  
group by pizza_size  
  
order by pizza_size;
```

Output

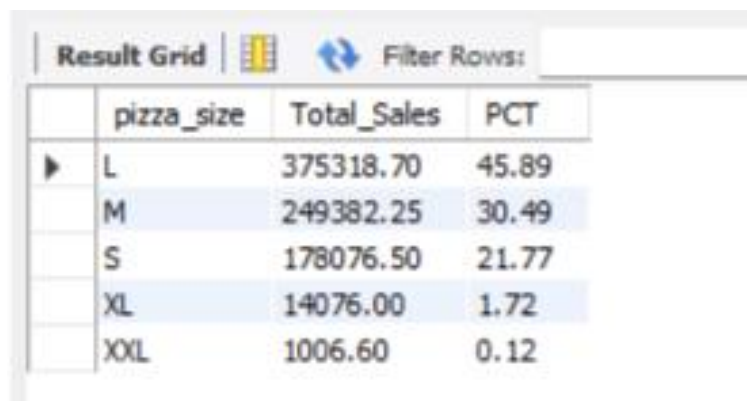


The screenshot shows a 'Result Grid' with a 'Filter Rows' button. The table has four columns: 'pizza_size', 'Total_Sales', and 'PCT'. There are five rows of data representing different pizza sizes: L, M, S, XL, and XXL. The 'Total_Sales' and 'PCT' values are formatted with two decimal places.

	pizza_size	Total_Sales	PCT
▶	L	375318.70	45.89
	M	249382.25	30.49
	S	178076.50	21.77
	XL	14076.00	1.72
	XXL	1006.60	0.12

F. Total Pizzas Sold by Pizza Category

```
select pizza_category , sum(quantity) as Total_Pizzas_Sold  
from pizza_sales  
  
group by pizza_category  
  
order by Total_Pizzas_Sold desc;
```

Output

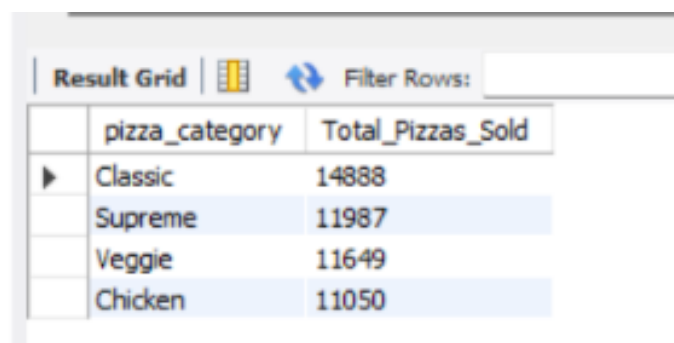


The screenshot shows a 'Result Grid' with a 'Filter Rows' button. The table has two columns: 'pizza_category' and 'Total_Pizzas_Sold'. There are four rows of data representing different pizza categories: Classic, Supreme, Veggie, and Chicken. The 'Total_Pizzas_Sold' values are integers.

	pizza_category	Total_Pizzas_Sold
▶	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050

G. Top 5 Best Sellers by Total Pizzas Sold

```
select pizza_name , sum(quantity) as Total_Pizzas_Sold
from pizza_sales
group by pizza_name
order by Total_Pizzas_Sold desc
limit 5;
```

Output

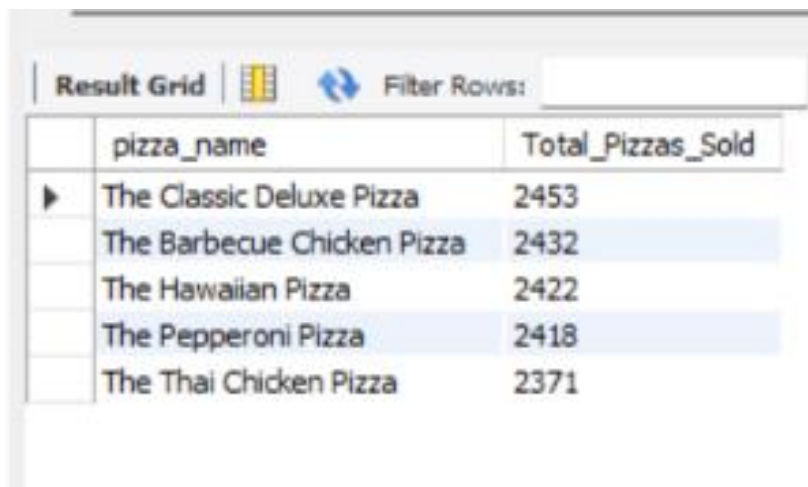

The screenshot shows a 'Result Grid' window with a table of pizza sales data. The table has two columns: 'pizza_name' and 'Total_Pizzas_Sold'. The data is sorted in descending order of total pizzas sold. The top five results are:

	pizza_name	Total_Pizzas_Sold
▶	The Classic Deluxe Pizza	2453
	The Barbecue Chicken Pizza	2432
	The Hawaiian Pizza	2422
	The Pepperoni Pizza	2418
	The Thai Chicken Pizza	2371

H. Bottom 5 Best Sellers by Total Pizzas Sold

```
select pizza_name , sum(quantity) as Total_Pizzas_Sold
from pizza_sales
group by pizza_name
order by Total_Pizzas_Sold ASC
limit 5;
```

Output

Result Grid



Filter Rows:

	pizza_name	Total_Pizzas_Sold
▶	The Brie Carre Pizza	490
	The Mediterranean Pizza	934
	The Calabrese Pizza	937
	The Spinach Supreme Pizza	950
	The Soppressata Pizza	961