* Function Invocation and Variable Environment :—

e.g. :—

```
var x = 1;
a();
b();
console.log(x);

function a(){
    var x = 10;
    console.log(x);
}

function b(){
    var x = 100;
    console.log(x);
}
```

Output :—

10
100
1

Date __/__/__
Page _____

↳ Global Execution is created. (GEC)

Memory	Code
x : undefined 1	var x = 1
a : { .. }	
b : { .. }	

Memory	Code
x : ~~undefined~~ 10	var x=10 Console log (x)

M	C
x : ~~undefined~~ 100	var x=100 Console.log(x)

This will be deleted after execution

find value in local memory space

Call stack :—

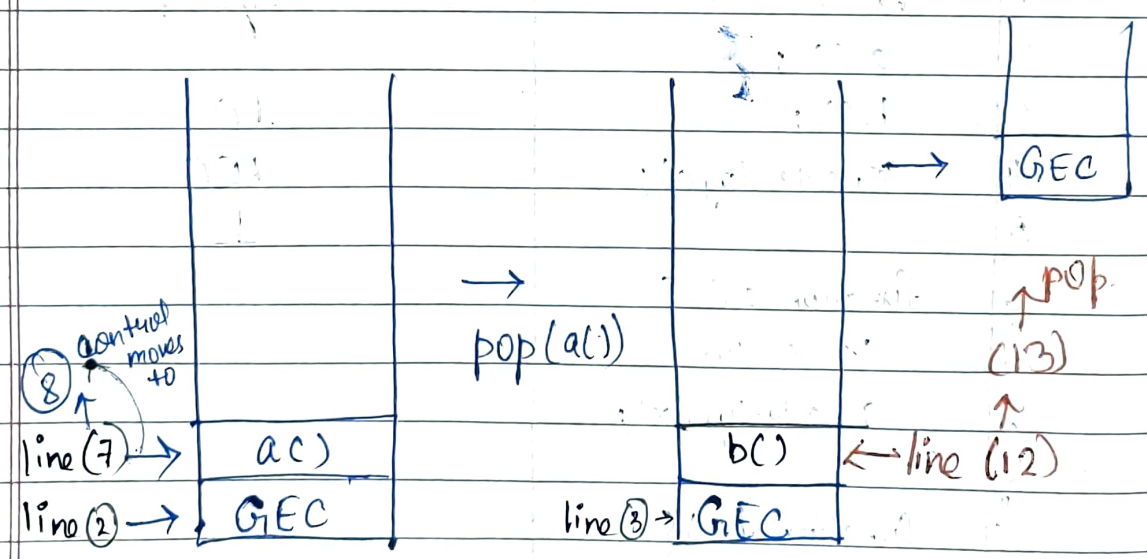

Date __/__/__
Page _____

now GEC look like : —

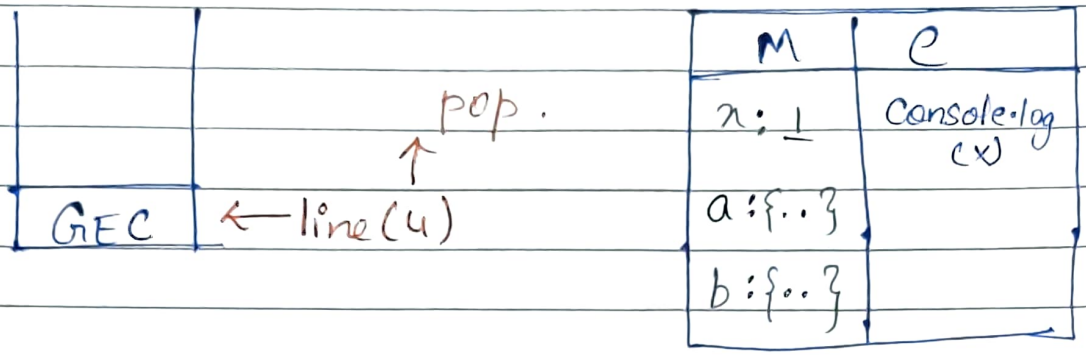

After execution

* After execution — the GEC is deleted & poped from stack.