Kiru0310 / Python-for-machine-learning

Code Issues Pull requests Actions Projects Wiki Security and quality Insights Settings

Python-for-machine-learning / 240901068_DataVisualisation_2.ipynb

Kiru0310 Add files via upload 9cc2675 · now

296 lines (296 loc) · 178 KB

Preview Code Blame Raw

In [1]:

```
import matplotlib.pyplot as plt
import numpy as np
#Title and label
ypoints = np.array([3, 8, 1, 10, 5, 7])
print(plt.plot(ypoints, linestyle='dashed'))
plt.title('Sample graph')
plt.xlabel('X axis')
plt.ylabel('Y axis')
print(plt.show())
```

```
[<matplotlib.lines.Line2D object at 0x7e996a71b980>]
```

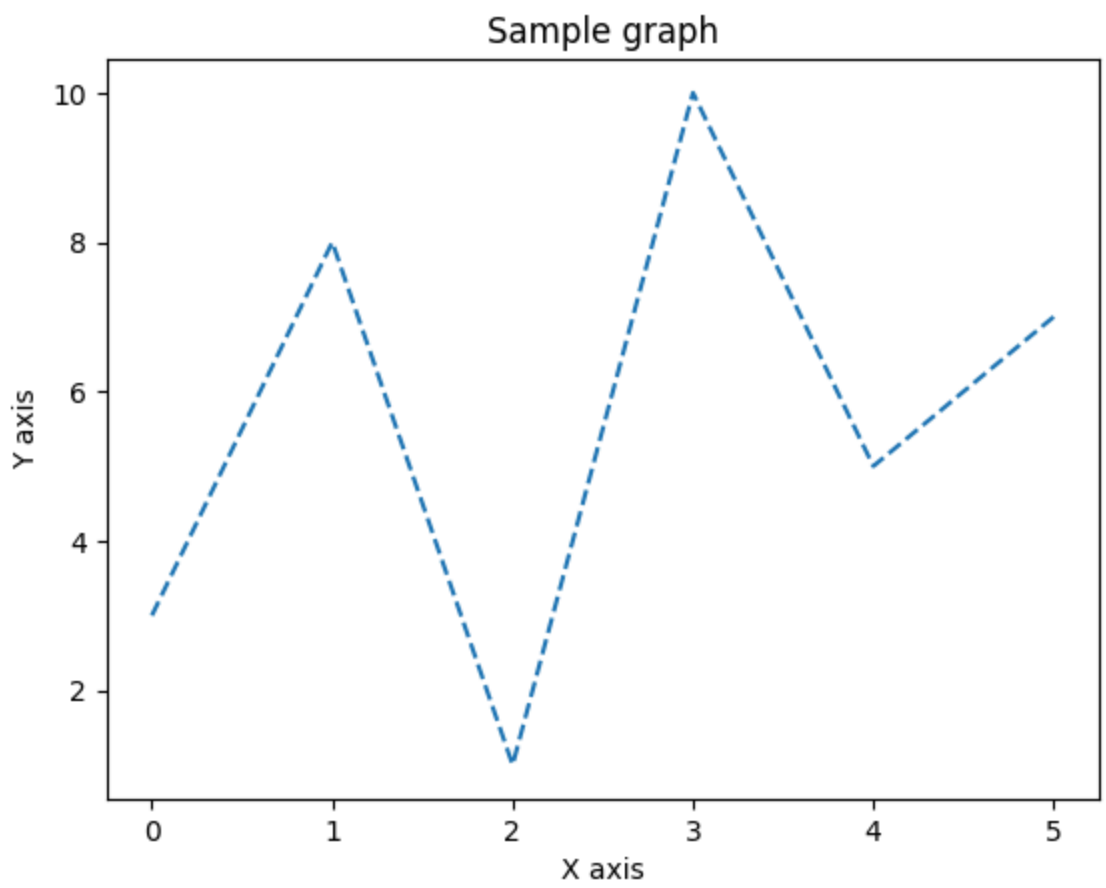


```
None
```

In [2]:

```
#Marker,color,Linewidth
ypoints = np.array([3, 8, 1, 10, 5, 7])
print(plt.plot(ypoints, marker = 'o'))
print(plt.show())

xpoints = np.array([0, 6])
ypoints = np.array([0, 250])

print(plt.plot(xpoints, ypoints, 'violet'))

print(plt.show())
```

```
[<matplotlib.lines.Line2D object at 0x7e9969c4e840>]
```

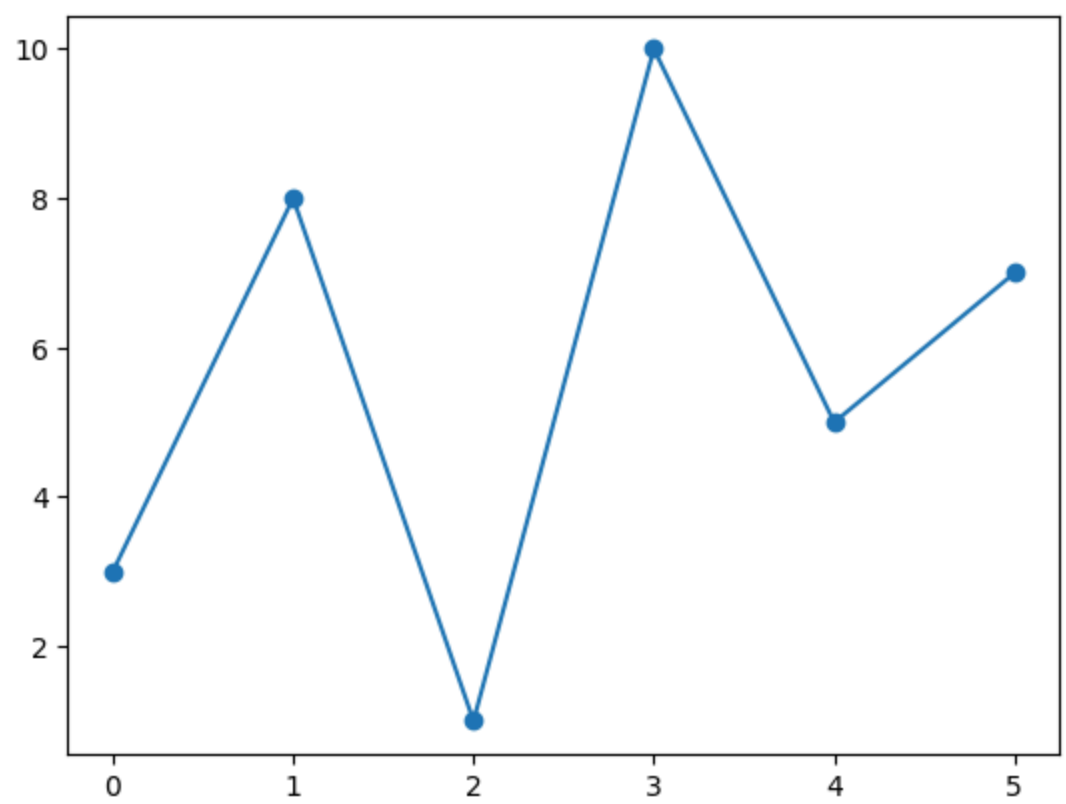


```
None
[<matplotlib.lines.Line2D object at 0x7e9969c92090>]
```

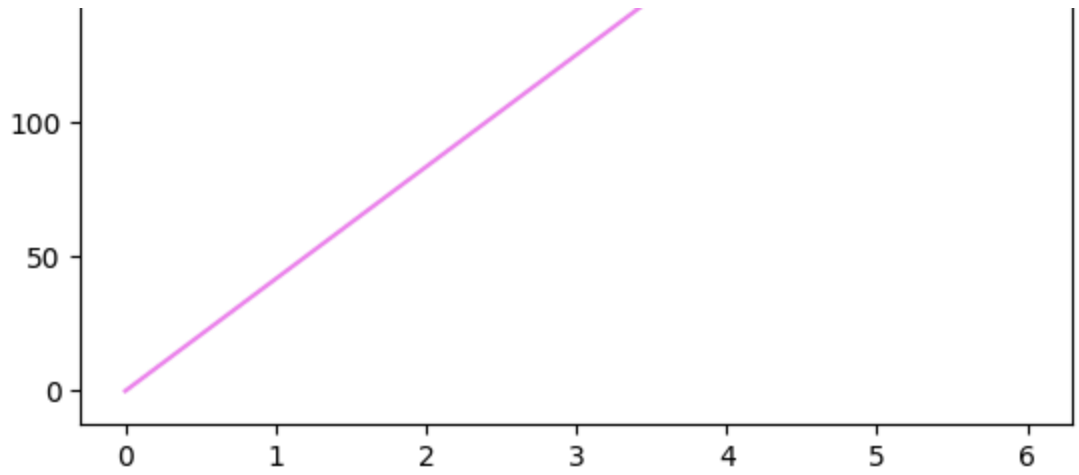


```
None
```

In [3]:

```
print(plt.plot(xpoints, ypoints, linewidth='30', color='c'))
print(plt.show())

#Multiple lines and grid
y1 = np.array([3, 8, 1, 10])
y2 = np.array([6, 2, 7, 11])

print(plt.plot(y1))
print(plt.plot(y2))
plt.grid()
print(plt.show())
```

```
[<matplotlib.lines.Line2D object at 0x7e9969d12450>]
```

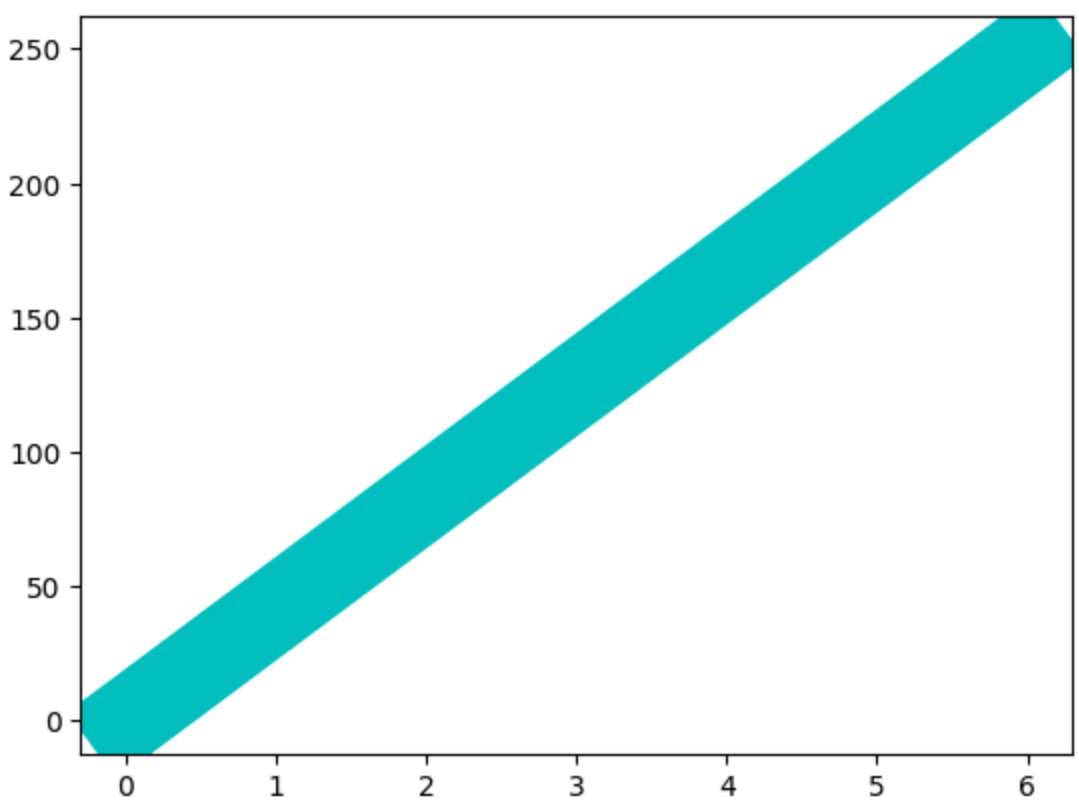


```
None
[<matplotlib.lines.Line2D object at 0x7e9969d070b0>]
[<matplotlib.lines.Line2D object at 0x7e9969d07710>]
```

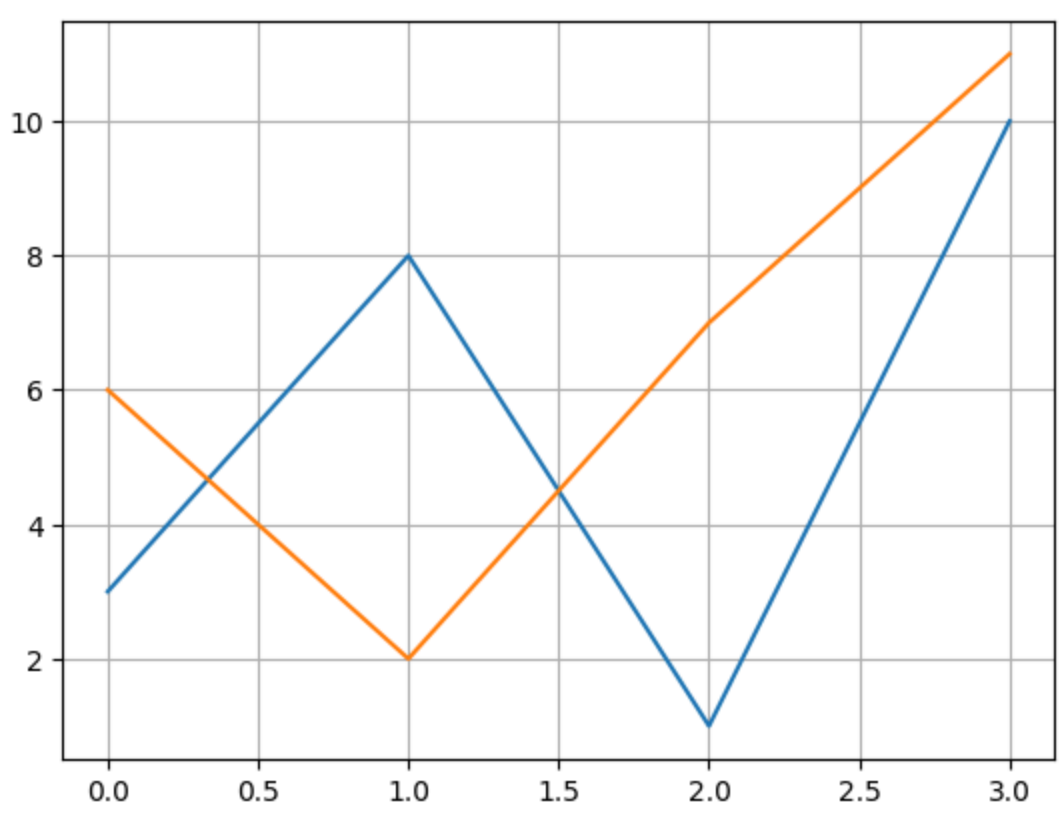


```
None
```

In [4]:

```
#sub_plot
#plot 1
x = np.array([0,1,2,3,4,5])
y = np.array([3,8,1,10,9,4])
plt.subplot(1,2,2)
plt.plot(x,y)
```

Out[4]: [<matplotlib.lines.Line2D at 0x7e9969dced50>]

Out[4]: [<matplotlib.lines.Line2D at 0x7e9969dced50>]

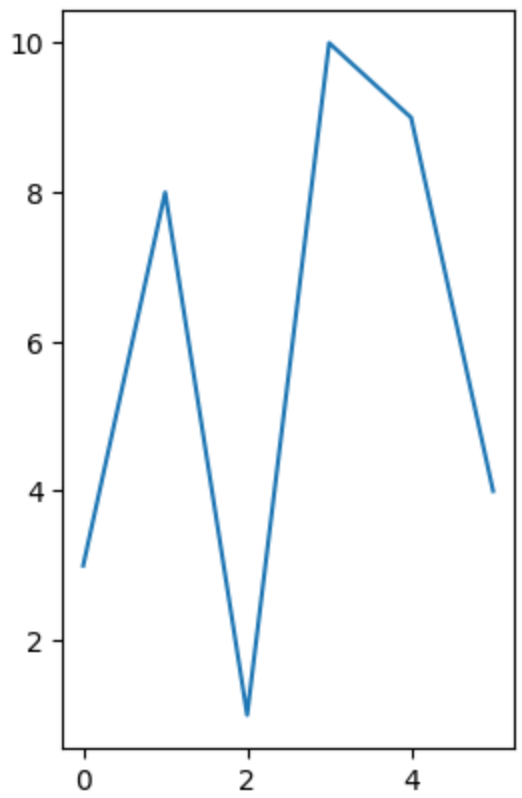

In [5]:
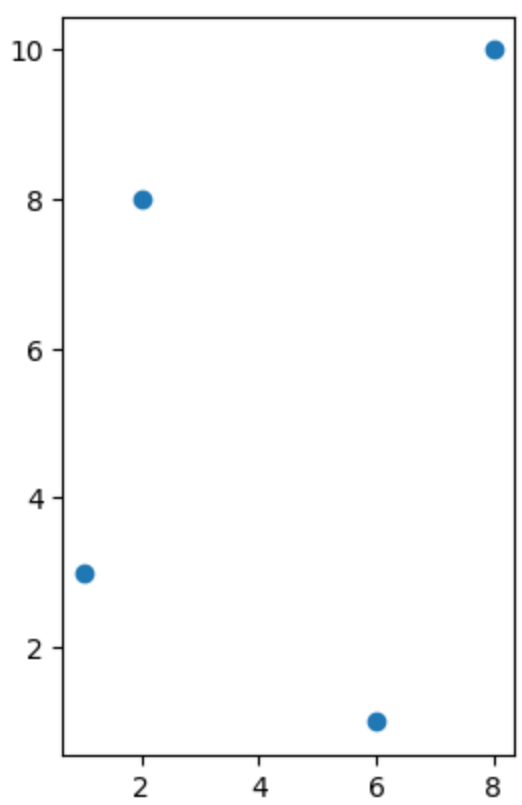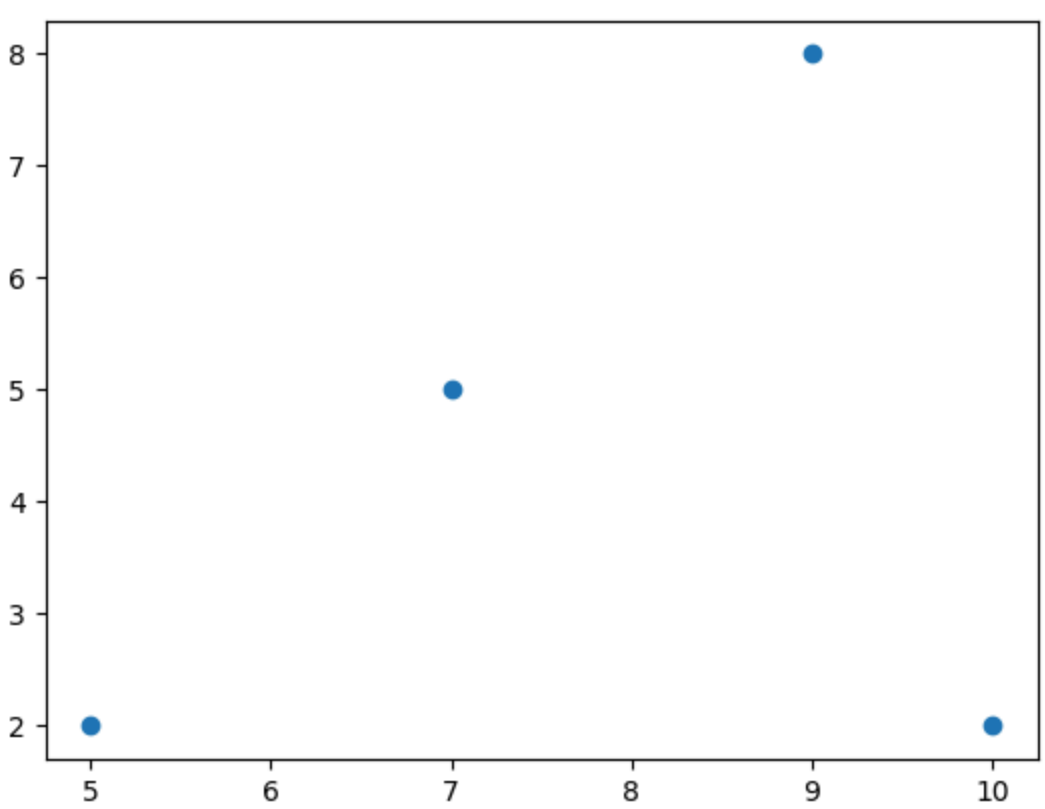
```
#plot 2
x= np.array([1, 2, 6, 8])
y= np.array([3, 8, 1, 10])
plt.subplot(1,2,2)
plt.scatter(x, y)
plt.show()
#scatter 1
a=np.array([5, 7, 9,10])
b=np.array([2, 5, 8,2])

plt.scatter(a,b)
plt.show()
```