

Sri Sivasubramaniya Nadar College of Engineering, Chennai
(An autonomous Institution affiliated to Anna University)

Degree & Branch	B.E. Computer Science & Engineering	Semester	V
Subject Code & Name	UCS2612 & Machine Learning Algorithms Laboratory		
Academic year	2025-2026 (Even)	Batch:2023-2027	Due date: 23/12/25

Experiment 1: Working with Python packages – Numpy, Scipy, Scikit-Learn, Matplotlib

Name: Kishor Sreenivasan

Reg.No: 3122235001068

Class: CSE-B

Aim:

To explore and work with Python packages like Numpy, Scikit-learn, and Matplotlib on datasets from public repositories and identify ML tasks, feature selection techniques, and suitable algorithms.

Libraries used:

- Numpy (imported as `np`)
- Pandas (imported as `pd`)
- Matplotlib.pyplot (imported as `plt`)
- Seaborn (imported as `sns`)
- OpenCV (`cv2`)
- OS (Standard Library)
- Math (Standard Library)

Mathematical/Theoretical description of the algorithm/objective performed:

- **Objective:** Exploratory Data Analysis (EDA) — summarize distributions, detect outliers, assess class balance, and reveal pairwise relationships/correlations.
- **Descriptive statistics**
 - Mean: $\mu = \frac{1}{n} \sum x_i$
 - Sample variance: $s^2 = \frac{1}{n-1} \sum (x_i - \mu)^2$
 - Quantiles (Median, $Q1$, $Q3$) used for spread and boxplot construction.
- **Histograms**
 - Empirical density approximation via bin counts; visualizes frequency/mode structure.
 - Kernel Density Estimate (KDE) used alongside histograms:

$$\hat{f}(x) = \frac{1}{nh} \sum_{i=1}^n K\left(\frac{x - x_i}{h}\right)$$

where K is the kernel (e.g., Gaussian) and h is the bandwidth.

- **Boxplots**

- Show Median, $Q1$, $Q3$; Interquartile Range $IQR = Q3 - Q1$.
- Whiskers typically extend to min/max within $[Q1 - 1.5 \cdot IQR, Q3 + 1.5 \cdot IQR]$; points outside are shown as outliers.

- **Pairplots / Scatterplots**

- Scatter for each feature pair to inspect linear/nonlinear relationships and class separation.
- Diagonal: KDE or histogram per feature to show marginal distributions.

- **Correlation Heatmap**

- Pearson correlation coefficient:

$$r_{XY} = \frac{\text{cov}(X, Y)}{\sigma_X \sigma_Y}$$

$$\text{cov}(X, Y) = \frac{1}{n-1} \sum (X_i - \bar{X})(Y_i - \bar{Y})$$

- Values in $[-1, 1]$ indicate linear association strength/direction.

- **Countplots (Categorical)**

- Bar heights = counts per category; optionally use hue for class-conditional counts to inspect imbalance/conditional distributions.

- **Image Dataset Overview**

- Distributions of image heights/widths (histograms/KDE) to assess resizing needs.
- Grid of sample images for qualitative inspection.



- **Missing Values**



- Count missing per column to decide imputation/removal.

- **Practical Interpretation Aims**

- Identify skewness, multimodality, outliers, collinearity, and class imbalance to guide preprocessing and modeling choices.

Results and Discussions: Iris Dataset

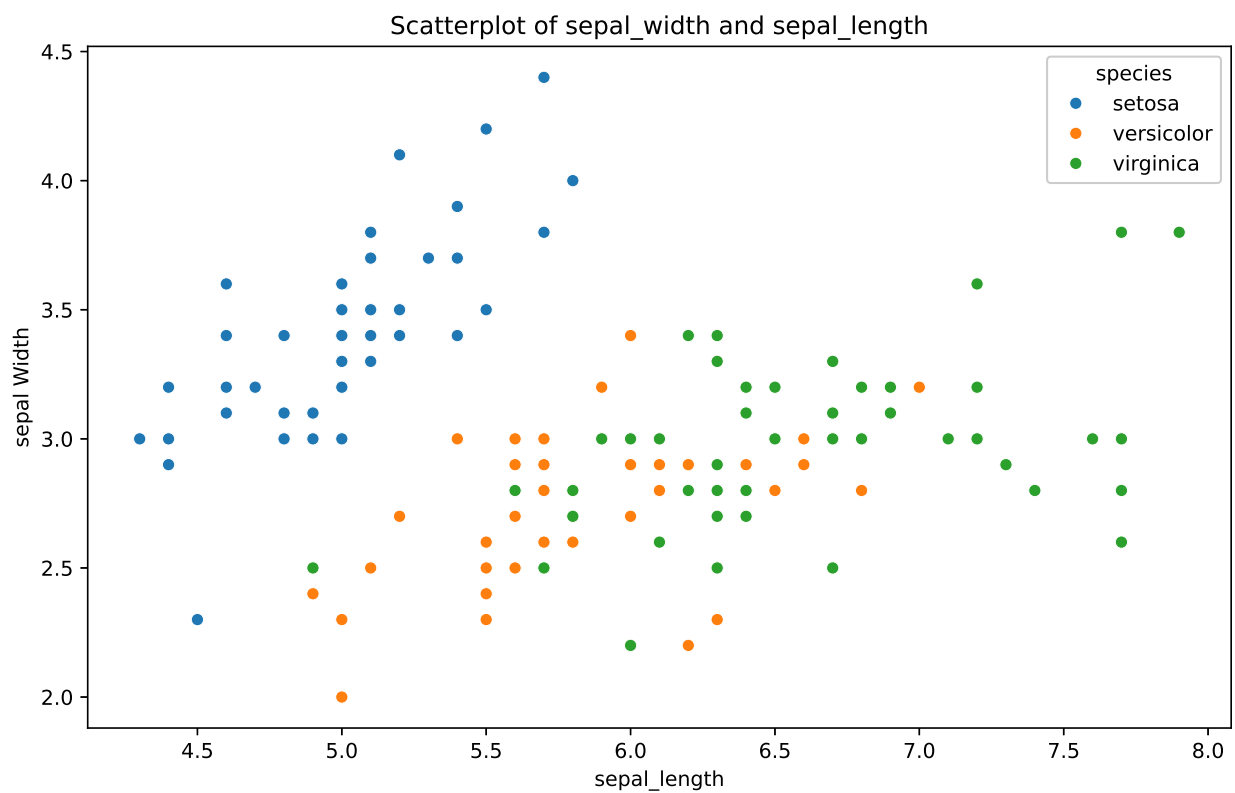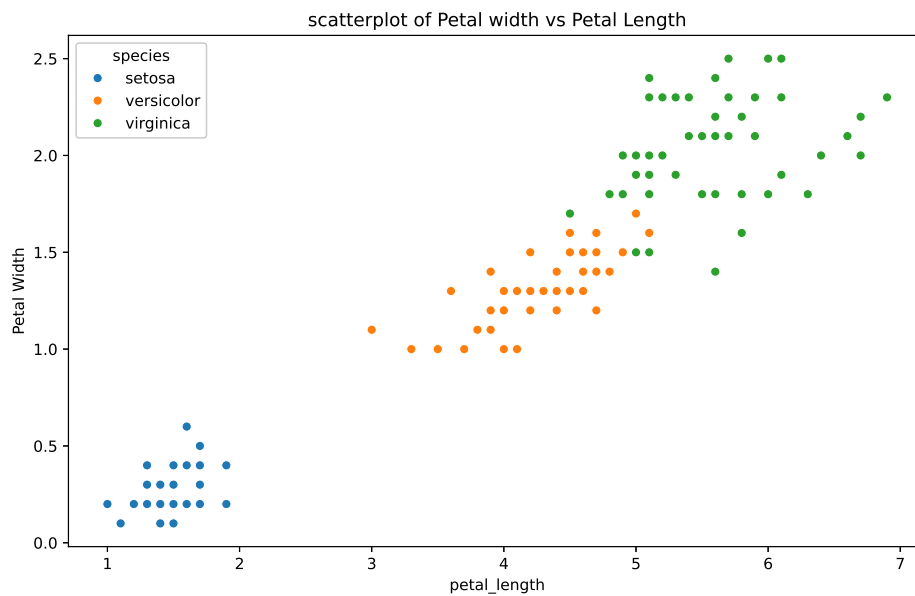

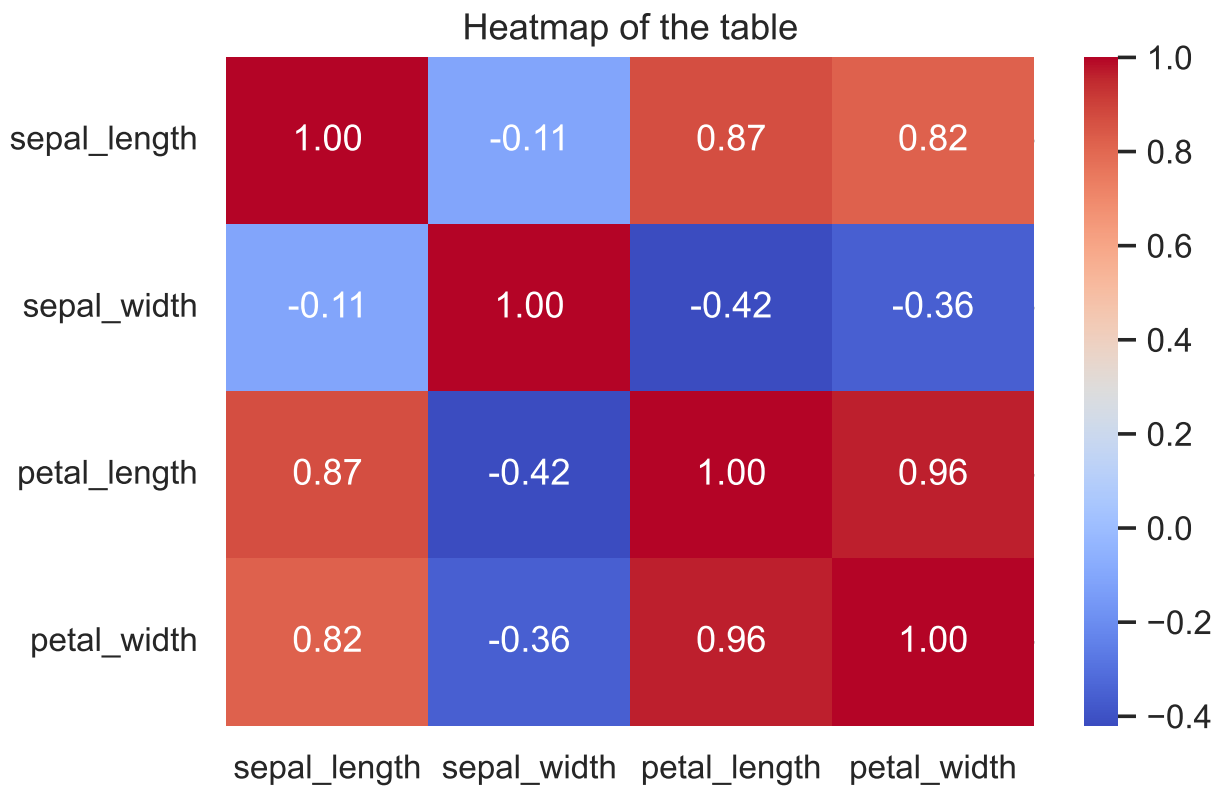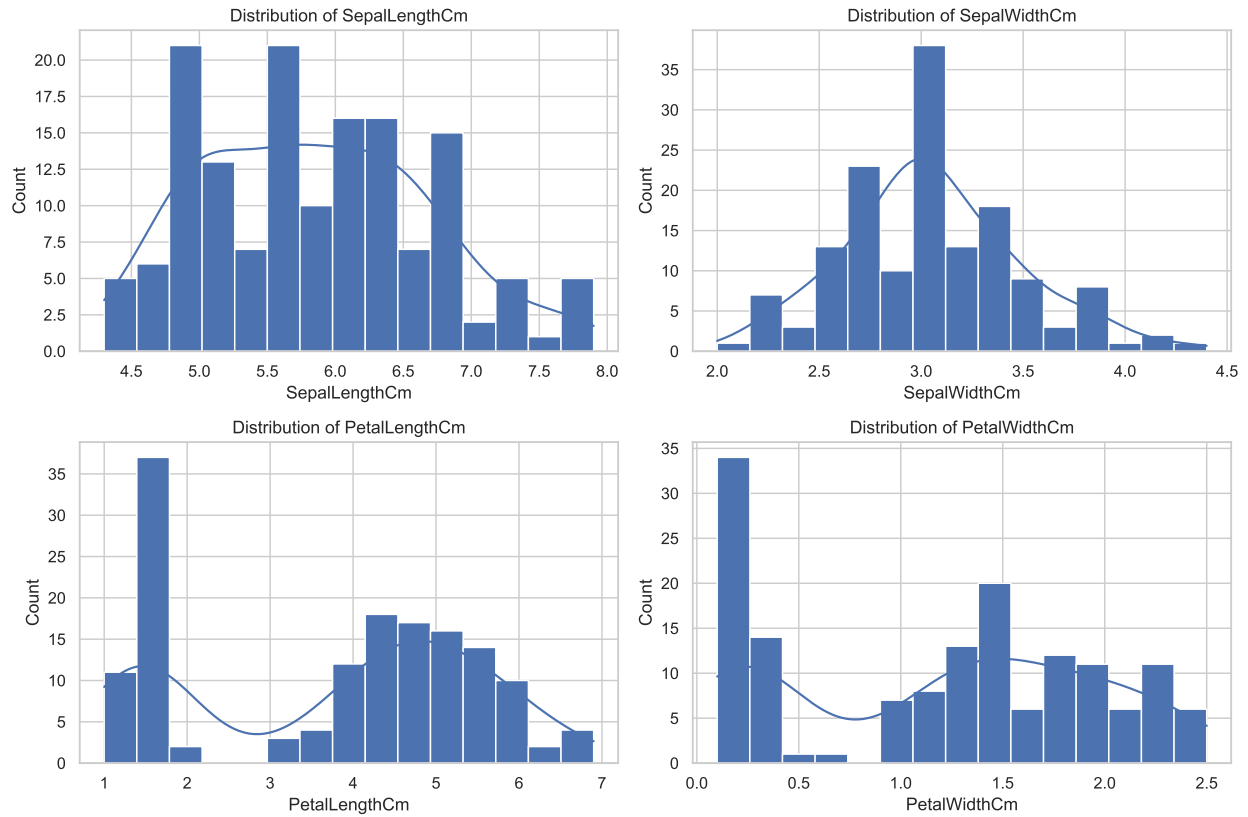

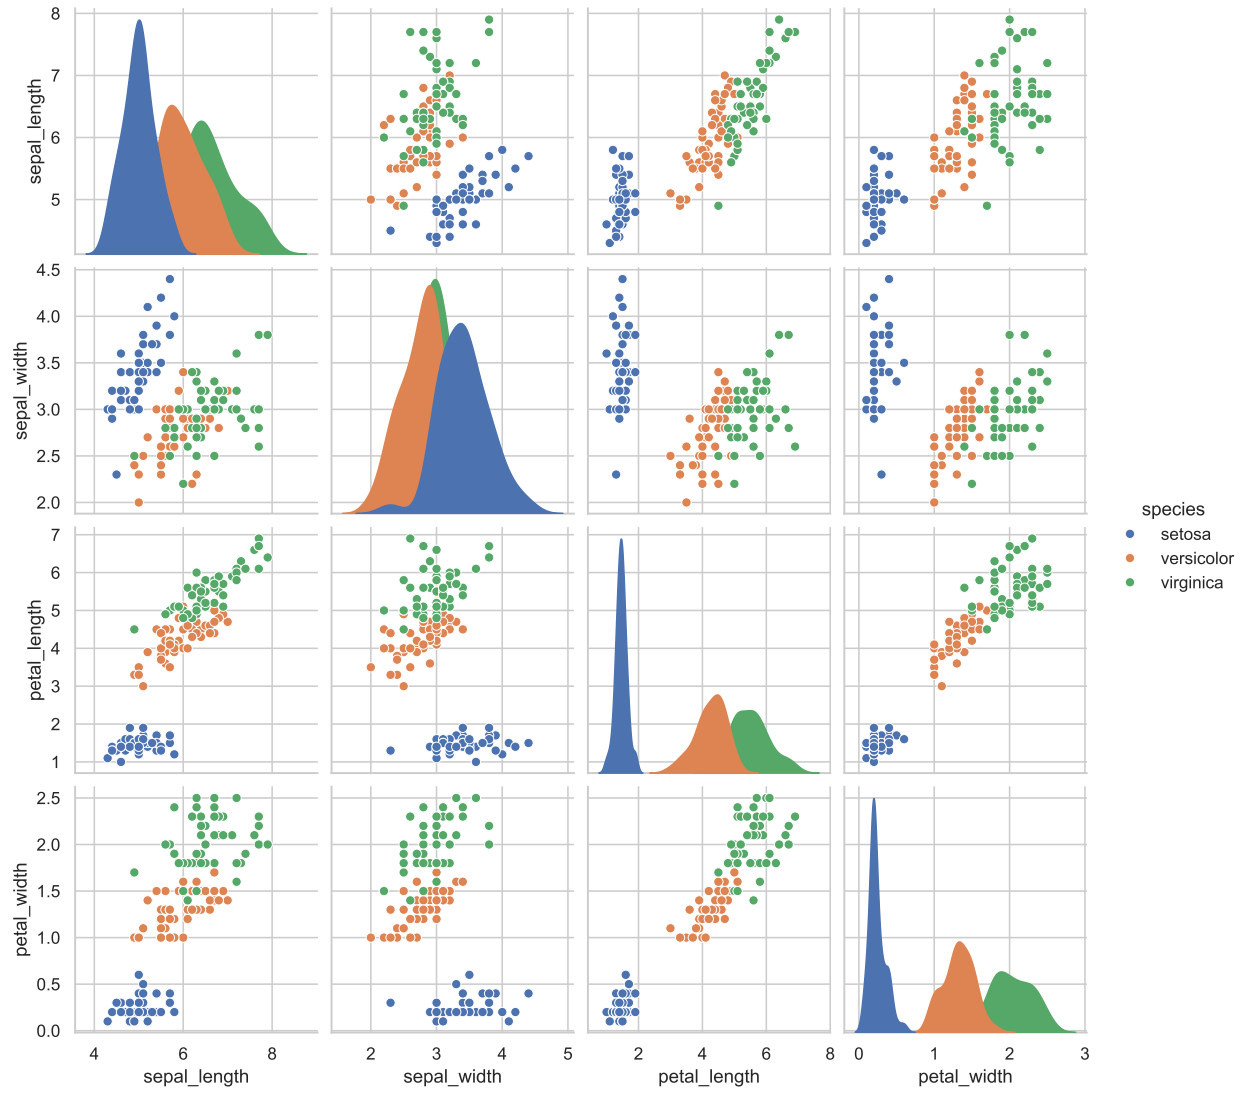
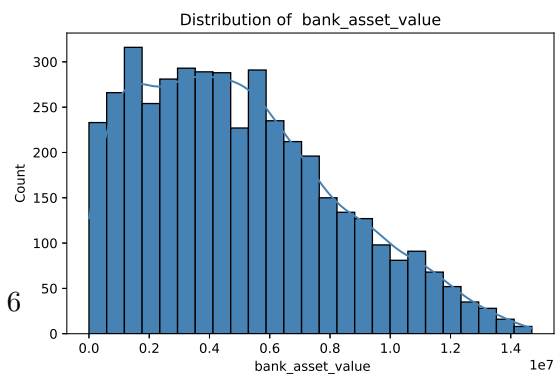
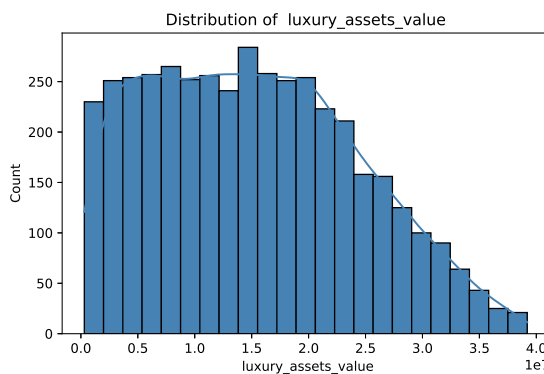
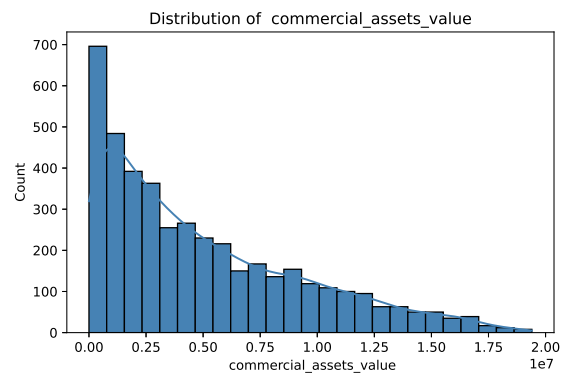
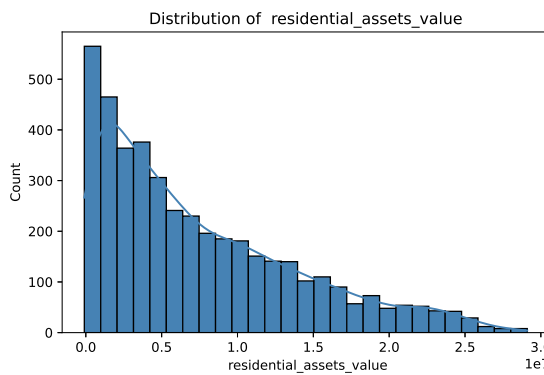
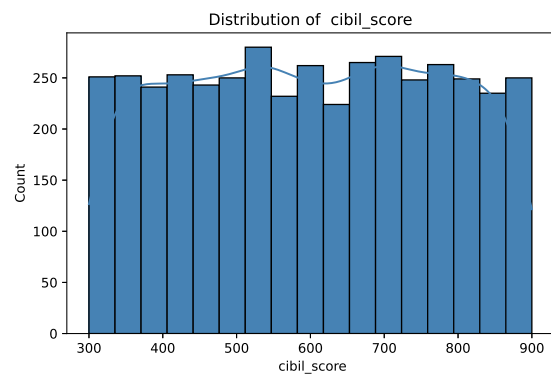
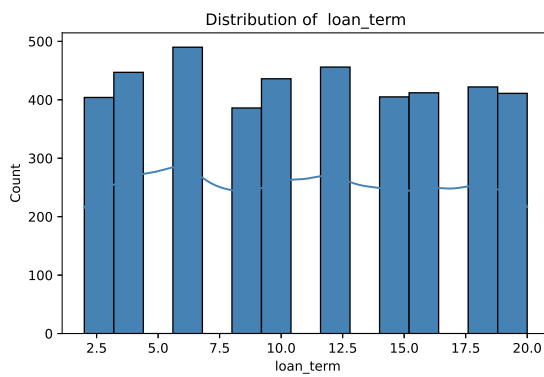
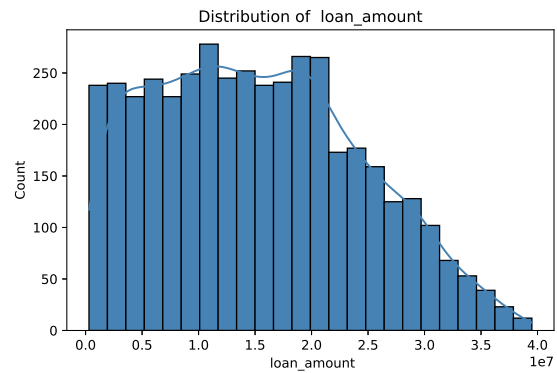
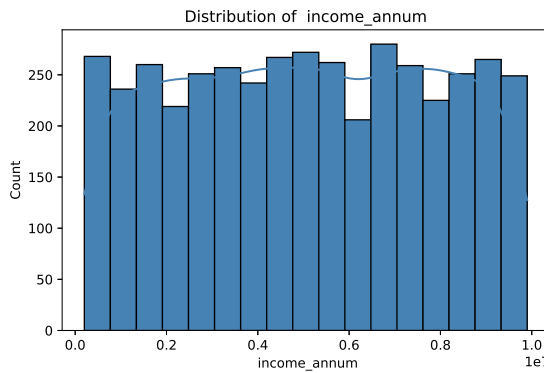
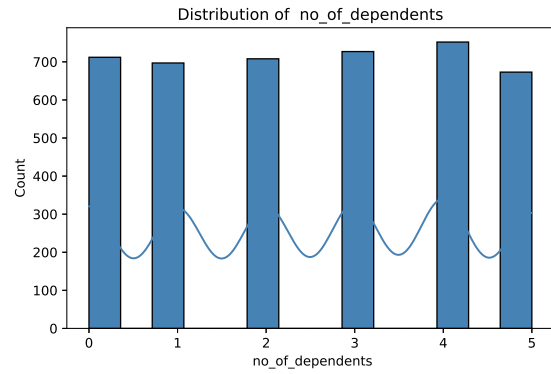
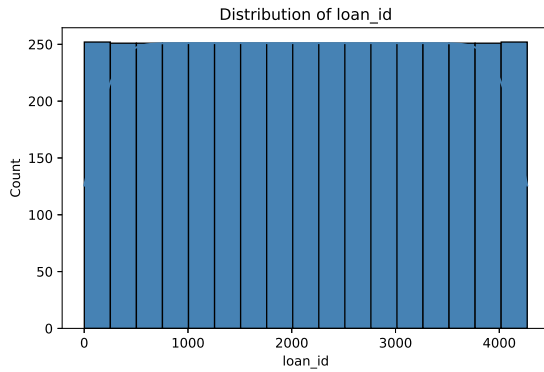


Figure 1: Pair Plot of Data

Loan Dataset



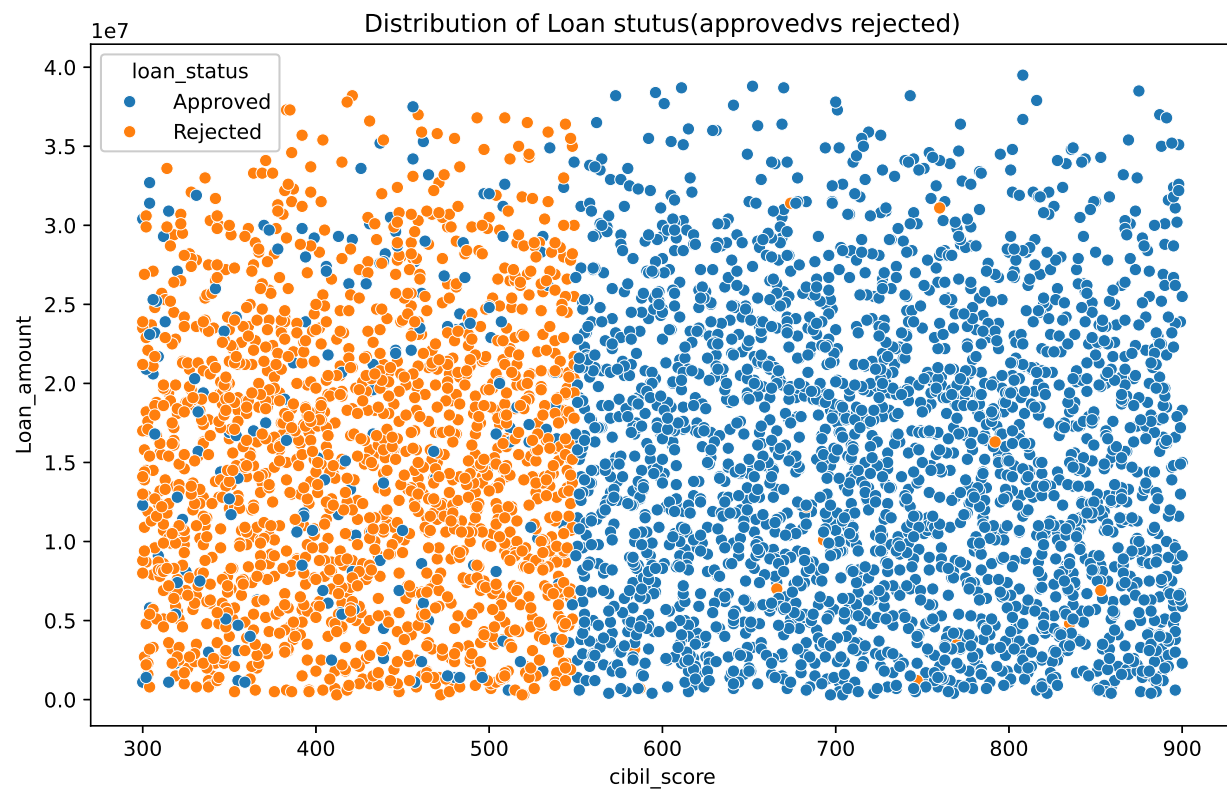


Figure 3: Scatterplot

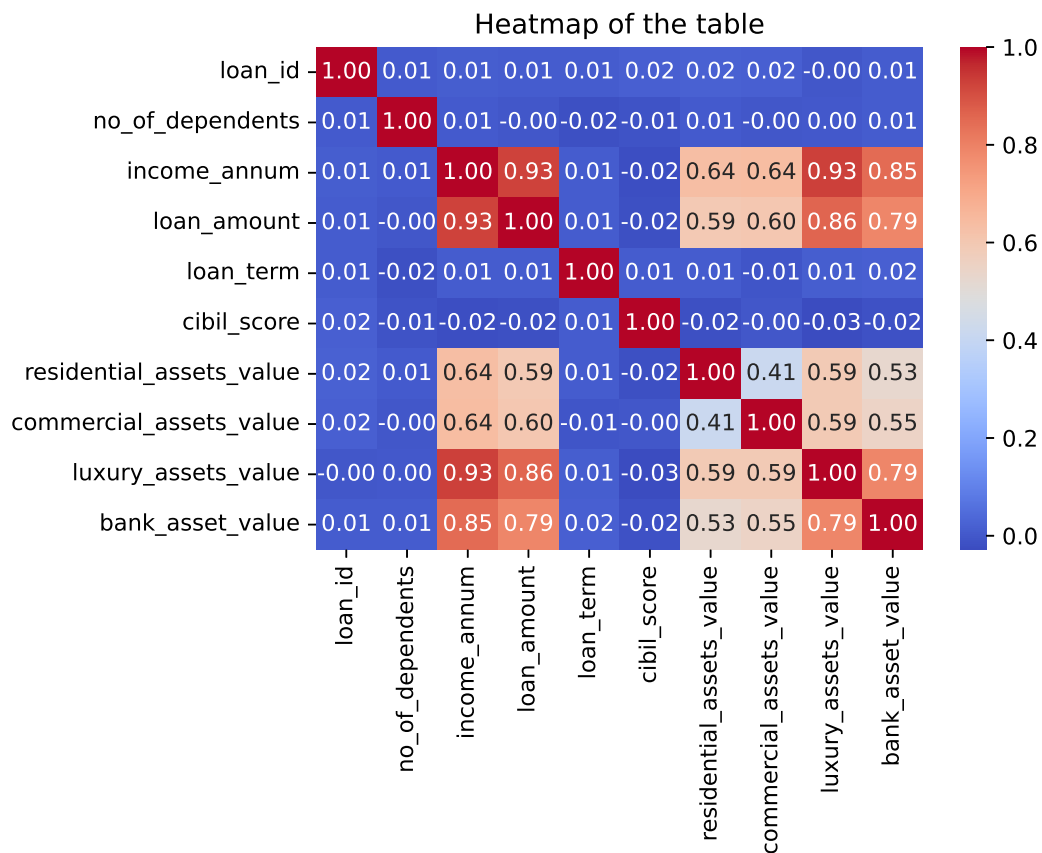


Figure 4: Correlation

Diabetes Dataset

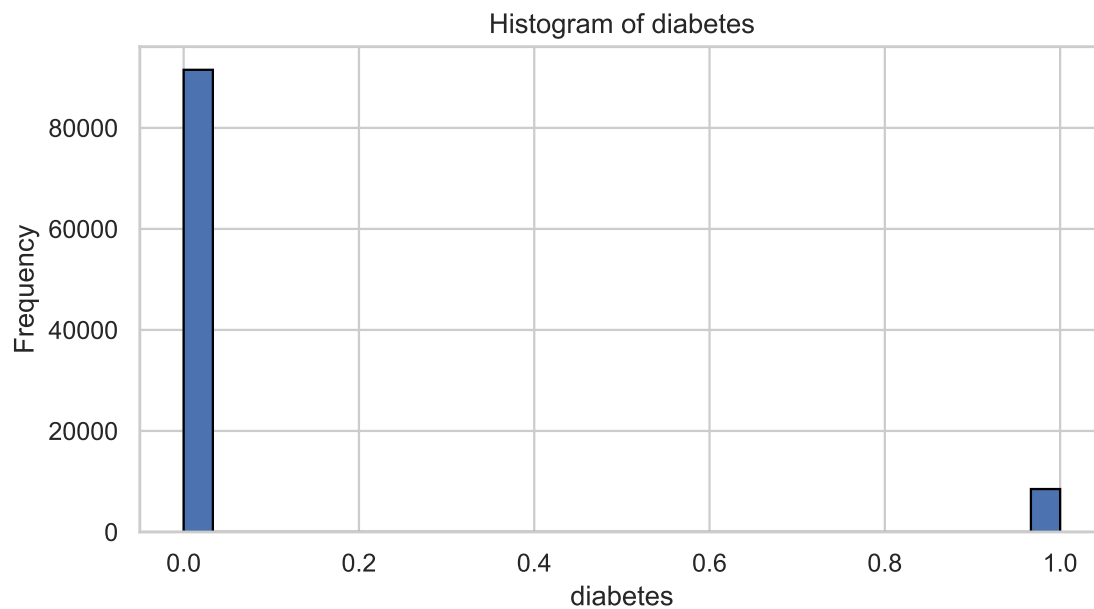


Figure 5: Numerical feature Distribution

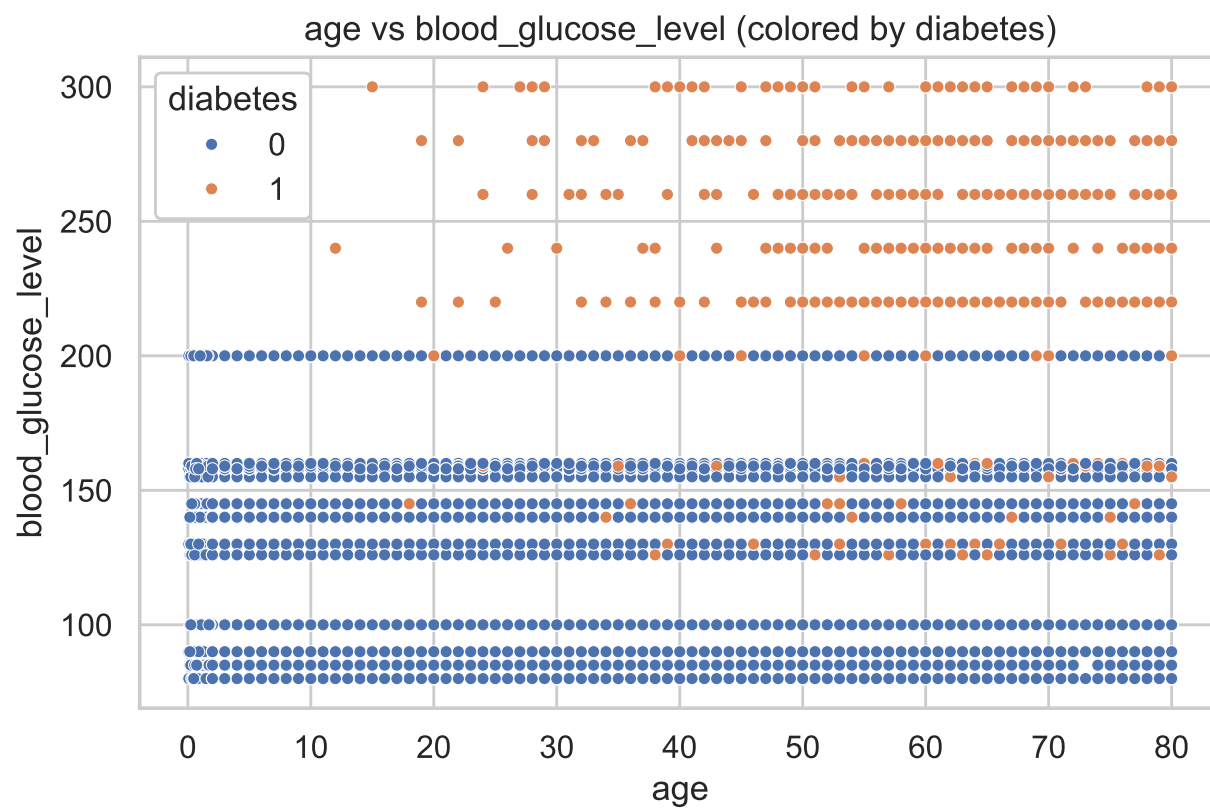


Figure 6: Scatterplot of age vs blood glucose level

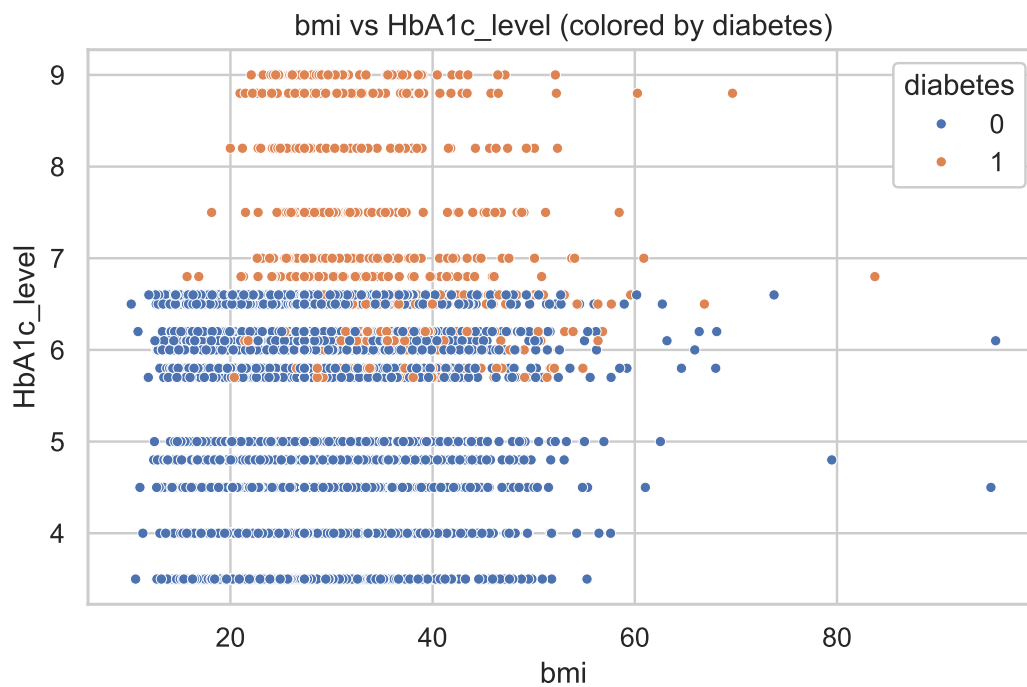


Figure 7: Scatterplot of bmi vs Hb1Ac level

Email Dataset

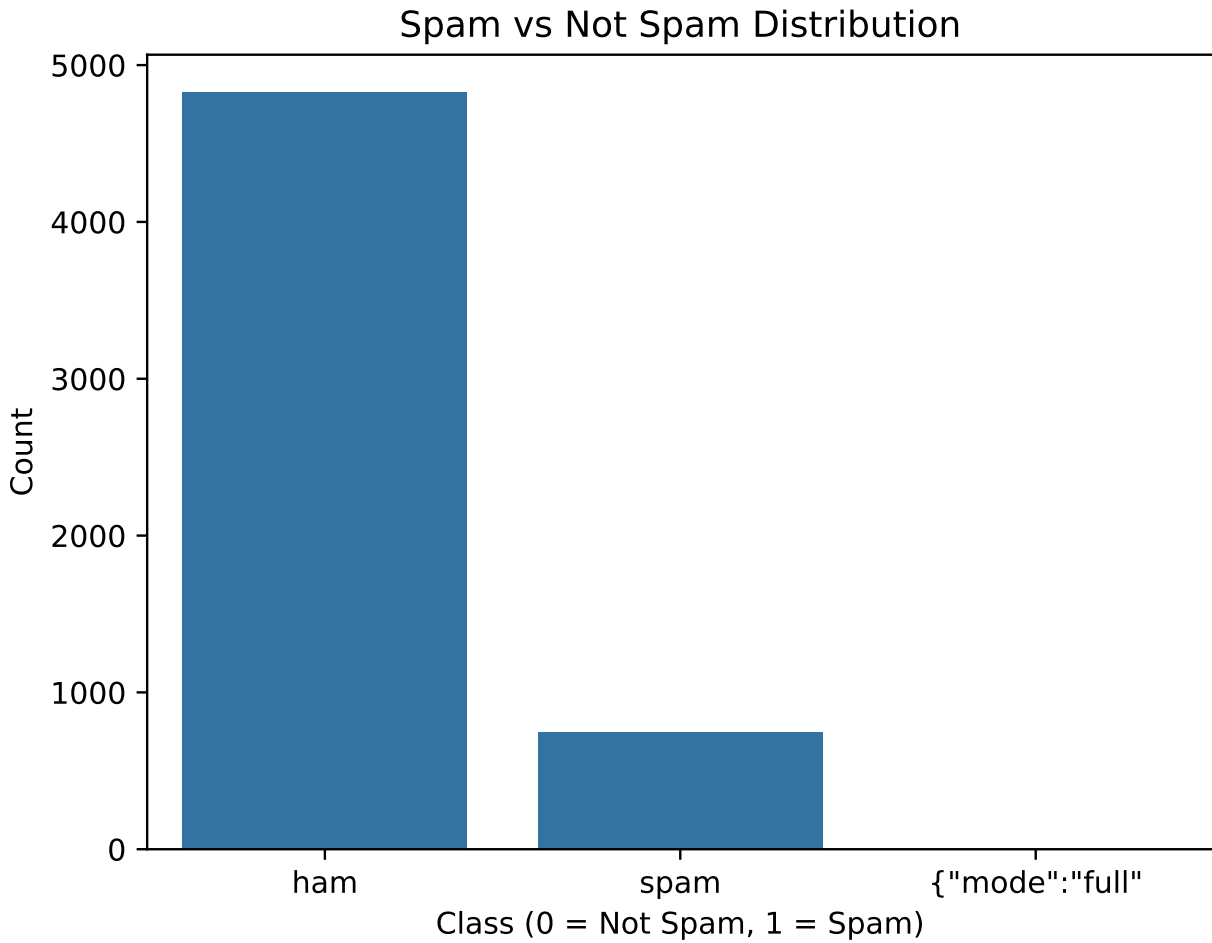


Figure 8: Target Distribution

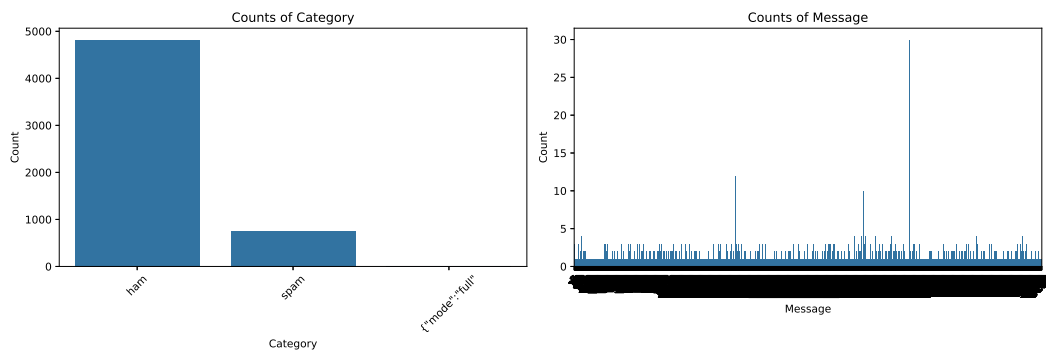


Figure 9: Histogram of Categorical Features

Handwritten Dataset:

The Handwritten Dataset Cannot be used for EDA like other datasets, as most of its data is in image format. Though, it is clear that it is a classification algorithm. Missing data is removed.

Dataset	Type of ML Task	Feature Selection Technique	Suitable ML Algorithm
Iris Dataset	Multi-class Classification	Correlation Matrix / ANOVA F-value	SVM, KNN
Loan Amount Prediction	Regression	Recursive Feature Elimination (RFE) / Pearson Correlation	Linear Regression, Random Forest Regressor
Predicting Diabetes	Binary Classification	Chi-Square Test / SelectKBest	Logistic Regression, Support Vector Machine (SVM)
Classification of Email Spam	Binary Classification (NLP)	Information Gain / Chi-Square (on word vectors)	Naive Bayes
Handwritten Character Recognition / MNIST	Classification	Principal Component Analysis (PCA)	Convolutional Neural Networks (CNN), SVM

Learning Practices:

- Interpret dataset structure: Learn to inspect shape, info, and missing values.
- Visualize distributions: Gain skills in plotting histograms, boxplots, and correlation heatmaps.
- Identify class balance: Understand how label distribution affects model performance.
- Spot feature relationships: Use pairplots and correlation matrices to detect predictive variables.
- Apply statistical tests: Use ANOVA F-test and correlation filtering.
- Leverage model-based importance: Interpret Random Forest feature importances.
- Perform dimensionality reduction: Use PCA for visualization and clustering.