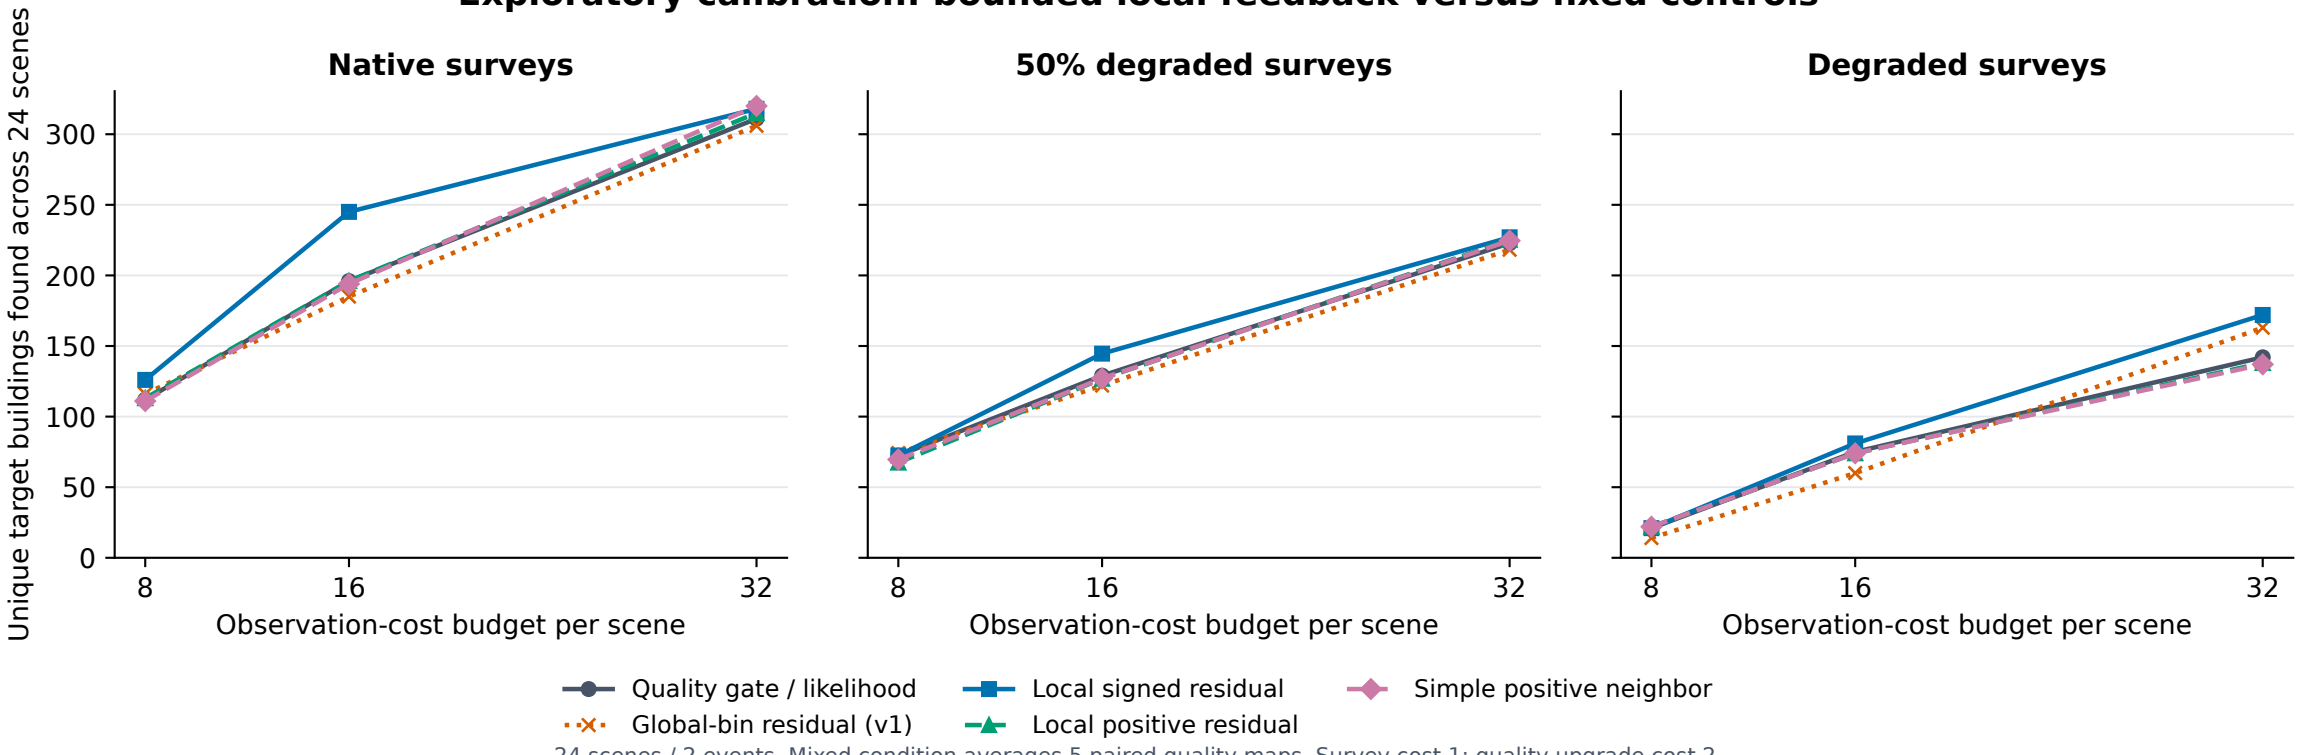
Exploratory calibration: bounded local feedback versus fixed controls
Native surveys
50% degraded surveys
Degraded surveys
Unique target buildings found across 24 scenes
0
50
100
150
200
250
300
8
16
32
Observation-cost budget per scene
Quality gate / likelihood
Local signed residual
Simple positive neighbor
Global-bin residual (v1)
Local positive residual
24 scenes / 2 events. Mixed condition averages 5 paired quality maps. Survey cost 1; quality upgrade cost 2.
All methods and budgets retained. No confidence intervals based on treating cells or quality seeds as independent events.