


CMDDB Query Builder

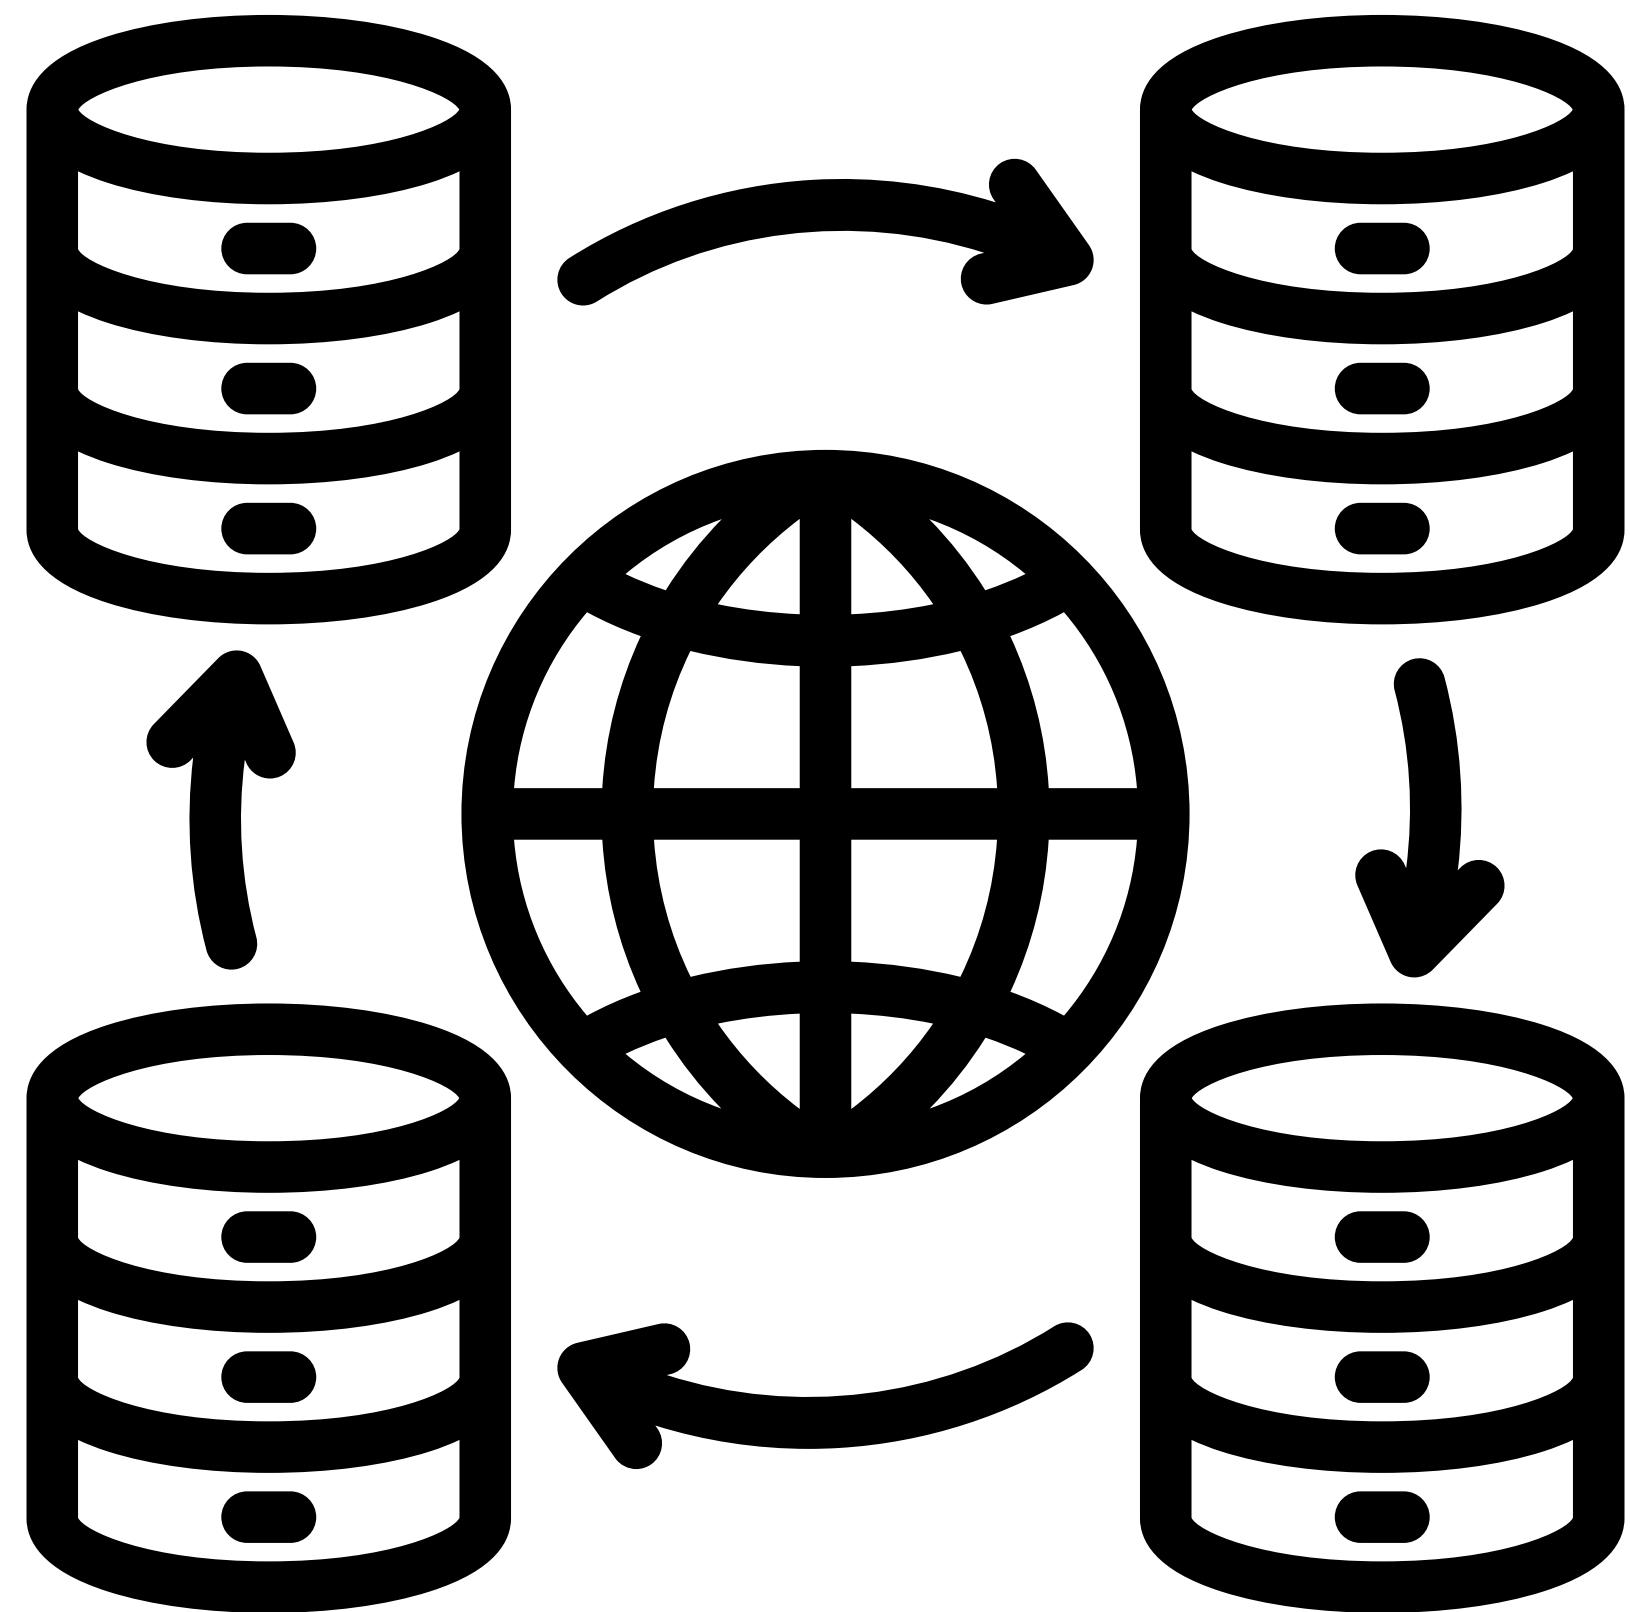

It allows to build complex queries that can include multiple CMDDB classes, non-cmdb tables, and that involve many CIs that are connected by different relationships.

It provides a canvas into which you drag the CI classes that you want to include in a query.

eg: Query to get list of virtual servers and physical servers that hosts them.

Query Builder Properties

- ***glide.cmdb.query.batch_time_limit_in_sec*** - Time limit (in seconds) for running one batch to get one batch of query results
- ***glide.cmdb.query.max_results_limit*** - Limits the number of results for a scheduled query and in the results section in the Query Builder when you click Load All Results
- ***glide.cmdb.query.query_time_limit_in_sec*** - Time limit (in seconds) for running an entire query to get all results.
- ***glide.cmdb.query.non_cmdb.black_listed_tables*** - Blacklist of non-CMDB tables that appear in the CMDB Query Builder when creating a CMDB query.
- ***glide.cmdb.query.batch.size*** - Batch size for every Query Builder query run.

CMDBQueryBuilderAPI

The CMDBQueryBuilderAPI provides methods to retrieve Query Builder saved query execution details in server-side scripts.

```
var result = SNC.CMDBQueryBuilderAPI.getSavedQueryExecutionDetails("Test Query", true);
var resultJSON = JSON.parse(result);
var grQBResult = new GlideRecord(resultJSON.table_name);
gs.print(resultJSON.table_name);
gs.print(resultJSON.query_id);
    grQBResult.addQuery('query', resultJSON.query_id);
    grQBResult.query();

    while(grQBResult.next())
    {
        gs.print(grQBResult.u_configuration_item_1.name);
    }
```

