


Network Setup for Discovery



AzureNetwork/Internal Network

Follow on

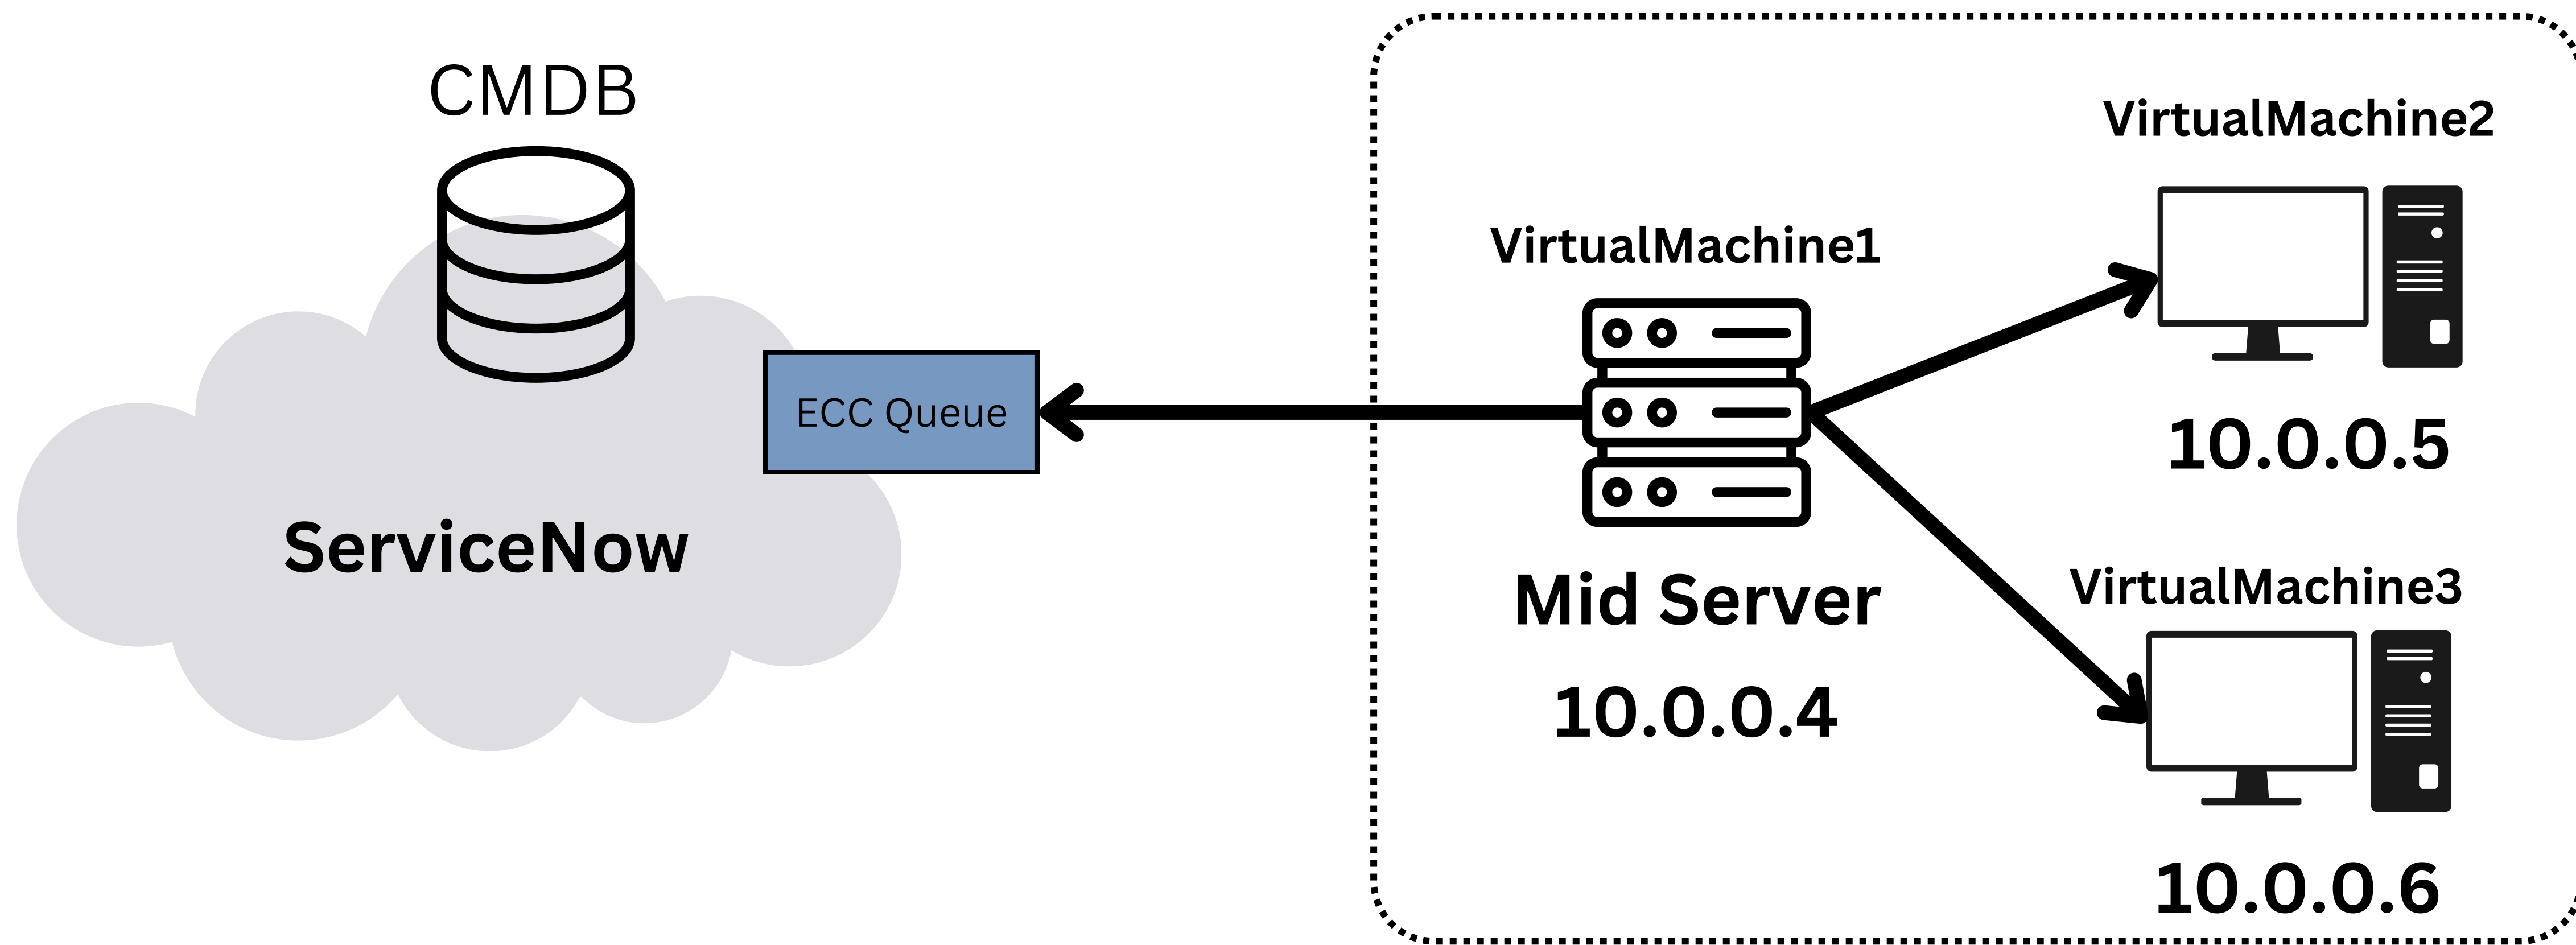

Discovery Example - 1

Quick Discovery

Quick Discovery to run discovery on single IP address.

- Navigate Discovery -> Discovery Schedules.
- Click Quick Discovery button.
- In Target IP provide the IP address of device you want to discover (10.0.0.5).
- In Mid Server provide the active mid server which has connectivity to Target IP device.
- Click Ok to run Discovery.
- Check the Discovery status for the discovered device(virtualmachine2).

Note - Make sure Credentials are configured and working.

- These credentials are of the Root User/Service Account configured in devices to be discovered.



Discovery Example - 2

Configuration Items

To discover CIs in specified IP ranges

- Navigate Discovery -> Discovery Schedules.
- Click New.
- Fill the form.
- Select ***Configuration Items*** in Discover.
- Select Mid Server and schedule time(eg - On Demand).
- Save the form.
- Click Quick ranges and set IP ranges (eg : 10.0.0.5,10.0.0.6).
- Click Discover Now.
- Open Discovery Status and check logs ecc queue and device.



Discovery Example - 3

IP Addresses

To Discover all the active IP addresses in the specified range but do not update the CMDB.

- Navigate Discovery -> Discovery Schedules.
- Click New.
- Fill the form.
- Select ***IP Addresses*** in Discover.
- Select Mid Server and schedule time(eg - On Demand).
- Save the form.
- Click Quick ranges and set IP ranges (eg : 10.0.0.0/24).
- Click Discover Now.
- Open Discovery Status and check Active IPs in given IP range.
- 10.0.0.0/24 means IP range from 10.0.0.1 to 10.0.0.254.



Discovery Example - 4

Use Behavior

Using Behavior you can specify which shazzam probe will be launched from which mid server. Benefits of using behavior are:

- Using multiple mid servers in single schedule helps in load balancing.
- Useful when single device running multiple protocols (ssh, snmp) so you can specify which protocol will be used.
- Useful in multi domain with multi protocol environment. for example you can specify one mid server will scan for network devices and one for windows devices only in single behavior.



In this example we will create a behavior which will launch our specified protocols (windows only and snmp only) for shazzam phase.

- First We will create a behavior to run discovery for two types of Protocols (SNMP and WMI)
- Navigate to Discovery Definition -> Behaviors
- Click New, Set the name and save the form.
- In related list we will create 2 Discovery Functionality
- In Discovery Functionality form you need to set Phase, Functionality Definition, Mid Server, Matching Criteria.
- For Windows Devices select “Windows only”
- For Network Devices select “SNMP Only”



- Navigate Discovery -> Discovery Schedules.
- Click New.
- Fill the form.
- Select Configuration Items in Discover.
- In Mid Server Selection Method select “Use Behavior” and select our behavior in next field.
- Set schedule time(eg - On Demand).
- Save the form.
- Click Quick ranges and set IP ranges (eg : 10.0.0.0/24).
- Click Discover Now.
- Open Discovery Status and check logs ecc queue and device.
- You will notice Shazzam Prob was triggered for only WMI and SNMP in the order they were created. Shazzam probe has excluded other protocols.



Discovery - Troubleshooting links

- **Troubleshooting Shazzam Phase** - https://support.servicenow.com/kb?id=kb_article_view&sysparm_article=KB0535234
- **Troubleshooting the Classification Phase in Discovery** - https://support.servicenow.com/kb?id=kb_article_view&sysparm_article=KB0535236
- **Troubleshooting the Identification Phase in Discovery** - https://support.servicenow.com/kb?id=kb_article_view&sysparm_article=KB0535238
- **Troubleshooting the Exploration Phase in Discovery** - https://support.servicenow.com/kb?id=kb_article_view&sysparm_article=KB0535240



Discovery - Run from Script

You can run DiscoverNow from a script, such as a background job, a business rule, or web services.

Script format :

```
var d = new Discovery();  
var statusID = d.discoveryFromIP(TARGET_IP, TARGET_MIDSERVER);
```

// TARGET_IP - IP address

//TARGET_MIDSERVER (optional)- sys_id or name of MID Server

//discoveryFromIP retruns the sys_id of status record.

