


PVEL population sensitivities | all 311 declared model/inference views

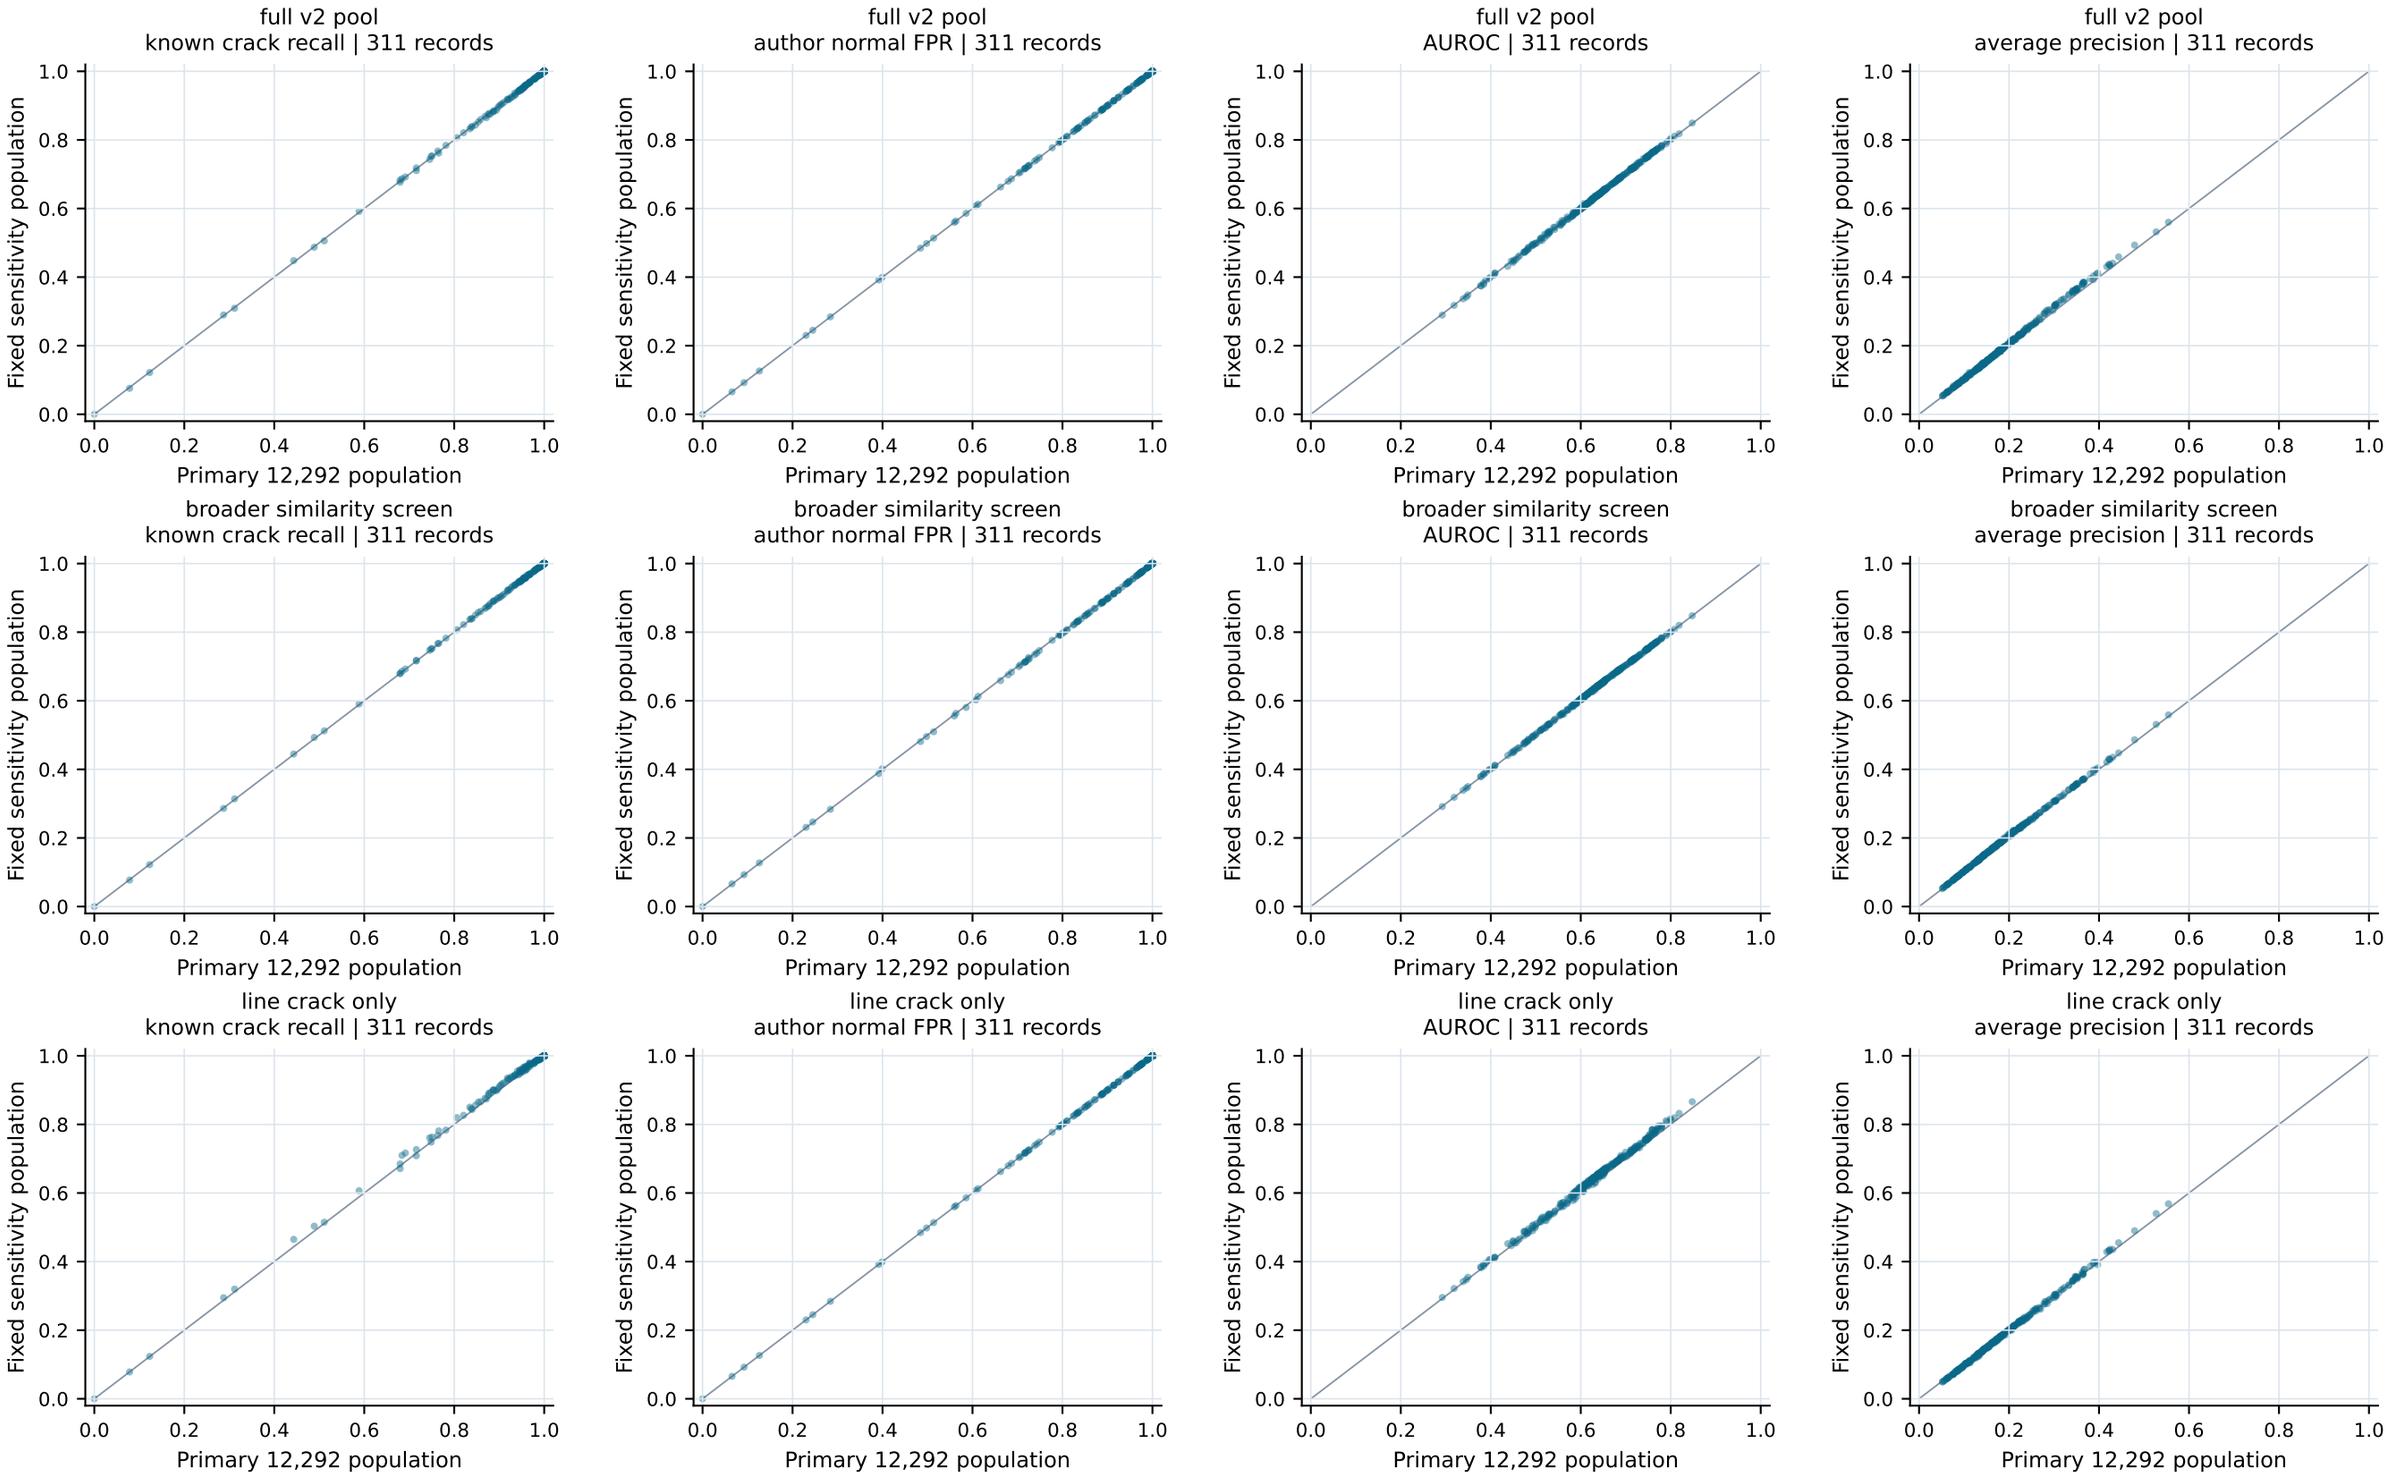



The same once-scored 12,326 pool supplies all views. Full pool 12,326, primary 12,292 and broader-screen 11,927 are fixed; line-only removes star-only positives.
AUROC/AP depend on constructed composition and remain secondary. No verified PVEL capture-family CI or independent population replication is claimed.
Every model/view is retained, including adverse directions. Correlated teacher/ensemble views and deterministic reuse remain correlated.


Source-frozen temperature scaling | every original saved prediction job

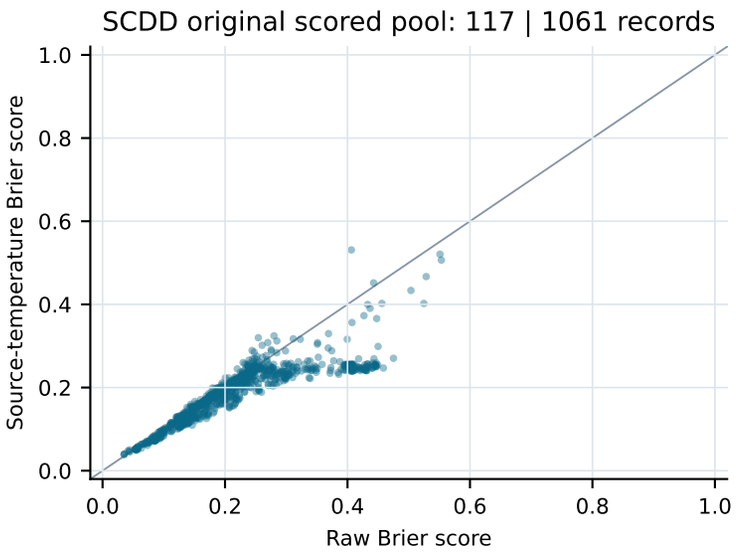


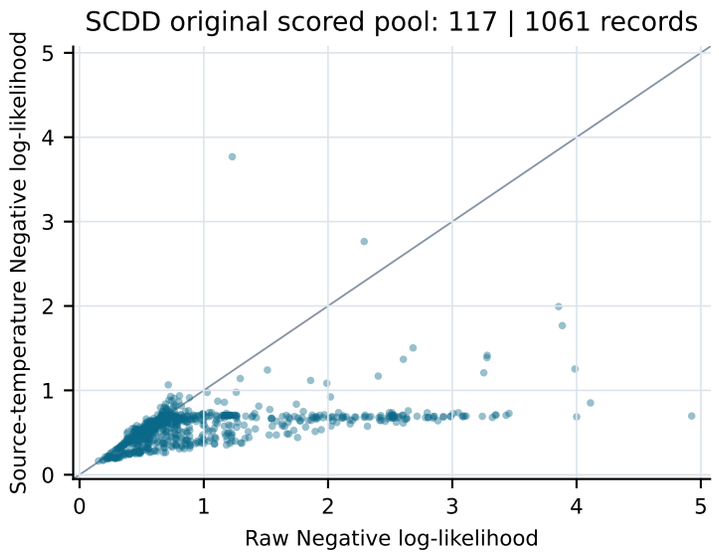


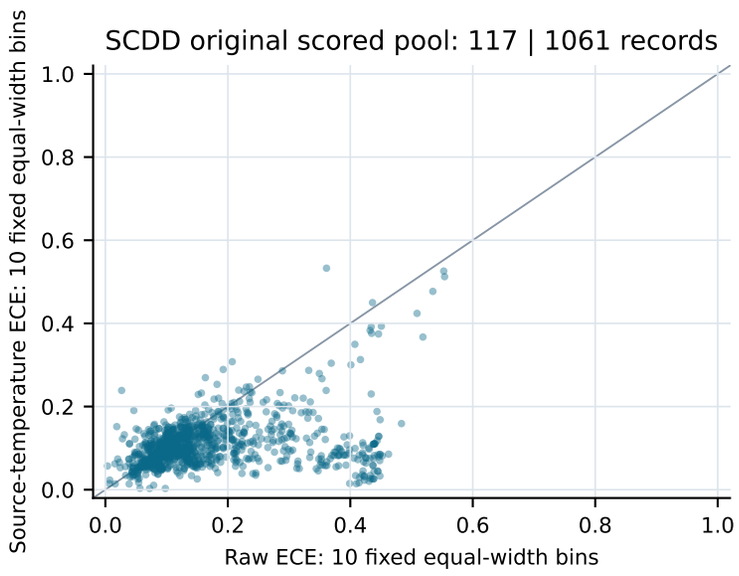


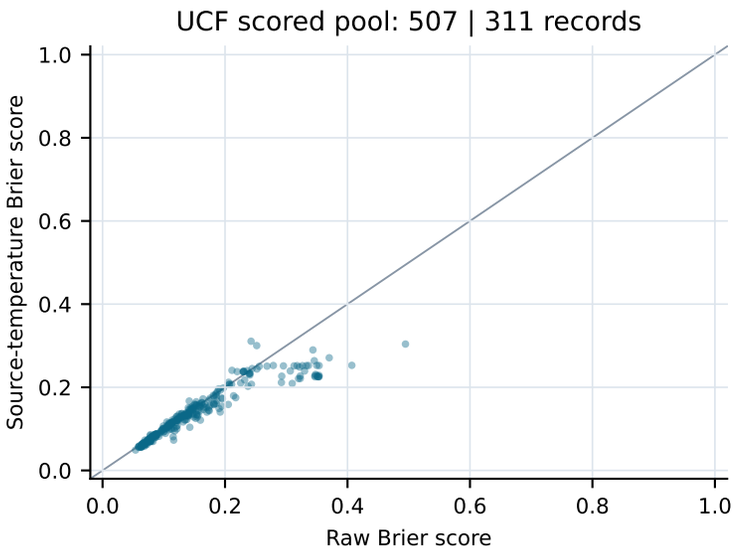


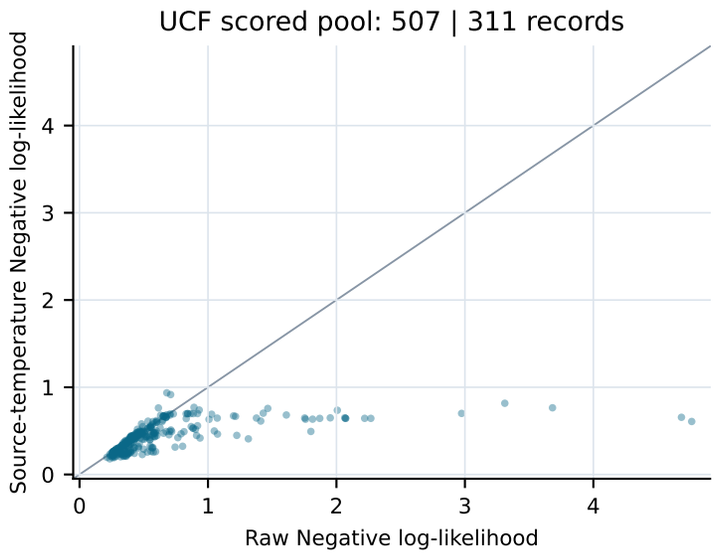

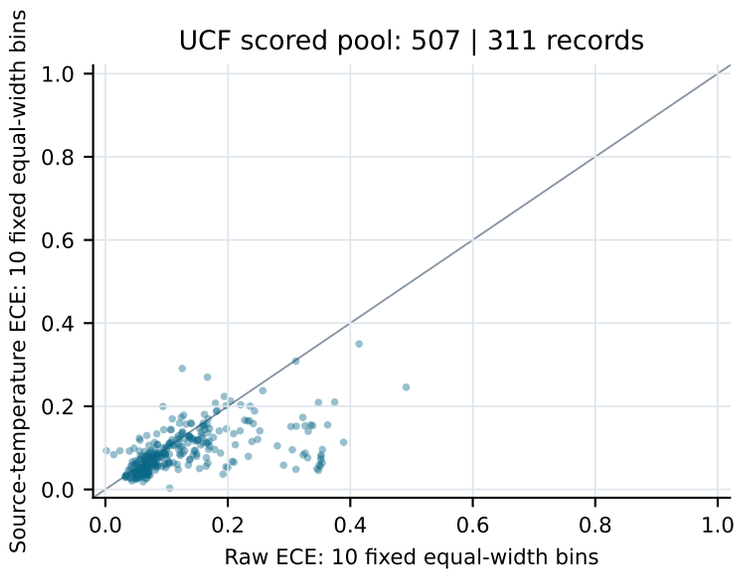


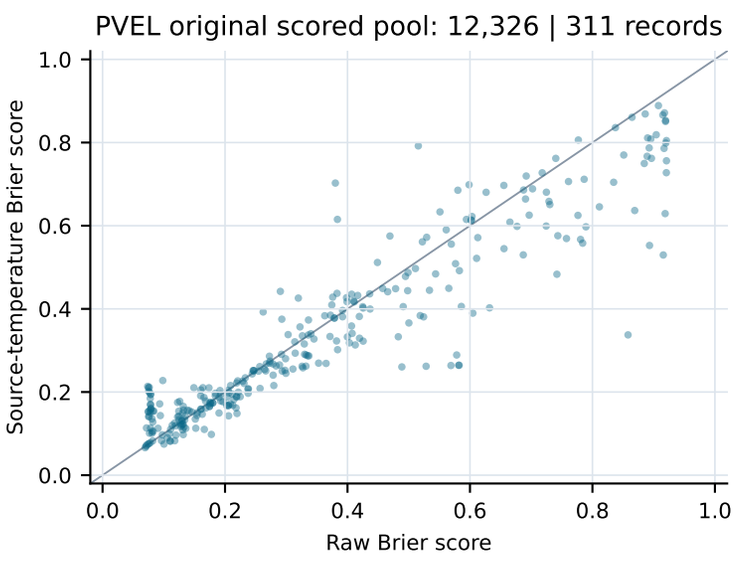

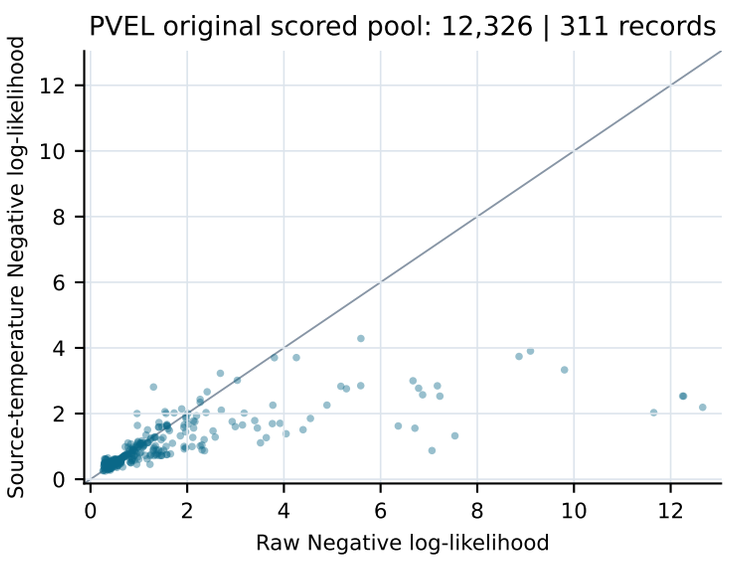

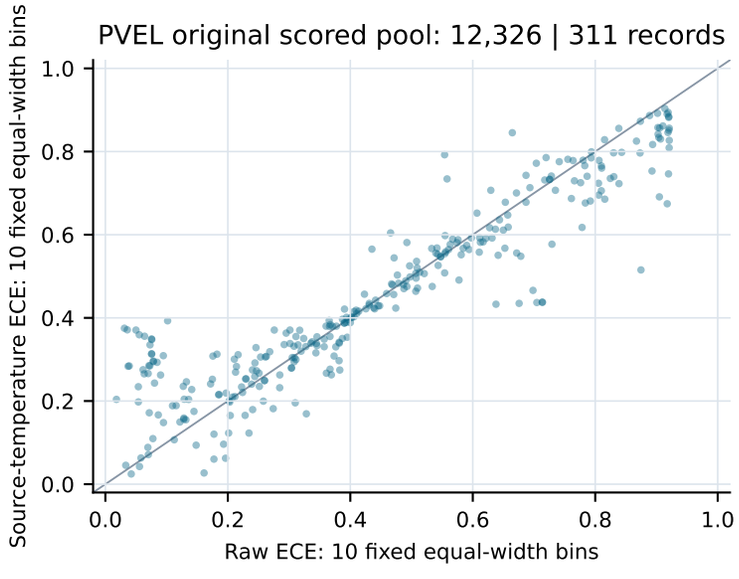



Each point is a saved model/view on its original whole scored pool. Lower values indicate lower probability error.
Full-pool SCDD includes all 117 and PVEL all 12,326; these are not matching held-source primary strata or the 12,292-image primary PVEL view.
Source temperatures are unchanged. Shared training, correlated views and deterministic reuse are not independent replications. No target calibration is fitted.

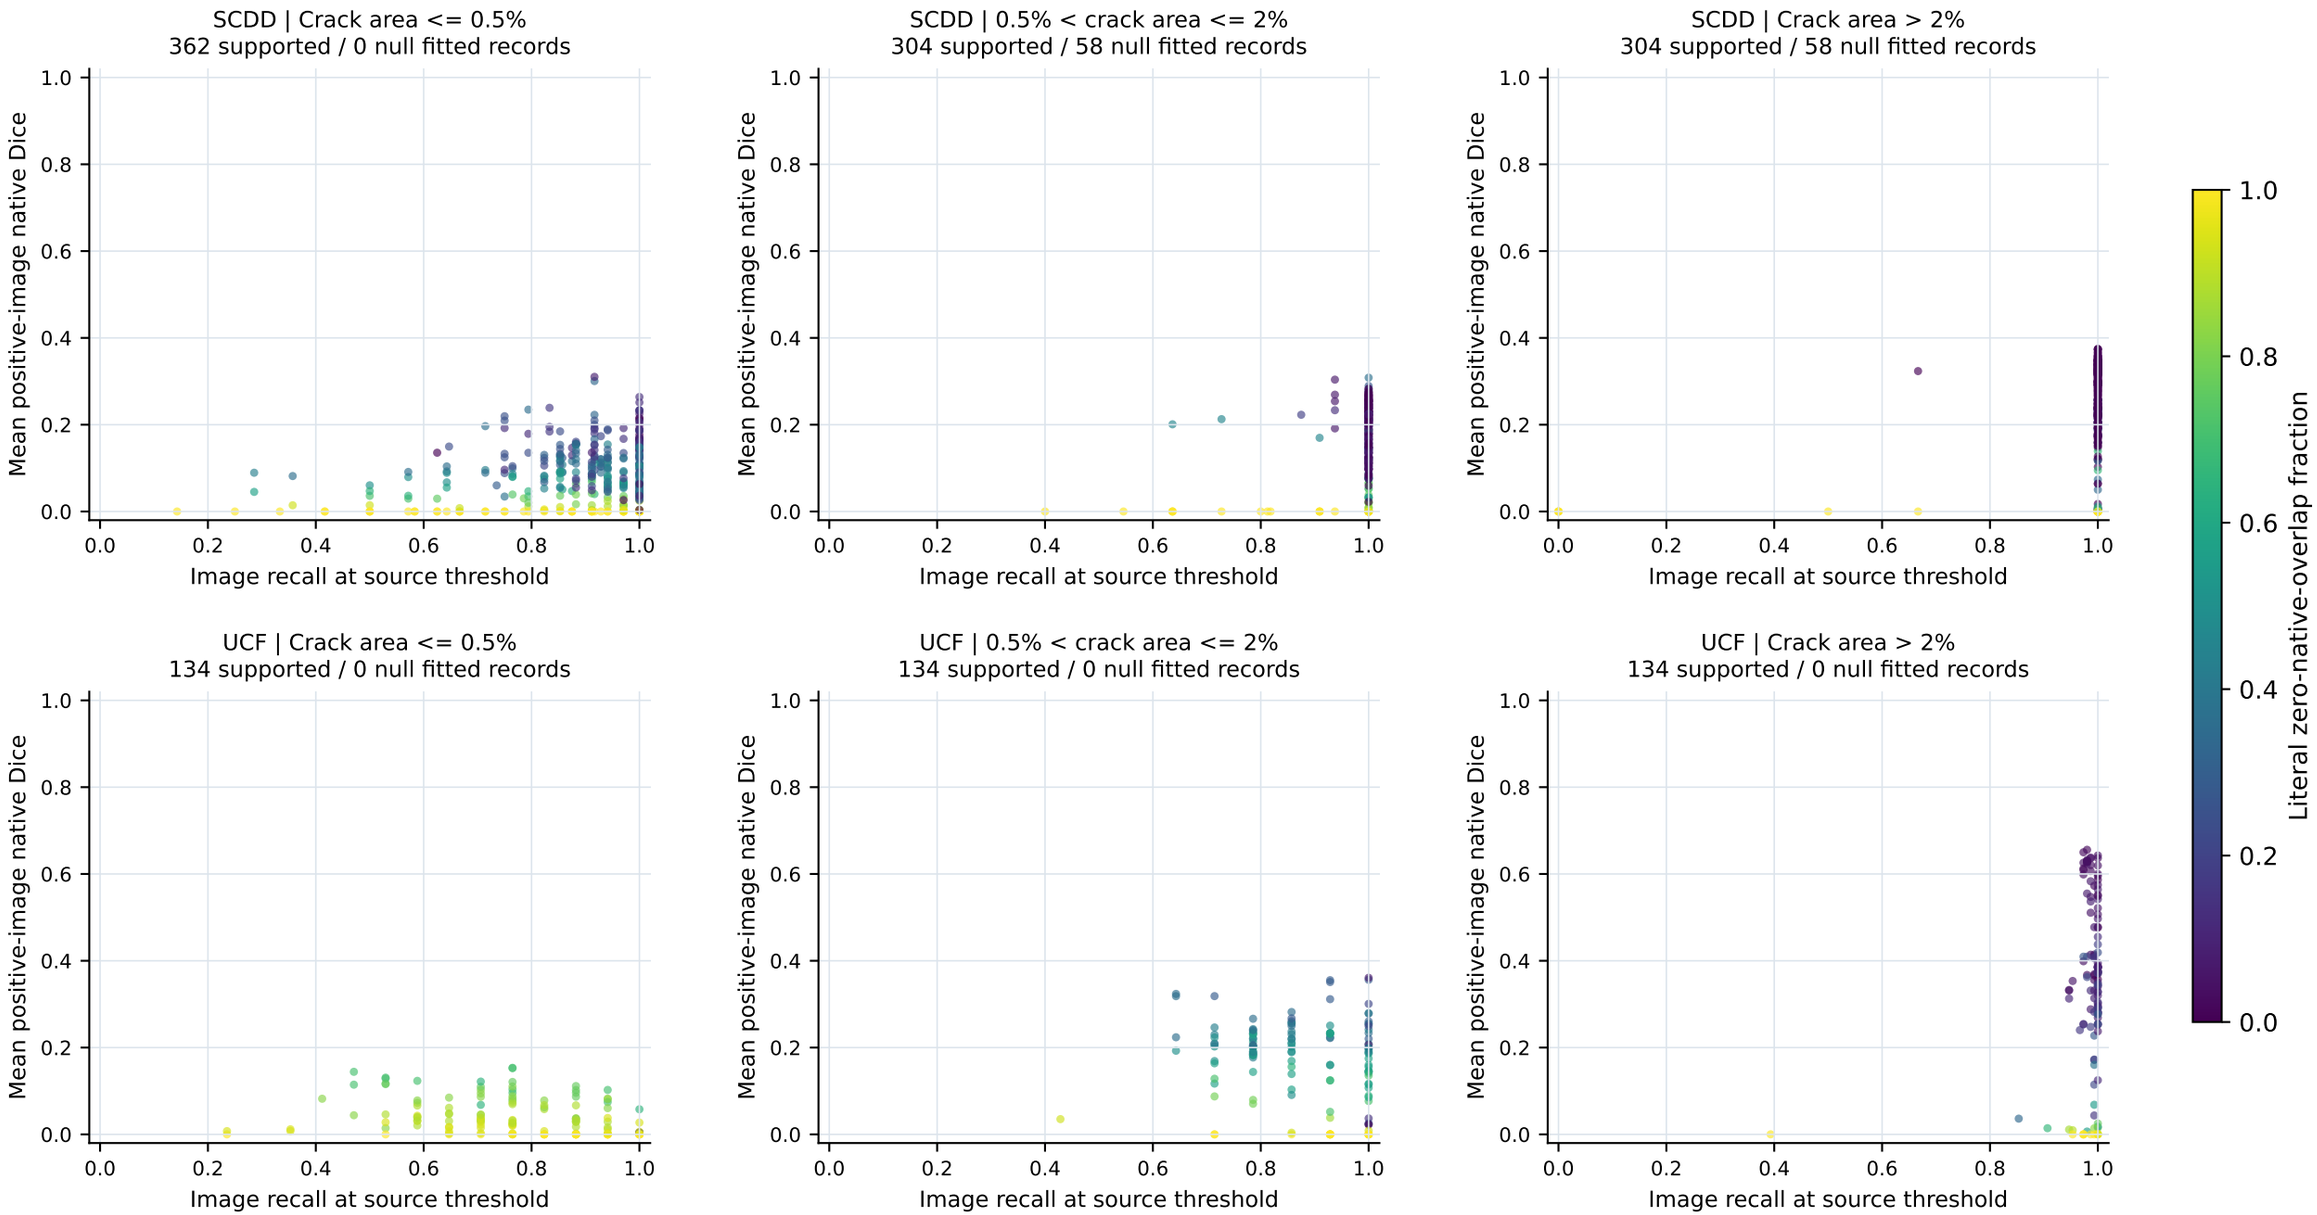



Every 496 native-mask job appears in each applicable frozen bin; absent denominators stay null in the complete 2,480-row table.
Zero native overlap means Dice exactly 0 and need not mean an empty predicted mask. Points are descriptive fitted records, without subgroup CIs.
The source-fixed area bins and both image/pixel operating points are unchanged. PVEL boxes do not enter mask-Dice plots.

Native failure diagnostics | every eligible fitted system

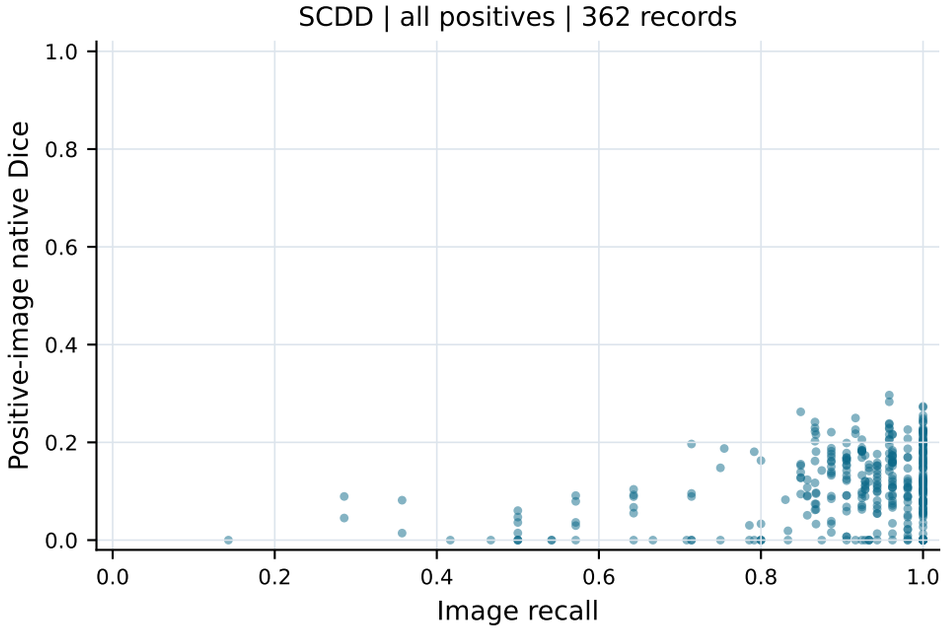

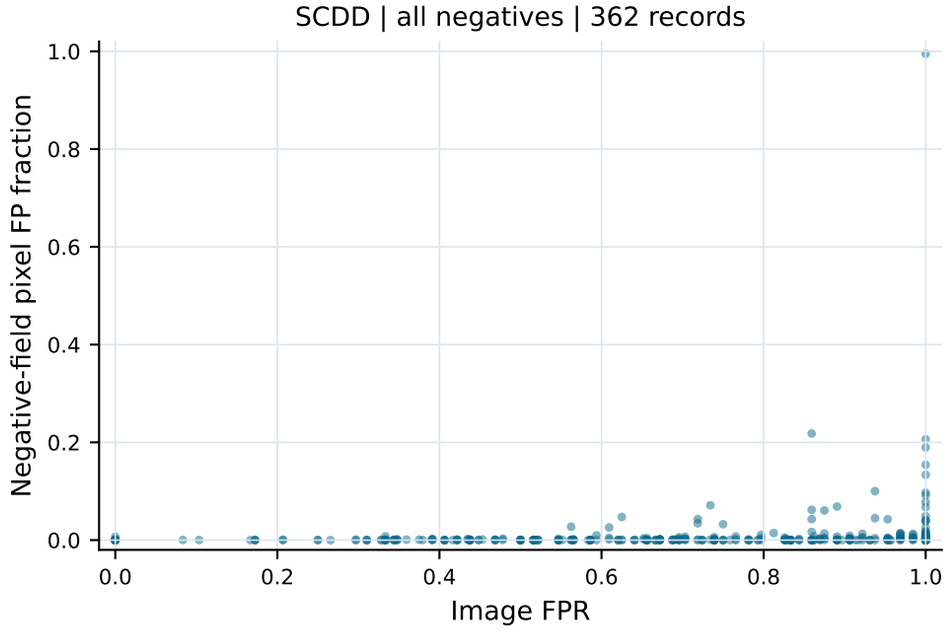


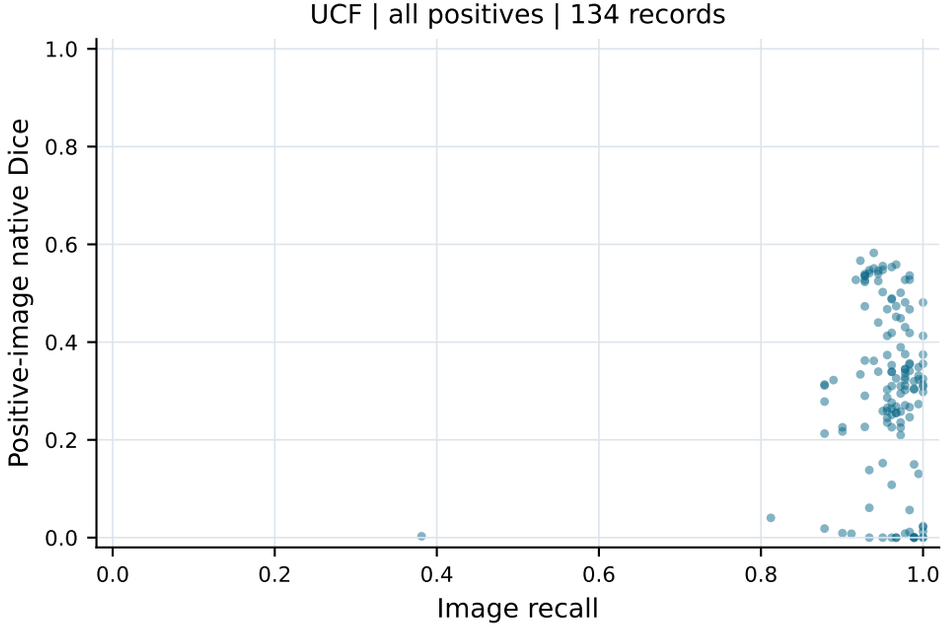


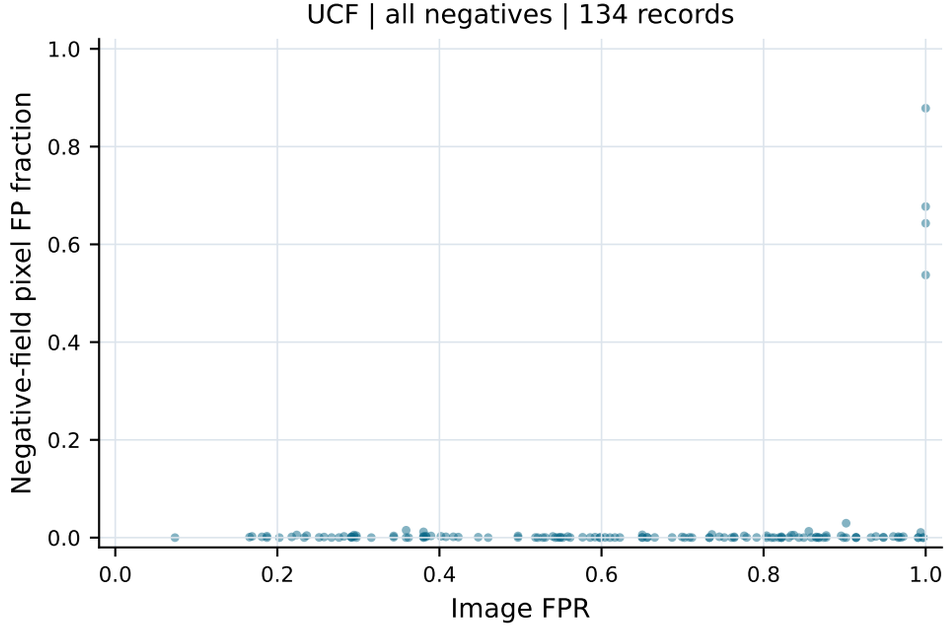



All-positive and all-negative strata are retained for each of 496 native-mask jobs; no model ranking or adjusted inference is performed.
Negative-field pixel FP fraction is a mean of per-image ratios over known pixels. It is NOT normal-structure FPR; UCF normal-structure FPR remains null.
Image recall/FPR use original source thresholds; native scores use the original fixed pixel rule. No threshold or native endpoint is substituted.


Existing paired endpoints | literal SECOND minus FIRST

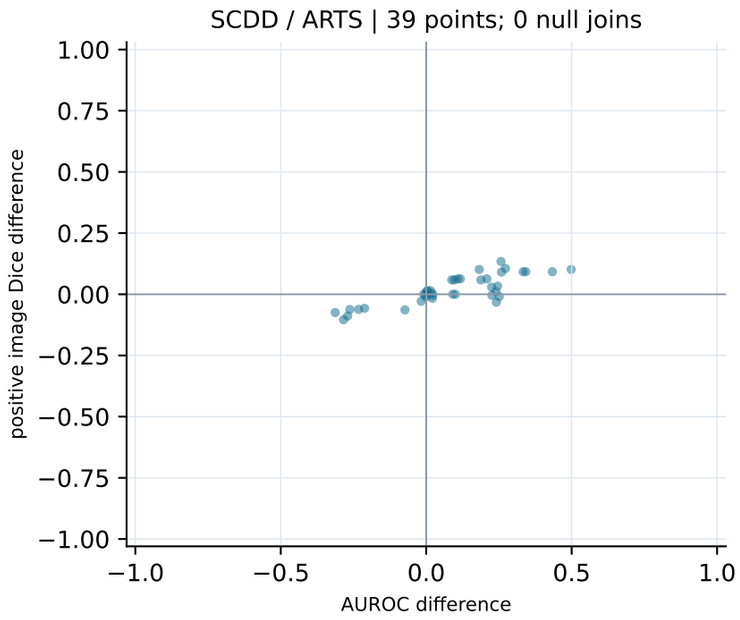

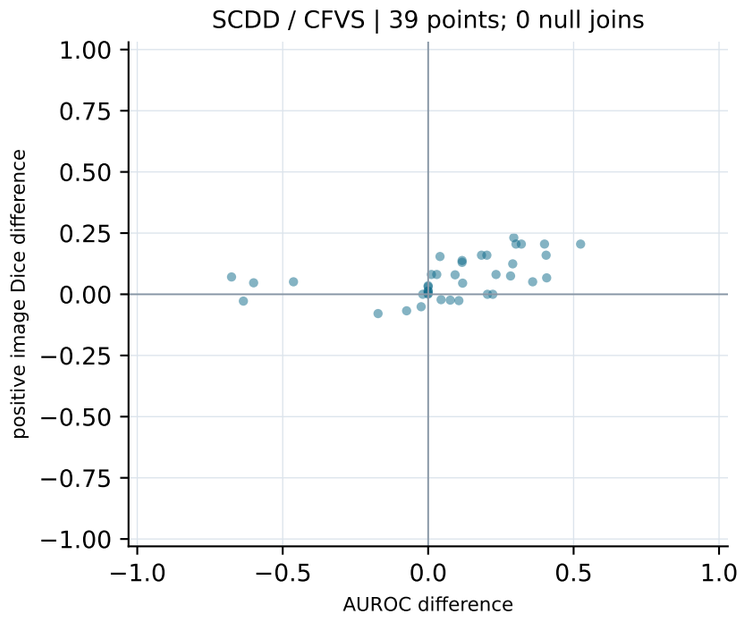

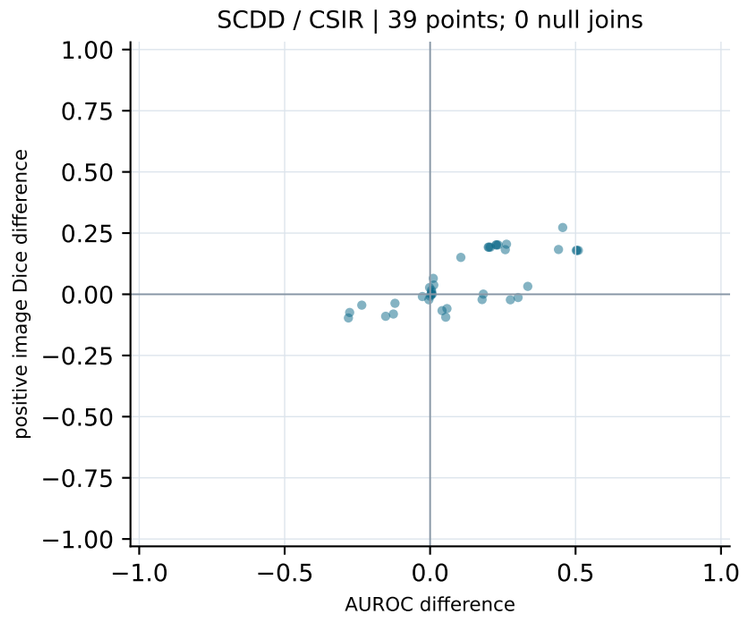


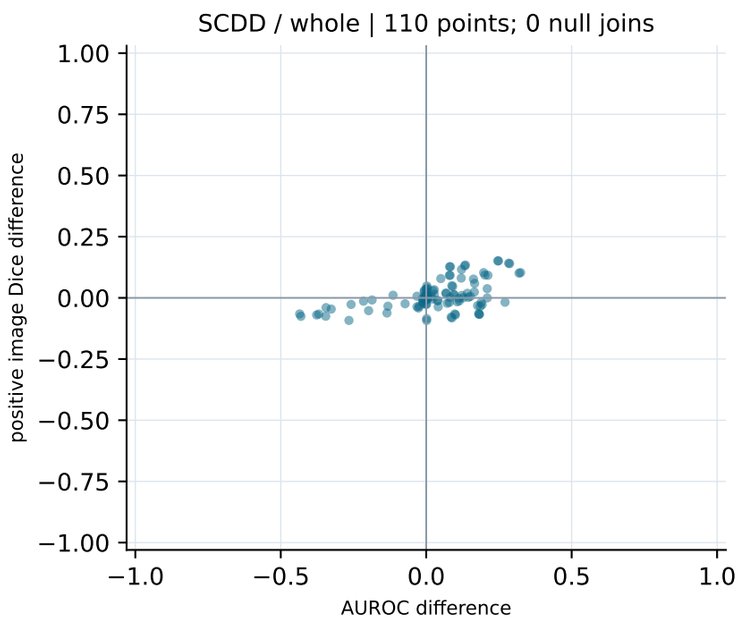


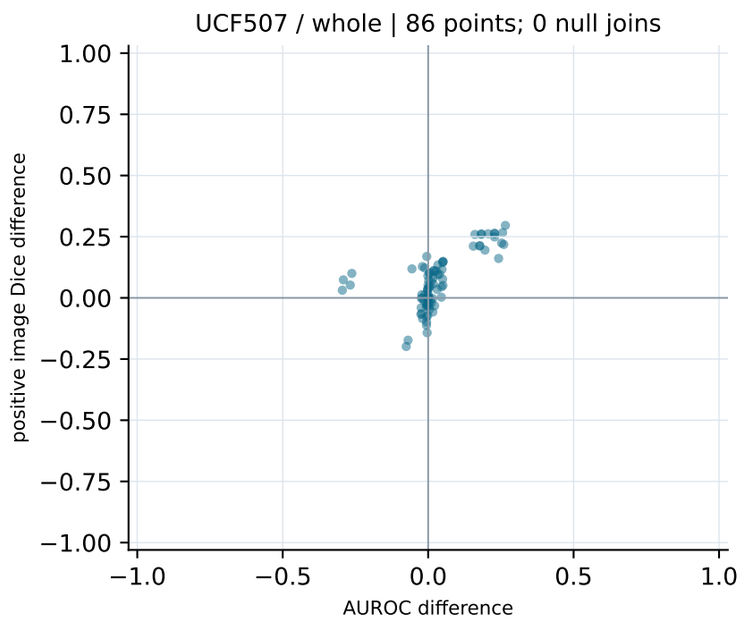



Every eligible original family-pair/cohort/stratum is retained, without outcome ordering or a fitted association. Null joins remain in the table.
Points are correlated recipe contrasts, not independent domains or training replications. Original conditional, unadjusted intervals remain in the complete atlas.
A joint direction does not establish universal superiority; image decisions, mask overlap and coarse box truth retain different meanings.


Existing paired endpoints | literal SECOND minus FIRST

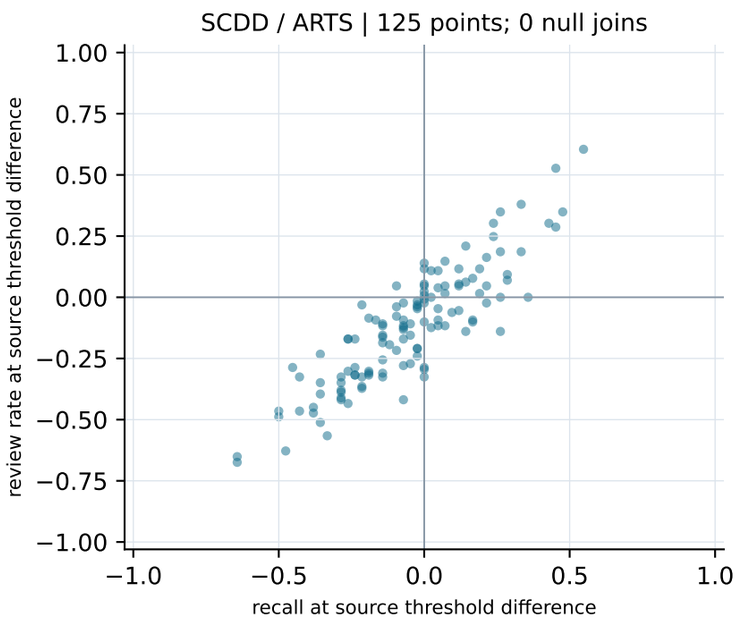

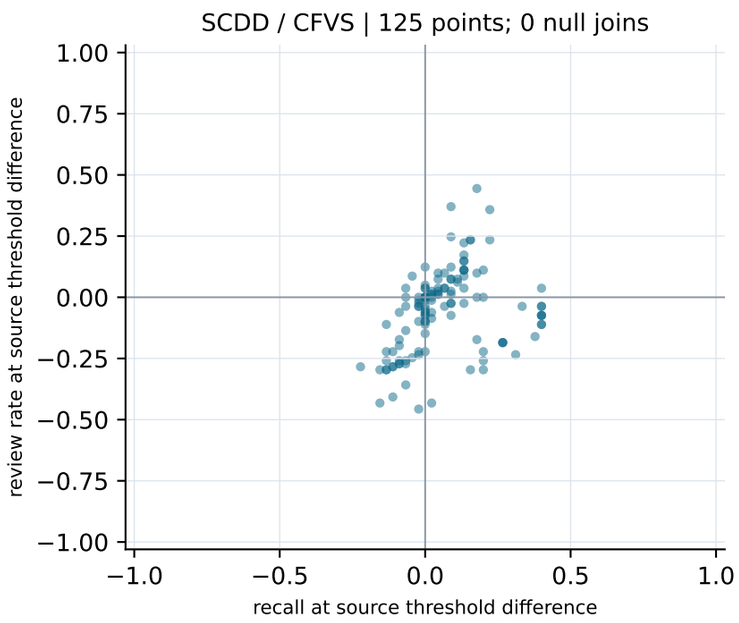

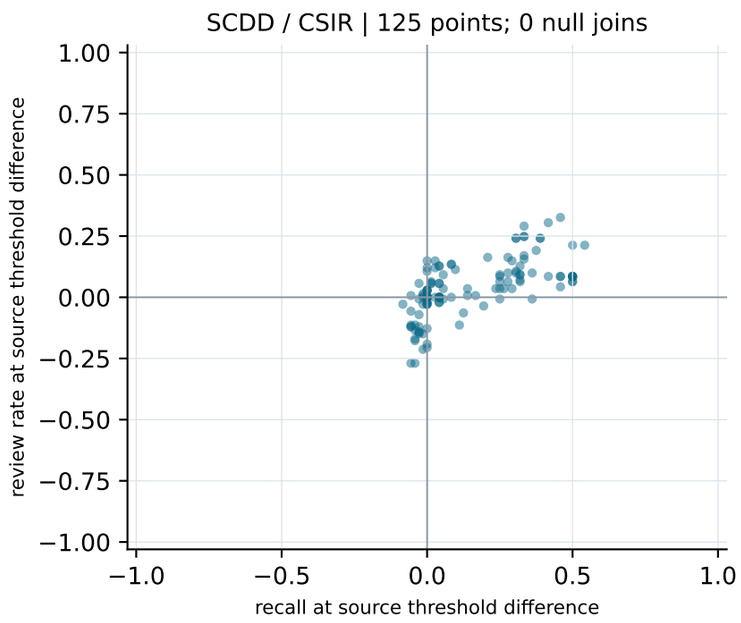


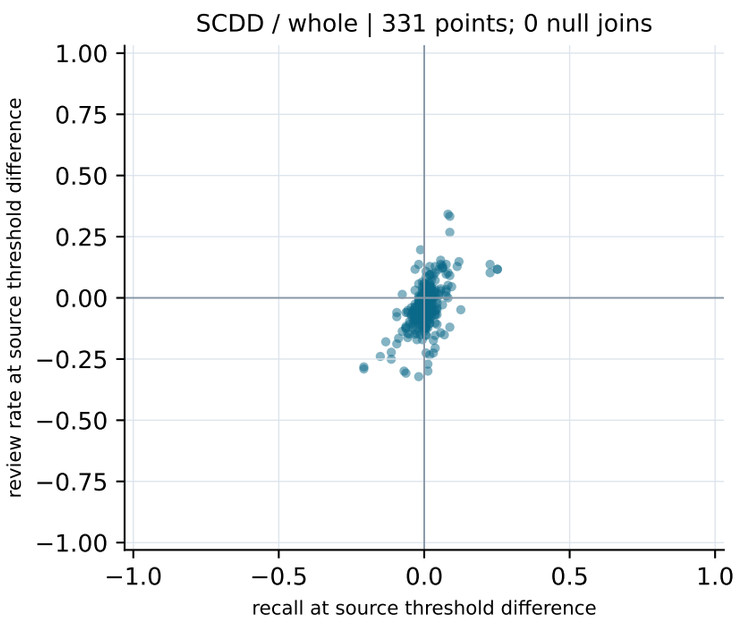

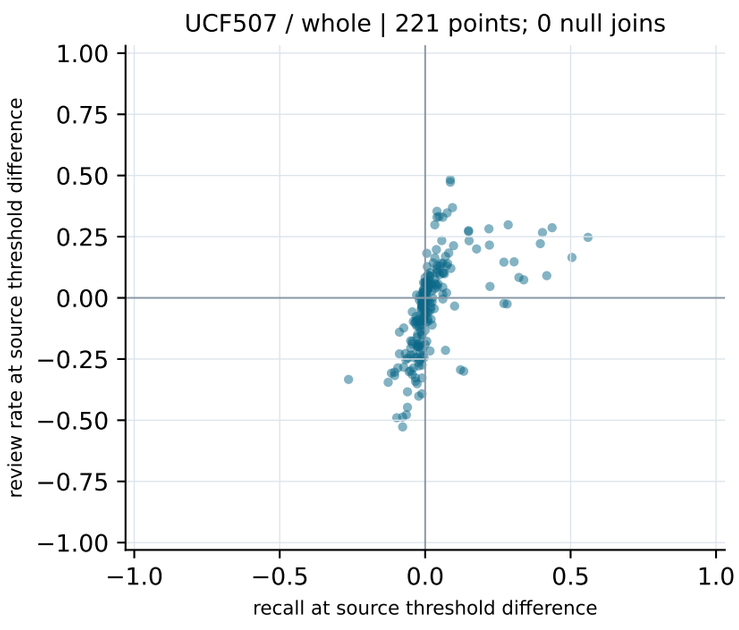


Every eligible original family-pair/cohort/stratum is retained, without outcome ordering or a fitted association. Null joins remain in the table.
Points are correlated recipe contrasts, not independent domains or training replications. Original conditional, unadjusted intervals remain in the complete atlas.
A joint direction does not establish universal superiority; image decisions, mask overlap and coarse box truth retain different meanings.

Existing paired endpoints | literal SECOND minus FIRST

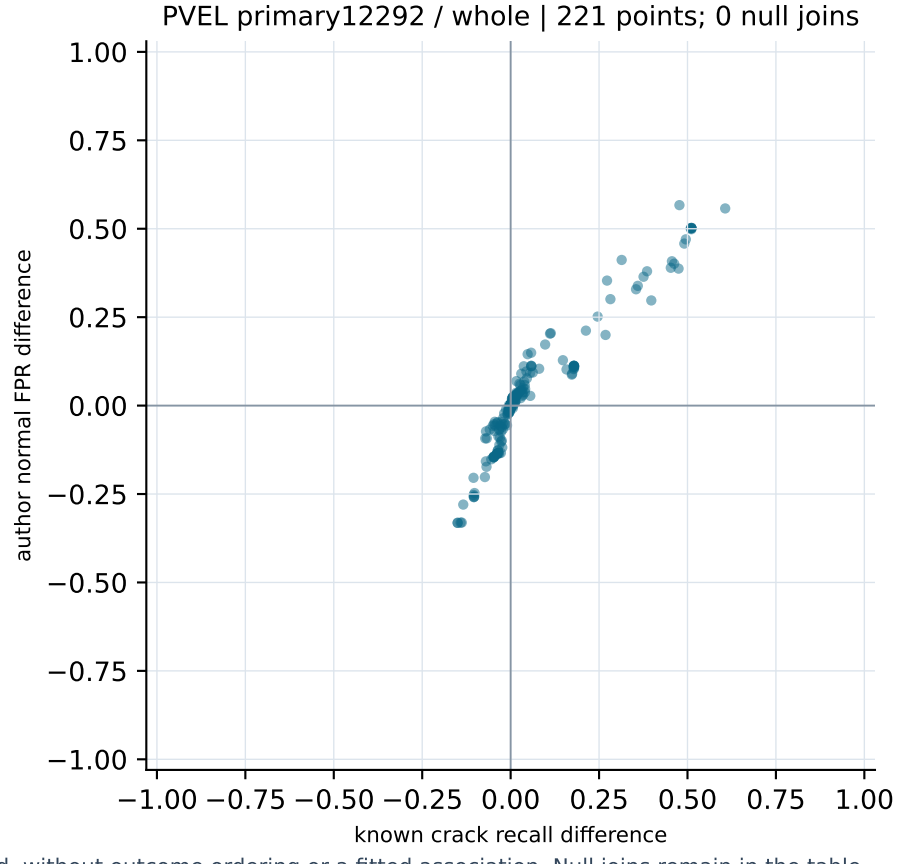

Every eligible original family-pair/cohort/stratum is retained, without outcome ordering or a fitted association. Null joins remain in the table.
Points are correlated recipe contrasts, not independent domains or training replications. Original conditional, unadjusted intervals remain in the complete atlas.
A joint direction does not establish universal superiority; image decisions, mask overlap and coarse box truth retain different meanings.

Existing paired endpoints | literal SECOND minus FIRST

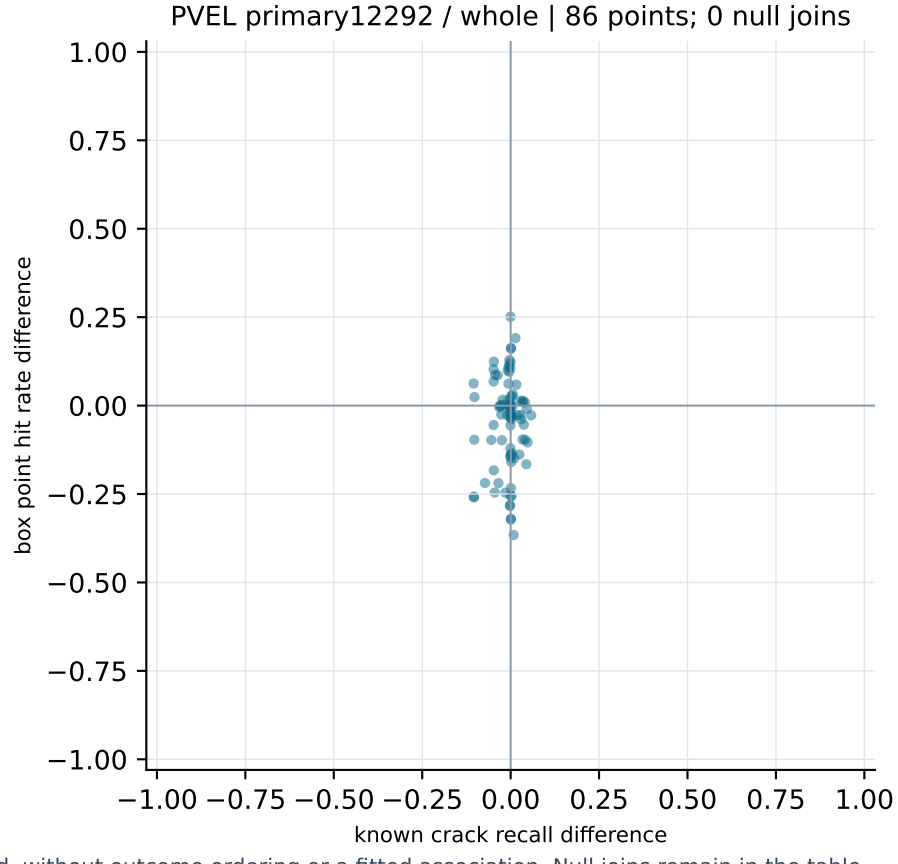

Every eligible original family-pair/cohort/stratum is retained, without outcome ordering or a fitted association. Null joins remain in the table.
Points are correlated recipe contrasts, not independent domains or training replications. Original conditional, unadjusted intervals remain in the complete atlas.
A joint direction does not establish universal superiority; image decisions, mask overlap and coarse box truth retain different meanings.