



Framework Laptop 16" Display Replacement

Use this guide to replace the display in your...

Written By: Alex Diaz-Kokaisl



INTRODUCTION

Use this guide to replace the display in your Framework 16" laptop.

TOOLS:

[T5 Torx Screwdriver](#) (1)


[Spudger](#) (1)

Step 1 — Before you begin



- Unplug all cables and fully shut down your laptop.
- ① If your repair requires a spudger, a T5 Torx, or a Phillips screwdriver, you can use the included Framework screwdriver. Whichever works best for you!

Step 2 — Create a gap

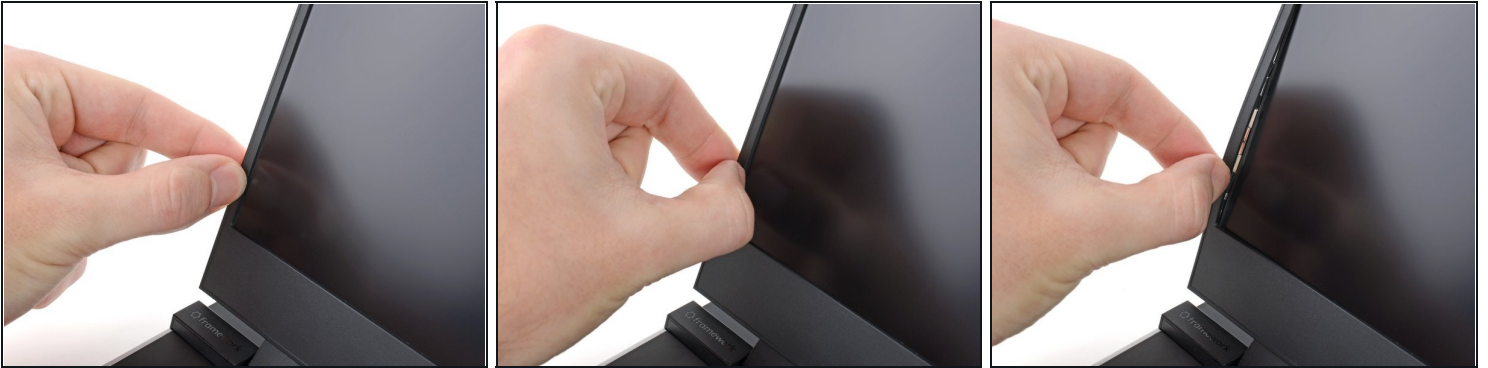

❗ The bezel is secured with [magnets](#)!


- Slide your fingernail under the inside edge of either bottom corner of the bezel.
- Pull the bezel away from the screen to release the first few magnets.

Step 3 — Remove the bezel



- Lift the bezel around the perimeter of the screen until all of its magnets are released.
- Remove the bezel.

Step 4 — Remove the display screws

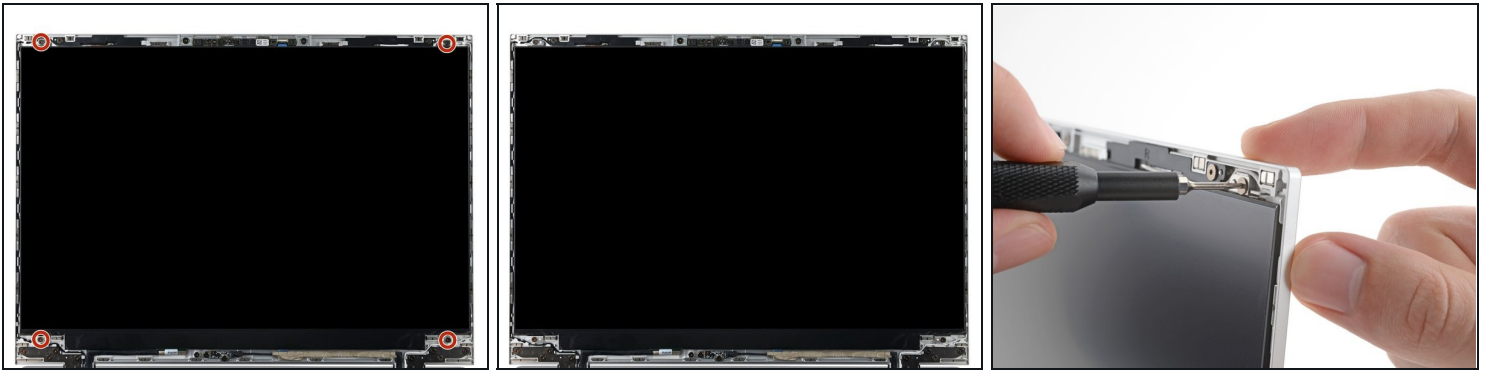

- Use a T5 Torx screwdriver to remove the four 2.4 mm-long screws securing the display.
- ☑ During reassembly, support the screen frame with your other hand as you reinsert screws to prevent the laptop from accidentally tipping over.

Step 5 — Disconnect the display



- Grab the display and pull it straight off the screen frame to free it from its [alignment pegs](#).
⚠ Don't pull the display too far from the frame, as it's still attached by a cable.
- Flip the front of the display down and rest it on the keyboard.

Step 6



- Use your fingers to flip up the plastic tab and access the connector underneath.

Step 7



- Use the flat end of a spudger to lift up the metal locking tab over the display connector.

Step 8 — Remove the display



- Grip the display cable where it meets the connector head.
 - Slide the connector straight out of its socket to disconnect it.
 - Remove the display.
-

To reassemble your device, follow these instructions in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Answers Community](#) for help.