


OUTPUT:

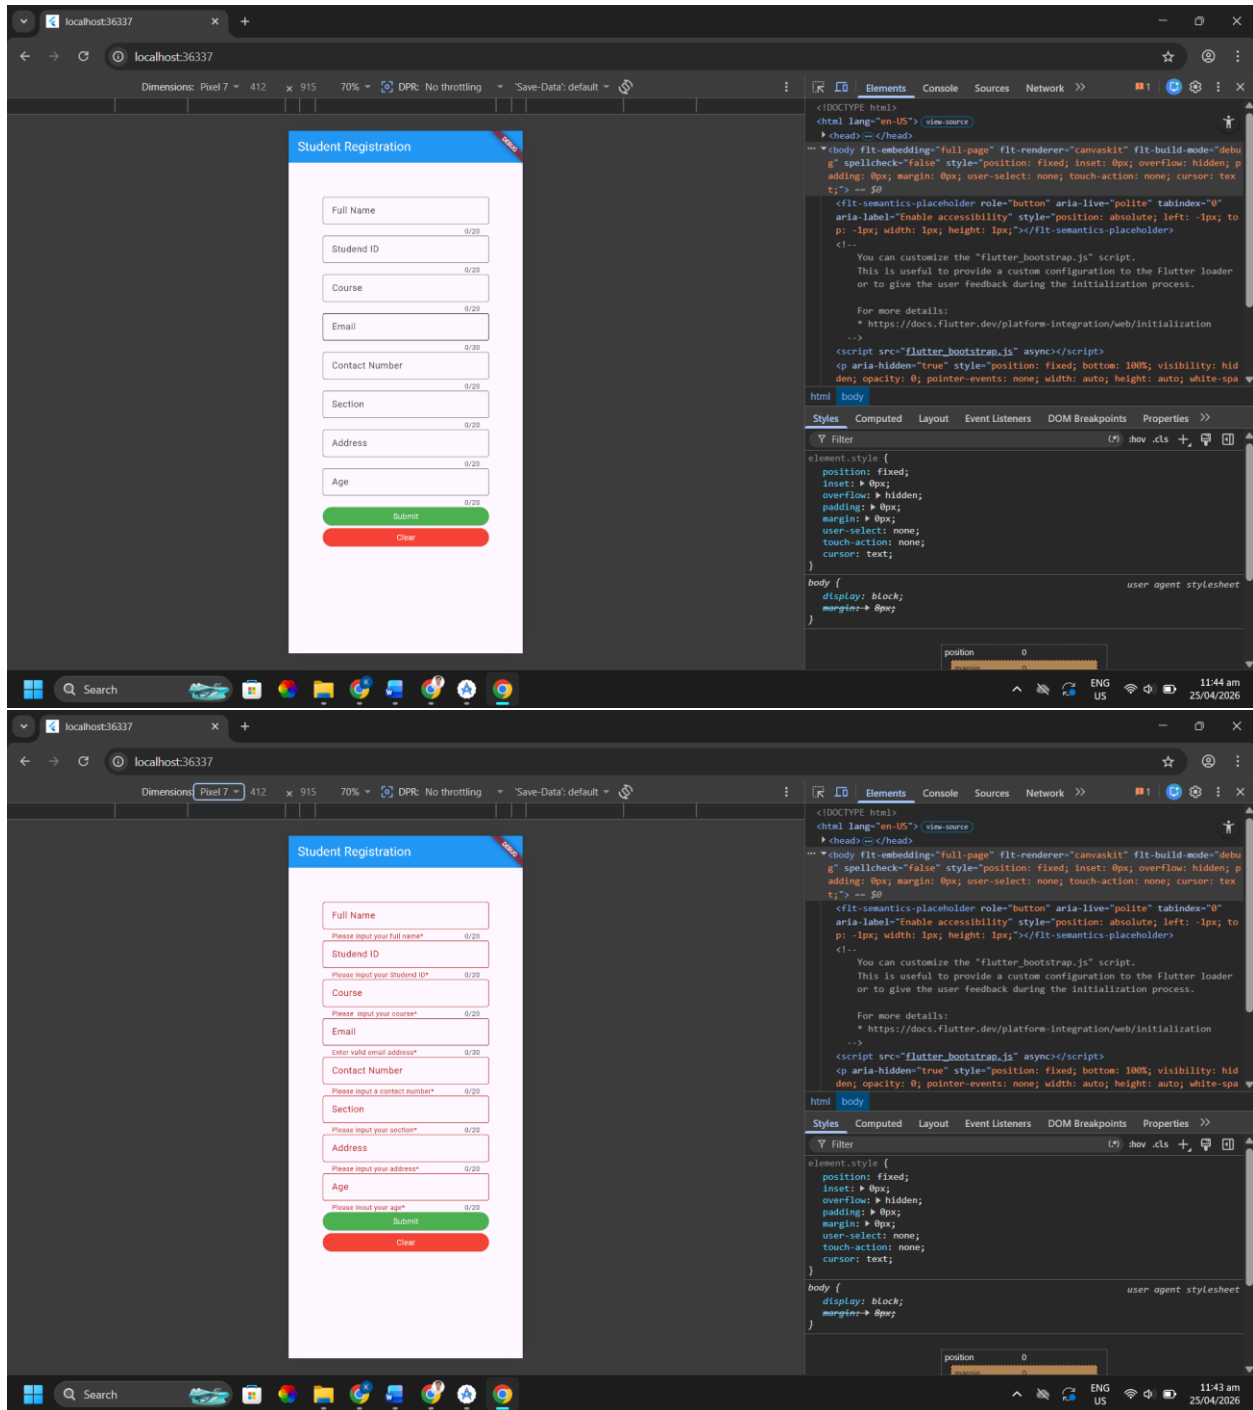

```
<!DOCTYPE html>
<html lang="en-US" > <!-- view source -->
<head></head>
<body fit-embedding="full-page" fit-renderer="canvaskit" fit-build-mode="debug"
spellcheck="false" style="position: fixed; inset: 0px; overflow: hidden; padding: 0px; margin: 0px; user-select: none; touch-action: none; cursor: text;";>
<!-->
<div semantics-placeholder role="button" aria-live="polite" tabindex="0"
aria-label="enable accessibility" style="position: absolute; left: -1px; top: -1px; width: 1px; height: 1px;"/></div semantics-placeholder>
<!-->
You can customize the "flutter_bootstrap.js" script.
This is useful to provide a custom configuration to the Flutter loader
or to give the user feedback during the initialization process.

For more details:
  * https://docs.flutter.dev/platform-integration/web/initialization
  -->
<script src="flutter_bootstrap.js" async></script>
<script aria-hidden="true" style="position: fixed; bottom: 100px; visibility: hidden; opacity: 0; pointer-events: none; width: auto; height: auto; white-space: nowrap">
</script>
</body>
</html>
```

[illegible]

SOURCE CODE:

