

```
In [ ]: from instrument import instrument #utility to help visualize recursive calls (on stderr)
```

```
In [ ]: instrument.SHOW_CALL = True  
instrument.SHOW_RET = True
```

Recursive Patterns

Let's start with some simple functions that recurse on lists...

Walk the list to find the first value satisfying function *f*

```
In [ ]: @instrument  
def walk_list(L, f):  
    """Walk a list -- in a recursive style. Note that this is done as a  
    stepping stone toward other recursive functions, and so does not  
    use easier/direct built-in list functions.  
  
    In this first version -- walk the list just to find/return the  
    FIRST item that satisfies some condition, where f(item) is true.  
  
    >>> walk_list([1, 2, 3], lambda x: x > 2)  
    3  
    """  
    pass
```

```
In [ ]: walk_list([1, 2, 3], lambda x: x > 2)
```

Walk a list, but now returning a *list* of items that satisfy *f* -- uses stack

```
In [ ]: @instrument  
def walk_list_filter1(L, f):  
    """ Walk a list, returning a list of items that satisfy the  
    condition f.  
  
    This implementation uses the stack to hold intermediate results,  
    and completes construction of the return list upon return of  
    the recursive call.  
  
    >>> walk_list_filter1([1, 2, 3], lambda x: x % 2 == 1) #odd only  
    [1, 3]  
    """  
    pass
```

```
In [ ]: walk_list_filter1([1, 2, 3], lambda x: x % 2 == 1)
```

Walk a list, returning a list of items that satisfy *f* -- uses helper with a "so_far" argument

```
@instrument
def walk_list_filter2(L, f):
    """ Walk a list, returning a list of items that satisfy the
    condition f.

    This implementation uses a helper with an explicit 'so far'
    variable, that holds the return value as it is being built
    up incrementally on each call.

    >>> walk_list_filter2([1, 2, 3], lambda x: x % 2 == 1)
    [1, 3]
    """
    @instrument
    def helper(L, ans_so_far):
        pass

    return helper(L, [])
```


```
walk_list_filter2([1, 2, 3], lambda x: x % 2 == 1)
```

Note the difference in how this works. `walk_list_filter2` builds up the result as an evolving argument to `helper`. When we're done, the stack does nothing more than keep passing that result back up the call chain (i.e., is written in a tail-recursive fashion). In contrast, `walk_list_filter1` uses the stack to hold partial results, and then does further work to build or complete the result after each recursive call returns.

Now consider some functions that recurse on trees...

We want to extend the basic idea of recursive walkers and builders for lists, now to trees. We'll see the same patterns at work, but now often with more base cases and/or more recursive branch cases.

For these examples, we need a simple tree structure. Here we'll represent a node in a tree as a list with the first element being the node value, and the rest of the list being the children nodes. That is to say, our tree structure is a simple nested list structure.



```
tree1 = [13,
          [7],
          [8,
           [99],
           [16,
            [77]]],
          [42]]
tree1
```

```
In [ ]: @instrument
def tree_max(tree):
    """Walk a tree, returning the maximum value in the (assumed non-empty) tree.
    >>> tree_max([13, [7], [8, [99], [16, [77]], [42]]])
    99
    """
    pass
```

```
In [ ]: tree_max(tree1)
```

```
In [ ]: @instrument
def depth_tree(tree):
    """ Walk a tree, returning the depth of the tree
    >>> depth_tree([13, [7], [8, [99], [16, [77]], [42]]])
    4
    """
    pass
```

```
In [ ]: depth_tree([13, [7], [8, [99], [16, [77]], [42]]])
```

Notice that the recursion structure is exactly the same in both cases? We could generalize to something like a `walk_tree` that took a tree *and* a function `f` (and perhaps some other base case values), and did that operation at each step. We'll leave that as an exercise for the reader.

Now a "builder" or "maker" function, that recursively creates a tree structure...

```
In [ ]: @instrument
def make_tree(L):
    """ Make and return a binary tree corresponding to the list. The
    tree is "binary" in the sense that the number of left and right
    branches are balanced as much as possible, but no condition is
    imposed on the left/right values under each node in the tree.

    >>> make_tree([1,2,3])
    [1, [2], [3]]
    >>> make_tree([1,2])
    [1, [2]]
    """
    n = len(L)
    pass
```

```
In [ ]: tree2 = make_tree([1, 2, 3])
tree2
```

```
In [ ]: tree3 = make_tree([1, 2]) #unbalanced tree case
tree3
```

How many recursive calls do you expect for a list of length `n`?

```
In [ ]: instrument.SHOW_CALL = True
instrument.SHOW_RET = False
```

```
In [ ]: tree4 = make_tree(list(range(8)))
tree4
```

Another recursive example -- a printed visualization of a tree


```
In [ ]: def show_tree(tree):  
        """ Return a formatted string representation to visualize a tree """  
        spaces = '  '  
        @instrument  
        def helper(tree, level):  
            if not tree:  
                return ""  
            val = tree[0]  
            children = tree[1:]  
            result = spaces*level + str(val) + '\n'  
            for child in children:  
                result += helper(child, level+1)  
            return result  
        return helper(tree, 0)
```

```
In [ ]: print("tree4:", tree4, "\n", show_tree(tree4))
```

This show_tree implementation is actually very similar to the recursive structure used inside our @instrument decorator! Feel free to look at that code and to use instrument.py in your own debugging, if you'd like.

Finally, consider some functions that recurse on directed graphs...

For this, we need a more sophisticated structure, since a node may be referenced from more than one other node. We'll represent a directed graph (also known as a "digraph") as a dictionary with node names as keys, and associated with the key is a list holding the node value and a list of children node names. The special name 'root' is the root of the graph.

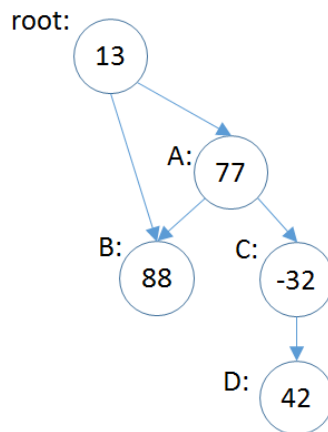

```
In [ ]: graph1 = {'root': [13, ['A', 'B']],  
                  'A': [77, ['B', 'C']],  
                  'B': [88, []],  
                  'C': [-32, ['D']],  
                  'D': [42, []]}
```


```
In [ ]: @instrument
def graph_max(graph):
    """Walk a graph, returning the maximum value in a (non-empty) graph.
    First, we'll assume there are no cycles in the graph.
    """
    @instrument
    def node_max(node_name):
        pass

    return node_max('root')
```

```
In [ ]: instrument.SHOW_CALL = True
instrument.SHOW_RET = True
```

```
In [ ]: graph_max(graph1)
```

What do we do if there *are* cycles in the graph? E.g.,

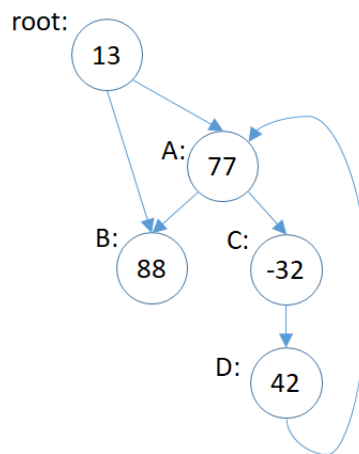

```
In [ ]: graph2 = {'root': [13, ['A', 'B']],
                  'A': [77, ['B', 'C']],
                  'B': [88, []],
                  'C': [-32, ['D']],
                  'D': [42, ['A']]}
```

#changed; now D -> A

```
In [ ]: #graph_max(graph2) # breaks (infinite recursion)! (need to re-execute def graph_max afterwards
for instrumentation)
```

```
In [ ]: @instrument
def graph_max2(graph):
    """Walk a graph, returning the maximum value in a (non-empty) graph.
    Now, however, there might be cycles, so need to be careful not to
    get stuck in them!
    """
    @instrument
    def node_max(node_name):
        pass

    return node_max('root')
```

```
In [ ]: graph_max2(graph2)
```

Circular Lists

It's possible to create a simple python list that has itself as an element. In essence, that means that python lists themselves might be "graphs" and have cycles in them, not just have a tree-like structure!

```
In [ ]: x = [0, 1, 2]
        x[1] = x
        print("x:", x)
        print("x[1][1][1][1][1][1][1][1][1][1][2]:", x[1][1][1][1][1][1][1][1][1][1][2])
```

We'd like a version of `deep_copy_list` that could create a (separate standalone) copy of a recursive list, *with the same* structural sharing (including any cycles that might exist!) as in the original recursive list.

```
In [ ]: @instrument
        def deep_copy_list(old, copies=None):
            if copies is None:
                copies = {}

            oid = id(old)      #get the unique python object-id for old

            if oid in copies: #base case: already copied object, just return it
                return copies[oid]

            if not isinstance(old, list): #base case: not a list, remember & return it
                copies[oid] = old
                return copies[oid]

            #recursive case
            copies[oid] = []
            for e in old:
                copies[oid].append(deep_copy_list(e, copies))
            return copies[oid]
```

```
In [ ]: y = deep_copy_list(x)
        y[0] = 'zero'
        print("x:", x)
        print("y:", y)
        print("y[1][1][1][1][1][1][1][1][1][1][2]:", y[1][1][1][1][1][1][1][1][1][1][2])
```