The calculus maps directly to a hardware pipeline

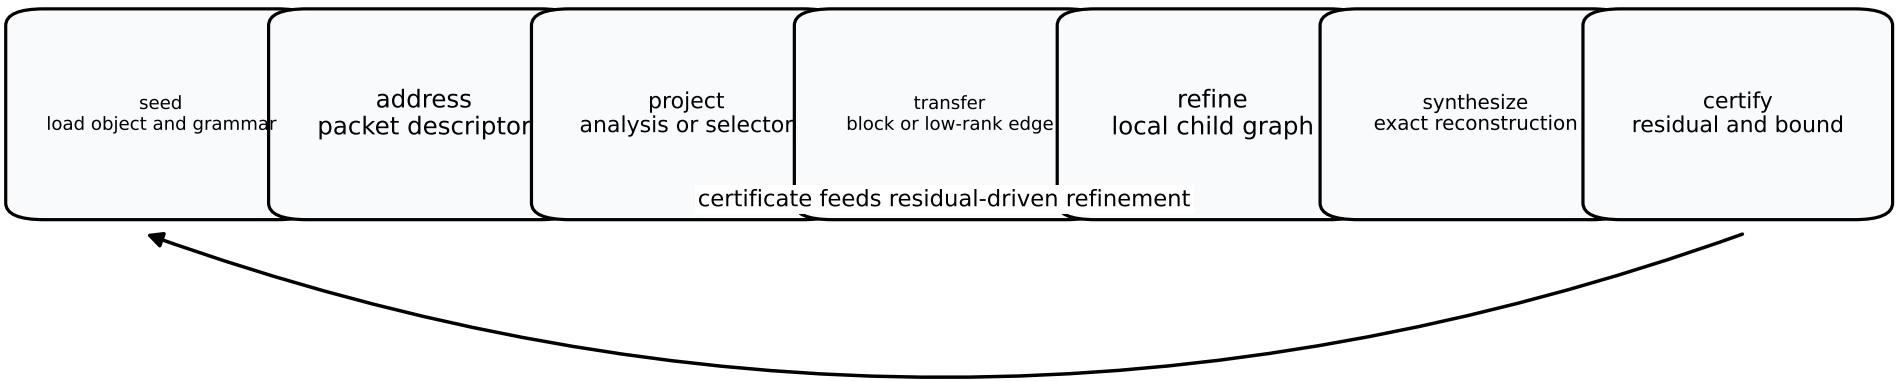

Every command keeps the packet identity, atlas, precision tag, parent relation, and error budget attached to the data.