Packet descriptor entry

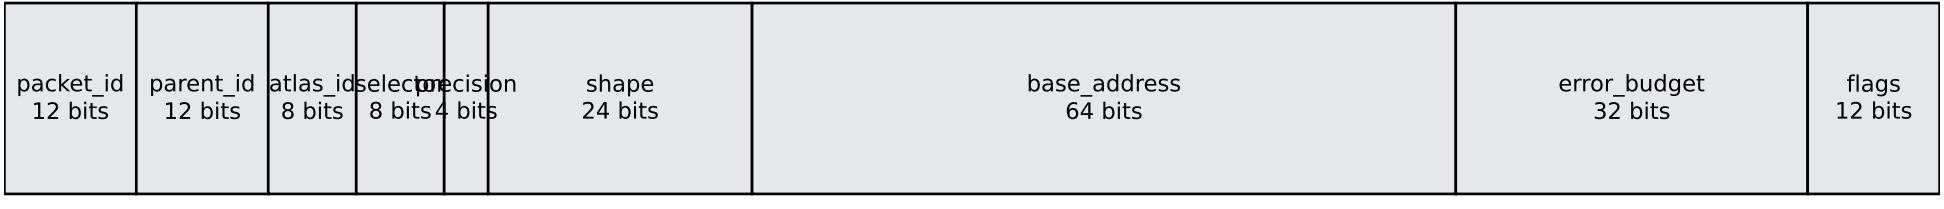

Selectors may be contiguous ranges, residue classes, bit masks, transform-domain bands, basis projectors, or packet-tree nodes.