Typed Bayesian operator posterior

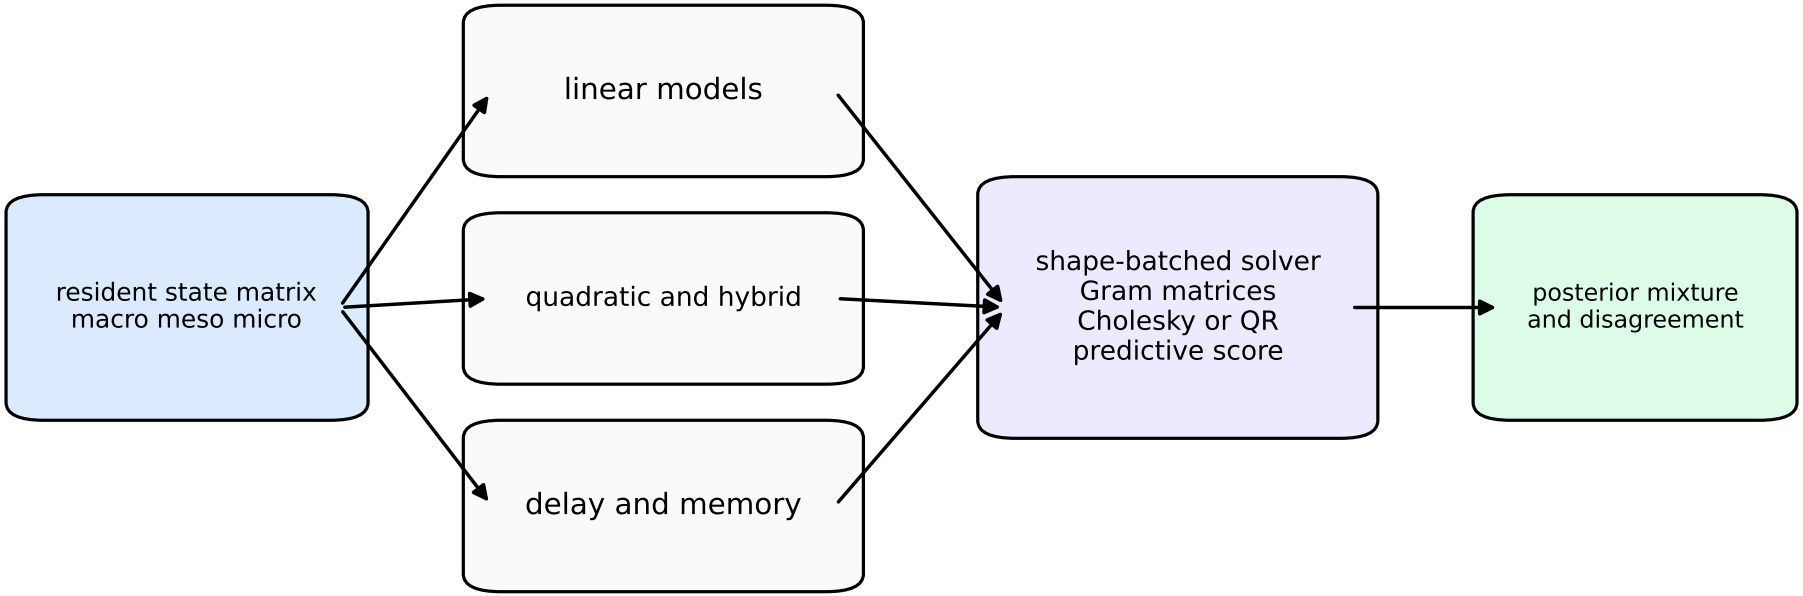

Shared design matrices are loaded once. Candidate programs are grouped by feature shape and precision.