Local refinement without global recompilation

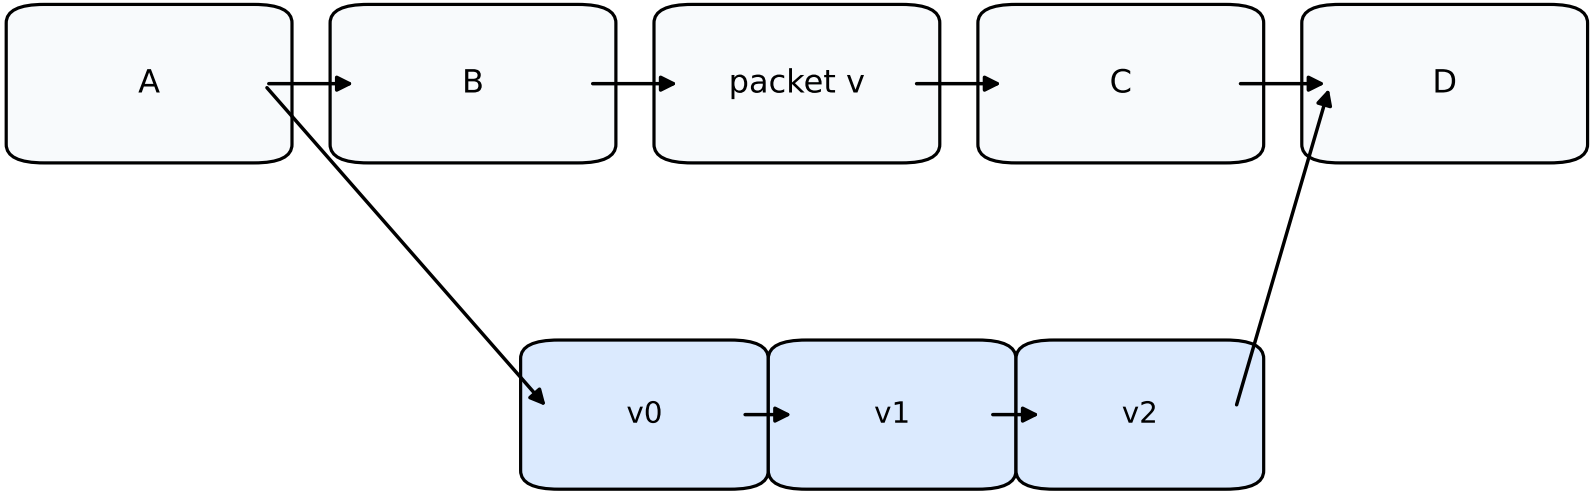

A and B keep their descriptors

C and D keep their descriptors

Only the child module and the edges incident to the parent packet are regenerated.