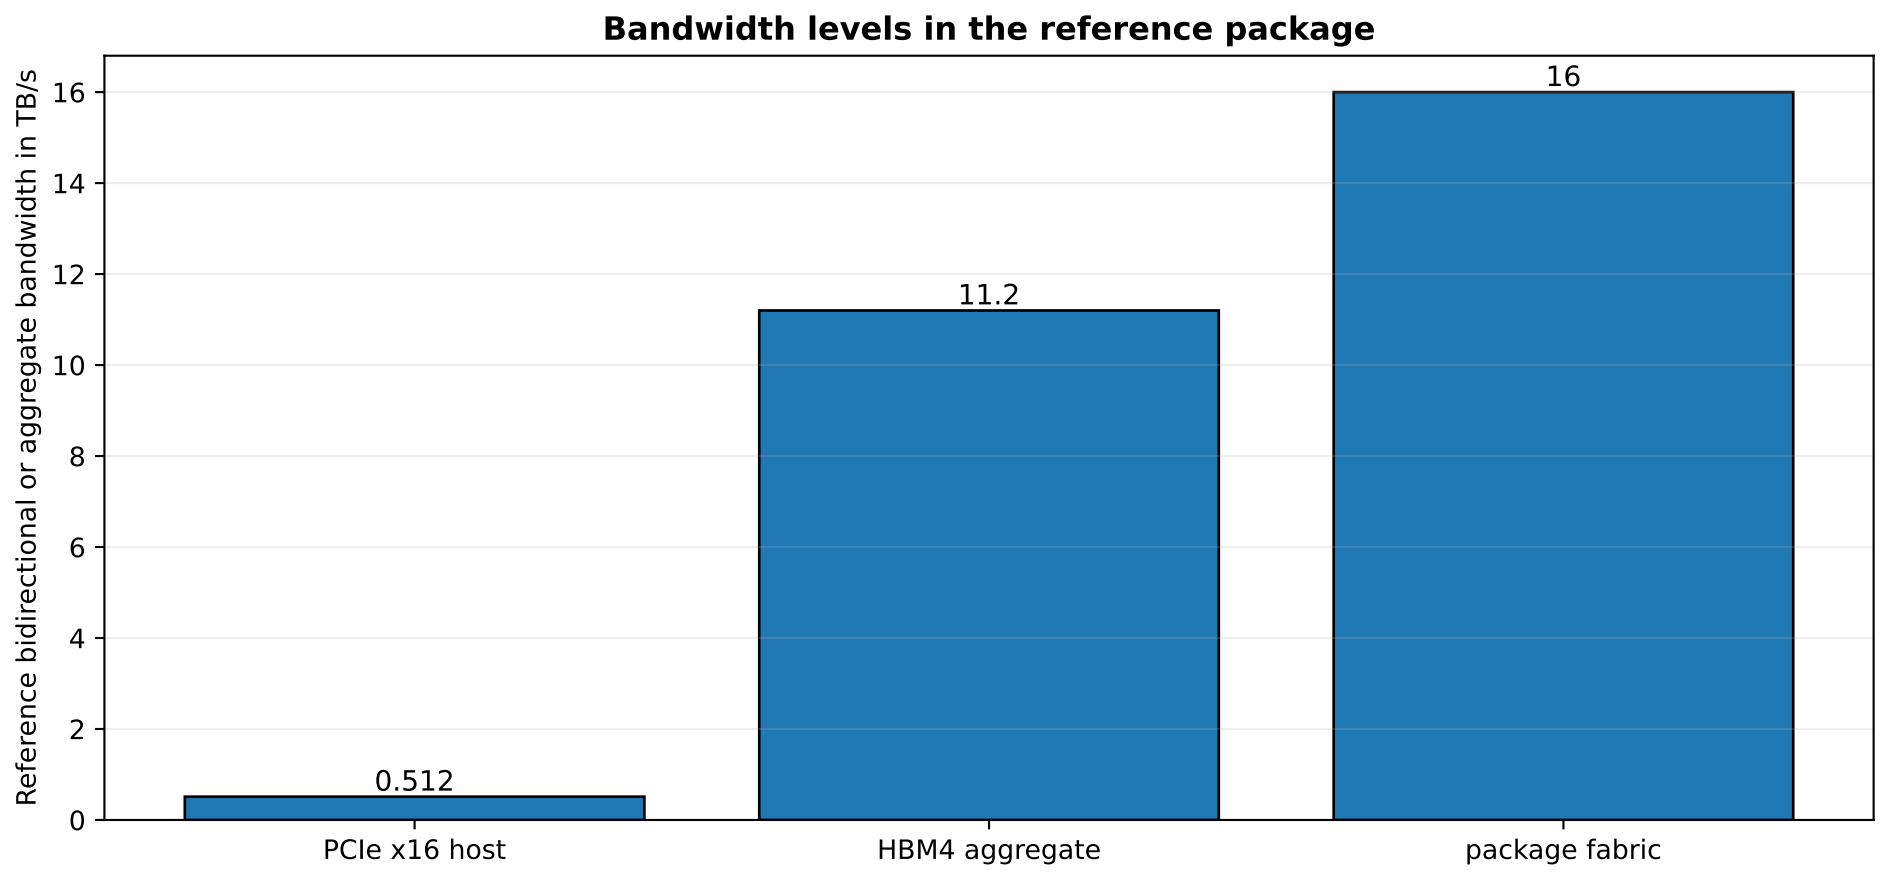

The host link is not the steady-state data path. Reusable packet graphs and factors are expected to remain on the package.