Transfer blocks of a sampled operator

Each entry is $\|P_i A P_j\|_F$. Rows name outputs and columns name inputs.

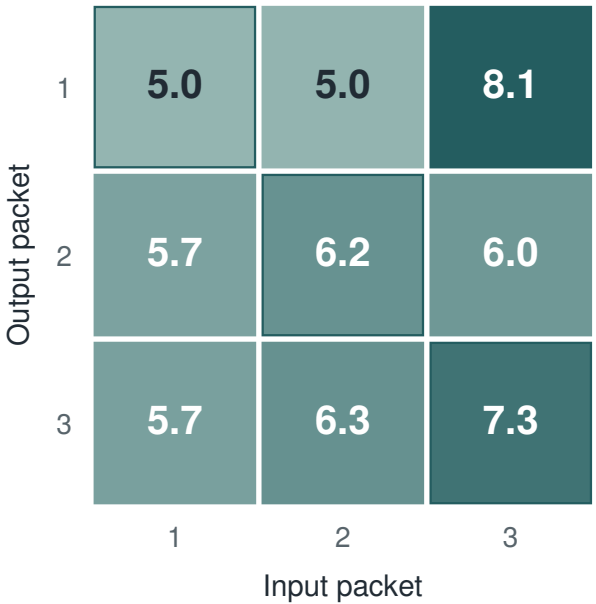

Reading a block

First select input packet j.

Apply the operator A.

Then select output packet i.

Diagonal blocks stay in one packet.

Other blocks transfer between packets.

Packet dimensions: 5, 6 and 7. Values are rounded to one decimal place.