Periodic shift through six residue packets

A finite model on 24 coordinates. Each input packet moves to its successor.

Transfer support

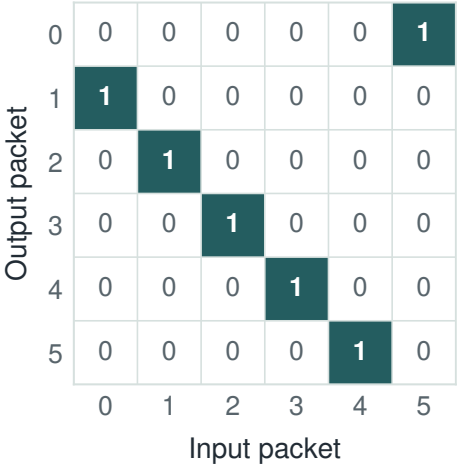

Successor cycle

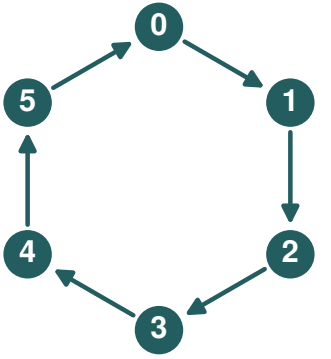

$S_1 P_{6,j} = P_{6,j+1} S_1$, with packet indices modulo 6. A 1 marks a nonzero block.