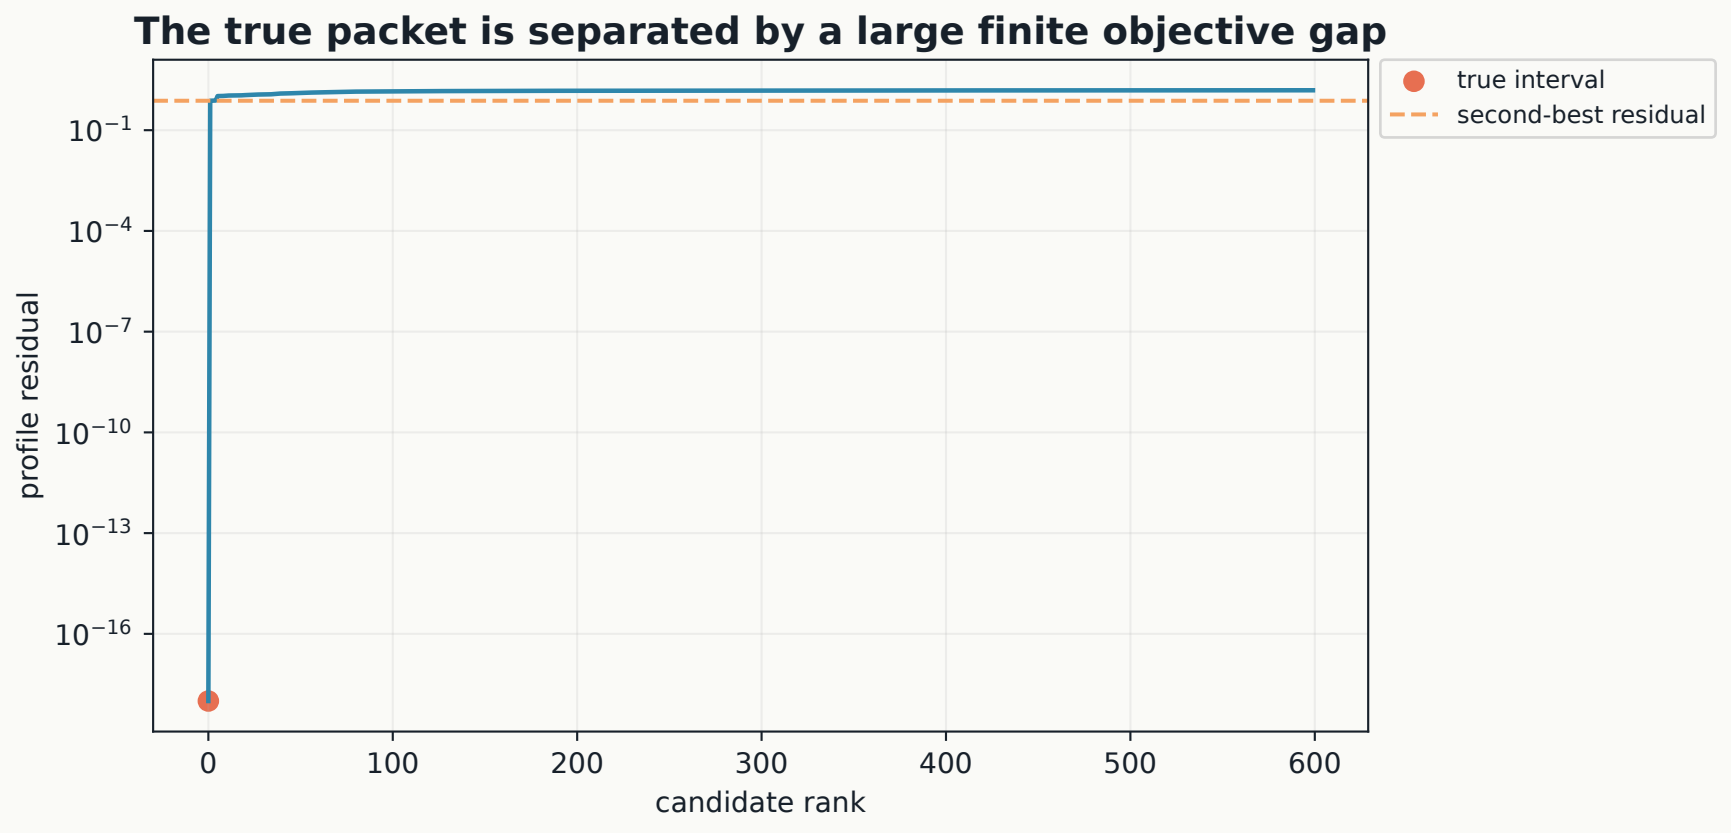
The true packet is separated by a large finite objective gap
profile residual
10^{-1}
10^{-4}
10^{-7}
10^{-10}
10^{-13}
10^{-16}
0
100
200
300
400
500
600
candidate rank
true interval
second-best residual