Residual-driven refinement acts only where the packet geometry is unresolved

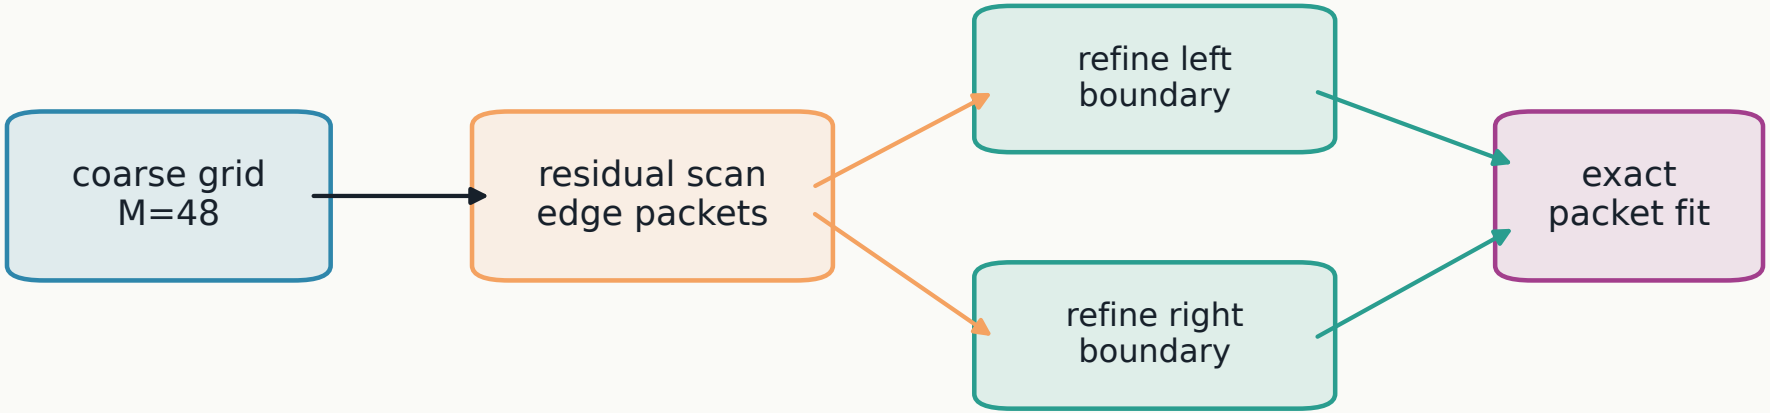

Global spectral resolution is not increased merely to sharpen two local edges.