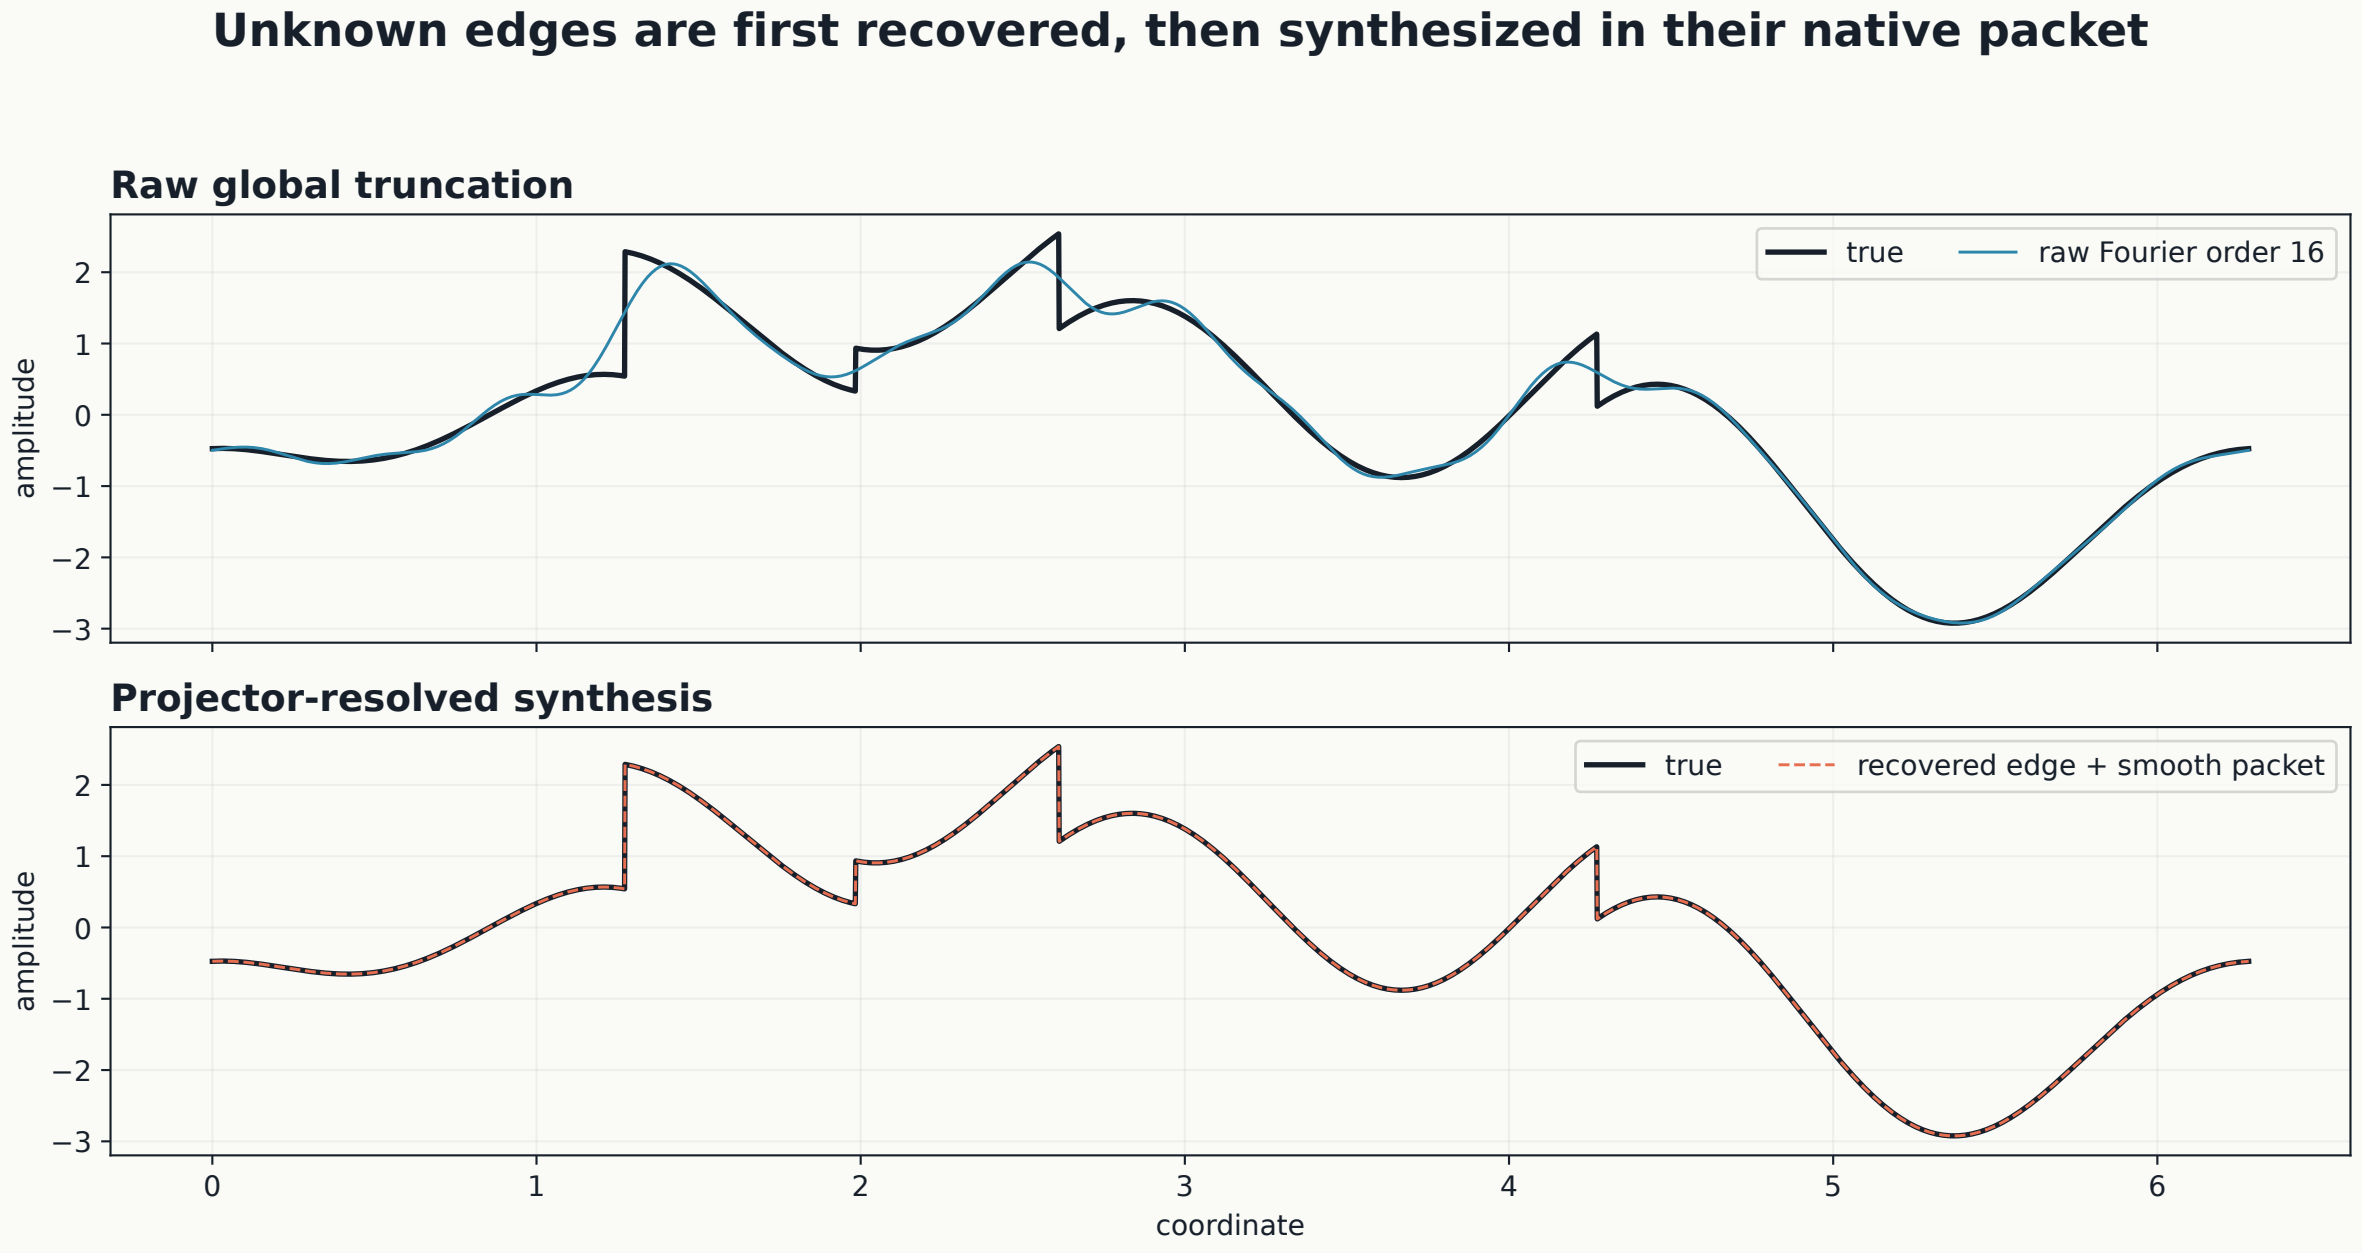
Unknown edges are first recovered, then synthesized in their native packet
Raw global truncation
true
raw Fourier order 16
amplitude
Projector-resolved synthesis
true
recovered edge + smooth packet
amplitude
coordinate