Rotated packets isolate the active residual

Q_+ projects onto (1, 1), Q_- onto (1, −1).

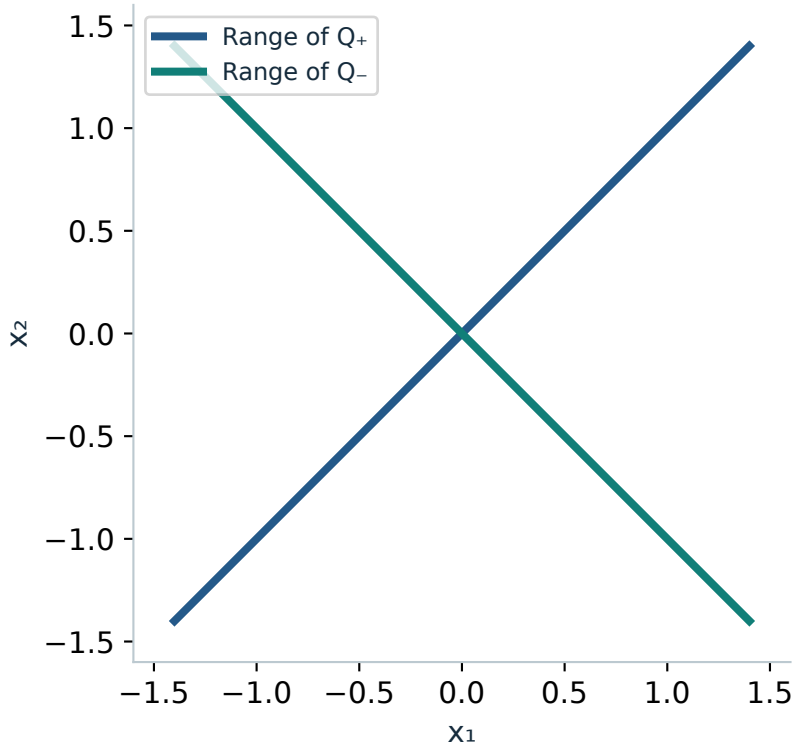

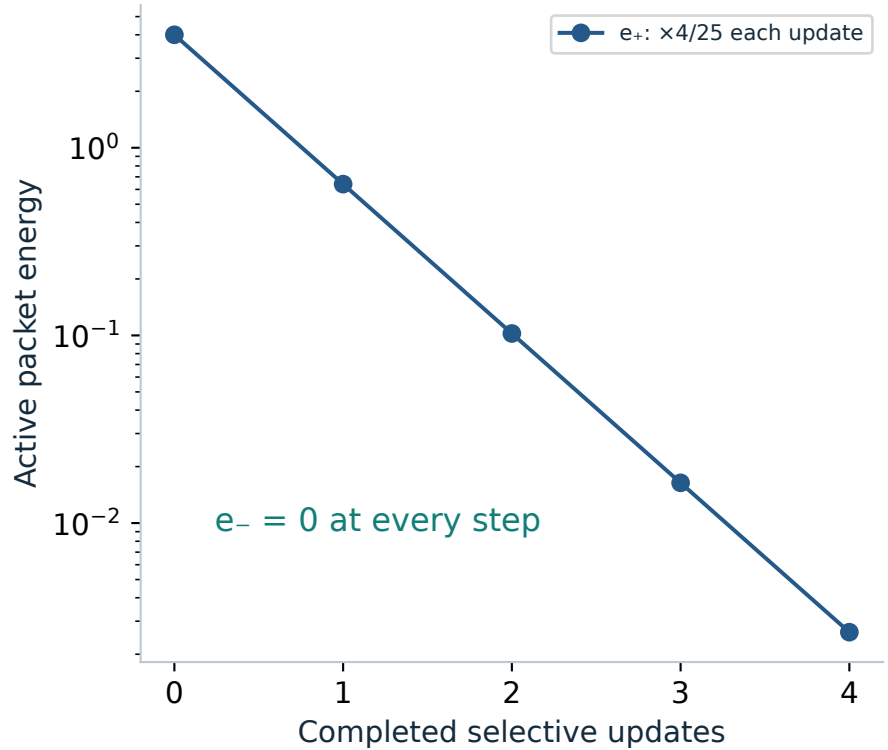

Exact rotated packet geometry and four-update trajectory.