A programmable q-packet execution path

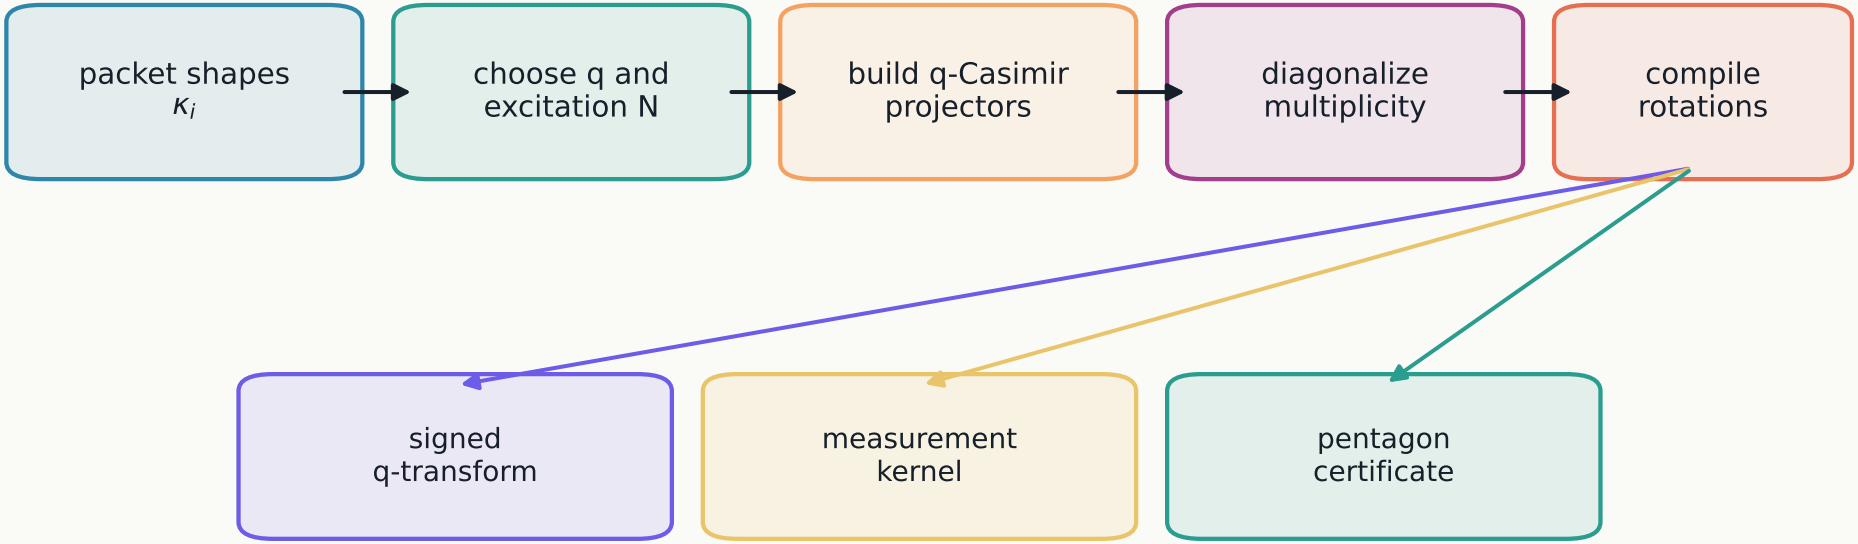

Dense tensor spaces are used only to define the projector. Execution takes place in the smaller multiplicity packet.