Output-sensitive recoupling algorithm

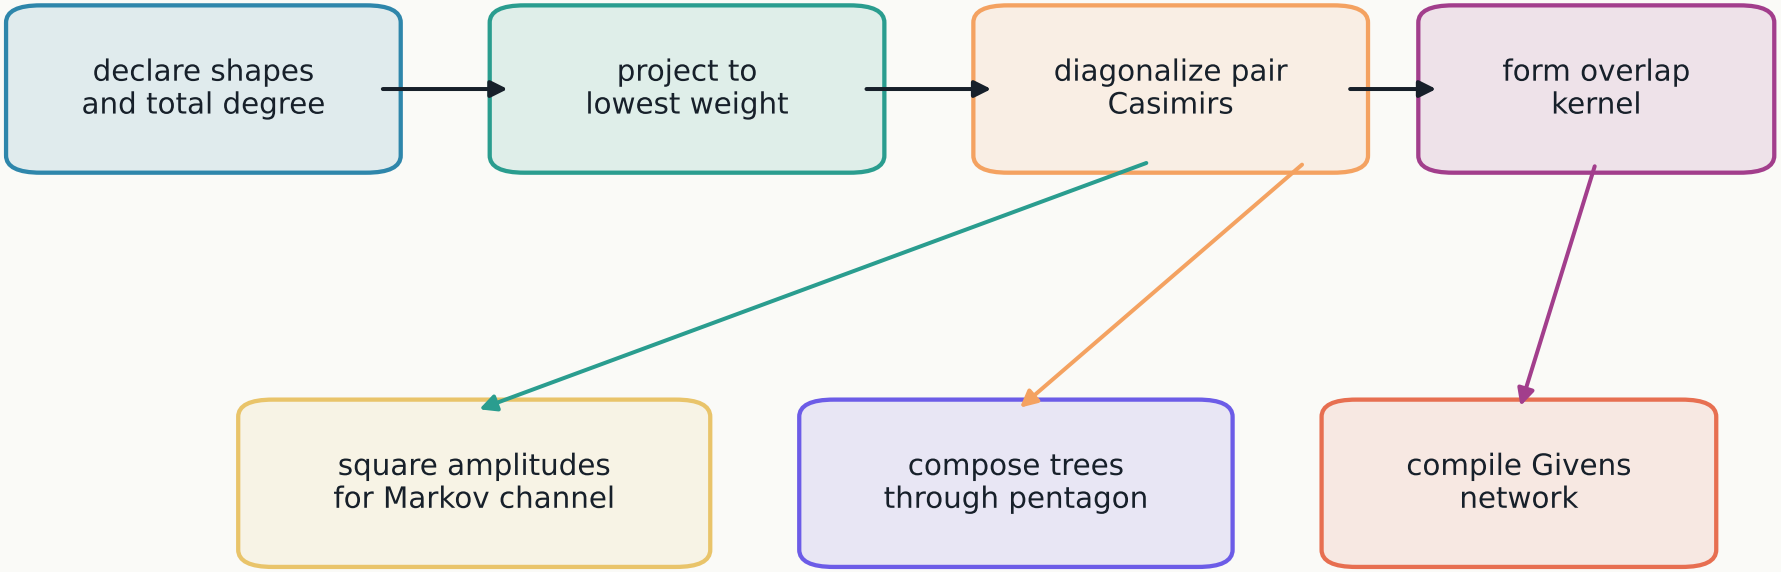

The full tensor level is used only to define the projector. Every later step occurs in the multiplicity packet space.