The fixed-denominator compiler has an exact reachable core

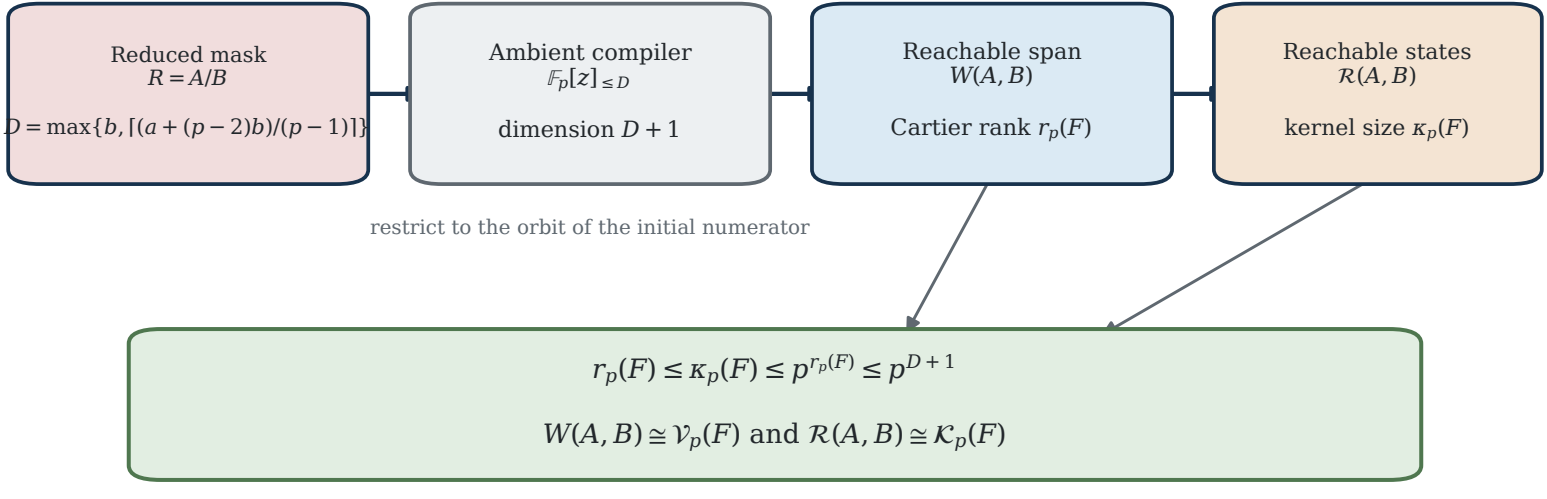

Distinct reachable numerators define distinct formal series, so no additional behavioral quotient survives after reachability restriction.