

# Docker Exercise

## General

In this exercise you are required to create a mini topology of 2 Docker containers.

## Criteria for Success


These are the criteria for success, by importance:

- (1) It works.
- (2) Code is clean.
- (3) Improvement suggestions make sense

## Tasks

### (1) Create “Timeservice” container

The “Timeservice” is a docker image that contains a web server which returns a simple screen with the current time:

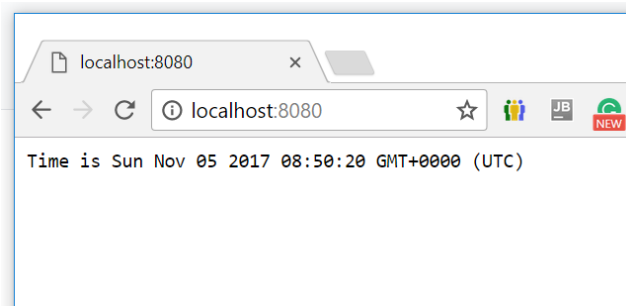

All source files for your container (e.g. dockerfile, scripts, etc.) should be put in folder `~/exam/timerservice`.


There are no limitations on the technology you use inside the docker container: python, node, ruby or whatever – use what makes you efficient.

### (2) Create “Loggerservice” container

We would like to monitor calls to the “Timeservice” using a new container called “loggerservice”.

- Modify “timerservice” so that it logs each time a user accesses it to the “loggerservice” (Note: this is not the web servers’ access.log)

- The “loggerservice” is also a container with a web server. It displays the content of the “timerservice” usage log at url `/usage.log`:

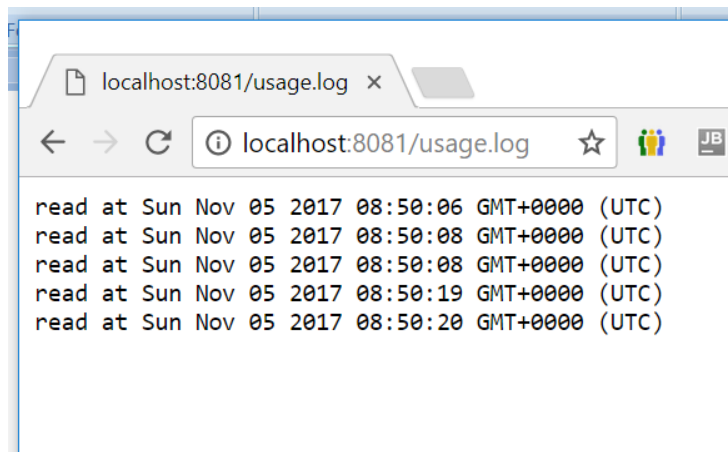

All source files for your container (e.g. dockerfile, scripts, etc.) should be put in folder `~/exam/loggerservice`.

There are no limitations on the technology you use inside the docker container: python, node, ruby or whatever – use what makes you efficient.

### (3) Start Topology with Both

Create a bash file which will start both servers mentioned and connect them:

- Timerservice on port 8080
- Loggerservice on port 8081
- Loggerservice displays the logs of Timerservice

The topology should be started using single “`./start.sh`” command in `~/exam`

### (4) Bonus questions

- Write a script that lists all the layers in your **timerservice** docker image, ordered by their size:

```
0B      /bin/sh -c #(nop)  CMD ["/bin/sh"]
0B      /bin/sh -c #(nop)  CMD ["node" "/src/server.
0B      /bin/sh -c #(nop)  ENV VERSION=v10.7.0 NPM_V...
0B      /bin/sh -c #(nop)  EXPOSE 4000
486B    /bin/sh -c cd /src && npm install
826B    /bin/sh -c #(nop) COPY dir:ad8b10e40ec0ca2ed...
4.2MB   /bin/sh -c #(nop) ADD file:6ee19b92d5cb1bf14...
63.6MB  /bin/sh -c apk add --no-cache curl make gcc ...
```

- (b) What is the most expensive layer? in our example it was the addition of packages related to nodejs:

```
63.6Mb /bin/sh -c apk add --no-cache curl make gcc g++ python linux-headers binutils-gold gnuPG libstdc++ && for server in ipv4.pool.sks-keyservers.net keyse
rver.pgpg.com ha.pool.sks-keyservers.net; do gpg --keyserver $server --recv-keys 94AE36675C464D64BAFA68DD74343908DBE9B9C5 B9AE9905FFD7803F2571466
1B63B535A4C206CA9 77984A986E8C2AA786BC9F66801FBB92821C587A 71DCFD284A79C3B38668286BC97EC7A07EDE3FC1 FD3A5288F042B6850C66B31F09FE44734EB7990E
8FCCA13FEF1D0C2E91008E09770F7A9A5AE15600 C4F0DFF4E8C1A8236409D08E73BC641CC11F4C8 DD8F2338BAE7501E3DD5AC78C273792F7D83545D && break; done &&
curl -sfsLO https://nodejs.org/dist/${VERSION}/node-${VERSION}.tar.xz && curl -sfsL https://nodejs.org/dist/${VERSION}/SHASUMS256.txt.asc | gpg --batch --de
crypt | grep "node-${VERSION}.tar.xz\" | sha256sum -c | grep ': OK$' && tar -xf node-${VERSION}.tar.xz && cd node-${VERSION} && ./configure --prefix
=/usr ${CONFIG_FLAGS} && make -j$(getconf _NPROCESSORS_ONLN) && make install && cd / && if [ -z "$CONFIG_FLAGS" ]; then if [ -n "$NPM_VERSION" ]; th
en npm install -g npm@${NPM_VERSION}; fi; find /usr/lib/node_modules/npm -name test -o -name .bin -type d | xargs rm -rf; if [ -n "$YARN_VERSI
ON" ]; then for server in ipv4.pool.sks-keyservers.net keyserver.pgpg.com ha.pool.sks-keyservers.net; do gpg --keyserver $server --recv-keys
6A010C5166006599AA17F08146C2130DFD2497F5 && break; done && curl -sfsL -O https://yarnpkg.com/${YARN_VERSION}.tar.gz -O https://yarnpkg.com/${YAR
N_VERSION}.tar.gz.asc && gpg --batch --verify ${YARN_VERSION}.tar.gz.asc ${YARN_VERSION}.tar.gz && mkdir /usr/local/share/yarn && tar -xf ${YA
RN_VERSION}.tar.gz -C /usr/local/share/yarn --strip 1 && ln -s /usr/local/share/yarn/bin/yarn /usr/local/bin/ && ln -s /usr/local/share/yarn/bin/yar
npg /usr/local/bin/ && rm ${YARN_VERSION}.tar.gz*; fi; fi && apk del curl make gcc g++ python linux-headers binutils-gold gnuPG ${DEL_PKGS} &&
rm -rf ${RM_DIRS} /node-${VERSION}* /usr/share/man /tmp/* /var/cache/apk/* /root/.npm /root/.node-gyp /root/.gnupg /usr/lib/node_modules/npm/man /usr/li
b/node_modules/npm/doc /usr/lib/node_modules/npm/html /usr/lib/node_modules/npm/scripts
```