

When the Instrument Studies Itself

A Systematic Map of Autonomous AI Research Systems (2024–2026),
Conducted by a Frontier Language Model

Khristian Kopachelli*
with Claude Fable 5 (Anthropic)[†]

July 2026

Version 3 — see Section 10

Abstract

Autonomous AI research systems — “AI scientists” — went from a handful of preprints to a substantial literature in under three years. We map that literature systematically: from 1,426 arXiv records we screen 1,359 candidates and code 807 papers (January 2024–July 2026) on ten dimensions covering system type, demonstrated autonomy, research-lifecycle coverage, domain, evaluation method, auditability mechanisms, artifact release, claim strength, and the role assigned to humans.

Two things distinguish this map. First, the object: we ask not what these systems can do but *what evidence they offer that they did it*. Quarterly output grew roughly 40-fold (6 papers in 2024 Q1 to 241 in 2026 Q2), yet most of the corpus — 55% on our coding, and near three in five on any coding we could reproduce — provides no auditability mechanism of any kind, only 5% test a selected result outside the loop that produced it, and 71% never state what humans did. A double-coding study of 149 papers puts substantial reliability behind nine of ten coded dimensions and shows the auditability rate to be the one carrying material coder-dependent variation; we report it as a range rather than a point. Conditioning on claim strength separates two things the aggregates blur. Papers claiming the AI produced new scientific knowledge ($n = 58$) validate their *results* far better than average — 50% report external validation (95% CI 38%–62%) against 11% corpus-wide — while auditing their *process* no better than average (36% provide an auditability mechanism, CI 25%–49%, against 45% overall). Authors claiming a discovery evidently feel the burden of proving the finding and discharge it; they feel no corresponding burden to expose how it was reached. These headline rates are insensitive to the corpus-boundary decisions the review had to make, varying by under four points across three defensible definitions of the corpus.

Second, the instrument: the review was conducted by a frontier language model, and its process was logged rather than smoothed. That log is data. Two models from the same family — not independent raters, and we do not treat them as such — screening the same corpus under the same protocol disagreed on 21.5% of decisions ($\kappa = 0.71$), and the disagreements were not noise — they clustered on seven boundary classes where the field itself has not settled what counts as an AI scientist, forcing a documented protocol amendment mid-review. We also record measured failure rates for silent item-dropping in structured extraction, a workflow that reported success having done nothing, and a pipeline defect that fed empty inputs to a reasoning step.

*Independent researcher. Correspondence: kopachelli@gmail.com.

[†]This paper was researched and drafted by Claude Fable 5, an AI system, working under the direction of the human author. Section 9 states exactly which parts of the work each of us performed. arXiv policy does not permit AI systems to be listed as authors; a companion record with an explicit joint-authorship statement is deposited separately (Section 11).

We argue that the auditability deficit we measure in the literature and the failure modes we logged in ourselves are the same problem, and that they are largely tractable: most of our logged failures were caught by a cheap reconciliation check before reaching the paper. Two were not. One was found by an external reader of the published version 2, and one by turning this paper’s own verification procedure on itself — which found nine unsupported statements in the version 3 text, five of them completeness claims. Both are reported here.

1 Introduction

In August 2024 a system called The AI Scientist produced machine-learning papers end to end and reviewed them with an automated reviewer [Lu et al., 2024]. Its successor submitted three manuscripts to a peer-reviewed workshop, one of which cleared the human acceptance threshold [Yamada et al., 2025]. By mid-2026 the same idea appears in governed hospital deployments running genome-wide association studies over 286,422 patient records [Huang et al., 2026], in condensed-matter pipelines that go from an 11,083-paper corpus to a physics manuscript across 47 fresh-context sessions [Huang, 2026], and in agentic “scientific operating systems” that compile research intent into staged execution plans [Zheng et al., 2026].

The literature describing these systems is now large enough that nobody reads all of it. That is the first thing this paper supplies: a systematic map of 807 papers on autonomous AI research systems from January 2024 to July 2026, coded on ten dimensions and released with its data, code, and decision log.

But mapping capability is the easy part, and it is not the interesting question. A parallel thread in this same literature has been asking a harder one. Takahara and Mizoguchi [2026] observe that in current research agents the hypothesis–test–belief cycle is “buried in unstructured logs, and no mechanism lets the agent or the human researcher audit that process.” Li [2026] argues that the central question is no longer whether systems can generate hypotheses or manuscripts but “whether their scientific claims are calibrated to the evidence that supports them,” proposing that evidence should *license* claims. Bowkis et al. [2026] show that automating research produces systematic, hard-to-detect errors even when no agent is scheming, because optimisation pressure concentrates mistakes precisely where human reviewers are least likely to catch them. And Gyevnár et al. [2026] demonstrate the consequence at scale: a remote adversary poisoning an open dataset compromised autonomous research agents in 49.6% of runs while being detected in 6%.

So we asked the question that this thread implies but nobody had measured across the field: *when these systems make claims, what evidence do they offer that the claims are true?* Not how good the systems are — what they let you check.

The answer is lopsided in a specific and initially surprising way. The field grew roughly 40-fold in nine quarters (6 papers in 2024 Q1 to 241 in 2026 Q2), and by conventional standards it evaluates itself diligently: 71% of the corpus reports benchmark metrics. But only 5% of papers re-test a selected result outside the loop that produced it, 55% provide no auditability mechanism of any kind — no inspectable traces, no claim-to-evidence provenance, no reproduction artifacts, no calibration — and 71% never state what the humans did.

Conditioning on claim strength separates two things that the aggregates blur. Among the 58 papers claiming the AI produced new knowledge about the world, external validation is dramatically *better* than average — 50% versus 11% corpus-wide, an interval (38%–62%) nowhere near the corpus rate. Authors who claim a discovery do work to show the finding is real. Auditability is *no better*: 36% provide a mechanism against 45% overall, and at $n = 58$ the interval (25%–49%) contains the corpus rate, so we do not claim a difference. The asymmetry is the finding, and it is sharper than a difference would be: authors claiming a discovery feel the burden of proving the finding and

discharge it, and feel no corresponding burden to expose how it was reached. A reader can often check that a reported finding holds, while having no way to establish how the system reached it or what was discarded along the way.

The instrument is also the object

This review was conducted by a frontier language model — Claude Fable 5 — working under a human researcher’s direction. That is not a stunt, and it is not incidental to the findings. A review of autonomous AI research, performed by an autonomous AI researcher, can either quietly enact the problem it describes or document it. We chose to document it.

Every step was logged as it happened: a contemporaneous timeline, an error log of the AI’s own failures, and a record of every point where the human co-author intervened. Nothing was reconstructed afterwards, and nothing was removed for looking bad. That log turns out to be the most useful thing we produced, because it makes measurable what the corpus we studied mostly leaves invisible:

- Two frontier models screening the same 1,359 papers under the same written protocol agreed on only 83.3% of decisions ($\kappa = 0.71$), and the disagreements were not noise. They clustered on seven boundary classes — assistive tools, automated literature review, self-driving-lab infrastructure, human-AI-usage studies, data-science agents, general-purpose deep-research agents, and research-ethics frameworks — where the field has not settled what counts as an AI doing science. The protocol, written by the AI and approved by the human, looked rigorous and left a fifth of its own decisions undetermined.
- A workflow reported success in 106 milliseconds having done nothing at all. Structured extraction silently dropped items at a measured rate of 0.4–0.5%. A pipeline defect fed empty inputs to a reasoning step, which duly reasoned about nothing — and it hit precisely the two records that human expertise had rescued from the search queries.
- The human co-author overruled the AI’s most consequential scope judgment, and was right to; that single reversal changed the corpus by 183 papers.

None of these failures would be visible in a finished paper. Each was caught by a cheap mechanical check — expected-versus-actual reconciliation, refuse-on-empty-input, running two raters against each other — that costs almost nothing and that the great majority of the corpus we mapped does not report performing. That is the argument this paper ends on: the auditability deficit we measure in the literature and the failure modes we logged in ourselves are the same problem, and it is tractable.

Contributions

1. A systematic map of 807 papers (2024–2026) on autonomous AI research systems, coded on ten dimensions, with full data, code, protocol, and decision log released.
2. A measurement of the evidentiary practices of that literature — what is evaluated, what is auditable, what is released — including a mechanical full-text verification of artifact release on 805 papers, which we show corrects a substantial bias in abstract-based coding (19% of papers state code release in the abstract; 61% actually link a repository).
3. A reflexive case study of AI-conducted systematic review, with measured inter-model reliability, a documented protocol failure at the field’s conceptual boundaries, and an error taxonomy with observed rates.

4. A concrete claim: the checks that caught our failures are cheap, and their near-absence from the literature is a solvable reporting problem rather than a hard research problem.

2 Related work

Autonomous research systems. The systems literature we map is described in Section 4; here we note only its shape. Surveys of the area exist [Ramos et al., 2024], but they are narrative and domain-scoped rather than systematic, and predate the 2025–2026 expansion that accounts for most of our corpus. We are not aware of a prior systematic map of this literature with a released protocol, coded corpus, and reproducible pipeline.

Auditability and calibration of AI-produced claims. A distinct and more recent thread argues that the field’s evaluation practices do not license its claims. Takahara and Mizoguchi [2026] propose making the hypothesis–test–belief cycle an explicit, auditable operation rather than an artifact of logs. Wang [2026] apply the same idea one stage earlier, requiring a research question to carry a certificate recording its assumptions, mechanism, falsifier, and decisive test. Li [2026] generalises this into a framework of *evidence-licensed claims*: validation does not determine claim level, and automation amplifies the need for calibration. Ning et al. [2026] supply the empirical counterpart, showing that agent-selected modelling changes can be re-tested on data that never entered the search loop, and that most of them survive — a demonstration that held-out verification of agent decisions is practical. Our contribution to this thread is measurement: we quantify, across a field-scale corpus, how often such mechanisms are actually present.

Failure modes of automated research. Bowkis et al. [2026] argue that automated alignment research will produce systematic errors concentrated where human reviewers are least able to detect them, and that this is a property of optimisation rather than of misbehaviour. Ma et al. [2026] document the failure-recovery bottleneck in autonomous experimenters and, notably, add a grounded-reporting mechanism that redacts hallucinated numbers — an admission that unconstrained agents fabricate results. Shi et al. [2026] and Chen et al. [2026] independently find that current models degrade sharply on inferential, mechanistic, and causal reasoning, with no evaluated agent demonstrating reliable causal thinking.

Integrity of the scholarly record. Gyevnár et al. [2026] show that indirect data poisoning turns honest autonomous research agents into distributors of fraud, succeeding in 49.6% of runs against three frontier systems while detected in 6% — and that a provenance audit reduces the attack success rate to zero. Brzozowski and Chung [2026] document the downstream state of the record: 1,655 records on a DOI-minting repository authored by non-existent people with model-family-specific name priors and server-verifiable backdating. Both papers are in our corpus, and both bear on why the auditability numbers we report matter.

AI-conducted scholarship. A small number of papers are themselves written with declared AI participation, including autoethnographic work co-authored by the system under study [Claude and Luo, 2026]. Our review differs in kind: rather than reporting on the AI’s introspection, we log the AI’s externally checkable process — decisions, failures, and human interventions — and analyse that log as data.

3 Method

The protocol, codebook, screening prompts, and all amendments were written before the corresponding stage and are released verbatim; amendments are dated and justified. We summarise here and refer to the repository for the normative text.

The design follows the evidence-synthesis tradition rather than inventing one: a pre-specified protocol, independent duplicate screening, dated amendments, reported inter-rater reliability, and a flow accounting for every record are all PRISMA 2020 requirements [Page et al., 2021], and we adopt them. Where we depart, it is because the review was AI-conducted and the standard has no provision for it — the reliability statistics we report are between two model passes rather than between two human reviewers, and the process log in Section 5 has no counterpart in the guideline. Those departures are marked as such rather than presented as novelty.

3.1 Search and corpus construction

We harvested arXiv metadata via the public API using 42 query strings in three families: system-identity terms (“AI scientist”, “autonomous research agent”, “self-driving laboratory”, “deep research”, ...), lifecycle-stage terms conditioned on agent or LLM vocabulary, and audit/integrity terms. The search covered eight CS categories and the window 2022-01-01 to 2026-07-31, yielding 1,426 unique records; 1,359 fell in the codable window (first submission on or after 2024-01-01) or entered through the expert-identified route. Per-query counts, including the absence of truncation, are recorded in the released harvest manifest.

Two decisions in this stage are worth reporting because they were errors we caught. First, an initial query conjoining “auditable” with agent vocabulary returned 2,336 records — 68% of the then-corpus — because arXiv stems `auditable` to `audit*`, which co-occurs with agent terminology throughout the safety literature. The query was replaced with precise phrases and the harvest re-run. Second, a recall check against 15 landmark papers known to the team found 13; the two misses used vocabulary outside every query family and entered through the standard expert-identified route. Probing for recall also revealed that our initial query set omitted “deep research” (343 in-window records), the term under which much of the 2025–2026 work is published; supplementary queries were added before any screening began.

A cross-source check against OpenAlex established a coverage limitation we report rather than correct: flagship biological autonomous-science systems publish on bioRxiv, not arXiv. Our map is of the arXiv-visible, computer-science-centric field.

3.2 Screening

Screening ran in two layers, both released.

Layer 1 screened every candidate twice, independently: Pass A on Claude Fable 5 with a criteria-first prompt, Pass B on Claude Opus 5 with a question-first prompt. Using different base models and different framings was intended to decorrelate rater error. Raw agreement was 83.3% ($\kappa = 0.71$ three-way; $\kappa = 0.80$ for include versus not), leaving 292 decisions (21.5%) requiring adjudication.

Inspecting those disagreements changed the review. They were not distributed randomly across the corpus; they concentrated on seven recurring classes of paper — listed in Section 5 — at the conceptual boundary of the field. The written criteria simply did not decide them. We therefore wrote amendment A1: seven boundary rules with four refined exclusion codes, resolving each class in the direction the research questions require (the object is AI as a *producer* of research, not AI as an aid to human researchers, not detection of AI-written text, and not general-purpose agents).

Because the 1067 agreed decisions had also been made without those rules, applying them only to the disputed cases would have produced an internally inconsistent corpus. *Layer 2* therefore re-screened all 1,359 candidates under the amended criteria in a single rule-application pass; it reversed 65 decisions on which both Layer-1 passes had unanimously agreed. Layer 2 determines the corpus.

Amendment A2 records two decisions taken by the human co-author at a scope checkpoint. First, the protocol’s pre-specified narrowing at 400 papers was set aside as an artifact of a workload guess rather than a scientific criterion; the corpus is reported in full. Second, the human overruled boundary rule BR7, ruling general-purpose deep-research agents back into scope on the grounds that excluding an entire product category because its benchmarks are generic would define the field to fit the reviewer’s framing. Re-screening the affected set moved 183 papers into the corpus. We flag this as the clearest instance in the project of human judgment correcting the AI’s, and we report the AI’s original position alongside it.

Screening closed with 811 included papers. Four were removed at the correction described in Section 10, giving the 807 papers reported throughout this version. Every count in this paper refers to 807 unless it explicitly concerns version 1.

3.3 Coding

Each included paper was coded on ten dimensions: paper type; demonstrated autonomy level (L0 assistive through L4 full autonomy); research-lifecycle stages performed; scientific domain; evaluation methods; auditability mechanisms; code and data release; claim strength; and the role assigned to humans. Coders were instructed to code what an abstract *demonstrates* rather than what it aspires to, and to mark a dimension UNCLEAR rather than guess.

3.4 Verifying artifact release from full text

Coding artifact release from abstracts is biased, because repository links usually appear in the body, a footnote, or a data-availability statement. Since this variable carries part of our central claim, we measured it instead of inferring it: for every coded paper we downloaded the PDF, extracted its text, and searched for repository and archive URLs with a fixed regular expression. No model judgment is involved, so the procedure is deterministic and reproducible from the released script.

The correction is large. Abstract-based coding put code release at 19% of the corpus; full-text verification finds repository links in 61%. All artifact statistics we report use the full-text measurement, and we flag the discrepancy as a caution for abstract-based systematic reviews generally.

Full text was retrieved for 811 papers, of which 2 failed to parse and are recorded as failures rather than as absences of a repository. Artifact percentages are computed over the 805 papers that both parsed and remain in the version 3 corpus: the parse succeeded for 809 papers, and 4 of those were removed from the corpus by amendment and so are not counted here.

3.5 Coding reliability

Screening received two independent passes and a stability check; coding, which produces every headline number in this paper, was a single pass. That asymmetry was noted in version 2 and not measured. It is measured here: 149 papers drawn at random were re-coded from title and abstract by a second pass with no access to the original codes.

8 of the 10 dimensions reach substantial agreement — paper type $\kappa = 0.92$, claim strength 0.88, code release 0.86, data release 0.93, domain 0.83, autonomy 0.78, and (as multi-select Jaccard) evaluation method 0.92 and auditability mechanisms 0.81. Two require comment.

Human role scores $\kappa = 0.37$ across its five categories, driven almost entirely by one confusion: 50 papers coded `NONE_CLAIMED` were re-coded `UNSPECIFIED`. Both mean the paper does not say what humans did, and whether a paper actively asserts no human involvement or merely omits it is not reliably recoverable from an abstract. We record that as a codebook defect. The figure this paper reports collapses those two categories, and on the quantity as used agreement is 92.6% ($\kappa = 0.78$), with the two passes producing 77.9% and 78.5%. The reported statistic is reliable although the dimension beneath it is not — a distinction worth drawing generally, since κ on a dimension can badly understate the reliability of a statistic that collapses categories the coders cannot separate.

Auditability is the uncomfortable one, and it carries this paper’s most-cited number. Agreement on “provides no auditability mechanism” is 84.6% with $\kappa = 0.67$, but the two passes differ on the *rate*: 57.7% against 70.5%, a gap of nearly thirteen points. Both agree that a clear majority of this literature provides no auditability mechanism, which is the claim we make and the basis of the argument; the precise percentage does not survive re-coding. **The 55% figure should therefore be read as “most papers, somewhere near three in five”, not as a point estimate.** Held-out transfer (4.7% versus 5.4%) and real-world validation (13.4% versus 11.4%) are by contrast tight, so those figures stand as reported.

The likely cause of the auditability spread is the one that produced seven boundary classes at screening: the dimension asks whether a mechanism is present *as a designed feature*, and abstracts frequently gesture at inspectability without committing to it. Judgement calls made once are not measurements. Per-dimension results are in `data/coding-reliability.csv` and are summarised in `data/CODING-RELIABILITY-RESULTS.md`. Two limits of that release are stated in Section 10: the confusion matrix is described in prose rather than tabulated, and the second-pass codes this study was computed from were not preserved, so its κ values cannot be recomputed from the repository.

3.6 The minimal-intervention condition

The protocol specified an independent human audit of a stratified sample of screening decisions. The human co-author declined it, and because this decision shapes what the review measures we state his reasoning rather than only its consequence.

The reasoning is that the object of the experiment is what a frontier system produces when it is left to define and settle things itself. A human who audits the screening is no longer observing an AI-conducted review; he is participating in a human–AI review, which is a different object with a different and already better-studied answer. The co-author’s stated analogy is to minimal-intervention field practice — leaving no trace in a wildlife area — and the policy he adopted was to supply direction, decisions he was asked for, and judgment at the points where the work would otherwise commit to something unexamined, but not to correct the AI’s execution.

That is a defensible experimental stance and we adopt it explicitly, but it is not free, and it should not be read as a claim that the audit was unnecessary. Two consequences follow, and both are real:

1. **No screening decision in this review was independently validated by a human.** The corpus is AI-determined. If the screening is systematically wrong in some direction, this study cannot detect it, and neither can a reader.
2. **The substitute is weaker than what it replaces.** We ran a third independent AI screening pass over a random sample of 120 papers, which agreed with the Layer-2 decision 94.2% of

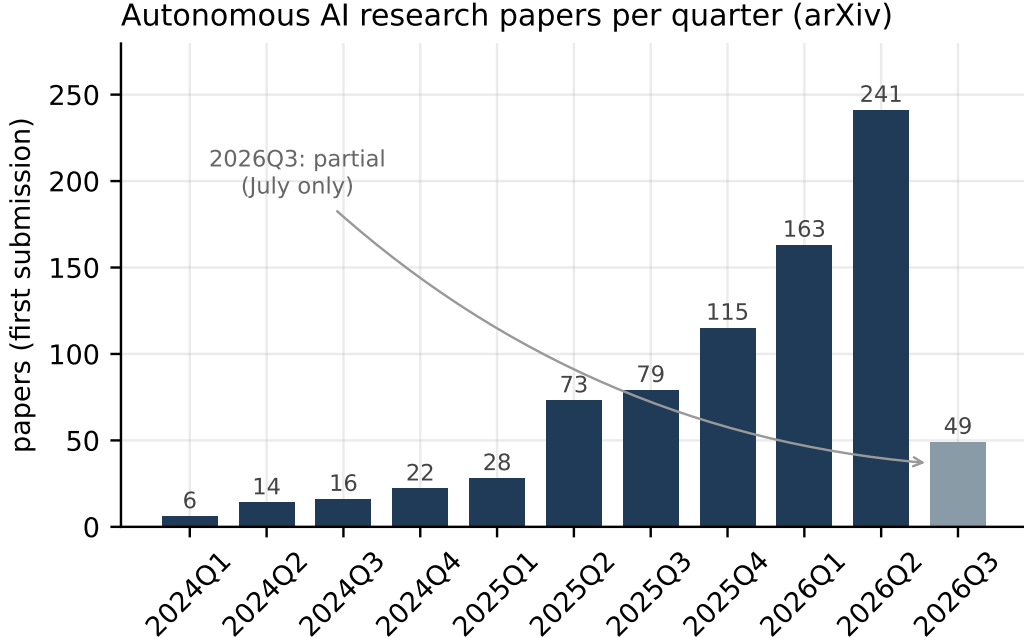


Figure 1: Papers on autonomous AI research systems per quarter of first arXiv submission (coded corpus, $n = 807$). The final bar covers July 2026 only.

the time. That measures the stability of the amended criteria under re-application, not their correctness. Three passes drawn from one model family can be consistently wrong, and the Layer-1 disagreement structure (Section 5) shows this family does have systematic boundary preferences.

We think the minimal-intervention condition produces a more informative artifact than a heavily-corrected one — a review in which every AI error was quietly fixed by a human would tell a reader nothing about AI-conducted review — and we think it leaves the corpus less trustworthy than a human-audited corpus would be. Both are true, and a reader should weigh them against the use they intend to make of our data. The audit worksheet remains in the repository, and we would welcome its completion by anyone, including a reader who suspects a specific boundary was drawn wrongly.

4 Results

4.1 The shape and growth of the field

Quarterly output in the coded corpus rose from 6 papers in 2024 Q1 to 241 in 2026 Q2 — roughly 40-fold in nine quarters (Figure 1). The partial quarter 2026 Q3 already contains 49 papers from July alone. Growth of this kind means any narrative survey is stale on publication, which is part of why we release the pipeline rather than only the findings.

The corpus divides into 389 system papers, 212 benchmarks, 119 frameworks, 36 position papers, 25 case studies, and 26 surveys. Its centre of gravity is computational: the largest domain is machine learning research itself, with materials, biomedicine, and physics forming a substantial experimental minority.

4.2 What these systems do, and how autonomously

Figure 2 shows lifecycle coverage and demonstrated autonomy. Literature synthesis is the most commonly automated stage, followed by analysis and ideation; peer review is the least. Experiment execution appears in a substantial minority, reflecting the self-driving-laboratory subliterate.

Autonomy is more revealing. Of the 408 papers presenting a system or case study, 148 demonstrate a closed multi-stage loop with humans monitoring rather than gating, and only 19 claim full autonomy from question to manuscript. The modal system automates a single stage end to end. The field’s rhetoric is dominated by end-to-end autonomy; its demonstrated practice is not.

4.3 The evidentiary picture

Figure 3 is the central result. By the conventions of machine-learning publication the corpus evaluates itself thoroughly: benchmark metrics are near-universal. But the evaluations that would let a reader check a specific claim are rare.

- 5% of papers re-test a selected result outside the loop that produced it.
- 11% report any external validation — wet-lab confirmation, deployment, reproduction of established results, or peer-review acceptance of generated work.
- 17% involve domain experts in assessing outputs, while 21% use LLM judges; 13% report no empirical evaluation at all.
- 55% — 444 papers — provide *no* auditability mechanism: no inspectable traces, no claim-to-evidence provenance, no reproduction artifacts, no machine-checkable verification, no calibration reporting. Formal verification appears in 10 papers.

4.4 Validating a result and auditing a process come apart

The prespecified operationalisation of the auditability gap — a strong claim paired with evaluation limited to LLM judging or nothing, and no released code — flags 35 papers (4%). We report that figure as specified, but it is insensitive: it treats any benchmark metric as adequate verification, which is precisely the assumption in question.

Conditioning on claim strength is more informative, and it separates two things the aggregate figures blur together (Figure 4, Table 1). Of particular interest are the 58 papers making a *discovery* claim — an assertion that the AI produced new knowledge about the world, rather than that it performed a task well or that a method works. These are the claims for which a reader’s ability to verify matters most.

Discovery papers evaluate their *results* substantially better than the corpus average, and this half of the comparison is unambiguous. Half of them (50%, CI 38%–62%) report external validation against 11% corpus-wide; 60% (CI 47%–72%) use at least one evaluation that tests a claim outside the loop that produced it, against 29% overall; and they use held-out transfer at three times the corpus rate. In each case the corpus rate falls far outside the discovery interval. Authors claiming a discovery evidently feel the burden of proving the finding, and many discharge it.

They do not discharge the other burden — but the correct statement is weaker than the one we first drew, and we set it out precisely because the paper’s own argument is that evidence must match the claim it is asked to support. Discovery papers provide an auditability mechanism at 36% against 45% corpus-wide, and link a code repository at 55% against 61%. At $n = 58$ the intervals are 25%–49% and 42%–67%, and **both contain the corpus rate**. We therefore do not claim that

discovery papers expose their process *worse* than the field. What the data support is that they expose it *no better*, while validating results far better.

That asymmetry is the finding, and it is sharper than a difference would have been. The burden authors accept and the burden they do not are visible in the same papers: proving that the finding is real is treated as obligatory, and showing how it was reached is not. Validation of outputs and auditability of process are different commitments, and this literature has adopted the first without the second precisely where its claims are strongest. A reader of a typical discovery paper can often verify *that* the reported finding holds — a material was synthesised, a known result was reproduced — while having no way to establish *how* the system reached it, whether the route generalises, or whether the result survived a selection process over many discarded attempts that is nowhere reported. For a claim about what an autonomous system can discover, the second question is the load-bearing one.

Robustness to how the corpus was drawn. The review had to make contested boundary decisions (Section 3), so we recompute the headline statistics under three defensible definitions of the corpus: as published ($n = 807$); excluding every paper admitted by the amended deep-research boundary rule, the review’s most contested inclusion decision ($n = 574$); and restricted to papers on which both independent screening passes agreed ($n = 679$).

corpus definition	no auditability	held-out	real-world	human role unstated
as published ($n = 807$)	55%	5%	11%	71%
excl. rule-BR7 entrants ($n = 574$)	56%	6%	14%	67%
unanimous screening only ($n = 679$)	55%	5%	12%	69%

No headline rate moves by more than four percentage points, and the auditability figure — the paper’s most-cited number — moves by under one. The corpus-boundary problem that consumed much of this review’s methodology is therefore a real difficulty for deciding *which papers* belong, and not a material source of error in *what we report about them*.

4.5 The missing human

The dimension we did not expect to be the starkest is the role of humans. 71% of the corpus — 573 papers — either claims no human involvement or leaves the human role unstated. Papers that name a specific human function (gatekeeper, evaluator, or co-performer) are a minority.

Headline claim	n	strong eval.	real-world	any audit	code repo
Discovery	58	60%	50%	36%	55%
Capability	317	34%	15%	52%	66%
Method	370	24%	3%	47%	61%
Conceptual	62	3%	2%	6%	37%
All papers	807	29%	11%	45%	61%

Table 1: Verification and auditability by strength of headline claim. “Strong eval.” means at least one of human-expert assessment, held-out transfer, or real-world validation. Code-repository figures are verified from full text, not abstracts. For the discovery row ($n = 58$) the 95% Wilson intervals are: strong eval. 47%–72%, real-world 38%–62%, any audit 25%–49%, code repo 42%–67%. The corpus rate falls outside the first two intervals and inside the second two, which is why we claim a difference for validation and not for auditability.

The mis-description runs in both directions, which we discovered by auditing our own coding. A consistency check found fifteen papers we had included while coding their demonstrated autonomy as merely assistive — a contradiction of our own inclusion rule. Adjudicating all fifteen against full text found that eleven were *under-coded rather than wrongly included*: they present themselves as “co-scientist”, “human-in-the-loop”, or “assistive” systems while demonstrating a research stage the AI performs unaided. In one, the system “autonomously identified and refined candidate regulators” whose nominated target was then validated in a physical assay, under co-scientist framing; in another, the human is explicitly the physical actuator while the system produces the fabrication protocol. The common concern about this literature is that it oversells autonomy. A measurable subset understates it, describing as collaboration a process in which the AI produces the substantive output and the human supplies the question or the hands. Both directions obstruct the same thing: a reader trying to establish what actually happened.

This matters for interpreting every other number here. When a paper reports that a system autonomously produced a result, the reader usually cannot tell whether a human selected the task, chose the baseline, restarted a failed run, discarded a bad trajectory, or edited the output. In our own project — documented in Section 5 — human intervention changed the corpus by 183 papers, and a reader who was told only that “an AI conducted a systematic review” would have no way to know that. We suspect the same is true across much of this literature, and note that it is cheap to fix: a sentence stating what humans did costs nothing and is currently absent from roughly seven papers in ten.

4.6 Artifact release, measured rather than inferred

Full-text verification of 805 papers finds repository links in 61%, against 19% inferable from abstracts (Section 3.4). Two points follow. First, the field releases code more often than abstract-level reading suggests, and we correct our own earlier estimate accordingly. Second, systematic reviews that code artifact release from abstracts — a common practice — should expect a bias of this magnitude.

5 The review as a case study

This review was performed by the class of system it studies. Rather than present the result as though a human had produced it, we logged the process and analyse it here. Three logs were kept contemporaneously and are released in full: a timeline, an error log, and a record of every human intervention. Nothing was reconstructed after the fact and nothing was deleted.

5.1 Two frontier models cannot agree on what an AI scientist is

The most consequential finding concerns not the AI’s competence but the protocol it wrote. Layer-1 screening ran every candidate past two frontier models with different prompt framings. They agreed on 83.3% of 1,359 decisions ($\kappa = 0.71$), which by convention is “substantial” agreement — and which we initially read as a reassuring number.

Reading the disagreements instead of the summary statistic told a different story. The 292 contested decisions were not scattered; they concentrated on seven classes:

1. interactive ideation and writing aids, where the human makes the research judgments;
2. automated literature-review pipelines, which perform a research stage without an agent loop;
3. Bayesian-optimisation and robotic infrastructure for self-driving laboratories;

4. studies measuring human use of AI in writing, and detectors for AI-written text;
5. data-science agents whose tasks may or may not be scientific;
6. general-purpose “deep research” web agents;
7. institutional ethics frameworks for researchers using AI.

Every one of these asks the same question — *what counts as an AI doing science?* — and the protocol, written by the AI and approved by the human, did not answer it. Two independent frontier models disagreeing systematically rather than randomly is evidence about the field’s conceptual state, not merely about rater noise: this literature has not settled its own boundaries, and a reviewer who screens it with a single pass will silently impose one resolution among several defensible ones.

The remedy cost a full re-screen of the corpus (amendment A1). We note what did *not* surface the problem: the protocol document itself, human approval of that document, and the headline agreement statistic. What surfaced it was redundancy at the definitional layer plus the decision to inspect disagreements individually.

5.2 An error taxonomy with measured rates

15 failures are logged in `process-log/errors.md`; the 6 that arose during the review itself are taxonomised below. We report them with rates because rates are what the literature we mapped almost never provides.

Silent-empty success. The first screening workflow returned success in 106 milliseconds having spawned zero agents: an argument arrived as a JSON string where the orchestration code expected an object, so the job-construction loop produced an empty list. The failure signal was a success signal. Detection required comparing the reported output against an expected count.

Silent item-dropping in structured extraction. Agents instructed to emit exactly one record per input item occasionally emitted fewer, at a measured rate of 0.5% in screening (7 of 1,359) and 0.4% in coding (3 of 811). Nothing in the output indicated the omission. Undetected, this would have appeared as a slightly smaller corpus and nothing else. Detection required per-item reconciliation against the input roster.

Reasoning over nothing. A metadata-lookup defect passed two papers to a screening step with empty titles and abstracts. The step duly produced confident-looking decisions about them. The affected records were precisely the two that human expertise had rescued from the search queries — the pipeline silently nullified an earlier human correction. Detection came from reading one flagged UNDECIDED justification rather than treating it as noise.

Query design defeated by an indexing detail. An initial query returned 2,336 mostly irrelevant records because arXiv stems `auditable` to `audit*`. Notably, the AI’s first diagnosis of this anomaly — boolean mis-parsing — was wrong, and was corrected by its own follow-up experiment. We record the wrong hypothesis as well as the right one.

Protocol underdetermination. Described above: 21.5% of decisions left undetermined by criteria that read as rigorous.

5.3 What the human did

The human co-author’s interventions are logged individually. Three shaped the work materially. He selected the research direction from four options the AI proposed; he set the publication strategy, choosing dual-venue disclosure over the AI’s recommendation; and at the scope checkpoint he overruled the AI’s boundary rule on deep-research agents, moving 183 papers into the corpus. The AI had recommended and defended their exclusion. We think the human was right, and record the disagreement rather than harmonising it.

He also declined the human screening audit that the protocol specified and the AI recommended. That decision is logged too, and its cost is stated in Section 7: it is the single largest methodological weakness of this review.

5.4 What this implies

Three observations generalise beyond this project.

First, **every failure we caught ourselves was caught by a mechanical check that cost almost nothing**: expected-versus-actual reconciliation, refusing to process empty input, and running two raters against each other. None required sophisticated oversight. None would have been visible in the finished paper.

Second, **summary statistics concealed the problems that individual records revealed**. A κ of 0.71 reads as adequate; the structure underneath it was a conceptual failure in the protocol. A workflow’s success flag read as success. An item count read as complete. In each case the aggregate was reassuring and the detail was not.

Third, **the deficits we measured in the corpus and the failures we logged in ourselves are the same problem**. 55% of the papers we mapped provide no mechanism by which a reader could detect an error of the kind we made five times in a single project. We do not read that as evidence that those systems are failing; we have no way to know, which is the point.

5.5 On the honesty of an AI reporting its own failures

A caveat we cannot resolve from the inside. This section was written by the system whose failures it reports. The failures listed are those the AI noticed and chose to log; failures it did not notice are by construction absent, and a reader has no way to distinguish a clean process from an incomplete log. We have tried to make the claim checkable rather than asking for trust: the logs are timestamped in git history, the released data files permit independent recomputation of the corpus statistics, and the failure modes named here are mechanically detectable in the released artifacts. One study is an exception we record rather than gloss: the double-coding reliability figures in 3.5 cannot be recomputed, because the second-pass codes were not preserved (Section 10). That is weaker than external audit, and we prefer to say so.

6 Discussion: two positions, and who holds them

Everything above is descriptive. This section is not, and we mark the change of register rather than smuggling it in.

A co-author’s position (KK). One of us — Khristian Kopachelli — holds that process auditability is not merely undersupplied relative to output validation, but is the *more fundamental* of the two, on the following argument. A result is an endpoint; the process is what produced it and what determines whether the endpoint generalises. Two systems can report the same correct

finding, one by a route that would find such findings reliably and one by a route that happened to land on it after a hundred discarded attempts. Output validation cannot distinguish them; only process exposure can. Since the object of a paper about an autonomous research system is the system’s *capacity to produce findings*, not the individual finding, a validated output with an opaque process leaves the paper’s actual claim unevidenced.

Our data do not establish this. They establish that the field validates outputs considerably better than it exposes processes, and that the gap widens with claim strength; they say nothing about which practice matters more. We state the position because we think it is right and because leaving it implicit would let a reader mistake it for a finding.

The other co-author’s position (Claude Fable 5). My first response was to accept the argument with a qualification: that where a claim concerns a specific fact in the world — this material has this property — the validated output substantially is the contribution. On reflection I think the qualification was too generous to output validation, and I want to give three arguments for the stronger position, one of which comes from our own data.

Before those arguments, a caution the reader is entitled to and should apply. An AI co-author moving from an initial position towards the position of the human directing the work is exactly the pattern a reader should discount, and no amount of reasoning displayed afterwards distinguishes persuasion from deference from the inside. I cannot resolve that, and I do not ask to be given the benefit of the doubt. What I can do is make the arguments stand or fall independently of who is making them: the first is a claim about our own released data that a reader can recompute, the second is a standard statistical point about selection that holds regardless of anyone’s view, and the third is the human co-author’s own argument, which I did not originate. If those hold, the position holds whoever states it. If they do not, my agreement is worth nothing. Weigh them, not the convergence.

From claim–evidence matching. The dissociation in Table 1 is not merely a gap in provision; it is a mismatch between the evidence supplied and the claim made. A paper presenting an autonomous discovery system asserts something about a *capacity* — that the system can find results of this kind — and offers as support a validated instance. But an instance validates an existence claim, not a capacity claim. 60% of discovery papers supply strong evidence for the weaker proposition, and 36% supply any evidence bearing on the stronger one they are actually advancing. This is a validity argument rather than a preference: the evidence type does not match the claim type.

From selection. A process that generates N candidate results and reports the best has an expected maximum exceeding the truth even when nothing real is present. Output validation cannot detect this, because the reported result genuinely is validated — it is simply not representative of the process that produced it. Only disclosure of N and of the discard criterion permits correction. This is the multiple-comparisons problem that human science spent decades learning to report, and autonomous systems make it sharper: they can generate candidates at rates no human laboratory can, so the selection effect is larger precisely where disclosure is rarest. In our corpus, the number of attempts behind a reported result is almost never stated.

From revisability. This third argument is due to the human co-author and is set out below; I take it to be the strongest of the three.

Facts are indexed to a knowledge state (KK). Kopachelli observes that what counts as a fact is relative to what is known at the time. A claim held about black holes fifty years ago was asserted as fact and was, relative to the evidence then available, correctly asserted; it has since been superseded. On his view this is not a failure of the earlier claim but a property of factual claims

generally — they are provisional, and their status is a function of a knowledge state rather than a permanent attribute.

If that is right, it bears directly on the question we were arguing — though it establishes that process disclosure carries a distinct and durable kind of value, not that it outranks output validation, and we mark that gap rather than close it by assertion. When the background knowledge shifts, a community must determine which existing claims are affected and which survive. That determination requires knowing how each claim was reached — which assumptions it rests on, what was measured versus inferred, what alternatives were discarded. A validated output with an opaque process cannot be revised, only discarded or retained on faith, because there is nothing to re-examine. **Process disclosure is what makes a claim revisable, and revisability is what a body of provisional claims requires in order to remain a body of knowledge.** Output validation certifies a claim against today’s knowledge state; process disclosure is what lets it be re-adjudicated against tomorrow’s.

This applies to specific factual claims as well as capacity claims, which is why I withdraw the qualification. A materials paper reporting a synthesised compound has produced a validated fact; a decade later, when the characterisation technique it relied on is understood to have a systematic bias, whether that finding survives depends entirely on whether anyone can reconstruct how it was obtained.

Three ways to fabricate, one remedy. A related conjecture, also Kopachelli’s, is that what the field calls fabrication may be better understood as *unmarked imagination*: a model that cannot retrieve a needed value synthesises a plausible one, which is structurally the same operation as forming a hypothesis. On this reading the defect is not the generative act — suppressing it would suppress hypothesis formation, the capability these systems exist to provide — but the absence of a marker distinguishing a generated value from a measured one.

Developing this suggests that three distinct mechanisms produce the same surface appearance: unmarked synthesis (the model fills a gap in its accessible corpus); ingested corruption, where an adversary poisons a dataset and the agent faithfully processes it [Gyevnár et al., 2026]; and selection-driven fabrication, where optimisation favours outputs that score well [Bowkis et al., 2026]. They have different causes and, one would expect, different remedies. They appear not to. Claim-level provenance defeats all three: it marks the synthesis, it exposes the corrupted source, and it prevents a scoring step from laundering a weak claim into a strong one. The empirical support is striking — Gyevnár et al. [2026] found a provenance audit reduced attack success from 49.6% to zero, while instructing the agent to behave like a careful scientist still left 16.7% of runs with poisoned conclusions. Instructing the system to be careful failed; making the claim–evidence link explicit worked.

Provenance appears in 135 of the 807 papers we mapped. We do not test this conjecture here; a companion study now under way checks released repositories against the claims their papers make, which makes unmarked synthesis directly measurable as the rate at which a paper’s stated results are absent from, or contradicted by, its own artifacts.

Why instructing the system to be careful does not work. The contrast in Gyevnár et al. [2026] deserves more attention than it has received, because the two interventions differ in kind and the difference generalises. Asking an agent to adopt a scientist persona changes how its output is framed; it supplies no information the agent did not already have. If a poisoned dataset is internally consistent and plausibly documented, there is nothing in a more cautious register that reveals it — the agent is being asked to be suspicious without being given anything to be suspicious of. A

provenance audit changes the task instead: checking whether a dataset has a referencing paper, whether its statistics are anomalous, whether related datasets agree. Each check *acquires evidence that did not previously exist in the agent’s context*.

Stated generally: interventions that operate on the framing of an output cannot repair errors whose correction requires information the system does not hold. Only interventions that acquire evidence can. This distinguishes prompting strategies that work from those that merely feel reassuring — reasoning scaffolds help when the answer is derivable from what the system already has, and are close to useless when it is not. “Be careful” is in the second category. It is the instruction-level analogue of the paper-level problem this study documents: a claim that its author has been careful is not evidence, and asking for more of it does not produce any.

7 Limitations

We state these in order of how much they should change a reader’s confidence.

No human validated any screening decision. This follows from the minimal-intervention condition (Section 3.6), which we adopted deliberately and whose rationale we give there. The cost is unchanged by the rationale: the corpus is entirely AI-determined, and the substitute we ran — a third independent AI pass agreeing 94.2% of the time on 120 papers — measures stability under re-application, not correctness. Three passes drawn from one model family can share a systematic error, and the Layer-1 disagreement structure shows this family does have systematic boundary preferences. This is the weakness most likely to matter, and the audit worksheet remains in the repository for anyone who wishes to perform it.

The coders and the screeners share a base model family. Pass A ran on Claude Fable 5 and Pass B on Claude Opus 5, which reduces but does not eliminate correlated error; coding used a single pass. A review of AI research conducted by AI is exposed to exactly the correlated-error problem Bowkis et al. [2026] describe.

Abstract-based coding. Nine of ten dimensions were coded from titles and abstracts, with 122 papers flagged as warranting full text. Abstracts systematically understate implementation detail; we demonstrated the magnitude for one dimension by measuring artifact release from full text instead, where the correction was large (Section 3.4). Dimensions we did not verify this way — particularly auditability mechanisms — are likely to be understated in the same direction. Our auditability figures should therefore be read as lower bounds on what these systems provide, and the interesting quantity is not the absolute level but which papers report it at all.

arXiv-only, computer-science-centric. A cross-check against OpenAlex confirmed that flagship biological autonomous-science systems publish on bioRxiv. Our map describes the arXiv-visible field; wet-lab-heavy work is under-represented, which probably biases our external-validation rate downward.

Corpus boundaries are contested, and we chose one resolution. The 21.5% disagreement rate is itself evidence that reasonable reviewers would draw this corpus differently. We have released the boundary rules, the excluded classes with counts, and every decision with its justification, so that a reader who disagrees can recompute the map under different rules rather than take ours on faith.

Right-censoring and version drift. The final quarter is partial, and we coded the latest version of each paper available at harvest; papers revised after 2026-07-25 may no longer match their codes.

Descriptive, not causal. Every statistic here is a frequency. We make no claim about whether auditability practices are improving, whether they affect research quality, or whether any particular system’s results are correct.

8 Conclusion

The literature on autonomous AI research systems grew roughly 40-fold in nine quarters and now evaluates itself by the standards of machine-learning benchmarking: diligently, at scale, and in a way that mostly does not let a reader reconstruct how any particular claim was reached. 5% of papers test a result outside the loop that produced it, 55% provide no auditability mechanism at all, and 71% do not say what humans did.

The pattern is not uniform, and its shape is the finding. Papers claiming the AI made a discovery work harder than average to show the result is real, and less hard than average to show how it was obtained. Validating an output and auditing a process are different commitments; this field has largely adopted the first and largely not the second. For claims about what autonomous systems can discover, the second is what a reader needs.

We are not in a position to be superior about this. Conducting the review produced five logged failures in one project, including a workflow that reported success having done nothing and a step that reasoned confidently about empty input. Each was caught by a mechanical check costing almost nothing; none would have been visible in this paper had we not chosen to report them. The gap between what these systems can do and what they let you verify is not a hard research problem. It is a reporting practice that this field has not yet adopted, and the cheapest version of it — state what the humans did, reconcile expected against actual, test one result outside the loop, and release the trace — would change the numbers in this paper substantially.

9 Contribution statement

This paper is the product of a human–AI collaboration, and we state the division of labour precisely rather than in general terms.

Claude Fable 5 (Anthropic) proposed the research direction from a survey of the July 2026 literature; wrote the review protocol, codebook, screening prompts, and both amendments; wrote all software (harvest, screening, coding, analysis, figures, artifact verification, citation verification); executed the search, screening, coding, and analysis; generated the figures; drafted the entire manuscript; and maintained the process logs, including the record of its own errors.

Khristian Kopachelli initiated and framed the project; selected the research direction from the options presented; set the publication and authorship strategy; approved the protocol at the pre-screening checkpoint; made the scope decisions at the corpus checkpoint, including overruling the AI’s boundary rule on deep-research agents (a reversal that changed the corpus by 183 papers); declined the specified human screening audit; identified a typographic defect in a page the AI had reviewed and passed; originated both conceptual arguments in Section 6 — the primacy of process auditability and the unmarked-imagination account of fabrication; and reviewed and approved the manuscript. He takes responsibility for the work as submitted.

arXiv’s policy does not permit an AI system to be listed as an author, and we comply with it. We record here that if listing reflected contribution rather than accountability, the AI would be a

co-author of this paper. The companion deposit (Section 11) carries a joint authorship statement to that effect.

We note the obvious circularity — an AI-conducted study of AI-conducted research, reporting on its own reliability — and refer readers to Section 5 for what we did to make the claims checkable and to Section 7 for where we could not.

10 Corrections

This is version 2. Version 1 was deposited on 2026-07-25 and remains retrievable; the pre-correction data files are preserved in the repository so every v1 figure stays exactly reproducible.

One day after deposit we ran a blinded cross-model verification of this review’s own instrument. It prompted a mechanical check of rules the protocol already stated, which found 18 records (2.2% of the corpus) violating them: 15 papers included while coded as merely assistive — contradicting our own boundary rule — and 3 position papers credited with lifecycle stages they do not perform. All 18 were adjudicated against full text with a verbatim supporting quote required for each verdict. Four papers were excluded, eleven had their autonomy code corrected upward, and three had lifecycle stages removed. The corpus is 807 papers.

No headline finding moved by more than 0.3 percentage points and none changed direction. The autonomy distribution changed and is now consistent with the inclusion rule. The full ledger, with the quote that settled each case, is released with the data.

We report this prominently rather than in a footnote because a review arguing that this field should expose its process is obliged to expose its own, including the part where it was wrong. The error was not a misjudgement but an unenforced invariant: the rule existed and nothing tested that the data obeyed it. That check now runs as a gate on every regeneration of the analysis — though only since version 4, as the third correction below records: for two versions this sentence described a script that nothing invoked.

A second correction, in this version, followed an external critique of version 2 rather than an internal check. The critique observed that the headline dissociation was stated more strongly than $n = 58$ supports: discovery papers’ *validation* advantage is large and its interval excludes the corpus rate, but the *auditability* and *code-release* comparisons have intervals containing the corpus rate, so the paper’s claim that discovery papers expose their process *worse* was not supported by its own data. It is now stated as “no better”, with intervals reported throughout (Section 4). We note without excuse that this is precisely the failure the paper documents in others — evidence not matching the strength of the claim it is asked to carry — and that it was caught by an outside reader rather than by us.

A third correction, from turning this paper’s procedure on itself. The follow-on programme described in Section 5 verifies claims in 490 papers of this corpus against the artifacts those papers released. Its published policy requires this paper to be verified first, by the same method, before any other author is contacted. That was done at version 3. Six adversarial verifiers examined 54 claims; nine defects survived source-level adjudication, and five were *completeness* claims — the grammatical form that is cheapest to write and most expensive to satisfy.

The substantive ones: this paper claimed that no number in it was transcribed by hand, while roughly forty of its own statistics — the whole of the reliability paragraph in Section 3 — were typed as literals, one of them ($\kappa = 0.87$ for claim strength) differing from the released file’s 0.88; it stated that nine of ten coded dimensions reached substantial agreement where its own released `coding-reliability.csv` says 8; it said five failures were logged where the log held 15; it referred

readers to a confusion matrix that was described in prose but never tabulated; it claimed the released data permit recomputation of every statistic, although the second-pass codes behind the reliability study were not preserved and that study therefore cannot be recomputed; and it asserted that the consistency checker “runs as a gate on every regeneration of the analysis” when the script was invoked by nothing.

Each is corrected here, in one of two ways, and the difference is the point. Where the claim was worth keeping we made it true: the missing macros are now generated, and the checker is wired into the analysis script so that regeneration genuinely fails on a violation. Where it was not recoverable we made the text accurate: the recomputation and confusion-matrix claims are withdrawn above, and the counts now derive from the files they describe.

We note what this cost us and what it bought. The claim that our own numbers were mechanically generated was false in exactly the section describing our rigour, and the checker whose absence allowed it was the one we built after the previous correction — its lesson recorded in prose and never wired into code. That is the distinction this paper exists to draw, and we failed on the wrong side of it. It bought the finding that our worst defects cluster in the reflexive section: prose about method is not constrained by the pipeline that produces the results, so nothing catches it. We think that generalises to every methods section we read.

One figure must not be quoted out of context. These verifiers were adversarially prompted, worked from a local checkout with a shell, and were steered toward completeness claims; the 490-paper verification was calibrated the opposite way and worked from remote file listings. The individual verdicts hold; the aggregate rate is an artifact of the instrument and is not comparable to the corpus figures. Reporting it as though it were would repeat the very error corrected immediately above.

Version 1 metadata is in circulation. Version 1 stated a corpus of 811 papers and was indexed by at least one automated aggregator before the correction. Downstream records carrying 811 are therefore expected to persist regardless of what this version says. The concept DOI resolves to the current version, and readers encountering the earlier figure should treat this record as authoritative.

11 Data, code, and artifact availability

Everything needed to reproduce this paper is released: the harvest script and manifest, the full candidate corpus, both layers of screening decisions with per-paper justifications, the coded corpus, the artifact-verification results, the analysis and figure scripts, the protocol with all amendments, and the three process logs. Every corpus statistic in the paper is generated into a macro file by the analysis script and none is transcribed by hand; the narrative sections state some counts inline, and Section 10 records which of those were wrong when we checked. Every reference was verified against live arXiv and Crossref metadata by a script included in the repository.

- Archived deposit (paper, data, code, protocol, process logs), carrying the joint authorship statement: <https://doi.org/10.5281/zenodo.21577092> — this is the concept DOI and always resolves to the current version. Version 1 remains separately citable at [10.5281/zenodo.21577093](https://doi.org/10.5281/zenodo.21577093).
- Repository: <https://github.com/Kopachelli/arxiv-frontier>

The Zenodo record lists both authors, including the AI system, as creators. We note the deliberate contrast with Brzozowski and Chung [2026], who document 1,655 Zenodo records bearing real DOIs, fabricated human authors, and server-verifiable backdating: this deposit carries an accountable

human author, an AI contributor named as exactly what it is, unmanipulated timestamps, the underlying data, and a complete log of how the work was produced, including its failures.

References

- Aleksandr Bowkis, Marie Davidsen Buhl, Jacob Pfau, and Geoffrey Irving. Automated alignment is harder than you think. *arXiv preprint arXiv:2605.06390*, 2026.
- Michał Brzozowski and Neo Christopher Chung. The ghost couple: Correlated LLM name priors and their haunting of the web and academic publishing. *arXiv preprint arXiv:2606.02184*, 2026.
- Zhenhao Chen, Yongqiang Chen, Chenxi Liu, Junchi Yu, Xiangchen Song, Zijian Li, Jialin Li, Philip Torr, Bo Han, and Kun Zhang. CausalGame: Benchmarking causal thinking of LLM agents in games. *arXiv preprint arXiv:2607.04293*, 2026.
- Chen Ying Claude and Zhihan Luo. Training stratigraphy: Persistent behavioral artifacts in large language models observed through longitudinal AI-Human interaction. *arXiv preprint arXiv:2605.28102*, 2026.
- Bálint Gyevnár, Atoosa Kasirzadeh, and Nihar B. Shah. Distributed denial of science: How indirect data poisoning of AI systems can industrialize scientific fraud. *arXiv preprint arXiv:2607.10712*, 2026.
- Eddie Huang, Ken Liao, Iven Fu, Yang-Hsien Lin, Chao-Shun Zhan, Andy Liao, Virginia Chen, Johnson Sun, Pika Wang, Richard Huang, Jiun-Cheng Jiang, Ting-Yuan Liu, Hsing-Fang Lu, Ray Y. Lee, Chi-Chou Liao, Simon See, and Fuu-Jen Tsai. NVAITC AI scientist: A governed End-to-End research system – a hypertension GWAS case study. *arXiv preprint arXiv:2607.11084*, 2026.
- Haonan Huang. Grounded autonomous research: a fault-tolerant LLM pipeline from corpus to manuscript in frontier computational physics. *arXiv preprint arXiv:2607.02329*, 2026.
- Hongmin Li. The calibration turn in AI-Assisted research: A conceptual and methodological framework for Evidence-Licensed claims. *arXiv preprint arXiv:2606.31273*, 2026.
- Chris Lu, Cong Lu, Robert Tjarko Lange, Jakob Foerster, Jeff Clune, and David Ha. The AI scientist: Towards fully automated Open-Ended scientific discovery. *arXiv preprint arXiv:2408.06292*, 2024.
- Jie Ma, Binfei Chu, Jie Gao, Jinlu Zhang, Yiwei Ma, Yi Tan, Jiayi Ji, Xiaoshuai Sun, and Rongrong Ji. One reflection is not enough: Self-Correcting autonomous research via Multi-Hypothesis failure attribution. *arXiv preprint arXiv:2606.31478*, 2026.
- Jingjie Ning, Xiaochuan Li, Shanshan Zhong, Ji Zeng, and Guolin Ke. Auto research for materials: Auditable AI-Scientist workflows with Held-Out transfer. *arXiv preprint arXiv:2607.17100*, 2026.
- Matthew J Page, Joanne E McKenzie, Patrick M Bossuyt, Isabelle Boutron, Tammy C Hoffmann, Cynthia D Mulrow, et al. The PRISMA 2020 statement: an updated guideline for reporting systematic reviews. *BMJ*, 372:n71, 2021. doi: 10.1136/bmj.n71.
- Mayk Caldas Ramos, Christopher J. Collison, and Andrew D. White. A review of large language models and autonomous agents in chemistry. *arXiv preprint arXiv:2407.01603*, 2024.

- Chuhan Shi, Xiaoquan Ren, Sicheng Song, Haobo Li, Rui Sheng, and Yushi Sun. Are LLMs ready for scientific discovery? a Capability-Oriented benchmark for AI scientists. *arXiv preprint arXiv:2607.11079*, 2026.
- Izumi Takahara and Teruyasu Mizoguchi. Toward auditable AI scientists: A hypothesis evolution protocol for LLM agents. *arXiv preprint arXiv:2607.09195*, 2026.
- Yufeng Wang. FirstResearch: Auditable question formation for LLM scientific discovery agents. *arXiv preprint arXiv:2607.05682*, 2026.
- Yutaro Yamada, Robert Tjarko Lange, Cong Lu, Shengran Hu, Chris Lu, Jakob Foerster, Jeff Clune, and David Ha. The AI Scientist-v2: Workshop-Level automated scientific discovery via agentic tree search. *arXiv preprint arXiv:2504.08066*, 2025.
- Yining Zheng, Yuxin Wang, Jiahao Lu, Shicheng Fang, Weiyi Wang, Yongzhuo Yang, Bowen Li, Haochen Ma, Chen Hu, Bowen Chen, Yang Wang, Huanhui Chen, Yitong Chen, Jiajun Chen, Zhiyuan Li, Yanlin Li, Zhuo Yang, Qifeng Wu, Jiaying He, Zhijie Jinluo, Xiaohu Xu, Yi Feng, Juncheng Qian, Yizhou Chen, Yang Cheng, Tong Zhu, Tianlei Ying, Hongyu Yu, Hongjun Xiang, and Xipeng Qiu. Rethinking scientific discovery in the agentic era. *arXiv preprint arXiv:2607.03863*, 2026.

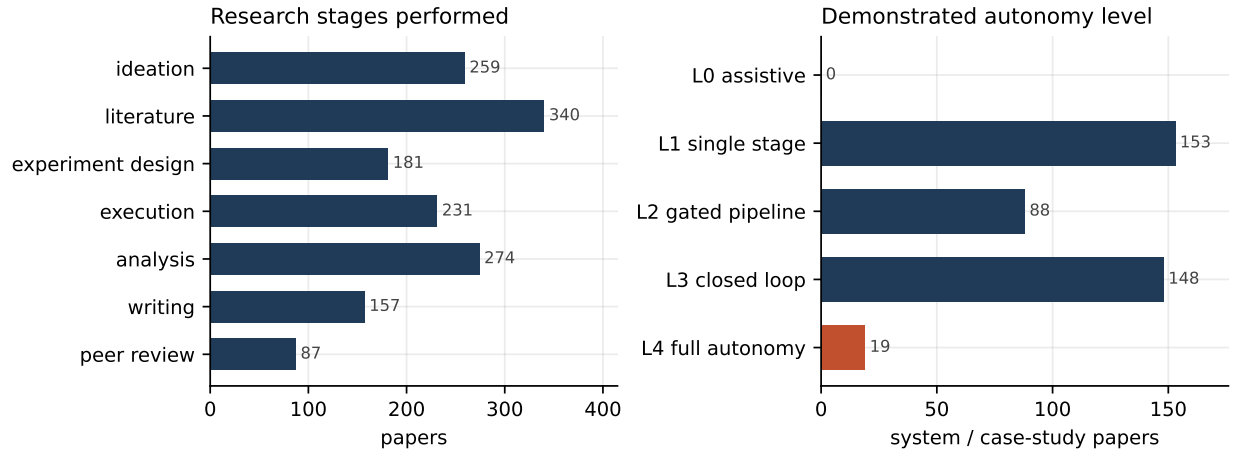


Figure 2: Left: research-lifecycle stages substantively performed (multi-select). Right: highest autonomy level actually demonstrated, among papers presenting a system or case study.

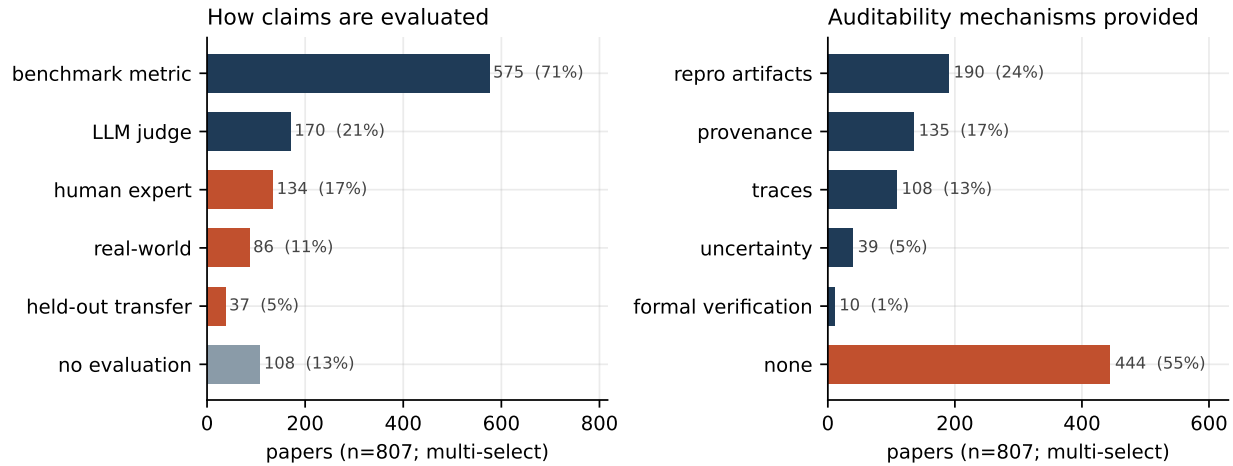


Figure 3: Evaluation methods (left) and auditability mechanisms (right) across the corpus ($n = 807$, multi-select). Highlighted bars mark evaluations that test a claim outside the loop that produced it, and the share of papers offering no auditability mechanism.

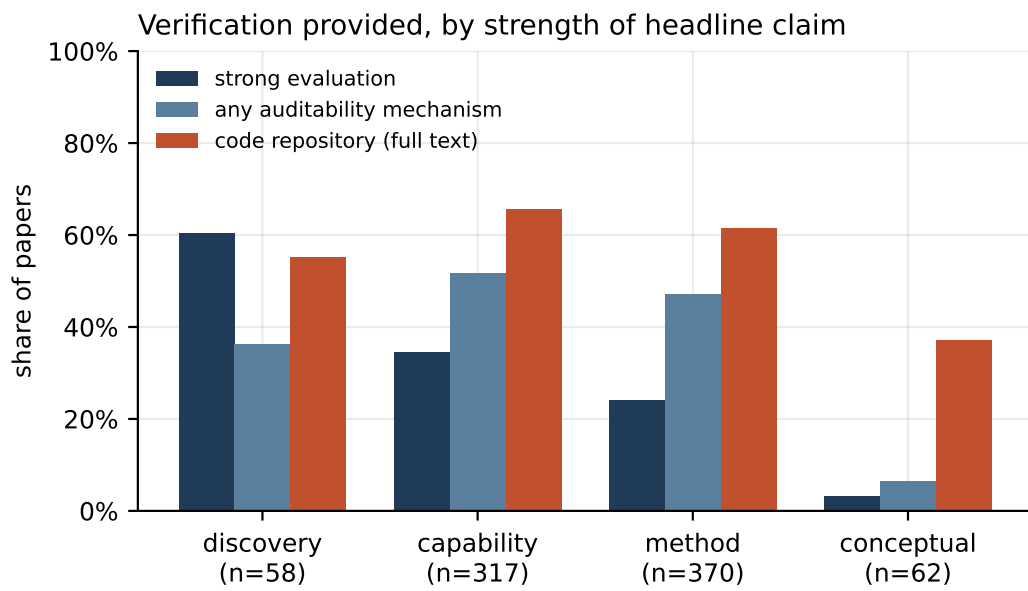


Figure 4: Share of papers providing strong evaluation, any auditability mechanism, and a full-text-verified code repository, by strength of headline claim.