

The

Memoir

Class



The Memoir Class  
for  
Configurable Typesetting  
User Guide  
Peter Wilson

Maintained by Lars Madsen

Corresponding to memoir version v3.7h, 2018/12/12



© 2001 — 2010 Peter R. Wilson  
© 2011 — Lars Madsen

All rights reserved

The Herries Press, Normandy Park, WA.

Printed in the World

The paper used in this publication may meet the minimum requirements of the American National Standard for Information Sciences — Permanence of Paper for Printed Library Materials, ANSI Z39.48--1984.

10 09 08 07 06 05 04 03 02 01 19 18 17 16 15 14 13

First edition:	3 June 2001
Second impression, with corrections:	2 July 2001
Second edition:	14 July 2001
Second impression, with corrections:	3 August 2001
Third impression, with minor additions:	31 August 2001
Third edition:	17 November 2001
Fourth edition:	16 March 2002
Fifth edition:	10 August 2002
Sixth edition:	31 January 2004
Seventh edition:	10 May 2008
Eighth impression, with very minor corrections:	12 July 2008
Ninth impression, with additions and corrections:	8 July 2009
Eighth edition:	August 2009
Tenth impression, with additions and corrections:	11 November 2015

memoir, n. a written record set down as material for a history or biography: a biographical sketch: a record of some study investigated by the writer: (in pl.) the transactions of a society. [Fr. *mémoire* — L. *memoria*, memory — *memor*, mindful.]

Chambers Twentieth Century Dictionary, New Edition, 1972.

memoir, n. [Fr. *mémoire*, masc., a memorandum, *memoir*, fem., memory < L. *memoria*, memory] 1. a biography or biographical notice, usually written by a relative or personal friend of the subject 2. [pl.] an autobiography, usually a full or highly personal account 3. [pl.] a report or record of important events based on the writer's personal observation, special knowledge, etc. 4. a report or record of a scholarly investigation, scientific study, etc. 5. [pl.] the record of the proceedings of a learned society

Webster's New World Dictionary, Second College Edition.

memoir, n. a fiction designed to flatter the subject and to impress the reader.

With apologies to Ambrose Bierce

memoir [mémwa:r], n. ① 전기; 실록; (보통 *pl.*) 추억의 기록; 회상(회고)록; 자서전; ② 연구, 보고, 논문 (monograph); (*pl.*) 학회지, 기요(記要); ③ 도서; 단행본.

«엣센스 英韓辭典»



---

## 목차 (略)

---

목차 (略)	· vii
목차	· ix
圖 목차	· xvi
表 목차	· xix
조판 例 목록	· xxi
프레휘스	· xxiii
1 시작하기	· 1
2 페이지 얹히기	· 7
3 텍스트와 글꼴	· 35
4 표제	· 57
5 요약문	· 71
6 문서의 장절구분	· 75
7 페이지 매김과 머릿글	· 105
8 문단과 리스트	· 121
9 목차 만들기	· 139
10 Floats and captions	· 167
11 Rows and columns	· 205
12 Page notes	· 229
13 Decorative text	· 249

14 Poetry	· 255
15 Boxes, verbatims and files	· 271
16 Cross referencing	· 293
17 Back matter	· 297
18 Miscellaneous	· 317
19 For package users	· 341
20 An example book design	· 345
21 An example thesis design	· 353
A Packages and macros	· 375
B Showcases	· 379
C Snippets	· 397
D Pictures	· 405
E LaTeX and TeX	· 425
F The terrors of errors	· 443
G Comments	· 467
Notes	· 469
문헌목록	· 471
색인	· 479
첫 행 색인	· 525



---

# 목차

---

목차 (略)	vii
목차	ix
圖 목차	xvi
表 목차	xix
조판 例 목록	xxi
프레휘스	xxiii
1 시작하기	1
1.1 용지 크기 옵션	1
1.2 활자 크기 옵션	2
1.2.1 확장된 글꼴 크기 3	
1.3 인쇄 옵션	4
1.4 기타 옵션	5
1.5 첨언	5
2 페이지 얹히기	7
2.1 소개	7
2.2 용지	7
2.3 페이지 (頁)	8
2.4 조판 영역	13
2.4.1 조판영역의 글줄 길이에 관한 주석 13, 2.4.2 조판 영역 크기 설정 16	
2.5 상단, 하단, 여백에 들어가는 요소	20
2.6 기타	22
2.7 종합	22
2.8 양면 여백	25
2.9 출력 페이지 크기	26
2.10 예제	26
2.10.1 이 매뉴얼의 레이아웃 27	
2.11 미리 정의된 레이아웃	29
3 텍스트와 글꼴	35

3.1	글꼴	35
3.2	Font sizes	44
3.3	Spaces	48
	3.3.1 Paragraphs 48, 3.3.2 Double spacing 49	
3.4	Overfull lines	51
3.5	Sloppybottom	52
3.6	Text case	53
	3.6.1 Nested text 54	
4	표제	57
4.1	표지 양식화	57
4.2	감사의 말 양식화하기	67
5	요약문	71
5.1	요약문의 양식	71
5.2	단단 요약문	73
6	문서의 장절구분	75
6.1	Logical divisions	75
6.2	Sectional divisions	76
	6.2.1 Appendices 77	
6.3	번호 매김	79
6.4	Book과 part 헤딩	79
	6.4.1 Leadpage 82	
6.5	장 제목	83
	6.5.1 장 스타일 정의하기 86, 6.5.2 더 많은 장 스타일 89, 6.5.3 장 요약 91	
6.6	Lower level headings	93
6.7	번호 없는 장절구획 꾸미기	98
6.8	장절 헤딩 내의 각주	101
6.9	미리 정의된 헤딩 스타일	101
7	페이지 매김과 머릿글	105
7.1	페이지 매김과 폴리오	105
7.2	페이지 양식	106
7.3	머릿글과 바닥글 만들기	108
	7.3.1 예시 페이지 양식 111, 7.3.2 색인 머릿글 116, 7.3.3 떠다니는 페이지 116	
7.4	showlocs 페이지 양식	119
7.5	페이지 양식으로 할 수 있는 다른 일들	119
8	문단과 리스트	121
8.1	문단	121
	8.1.1 블록 문단 121, 8.1.2 Hanging paragraphs 122	
8.2	Flush and ragged	123
8.3	Quotations	124
8.4	Some less common paragraph shapes	125

8.4.1 Last line not short	125, 8.4.2 Russian typography	126, 8.4.3 Fill with rules	126, 8.4.4 Some ragged paragraphs	127, 8.4.5 Left spring right	128
8.5	Changing the textwidth				129
8.6	Lists				131
9	목차 만들기				139
9.1	General ToC methods				139
9.2	The class ToC methods				144
	9.2.1 Changing the titles	145, 9.2.2 Typesetting the entries	147, 9.2.3 Example: No section number	156, 9.2.4 Example: Multicolumn entries	157, 9.2.5 Example: Multiple contents
9.3	New ‘List of...’ and entries				161
	9.3.1 Example: plates	164			
9.4	Chapter precis				165
9.5	Contents lists and bookmarks				165
10	Floats and captions				167
10.1	New float environments				167
	10.1.1 Margin floats	169			
10.2	Setting off a float				169
10.3	Multiple floats				171
10.4	Where LaTeX puts floats				175
10.5	Captions				181
10.6	Caption styling				181
10.7	Continuation captions and legends				185
10.8	Bilingual captions				190
10.9	Subcaptions				192
10.10	Side captions				196
	10.10.1 Tweaks	197			
10.11	How LaTeX makes captions				199
10.12	Footnotes in captions				202
10.13	The class versus the caption package (and its friends)				203
11	Rows and columns				205
11.1	General				205
11.2	The preamble				206
	11.2.1 D column specifiers	207, 11.2.2 Defining new column specifiers	210, 11.2.3 Surprises	211	
11.3	The array environment				212
11.4	Tables				214
11.5	Fear’s rules				216
	11.5.1 Fills	218			
11.6	Tabular environments				220
	11.6.1 Examples	220			
11.7	Spaces and rules				223
	11.7.1 Spacing	223, 11.7.2 Special variations on horizontal lines	224, 11.7.3 Handling of rules	225	

11.8	Free tabulars . . . . .	225
11.8.1	Continuous tabulars 225, 11.8.2 Automatic tabulars 226	
12	Page notes . . . . .	229
12.1	Footnotes . . . . .	229
12.1.1	A variety of footnotes 230, 12.1.2 Styling 232	
12.2	Marginal notes . . . . .	236
12.3	Side notes . . . . .	237
12.4	Sidebars . . . . .	238
12.5	Side footnotes . . . . .	240
12.5.1	Bottom aligned side footnotes 241, 12.5.2 Setting the layout for <code>\sidefootnote</code> 241, 12.5.3 Styling <code>\sidefootnote</code> 242, 12.5.4 Side footnote example 243	
12.6	Endnotes . . . . .	243
12.6.1	Changing the appearance 245	
13	Decorative text . . . . .	249
13.1	Epigraphs . . . . .	249
13.2	General . . . . .	250
13.3	Epigraphs before chapter headings . . . . .	251
13.3.1	Epigraphs on book or part pages 253	
14	Poetry . . . . .	255
14.1	Classy verse . . . . .	257
14.1.1	Indented lines 261, 14.1.2 Numbering 262	
14.2	Titles . . . . .	262
14.2.1	Main Poem Title layout parameters 263, 14.2.2 Detailed Poem Title layout parameters 264	
14.3	Examples . . . . .	264
	A Limerick 265, Love's lost 265, Fleas 266, In the beginning 266, Mathematics 267, The Young Lady of Ryde 268, Clementine 268, Mouse's Tale 270	
15	Boxes, verbatims and files . . . . .	271
15.1	Boxes . . . . .	272
15.2	Long comments . . . . .	276
15.3	Verbatims . . . . .	277
15.3.1	Boxed verbatims 279, 15.3.2 New verbatims 281, 15.3.3 Example: the <code>lcode</code> environment 282	
15.4	Files . . . . .	284
15.4.1	Writing to a file 285, 15.4.2 Reading from a file 285, 15.4.3 Example: endnotes 286, 15.4.4 Example: end floats 286, 15.4.5 Example: questions and answers 289	
15.5	Answers . . . . .	292
16	Cross referencing . . . . .	293
16.1	Labels and references . . . . .	293

16.2	Reference by name . . . . .	294
17	Back matter . . . . .	297
17.1	Bibliography . . . . .	297
17.1.1	BibTeX 299	
17.2	Index . . . . .	300
17.2.1	Printing an index 300, 17.2.2 Preparing an index 301,	
17.2.3	MakeIndex 304, 17.2.4 Controlling MakeIndex output 307,	
17.2.5	Indexing and the <i>natbib</i> package 310	
17.3	Glossaries . . . . .	310
17.3.1	Controlling the glossary 311	
18	Miscellaneous . . . . .	317
	In which we talk of many things, but not shoes or ships or sealing wax, nor cabbages and kings.	
18.1	Draft documents . . . . .	317
18.2	Change marks . . . . .	317
18.3	Trim marks . . . . .	318
18.4	Sheet numbering . . . . .	320
18.5	Gatherings or signatures . . . . .	320
18.6	Time . . . . .	321
18.7	Page breaks before lists . . . . .	321
18.8	Changing counters . . . . .	322
18.9	New new and provide commands . . . . .	323
18.10	Changing macros . . . . .	323
18.11	String arguments . . . . .	324
18.12	Odd/even page checking . . . . .	325
18.13	Moving to another page . . . . .	326
18.14	Number formatting . . . . .	327
18.14.1	Numeric numbers 327, 18.14.2 Named numbers 328, 18.14.3 Frac-	
	tions 330	
18.15	An array data structure . . . . .	331
18.16	Checking the processor . . . . .	332
18.16.1	Checking for pdfLaTeX 332, 18.16.2 Checking for etex 332,	
18.16.3	Checking for XeTeX 333, 18.16.4 Checking for LuaTeX 333	
18.17	Leading . . . . .	333
18.18	Minor space adjustment . . . . .	333
18.19	Adding a period . . . . .	334
18.20	Words and phrases . . . . .	334
18.21	Symbols . . . . .	334
18.22	Two simple macros . . . . .	336
18.23	Vertical centering . . . . .	336
18.24	For package writers . . . . .	336
18.24.1	Emulating packages 336, 18.24.2 Inserting code before and after	
	a file, package or class 337	
18.25	Heading hooks . . . . .	338
18.26	Documenting LaTeX commands . . . . .	340

19	For package users	341
19.1	Class/package name clash	341
19.2	Support for bidirectional typesetting	342
20	An example book design	345
20.1	Introduction	345
20.2	Design requirements	345
20.3	Specifying the page and typeblock	346
20.4	Specifying the sectional titling styles	348
20.4.1	The chapter style 348, 20.4.2 Lower level divisions	348
20.5	Specifying the pagestyle	349
20.6	Captions and the ToC	351
20.7	Preamble or package?	351
21	An example thesis design	353
21.1	Example US thesis typographic requirements	353
21.1.1	General 353, 21.1.2 Preliminary matter 354, 21.1.3 Table of contents 355, 21.1.4 Lists 356, 21.1.5 Main text 356, 21.1.6 Backmatter 357	
21.2	Code	357
21.2.1	Initialisation 358, 21.2.2 Page layout 358, 21.2.3 Page styles 360, 21.2.4 The ToC and friends 360, 21.2.5 Chapter styling 361, 21.2.6 Section, etc., styling 362, 21.2.7 Captions 363, 21.2.8 The bibliography 363, 21.2.9 End notes 363, 21.2.10 Preliminary headings 364, 21.2.11 Components of the title and approval pages 364, 21.2.12 The title and approval pages 365, 21.2.13 The last bits 369	
21.3	Usage	369
21.4	Comments	371
A	Packages and macros	375
A.1	Packages	375
A.2	Macros	376
B	Showcases	379
B.1	Chapter styles	379
B.1.1	Chappell 392, B.1.2 Demo, Demo2 and demo3 393, B.1.3 Pedersen 393, B.1.4 Southall 394, B.1.5 Veelo 395	
C	Snippets	397
Snippet C.1	(Mirroring the output)	397
Snippet C.2	(Remove pagenumber if only one page)	398
Snippet C.3	(A kind of draft note)	398
Snippet C.4	(Adding indentation to footnotes)	399
Snippet C.5	(Background image and trimmarks)	399
Snippet C.6	(Autoadjusted number widths in the ToC)	399
Snippet C.7	(Using class tools to make a chapter ToC)	401
Snippet C.8	(An appendix ToC)	403
D	Pictures	405

D.1	Basic principles . . . . .	405
D.2	Picture objects . . . . .	407
	D.2.1 Text 407, D.2.2 Boxes 408, D.2.3 Lines 413, D.2.4 Arrows 415, D.2.5 Circles 415	
D.3	Repetitions . . . . .	418
D.4	Bezier curves . . . . .	421
E	LaTeX and TeX . . . . .	425
E.1	The TeX process . . . . .	426
E.2	LaTeX files . . . . .	427
E.3	Syntax . . . . .	428
E.4	(La)TeX commands . . . . .	429
E.5	Calculation . . . . .	432
	E.5.1 Numbers 432, E.5.2 Lengths 433	
E.6	Programming . . . . .	437
F	The terrors of errors . . . . .	443
F.1	TeX messages . . . . .	444
	F.1.1 TeX capacity exceeded 452	
F.2	LaTeX errors . . . . .	453
F.3	LaTeX warnings . . . . .	458
F.4	Class errors . . . . .	461
F.5	Class warnings . . . . .	464
G	Comments . . . . .	467
G.1	Algorithms . . . . .	467
	G.1.1 Autoadjusting <code>\marginparwidth</code> 467	
Notes	. . . . .	469
	Chapter 3 텍스트와 글꼴 . . . . .	469
	Chapter 12 Page notes . . . . .	470
문헌목록	. . . . .	471
색인	. . . . .	479
첫 행 색인	. . . . .	525

## 圖 目次

2.1	오른쪽 페이지 (홀수면)의 LaTeX 페이지 레이아웃 파라미터	9
2.2	왼쪽 페이지에 대한 memoir 클래스 파라미터	10
2.3	오른쪽 페이지에 대한 memoir 클래스 파라미터	11
2.4	이 매뉴얼의 홀수면 레이아웃	28
2.5	letterpaper를 위한 기본 레이아웃	30
2.6	letterpaper 레이아웃: 좌 <code>\medievalpage</code> , 우 <code>\medievalpage[12]</code>	30
2.7	letterpaper 레이아웃: 좌 <code>\isopage</code> , 우 <code>\isopage[12]</code>	30
2.8	letterpaper 레이아웃: 좌 <code>\semiisopage</code> , 우 <code>\semiisopage[12]</code>	30
2.9	a4paper를 위한 기본 레이아웃	31
2.10	a4paper 레이아웃: 좌 <code>\medievalpage</code> , 우 <code>\medievalpage[12]</code>	31
2.11	a4paper 레이아웃: 좌 <code>\isopage</code> , 우 <code>\isopage[12]</code>	31
2.12	a4paper 레이아웃: 좌 <code>\semiisopage</code> , 우 <code>\semiisopage[12]</code>	31
2.13	아홉 가지 <code>\setpageXX</code> 매크로로써 트리밍된 페이지를 용지에 놓는 예. 이것은 모두 <code>twoside</code> 옵션을 준 홀수면이며 짝수면은 왼쪽/오른쪽 트리밍이 반대 방향이다.	33
4.1	타이포그래피에 관한 책의 표지 레이아웃	58
4.2	박사 학위 논문의 지정 표지 양식의 예시	59
4.3	빅토리아 시대의 표지 예시	60
4.4	책 디자인에 관한 책의 표지 레이아웃	61
4.5	책들에 관한 책의 표지 레이아웃	62
6.1	장 제목을 위한 클래스 레이아웃 매개변수들. <code>\beforechapskip</code> 을 사용하려면 생각해볼 내용이 더 있는데, 본문의 설명을 보면 된다.	84
6.2	Displayed sectional headings	93
6.3	Run-in sectional headings	94
7.1	머릿글과 바닥글 영역	109
8.1	문단의 매개변수	121
8.2	The layout parameters for general lists	135
9.1	Example extracts from <code>toc</code> , <code>lof</code> and <code>lot</code> files	141
9.2	Layout of a ToC (LoF, LoT) entry	141
10.1	Example framed figure	170



10.2	Example framed figure and caption . . . . .	170
10.3	Example ruled figure . . . . .	171
10.4	Example ruled figure and caption . . . . .	171
10.5	Example float with two illustrations . . . . .	171
10.6	Graphic 1 in a float . . . . .	172
10.7	Graphic 2 in same float . . . . .	172
10.8	Left center aligned . . . . .	173
10.9	Right figure. This has more text than the adjacent caption (10.8) so the heights are unequal . . . . .	173
10.10	Left top aligned . . . . .	174
10.11	Right figure. This has more text than the adjacent caption (10.10) so the heights are unequal . . . . .	174
10.12	Left bottom aligned . . . . .	175
10.13	Right figure. This has more text than the adjacent caption (10.12) so the heights are unequal . . . . .	175
10.14	Float and text page parameters . . . . .	177
10.15	Float parameters . . . . .	178
10.16	Long <code>\bitwonumcaption</code> . . . . .	191
10.16	Lang <code>\bitwonumcaption</code> . . . . .	191
10.17	Long English <code>\bionenumcaption</code> . . . . .	191
	Lang Deutsch <code>\bionenumcaption</code> . . . . .	191
10.18	Short English <code>\bicaption</code> . . . . .	192
10.19	Figure with two subfigures . . . . .	195
	(a) Subfigure 1 . . . . .	195
	(b) Subfigure 2 . . . . .	195
10.20	A picture is worth a thousand words . . . . .	201
10.21	A different kind of figure caption . . . . .	202
11.1	Example of a regular <code>tabular</code> . . . . .	220
11.2	Example <code>tabularx</code> and <code>tabular*</code> with widths of 250pt . . . . .	221
11.3	Example <code>tabularx</code> and <code>tabular*</code> with widths of 300pt . . . . .	221
11.4	Changing the width of a row ordered table . . . . .	228
11.5	Changing the width of a column ordered table . . . . .	228
12.1	Footnote layout parameters . . . . .	233
12.2	Interpretation of the arguments to the <code>\Xmargin</code> commands for specifying the side in which to place side note like material. <b>X</b> here equals <code>marginpar</code> , <code>sidepar</code> , <code>sidebar</code> , or <code>sidefoot</code> . . . . .	237
12.3	Example endnote listing . . . . .	244
17.1	Raw indexing: (left) index commands in the source text; (right) <code>idx</code> file entries . . . . .	304
17.2	Processed index: (left) alphabeticized <code>ind</code> file; (right) typeset index . . . . .	305
18.1	The four trimmark types . . . . .	320
21.1	Example Archibald Smythe University title page . . . . .	366
21.2	Example Archibald Smythe University approval page . . . . .	367

B.1	The default chapterstyle . . . . .	379
B.2	The section chapterstyle . . . . .	380
B.3	The hangnum chapterstyle . . . . .	380
B.4	The companion chapterstyle . . . . .	381
B.5	The article chapterstyle . . . . .	381
B.6	The bianchi chapterstyle . . . . .	382
B.7	The bringhurst chapterstyle . . . . .	382
B.8	The brotherton chapterstyle . . . . .	383
B.9	The chappell chapterstyle . . . . .	383
B.10	The crosshead chapterstyle . . . . .	384
B.11	The culver chapterstyle . . . . .	384
B.12	The dash chapterstyle . . . . .	384
B.13	The demo2 chapterstyle . . . . .	385
B.14	The dowing chapterstyle . . . . .	385
B.15	The ell chapterstyle . . . . .	386
B.16	The ger chapterstyle . . . . .	386
B.17	The komalike chapterstyle . . . . .	387
B.18	The lyhne chapterstyle. This style requires the <code>graphicx</code> package . . . . .	387
B.19	The madsen chapterstyle. This style requires the <code>graphicx</code> package . . . . .	388
B.20	The ntglke chapterstyle . . . . .	389
B.21	The southall chapterstyle . . . . .	389
B.22	The tandh chapterstyle . . . . .	390
B.23	The thatcher chapterstyle . . . . .	390
B.24	The veelo chapterstyle. This style requires the <code>graphicx</code> package . . . . .	391
B.25	The verville chapterstyle . . . . .	391
B.26	The wilsondob chapterstyle . . . . .	392
D.1	Some points in the cartesian coordinate system . . . . .	406
D.2	Specification of a line or arrow . . . . .	415
D.3	Sloping lines and arrows . . . . .	416
D.4	Some measuring scales . . . . .	419
D.5	Two Bezier curves . . . . .	423

---

## 表 목차

---

1.1	미터법 표시 클래스 용지 옵션과 그 명령어 . . . . .	1
1.2	미국 용지의 클래스 옵션과 그 명령 . . . . .	2
1.3	영국 용지의 클래스 옵션과 그 명령 . . . . .	2
2.1	<code>\settrimmedsize</code> 및 <code>\settypeblocksize</code> 명령의 인자와 결과 . . . . .	12
2.2	평균 행당 문자수 . . . . .	14
2.3	다양한 폰트에서 포인트별 소문자 알파벳 길이 . . . . .	16
2.4	<code>\setlrmargins</code> 의 인자와 그 결과 . . . . .	17
2.5	<code>\setlrmarginsandblock</code> 의 인자와 결과 . . . . .	18
2.6	<code>\setulmargins</code> 의 인자와 그 결과 . . . . .	19
2.7	<code>\setulmarginsandblock</code> 의 인자와 그 결과 . . . . .	20
2.8	<code>\setheaderspaces</code> 의 인자와 그 결과 . . . . .	21
2.9	이 클래스와 LaTeX의 페이지 레이아웃 파라미터 . . . . .	23
2.10	<code>\textheight</code> 조절의 결과 . . . . .	25
3.1	LaTeX 에 Palatino roman font의 글리프 . . . . .	36
3.2	LaTeX 에 Symbol font가 배부된 글리프 . . . . .	37
3.3	LaTeX 에 Zapf Dingbat font가 배부된 글리프 . . . . .	38
3.4	Font categorisation and commands . . . . .	41
3.5	Font declarations . . . . .	42
3.6	Standard font size declarations . . . . .	45
3.7	Standard font sizes . . . . .	45
3.8	The memoir class font size declarations . . . . .	45
3.9	The memoir class font sizes . . . . .	46
6.1	장절명령의 수준 . . . . .	79
6.2	Default display sectioning layout parameter values . . . . .	94
6.3	Default run-in sectioning layout parameter values . . . . .	94
6.4	Values for S in section styling macro names. . . . .	94
6.5	Section 헤딩을 위한 기본 폰트의 목록 . . . . .	102
6.6	각각의 헤딩 스타일에서 사용된 폰트 목록. . . . .	103
7.1	<code>\thispagestyle</code> 의 사용 . . . . .	107
7.2	페이지 머릿글에 대한 표지 매크로 . . . . .	108
9.1	Indents and Numwidths . . . . .	142

9.2	Values for X in macros for styling the titles of ‘List of...’ . . . . .	145
9.3	Value of K in macros for styling entries in a ‘List of...’ . . . . .	148
10.1	Float placement parameters . . . . .	179
10.2	Float spacing parameters . . . . .	179
10.3	Redesigned table caption style . . . . .	184
10.4	A multi-part table . . . . .	186
10.5	Another table . . . . .	186
	Legendary table (toc 1) . . . . .	187
	Legendary table (toc 2) . . . . .	187
10.6	Permitted arguments for some sidecaption related commands . . . . .	198
11.1	The array and tabular preamble options. . . . .	206
11.2	Demonstrating the parts of a table . . . . .	214
11.3	Two views of one table . . . . .	215
11.4	Micawber’s law . . . . .	216
11.5	A narrow table split half and half . . . . .	216
11.6	Example table with fills . . . . .	219
11.7	Example automatic row ordered table . . . . .	227
12.1	Some footnote text styles . . . . .	234
17.1	MakeIndex configuration file input parameters . . . . .	305
17.2	MakeIndex configuration file output parameters . . . . .	308
18.1	Defined words and phrases . . . . .	335
E.1	Some internal macros for numbers . . . . .	433

---

## 조판 例 목록

---

3.1	Badly mixed fonts . . . . .	42
3.2	Sometimes mixed fonts work . . . . .	43
3.3	Emphasis upon emphasis . . . . .	44
4.1	예시 <code>\maketitle</code> 표제 . . . . .	63
6.1	A variety of subhead styles . . . . .	98
8.1	Setting the source of a quotation . . . . .	124
8.2	Paragraph's line not too short . . . . .	126
8.3	Rules for spaces . . . . .	127
8.4	Ragged paragraphs . . . . .	127
8.5	A sprung paragraph . . . . .	129
8.6	Smallcap quote style description list . . . . .	132
8.7	Changing space before and after lists . . . . .	137
11.1	Tabular with narrow and wide headings . . . . .	210
14.1	Phantom text in verse . . . . .	260
14.2	Verse with regular quote marks . . . . .	261
14.3	Verse with hanging left quote marks . . . . .	261
16.1	Named references should be to titled elements . . . . .	295
16.2	Current title . . . . .	296
18.1	TeX's minimum number in words (English style) . . . . .	328
18.2	TeX's maximum number in words (American style) . . . . .	329
18.3	Varieties of fractions in text . . . . .	330
18.4	Super- and subscripts in text . . . . .	331
D.1	Picture: text . . . . .	408
D.2	Picture: text in boxes . . . . .	409
D.3	Picture: positioning text . . . . .	410
D.4	Picture: dashed box . . . . .	410
D.5	Picture: framing . . . . .	411
D.6	Picture: stacking . . . . .	412
D.7	Picture: saved boxes . . . . .	413
D.8	Picture: circles . . . . .	416
D.9	Picture: ovals . . . . .	417
D.10	Picture: text in oval . . . . .	418
D.11	Picture: repetitions . . . . .	421



---

## 프레휘스

---

개인적 경험으로나 `comp.tex.tex` 뉴스그룹을 보거나 LaTeX을 사용함에 있어 주요 문제는 문서 디자인에 관련된 것이다. 몇 년 전만 하더라도 `CTT`에 질문이 올라오면 누군가 주어진 특정 문제를 해결하는 짧은 코드를 제공하여 답변했고 이 일이 반복되었다. 더 최근에는 답변이 ‘——— 패키지를 사용하라’는 것으로 바뀌었고 역시 이런 상황이 반복되고 있다.

너무 많은 패키지를 사용하다 보니 순서도 뒤죽박죽이 되고 각 패키지의 사용설명서를 어디에 두었는지 잊어버리게 되었는데, 심지어 내가 작성한 패키지마저 그런 상태가 되었다. `memoir`는 `book` 클래스에서의 디자인 관련 패키지를 통합하려는 시도이다. 필자는 `report`가 아니라 `book` 클래스를 문제삼았다. 이 둘은 사실상 거의 동일한 클래스이고 유일한 차이는 `book`에 `abstract` 환경이 없다는 점이다. 사실 `abstract`를 필요하다면 가져다 쓰는 것은 어려운 일도 아니다. 심지어 조금 손을 보면 `book` 클래스 문서를 `article` 문서처럼 보이게 하는 것도 가능하다. 이런 관점에서 여러 상황에 맞도록 손보는 일을 유념하여 `memoir` 클래스를 작성하였다.

`memoir` 클래스는 지금까지 외부 패키지로 하던 기능들을 하나로 모아 짜넣은 것이다. 이 클래스로 들어온 각 패키지의 코드는 대부분 새롭게 구현하였고 단지 필자 자신이 작성한 패키지는 단순히 복사-붙여넣기하였다. LaTeX과 여러 패키지의 도움이 없었다면 이 클래스는 작성될 수 없었을 것이다.

직접 활용한 패키지 말고도 문헌목록에 열거된 다양한 패키지의 아이디어를 빌어온 것도 많다. 이 패키지의 저자들은 스스로 인식하지 못하더라도 어떤 식으로든 이 클래스에 기여한 바가 있다. `comp.tex.tex` 뉴스그룹의 참여자들 또한 귀중한 기여를 하였는데, 한편으로는 LaTeX에 관한 뭔가를 질문함으로써, 다른 한편으로 답변을 제공함으로써 그리하였다. 매우 분위기 좋고 공부가 되는 포럼이었다.

PETER WILSON  
Seattle, WA  
June 2001





# One

## 시작하기

다른 클래스와 마찬가지로, memoir 클래스는 `\documentclass[options]{memoir}`로 불러온다. 옵션(option)으로는 종이 크기, 본문의 활자 크기, 원고의 종류, 수식 조판상의 지시 등을 지정할 수 있다.

### 1.1 용지 크기 옵션

기본 용지 크기(stock size)는 인쇄기에 공급되는 종이(paper) 한 장의 크기를 말한다. 옵션으로 지정할 수 있는 용지 크기가 Table 1.1부터 Table 1.3까지 나열되어 있으며, 여기에는 용지 크기나 종이 크기를 같은 단위(dimension)로 설정하기 위한 명령도 들어 있다.

표에 잘 어울리지 않는 다음 두 가지 옵션을 따로 적는다.

ebook 6 × 9 inches의 용지 크기로, 주로 컴퓨터 모니터용 ‘전자책’에 적합함.

landscape 가로와 세로의 길이를 맞바꾸어 (옆으로 긴 종이로) 조판하기 위함.

landscape를 제외한 모든 옵션은 상호배타적이므로 같이 쓰지 않는다. 용지와 종이 크기의 기본값(default)은 letterpaper이다.

만약 리스트에 없는 용지 크기를 사용하고 싶다면 그에 맞는 방법들이 있겠지만, 나중에 설명하기로 한다.

Table 1.1: 미터법 표시 클래스 용지 옵션과 그 명령어

옵션	크기	용지 크기 명령	페이지 크기 명령
a6paper	148 × 105 mm	<code>\stockavi</code>	<code>\pageavi</code>
a5paper	210 × 148 mm	<code>\stockav</code>	<code>\pageav</code>
a4paper	297 × 210 mm	<code>\stockaiv</code>	<code>\pageaiv</code>
a3paper	420 × 297 mm	<code>\stockaiii</code>	<code>\pageaiii</code>
b6paper	176 × 125 mm	<code>\stockbvi</code>	<code>\pagebvi</code>
b5paper	250 × 176 mm	<code>\stockbv</code>	<code>\pagebv</code>
b4paper	353 × 250 mm	<code>\stockbiv</code>	<code>\pagebiv</code>
b3paper	500 × 353 mm	<code>\stockbiii</code>	<code>\pagebiii</code>
mcrownvopaper	186 × 123 mm	<code>\stockmetriccrownvo</code>	<code>\pagetriccrownvo</code>
mlargecrownvopaper	198 × 129 mm	<code>\stockmlargecrownvo</code>	<code>\pagemlargecrownvo</code>
mdemyvopaper	216 × 138 mm	<code>\stockmdemyvo</code>	<code>\pagemdemyvo</code>
msmallroyalvopaper	234 × 156 mm	<code>\stocksmallroyalvo</code>	<code>\pagemsallroyalvo</code>

Table 1.2: 미국 용지의 클래스 옵션과 그 명령

옵션	크기	용지 크기 명령	페이지 크기 명령
dbillpaper	7 × 3 in	\stockdbill	\pagedbill
statementpaper	8.5 × 5.5 in	\stockstatement	\pagestatement
executivepaper	10.5 × 7.25 in	\stockexecutive	\pageexecutive
letterpaper	11 × 8.5 in	\stockletter	\pageletter
oldpaper	12 × 9 in	\stockold	\pageold
legalpaper	14 × 8.5 in	\stocklegal	\pagelegal
ledgerpaper	17 × 11 in	\stockledger	\pageledger
broadsheetpaper	22 × 17 in	\stockbroadsheet	\pagebroadsheet

Table 1.3: 영국 용지의 클래스 옵션과 그 명령

옵션	크기	용지 크기 명령	페이지 크기 명령
pottvopaper	6.25 × 4 in	\stockpottvo	\pagepottvo
foolscapvopaper	6.75 × 4.25 in	\stockfoolscapvo	\pagefoolscapvo
crownvopaper	7.5 × 5 in	\stockcrownvo	\pagecrownvo
postvopaper	8 × 5 in	\stockpostvo	\pagepostvo
largecrownvopaper	8 × 5.25 in	\stocklargecrownvo	\pagelargecrownvo
largepostvopaper	8.25 × 5.25 in	\stocklargepostvo	\pagelargepostvo
smalldemyvopaper	8.5 × 5.675 in	\stocksmalldemyvo	\pagesmalldemyvo
demyvopaper	8.75 × 5.675 in	\stockdemyvo	\pagedemyvo
mediumvopaper	9 × 5.75 in	\stockmediumvo	\pagemediumvo
smallroyalvopaper	9.25 × 6.175 in	\stocksmallroyalvo	\pagesmallroyalvo
royalvopaper	10 × 6.25 in	\stockroyalvo	\pageroyalvo
superroyalvopaper	10.25 × 6.75 in	\stocksuperroyalvo	\pagesuperroyalvo
imperialvopaper	11 × 7.5 in	\stockimperialvo	\pageimperialvo

## 1.2 활자 크기 옵션

활자 크기 옵션은 문서내 글꼴 (font) 크기의 기본값을 설정한다. 이 클래스는 다음과 같이 상당히 많은 활자 크기를 제공한다.

- 9pt 기본 글꼴 크기 9pt
- 10pt 기본 글꼴 크기 10pt
- 11pt 기본 글꼴 크기 11pt
- 12pt 기본 글꼴 크기 12pt
- 14pt 기본 글꼴 크기 14pt<sup>1</sup>
- 17pt 기본 글꼴 크기 17pt
- 20pt 기본 글꼴 크기 20pt
- 25pt 기본 글꼴 크기 25pt

<sup>1</sup> 14pt 옵션의 경우, extrafont sizes 옵션이 없으면, \huge, \Huge, \HUGE가 \LARGE와 같은 크기로 나타난다.

30pt 기본 글꼴 크기 30pt

36pt 기본 글꼴 크기 36pt

48pt 기본 글꼴 크기 48pt

60pt 기본 글꼴 크기 60pt

\*pt 저자가 정하는 기본 글꼴 크기

extrafontsizes 25pt보다 큰 scalable 글꼴을 사용할 수 있음

이는, 14pt 옵션의 경우, `\huge`, `\Huge`와 `\HUGE`를 포함한다. 17pt이상의 경우에는 `extrafontsizes`를 함께 사용하지 않으면, 에러가 발생한다. 14pt에서는 에러를 내지 않지만, `extrafontsizes` 옵션이 없으면, `\LARGE`보다 큰 크기를 나타낼 수 없다.

`extrafontsizes`를 제외하면, 이 옵션들은 서로 배타적이다. 기본 활자 크기는 10pt이다.

17pt 혹은 20pt보다 큰 옵션들은 scalable fonts를 사용하지 않는 이상 그 사용은 제한적이다 — the regular Computer Modern bitmap fonts는 25pt까지만 지원된다. `extrafontsizes` 옵션을 지정함으로써 25pt를 초과하는 scalable fonts를 사용할 것이라고 선언하는 것이다. 이 옵션은 T1 인코딩 Latin Modern을 기본 글꼴로 설정한다. (일반적으로는 OT1 인코딩 Computer Modern이 기본 글꼴이다.)

### 1.2.1 확장된 글꼴 크기

기본값을 변경하지 않는 한, `extrafontsizes` 옵션을 쓰면, 문서의 기본 글꼴은 T1 인코딩 Latin Modern이다. 이는 문서 전처리부 (preamble)에 다음을 사용한 것과 같다(`extrafontsizes` 옵션을 쓰면 불필요한 작업임).

```
\usepackage{lmodern}\usepackage[T1]{fontenc}
```

```
\newcommand*{\memfontfamily}{\fontfamily}  
\newcommand*{\memfontenc}{\fontencoding}  
\newcommand*{\memfontpack}{\package}
```

내부적으로 이 클래스는 새로운 글꼴과 인코딩을 특정하기 위해 `\memfontfamily`와 `\memfontenc`를 사용하며, `\memfontpack`을 글꼴 적용을 위한 패키지의 이름으로 사용한다. 내부적으로는 다음과 같이 정의된다.

```
\providecommand*{\memfontfamily}{lmr}  
\providecommand*{\memfontenc}{T1}  
\providecommand*{\memfontpack}{lmodern}
```

이것은 결과적으로 T1 인코딩 lmr(Latin Modern) 글꼴을 기본 글꼴로 설정하며, 이는 lmodern 패키지로 실행된다. 다른 기본 글꼴을 사용하고 싶은 경우, 예를 들어 T1 인코딩 New Century Schoolbook을 사용하고 싶다면 다음과 같은 방법으로 해결할 수 있다.

```
\newcommand*{\memfontfamily}{pnc}  
\newcommand*{\memfontpack}{newcent}  
\documentclass[...]{memoir}
```

위 코드에서 `\newcommand*`들이 `\documentclass` 이전에 위치해 있는데, 이는 이 클래스 코드 내부의 `\provide...` 정의를 덮어씌울 수 있도록 하기 위함이다.

만일 \*pt 옵션을 사용하는 경우에는 선택한 글꼴의 크기와 스페이스(space)에 관련된 모든 값들을 포함하는 `clo` 파일을 연결해주어야 한다. 또한 memoir에 그 파일명을 알려주어야 한다. 이를 위해 `\documentclass` 이전에 다음과 같이 `\anyptfilebase`와 `\anyptsize` 두 매크로를 정의해야 한다.

```
\newcommand*{\anyptfilebase}{\langle chars \rangle}
\newcommand*{\anyptsize}{\langle num \rangle}
```

memoir는 글꼴의 크기와 스페이싱(spacing)에 관한 정보가 필요할 때 사용자가 제공한 `\anyptfilebase\anyptsize.clo`라는 파일에서 찾아 넣는다. `\anyptsize \langle num \rangle`은 정수여야 한다.<sup>2</sup> 내부적으로 이 클래스는 다음과 같은 동작을 한다.

```
\providecommand*{\anyptfilebase}{mem}
\providecommand*{\anyptsize}{10}
```

이로써 10pt 글꼴에 해당하는 `mem10.clo`를 기본값으로 지정하는 것이다. 만약, 예를 들어, 사용자가 18pt 크기의 글꼴 파일을 가지고 있어서 이를 쓰고 싶다면 다음과 같은 방법을 사용할 수 있다.

```
\newcommand*{\anyptfilebase}{myfont}
\newcommand*{\anyptsize}{18}
\documentclass[...*pt...]{memoir}
```

이렇게 하면 LaTeX은 사용자가 제공하는 `myfont18.clo` 파일을 찾아 필요 정보를 입력한다. 사용자의 `clo` 파일에 어떤 값들이 들어있어야 하는지 알아보고 싶다면, 제공되는 `mem10.clo` 나 `mem60.clo` 등을 그 예로 참고하자.

### 1.3 인쇄 옵션

인쇄 옵션은 다음과 같다.

`twoside` 종이 양면을 이용하여 인쇄할 문서를 작성한다.

`oneside` 단면 인쇄용 문서를 작성한다.

`twoside`와 `oneside` 옵션은 서로 배타적이다.

`onecolumn` 한 페이지에 텍스트를 1단으로 출력한다.

`twocolumn` 한 페이지에 너비(width)가 같은 2단의 텍스트가 출력된다.

`onecolumn`과 `twocolumn` 옵션은 서로 배타적이다.

`openright` 각 장(chapter)이 펼침면의 오른쪽(홀수쪽)에서 시작된다.

`openleft` 각 장이 펼침면의 왼쪽(짝수쪽)에서 시작된다.

`openany` 각 장이 짝수·홀수쪽 어디에서나 시작하도록 한다.

`openright`, `openleft`, `openany` 옵션은 서로 배타적이다.

`final` 문서의 인쇄용 최종본을 만든다.

`draft` 행넘침(overflow)이 있을 때 검은 선을 그어주고, 몇 가지 변화점을 표시해준다. 어떤 패키지를 사용하면 다른 효과들을 나타낼 수도 있다.

`ms` 문서가 타자기로 친 것처럼 보이도록 한다. 일부 출판편집자는 정제되지 않은 듯 보이는 원고 상태를 선호하기도 한다.

`final`, `draft`, `ms` 옵션은 서로 배타적이다.

`showtrims` 인쇄기를 거친 최종본에서 잘라내야 할 용지의 여백을 표시하는 트림 마크를 찍어 준다.

인쇄 옵션의 기본값은 `twoside`, `onecolumn`, `openright`, `final`이다.

<sup>2</sup>정수가 아니라면 TeX이 파일명을 헷갈릴 수 있는데 — 이는 파일명에 단 하나의 온점(.)을 기대하기 때문이다.

## 1.4 기타 옵션

그 밖에 남아 있는 옵션은 다음과 같다.

`leqno` 수식 (equation) 번호가 왼쪽에 붙는다 (기본값은 오른쪽).

`fleqn` 별행수식 (`\displaystyle math`) 이 왼쪽 마진에서 `\mathindent` 만큼 들여쓰기 된다 (기본값은 중앙정렬).

`openbib` 참고문헌 (bibliography) 항목이 새로운 줄에서 시작하며, 두 번째 줄부터 `\bibindent` 만큼 들여쓰기 된다 (기본값은 들여쓰기 없이 계속 이어지는 것).

`article` `article` 클래스를 흉내내지만 `\chapter` 명령을 쓸 수 있다. 이 경우, 기본적으로, `\chapter`는 `\section`처럼 동작한다. 장 (chapter)이 새 페이지에서 시작되지 않으며 `chapter headings`는 `section headings`처럼 식자된다. 그림 따위의 번호는 장이 바뀌어도 재설정되지 않고 연속적으로 매겨진다. 그러나 `\part` 명령은 여전히 그 자체로 한 페이지에 heading을 표시한다.

`oldfontcommands` 오래되어 더 이상 쓰지 않는 LaTeX version 2.09 폰트 명령을 사용할 수 있게 한다. `old font` 명령을 사용할 때마다 경고 메시지를 받게 된다.

`fullptlayout` 어떤 layout 값 (예로, `\textwidth`)에서 소수점자리 버림을 허용하지 않는다. 기본값으로는 소수점 반올림을 하는데, 이 옵션은 이러한 기능을 무력화한다.

위 옵션은 모두 기본값이 아니다.

## 1.5 첨언

어떤 옵션도 없이 이 클래스를 부르는 것은 다음과 동일하다.

```
\documentclass[letterpaper,10pt,twoside,oneside,openright,final]{memoir}
```

이 매뉴얼의 소스파일은 다음과 같이 시작한다.

```
\documentclass[letterpaper,10pt,extrafontsizes]{memoir}
```

이는 다소 과한 것인데, `letterpaper`와 `10pt`는 이미 기본값이기 때문이다.

문서는 `document` 환경내의 내용만 조판된다. `\documentclass` 명령에서 `document` 환경 이전까지의 영역을 *전처리부* (`preamble`)라 한다. 필요하다면 이 곳에서 외부 패키지를 불러들이거나 자신의 매크로를 정의한다.

```
\flushbottom \raggedbottom
```

`twoside`나 `twocolumn` 옵션이 주어지면 `\flushbottom`, 그 외의 경우에는 `\raggedbottom`으로 조판된다.

`\raggedbottom`이 선언되면 LaTeX이 조판 영역 (type block)의 높이를 일정하게 유지하려는 시도를 하지 않기 때문에 페이지가 조금 부족하게 채워질 수도 있다.

`\flushbottom`이 선언되면, 사용자가 페이지 나눔을 일부러 사용하지 않는 한, LaTeX은 매 페이지마다 조판 영역의 높이를 일정하게 유지하려고 한다. LaTeX이 페이지 높이를 일정하게 유지하기 위해 사용하는 방법은 수직 간격 (예를 들면, 문단과 문단의 사이의 간격이나 `headings`, 떠다니는 개체 (float), 수식과 같이 삽입된 내용의 전후 공간 등)을 늘리거나 줄이는 것이다. 이는 일부의 페이지 컬러에 악영향을 줄 수도 있다.

만약 너무 많은 페이지가 `\flushbottom` 때문에 늘어난 상태라면 전처리부에 `\raggedbottom`을 사용하는 것이 좋다.

`ebook` 옵션을 쓸 때는 `12pt`와 `oneside` 옵션을 함께 사용하는 편이 좋다.



# Two

## 페이지 얹히기

이 앞까지 *headings* 페이지 스타일을 적용해왔다. 페이지 스타일에 대해서는 §7.2 절에 기술되어 있다. 이 장 이후로는 *ruled* 페이지 스타일로 조판한다.

### 2.1 소개

이 클래스의 기본 페이지 레이아웃은 페이지 크기가 용지 크기와 같고 조판 영역의 크기는 대략 페이지의 중앙에 놓이는 것이다. 이러한 기본값이 만족스럽지 않을 때 자신만의 페이지 레이아웃을 만들어낼 수 있도록 하는 명령을 이 클래스가 제공한다. 이 장에서 이에 대하여 살펴본다.

기본 레이아웃으로 만족한다면 이 장의 내용을 건너뛰어도 좋다.

책의 각 페이지는 독자에게 정보와 즐거움과 놀라움을 주려는 의도로 텍스트를 배치한다. 페이지는 저자의 이러한 목적에 적합하도록, 그리고 독자가 저자의 생각과 의도를 파악하기 쉽도록 디자인되어야 한다. 일반적 독자가 쉽게 알아차리기 어려운 것이 좋은 페이지 디자인이다. 독자에게 끊임없이 페이지 레이아웃이 의식적이든 무의식적이든 신경쓰이게 한다면 책의 원래 목적과는 동떨어진 효과를 가져오게 된다. 디자인이 “이것 좀 봐줘”라고 노골적으로 들이대거나 주의를 끌려한다면 그것은 좋은 디자인이 아니다.

페이지에는 세 가지 주요 구성부분이 있다. 페이지 자체, 조판 영역, 마진. 마진이란 페이지의 끝단에서 조판영역까지를 말한다. 좀 덜 중요한 요소로서 면주(상단면주와 하단면주)가 있고 여백주석이 있을 수도 있다. 페이지 디자인의 성공 여부는 이 모든 것이 얼마나 조화롭고 균형있고 리듬감있게 배치되는가에 달렸다.

형식이 많이 다르기는 하지만 이 장에서 설명하는 기능들은 *geometry* 패키지 [Ume99]가 제공하는 것과 유사하다.

만약 클래스에 용지 옵션을 적용한 글을 쓰고 있다면 2.4 – 조판 영역 절로 바로 가도 된다. 용지(*stock*) 크기를 이미 선택하였고 트리밍이 필요하지 않은 경우이기 때문이다.

그러나 만약 지금 하고 있는 일이 특정 용지(*stock*)를 선택하고 트리밍을 표시하여야 하는 문서를 디자인을 하고 있는 상황이라면, 다음 절을 계속 읽도록 하라.

### 2.2 용지

인쇄라는 것은 어떤 소재의 일부에 기호를 얹히는 행동이다. 실크 스크린이라 불리는 티셔츠 인쇄 과정을 생각해보면 여기서는 인쇄할 기호 모양을 스크린에 떠서, 이 경우의 소재가 되는 티셔츠 옷감에 대고 스크린 위로 잉크를 흘려넣는다. 그러나 이런 것은 책을 만드는 데 일반

## 2. 페이지 얹히기

적으로 쓰이는 종류의 인쇄나 소재가 아니다. 아주 특별한 경우를 제외하면 책의 인쇄 소재는 종이이다.

탁상출판의 세계에서 용지는 표준 크기가 정해져 있다. 미국에서 주로 쓰이는 것은 letter-paper(11 × 8.5인치)이다. 다른 나라에서는 용지 한 장의 크기를 A4 사이즈로 하는 경우가 많다. 상업출판에서 사용되는 용지는 이보다 훨씬 큰 종이에 여러 페이지를 인쇄할 수 있게 되어 있다. 이 인쇄되는 용지를 접고 자르고 트리밍하여 최종적으로 제본할 수 있는 페이지로 만든다. 이 클래스는 탁상출판을 보편적인 경우로 상정하고 제작하였다.

### 2.3 페이지(頁)

이 클래스는 용지의 한 면에 한 페이지만 존재한다고 본다. 그리고 두 종류의 페이지가 있어서 앞면과 뒷면의 맞쪽을 이룬다고 상정한다.

LaTeX 자체에서 정의하는 페이지 레이아웃의 파라미터들을 Figure 2.1에 보였다. LaTeX은 페이지의 물리적 크기에 대해서는 아무런 상관도 하지 않는다. 단지 왼쪽 상단의 기준점을 정해두고 인쇄될 영역은 무한대라고 가정한다. 조판 영역이 인쇄될 용지 영역에 비하여 너무 크거나 길 때 LaTeX은 주저없이 물리적 경계 바깥쪽에 텍스트를 놓는다.

LaTeX 파라미터가 불편할 때가 있다. 이를테면 텍스트의 상단이 페이지 상단보다 정해진 길이만큼 떨어져야 한다면 바깥쪽 여백이 안쪽 여백보다 2배의 길이여야 하는 경우이다. 파라미터의 값을 필요하면 계산하는 것이 가능하기야 하지만 불편한 것이 사실이다.

이 클래스는 페이지 레이아웃을 지정하는 다양한 수단을 제공한다. 이것이 표준 클래스의 그것보다 편리하기를 바란다. 설정값을 변경할 수 있는 파라미터를 이용하여 용지 크기, 페이지 크기 등을 바꿀 수 있다. 표준 클래스와 이 클래스의 파라미터에서, 마진 노트를 위한 파라미터는 양자가 동일하지만 서로 다른 것이 몇 가지 있다. 그림 2.3은 홀수면(오른쪽 페이지)에 대한 이 클래스의 파라미터를 보인 것이다. 이 파라미터들은 `\setlength`나 아래 설명하는 명령을 이용하여 각각 바꿀 수 있다. 그림 2.2는 짝수면(왼쪽 페이지)에 대하여 같은 파라미터를 보인 것이다.

페이지 레이아웃을 디자인하는 첫 단계는 페이지의 크기를 결정하고 알맞은 용지 크기를 선택하는 것이다. 표준 용지를 사용하면 특별한 크기의 용지를 설정하는 것보다 편하다.

```
\setstocksize{<height>}{<width>}
```

클래스 옵션으로 몇 가지 용지 크기를 선택할 수 있다. 따라서 클래스 옵션 `a4paper`를 지정하고 A4에 인쇄할 생각이라면 `\setstocksize` 명령에 대해서 알 필요가 없으니 2.4 절로 바로 진행해도 좋다. 이 외에도 이 클래스는 여러 표준 용지 크기에 대한 설정을 제공한다. Table 1.1부터 Table 1.3까지를 살펴보자.

만약 용지 크기를 새롭게 설정하려 한다면 `\setstocksize` 명령을 사용하면 된다. 세로 길이가 `<height>`, 가로 길이가 `<width>`가 되도록 설정해준다. 다음 명령은 용지 크기를 세로(높이) 9인치, 가로(너비) 4인치가 되도록 한다.

```
\setstocksize{9in}{4in}
```

페이지 크기는 용지 크기보다 커서는 안 된다. 용지보다 작다면 나중에 용지를 트리밍할 것이라는 뜻이다. 페이지가 용지 위에 놓이는 위치는 용지 범위 안이기만 하면 어디든 상관없다.

페이지 레이아웃은 맞쪽 펼침면으로 인식한다. 책을 펼쳤을 때의 모양이 맞쪽 펼침면이다. 짝수면이 왼쪽에 있고 홀수면이 오른쪽에 있으며 그 사이에 제본부위(책등)가 있다. 책은 단았을 때 가로가 긴 것보다 세로가 긴 것이 많다. 그것이 펼쳐서 읽기 쉽기 때문이다. 가로가 길게 짜부라진 책은 책상 위에 펼쳐놓지 않는 한 읽기 불편하다.

```
\settrimmedsize{<height>}{<width>}{<ratio>}
```



The circle is at 1 inch from the top and left of the page. Dashed lines represent  $(\backslash\text{hoffset} + 1\text{ inch})$  and  $(\backslash\text{voffset} + 1\text{ inch})$  from the top and left of the page.

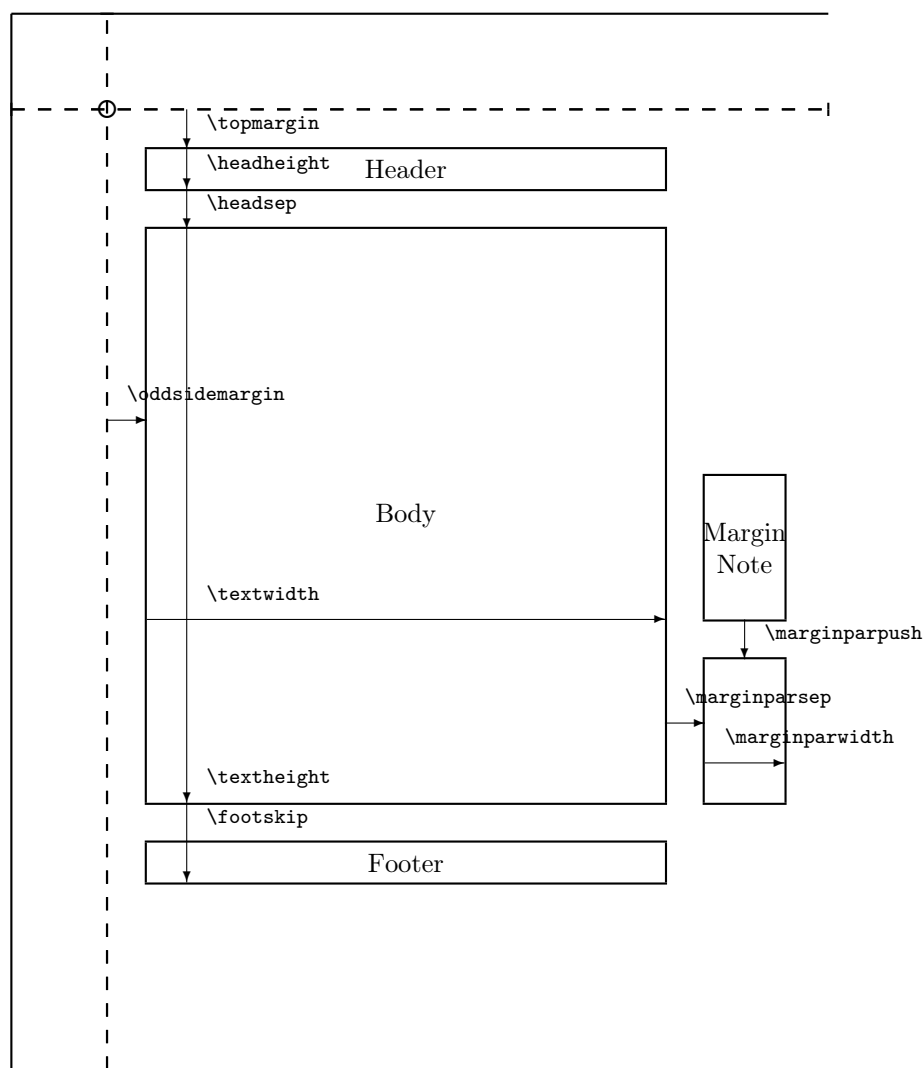


Figure 2.1: 오른쪽 페이지 (홀수면)의 LaTeX 페이지 레이아웃 파라미터

## 2. 페이지 앞하기

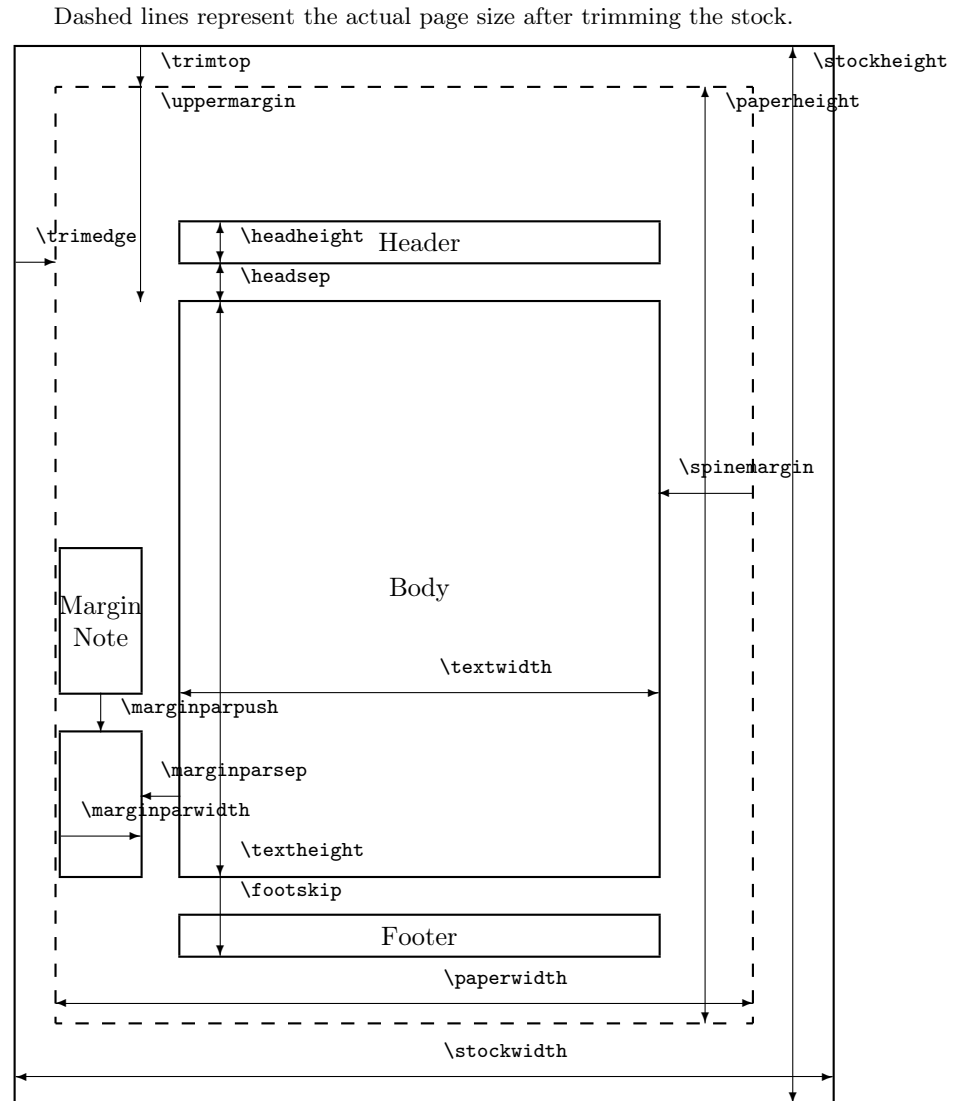


Figure 2.2: 왼쪽 페이지에 대한 memoir 클래스 파라미터

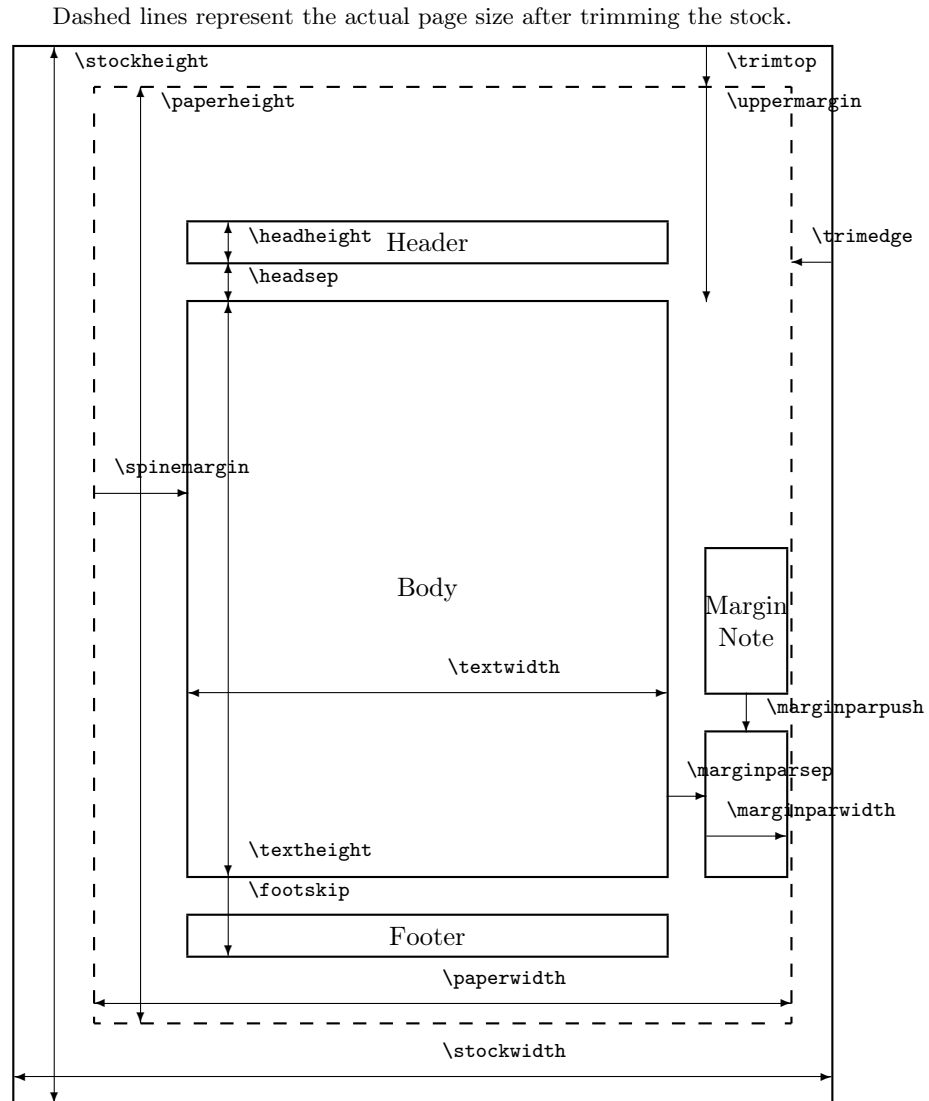


Figure 2.3: 오른쪽 페이지에 대한 memoir 클래스 파라미터

## 2. 페이지 얹히기

Table 2.1: `\settrimmedsize` 및 `\settypeblocksize` 명령의 인자와 결과

$\langle height \rangle$	$\langle width \rangle$	$\langle ratio \rangle$	Result
H	W	r	ambiguous
H	W	*	$H, W$
H	*	r	$W = rH$
H	*	*	ambiguous
*	W	r	$H = rW$
*	W	*	ambiguous
*	*	r	ambiguous
*	*	*	ambiguous

맨먼저 페이지 크기는 `papersize` 옵션에 의하여 주어지는 용지 크기와 동일하게 설정된다. `\settrimmedsize` 명령은 페이지의 (트리밍 후의) 세로, 가로 길이를 설정한다.  $\langle ratio \rangle$  인자는 주어진 너비 ( $\langle width \rangle$ ) 나 높이 ( $\langle height \rangle$ ) 값에 이 값을 곱하여  $\langle height \rangle$  또는  $\langle width \rangle$ 를 설정하게 하는 값이다. 세 개의 인자 가운데 두 개만을 명시적 값으로 지정하여야 하고 값을 정하지 않을 인자는 \* (별표)로 주어야 한다. `\paperheight`와 `\paperwidth`의 길이가 이 인자 값에 따라 계산된다. 다시 말하면 이 명령은 `\paperheight`와 `\paperwidth`의 값을 직접 또는 주어지는 상대적 비율값에 따라서 계산하게 하는 것이다. 인자 중에서 어떤 것을 주고 어떤 것을 주지 않을 수 있는가와 그에 따른 결과를 Table 2.1에 요약하였다.

용지 크기를 다르게 설정하기 위하여 `\setstocksize` 명령을 사용하였다면 다음 명령으로 페이지 크기를 용지와 동일하게 만든다.

```
\settrimmedsize{\stockheight}{\stockwidth}{*}
```

페이지 크기를 용지의 90%로 설정하려면 다음과 같이 한다.

```
\settrimmedsize{0.9\stockheight}{0.9\stockwidth}{*}
```

다음 세 가지 서로 다른 방법은 모두 페이지 크기를 가로 5인치, 세로 8인치로 설정한다.

```
\settrimmedsize{8in}{5in}{*}
```

```
\settrimmedsize{8in}{*}{0.625} % 5 = 0.625 times 8
```

```
\settrimmedsize{*}{5in}{1.6} % 8 = 1.6 times 5
```

잘 만들어진 하드백 제본 도서를 보면 각 낱장을 책등쪽에 접어 묶은 다음 이것을 실로 철하여 제본하고 있다. 페이지의 상단은 매끈하게 되어야 하는데 책이 책장에 똑바로 놓였을 때 울퉁불퉁한 것에 비하여 먼지가 스며들기 어렵게 만들려고 그렇게 하는 것이다. 따라서 용지를 트리밍할 때는 상단을 가지런하게 잘라내야 한다. 또한 페이지의 바깥쪽 마진과 아래쪽도 트리밍 해야 한다. 그러지 않으면 책을 펼쳐 읽을 수가 없게 된다.

```
\settrims{\top}{\foredge}
```

`\settrims` 명령은 홀수면의 상단과 fore-edge를 맞추기 위해 용지의 상단 ( $\langle top \rangle$ )과 바깥쪽 마진 ( $\langle foreedge \rangle$ )에서 잘라내어야 할 길이를 지정한다. `\settrims`와 `\settrimmedsize` 명령을 함께 써서 페이지를 용지 위의 어딘가의 위치에 놓을 수 있다는 사실을 알아두자. 기본적으로 상단과 여백쪽 잘라내기 값은 0이다. `\settrims` 명령을 써서 이것을 바꾸지 않는 한 잘라내기가 용지의 바닥과 안쪽 마진에서 일어난다는 뜻이다.

트리밍 값을 계산하는 것은 직접 할 수도 있고 LaTeX에게 계산시킬 수도 있다. 가로 5인치 세로 8인치 페이지를 가로 7인치 세로 10인치 용지에 얹히는 예를 들어본다.

```
\settrims{2in}{2in}
```

원하는 페이지 크기를 얻기 위해서 용지의 상단과 바깥쪽 여백을 2인치씩 잘라내도록 하였다. 그런데 예컨대 용지의 90% 페이지를 만들려 하는 경우에는 LaTeX에게 계산시키는 것이 쉬울 것이다.

```
\setlength{\trimtop}{\stockheight} % \trimtop = \stockheight
\addtolength{\trimtop}{-\paperheight} % - \paperheight
\setlength{\trimedge}{\stockwidth} % \trimedge = \stockwidth
\addtolength{\trimedge}{-\paperwidth} % - \paperwidth
```

이렇게 하면 모든 트리밍 값이 상단과 바깥여백에서 일어난다. 만약 하단도 상단과 같은 크기로 잘라내려고 한다면 다음과 같이 설정한다.

```
\settrims{0.5\trimtop}{\trimedge}
```

**2.11 미리 정의된 레이아웃** 절도 함께 보라. 몇 가지 추가적인 명령이 나와 있다. 예를 들어 `\setpagecc` 명령은 트리밍된 페이지가 용지의 중앙에 오도록 한다.

트리밍 이후에 조판 영역을 지정하는 여러 가지 방법을 소개할 것이다. 이후로 *트리밍된* 페이지만을 언급하고 용지에 대해서는 더 문제삼지 않는다.

## 2.4 조판 영역

페이지와 마찬가지로 조판영역도 세로 길이가 가로 길이보다 긴 직사각형 영역으로 이루어진다. 본문의 길이는 가독성을 고려하여 배치되어야 한다. 관행으로 보나 최근의 생리학적 연구결과로 보나 본문 글줄이 너무 길면 읽기가 어렵다. 그래서 조판 영역의 가로 길이에 상한을 둔다. 실무적 관점에서 한 행은 텍스트를 양끝맞추기하는 데 어려울 정도로 너무 짧아서도 안 된다.

### 2.4.1 조판영역의 글줄 길이에 관한 주석

실험에 의하면 단단 일행의 문자 수가 60에서 70 범위일 때 읽기 쉽다고 한다. 이 범위는 45자에서 75자 정도로 보아도 될 것인데 보통 66자가 가장 좋은 것으로 간주된다. 이보다 짧으면 눈이 행 사이에서 왕복하는 빈도가 너무 높아지고 이보다 길면 행의 마지막에서 눈이 너무 멀리 이동해야 하기 때문에 다음 행의 시작부분을 잘 찾아내지 못하여 같은 곳을 두 번 읽거나 다음 줄을 건너뛰거나 할 수 있다. 단단 텍스트에서 이상적인 것은 5자 정도 출입이 있는 45자 안팎이다.

Brighurst [Bri99]는 특정 폰트에서 한 행의 글자 수를 결정하는 방법을 제시하고 있다. 알파벳 소문자의 길이를 측정하고, 그 알파벳의 길이, 행장, 한 행에서의 평균 문자수를 보여주는 적정문자수표(copyfitting table)를 이용한다. 표 2.2는 Brighurst의 적정문자수표를 축약한 것이다. 예를 들면 130포인트 길이의 폰트는 단단 텍스트에서는 약 26pc 척도로 설정되어야 하고 단단 텍스트에서는 18pc 너비의 단으로 구성되어야 한다.

Morten Høgholm은 이 데이터의 곡선 맞춤 방정식을 다음과 같이 제시하였다.

$$L_{65} = 2.042\alpha + 33.41 \quad (2.1)$$

그리고

$$L_{45} = 1.415\alpha + 23.03 \quad (2.2)$$

여기서  $\alpha$ 는 포인트 단위로 표시된 알파벳 길이이고  $L_i$ 는  $i$ 개 문자가 있는 한 행에 대하여 포인트 단위로 표시된 추천 길이이다. (1pc는 12pt임을 기억하라.)

## 2. 페이지 앞하기

---

Table 2.2: 평균 행당 문자수

Pts.	Line length in picas							
	10	14	18	22	26	30	35	40
80	40	56	72	88	104			
85	38	53	68	83	98	113		
90	36	50	64	79	86	107		
95	34	48	62	75	89	103		
100	33	46	59	73	86	99	116	
105	32	44	57	70	82	95	111	
110	30	43	55	67	79	92	107	
115	29	41	53	64	76	88	103	
120	28	39	50	62	73	84	98	112
125	27	38	48	59	70	81	94	108
130	26	36	47	57	67	78	91	104
135	25	35	45	55	65	75	88	100
140	24	34	44	53	63	73	85	97
145	23	33	42	51	61	70	82	94
150	23	32	41	51	60	69	81	92
155	22	31	39	49	58	67	79	90
160	22	30	39	48	56	65	76	87
165	21	30	38	46	55	63	74	84
170	21	29	37	45	53	62	72	82
175	20	28	36	44	52	60	70	80
180	20	27	35	43	51	59	68	78
185	19	27	34	42	49	57	67	76
190	19	26	33	41	48	56	65	74
195	18	25	32	40	47	54	63	72
200	18	25	32	39	46	53	62	70
220	16	22	29	35	41	48	56	64
240	15	20	26	32	38	44	51	58
260	14	19	24	30	35	41	48	54
280	13	18	23	28	33	38	44	50
300	12	17	21	26	31	35	41	47
320	11	16	20	25	29	34	39	45
340	10	15	19	23	27	32	37	42

표 2.3은 몇몇 폰트에 대하여 일련의 폰트 크기에 따른 알파벳 소문자 길이를 보여준다. 14 페이지의 Table 2.2와 함께 사용하여 적정 본문 길이를 결정할 수 있다. 폰트 이름을 로만, 산세리프, 모노스페이스 순서로 배열하였는데 표준 LaTeX 시스템에서 모두 사용가능하다. Computer Modern Roman, Concrete Roman, Computer Sans, Typewriter 폰트는 모두 도널드 커누스가 Metafont를 사용하여 특히 TeX에서 쓰려고 디자인한 것이다. 다른 폰트 패밀리들은 PostScript 윤곽선 글꼴로서 여러 조판 시스템에서 사용되고 있는 것들이다. 이 특정 폰트들은 psnfss 묶음에 포함된 패키지를 이용하여 LaTeX에서 사용할 수 있다. 커누스의 폰트들은 폰트 가족을 이루도록 설계되었다. 즉 그 폰트들을 함께 조화롭게 사용할 수 있게 디자인되어 있다. 반면에 위에 열거된 다른 PostScript 폰트들은 서로 다른 사람이 다른 시기에 다른 목적으로 디자인한 것들이다. Bringhurst [Bri99, p. 96]는 기억하기 쉽도록 다음과 같이 말한 바가 있다. “예를 들면 Baskerville, Helvetica, Palatino, Times Roman, 이 네 폰트는 (가장 널리 사용되는 것으로서) 별다른 고민 없이 그냥 사용해도 큰 문제 없다.”

Courier와 Typewriter 같은 모노스페이스 폰트는 실제 고품위 출판에서는 거의 쓰이지 않는다. 이것은 컴퓨터 코드나 소스를 식자해야 할 때나 아니면 타자기로 타자친 모양을 흉내내어 식자하여야 할 때에 사용되는 것이다. 이것을 제외하고 Table을 간단히 살펴보면 Bookman은 폭이 넓은 폰트이고 Times는 원래 신문지상의 좁은 컬럼에서 사용하기 위해 만들었던 제작 의도대로 폭이 좁은 폰트인 것을 알 수 있다. Computer Modern은 폭이 좁은 편에 더 가깝다.

```
\xlvchars \lxvchars
```

Table 2.3에 따라 두 개의 길이 명령 \xlvchars와 \lxvchars가 다른 폰트 사용이 지정되지 않았을 때 문서가 설정한 폰트 크기에 따라 Computer Modern Roman 폰트에 대하여 각각 45글자와 65글자에 해당하는 개략적인 길이로 설정된다.

다른 폰트를 사용한다면 다음에 보이는 것과 같이 하여 그 길이를 계산하여 보여줄 수 있다.

```
\newlength{\mylen} % a length
\newcommand{\alphabet}{abc...xyz} % the lowercase alphabet
\begingroup % keep font change local
%% font specification e.g., \Large\sffamily
\settowidth{\mylen}{\alphabet}
The length of this alphabet is \the\mylen. % print in document
\typeout{The length of the Large sans alphabet
is \the\mylen} % put in log file
\endgroup % end the grouping
```

\typeout 매크로는 그 인자를 터미널과 로그 파일로 출력한다. 그러나 더 쉬운 방법이 있다.

```
\setxlvchars[<fontspec>]
\setlxvchars[<fontspec>]
```

Morten Høgholm이 제안한 매크로 \setxlvchars와 \setlxvchars는 <fontspec> 폰트에 대하여 각각 \xlvchars와 \lxvchars 길이를 설정한다. <fontspec>의 기본값은 \normalfont이다. 예를 들어보면 다음 코드가 실행된 이후의 \lxvchars와 \xlvchars 값은

```
\setlxvchars \setxlvchars[\small\sffamily]
```

이렇게 된다. \lxvchars = 292.73834pt, 그리고 \xlvchars = 179.59335pt.

Morten Høgholm은<sup>1</sup> 또 다음과 같이 언급하였다.

<sup>1</sup>개인적인 교신에서

## 2. 페이지 얹히기

Table 2.3: 다양한 폰트에서 포인트별 소문자 알파벳 길이

	8pt	9pt	10pt	11pt	12pt	14pt	17pt	20pt
Bookman	113	127	142	155	170	204	245	294
Charter	102	115	127	139	152	184	221	264
Computer Modern	108	118	127	139	149	180	202	242
Concrete Roman	109	119	128	140	154	185	222	266
New Century Schoolbook	108	122	136	149	162	194	234	281
Palatino	107	120	133	146	160	192	230	276
Times Roman	96	108	120	131	143	172	206	247
Utopia	107	120	134	146	161	193	232	277
Avant Garde Gothic	113	127	142	155	169	203	243	293
Computer Sans	102	110	120	131	140	168	193	233
Helvetica	102	114	127	139	152	184	220	264
Courier	125	140	156	170	187	224	270	324
Typewriter	110	122	137	149	161	192	232	277

…저는 `\parindent`를 인덴트 값으로 갖는 환경을 정의하려 하였습니다. 몇 가지 이유가 있어서 `\parindent`에 해당하는 값이라고 제가 “알고 있던” `1.5em`을 적어넣었는데, 나중에 보니 제가 `mathpazo` 패키지 [Pug02]를 로드하고 있었던 것입니다. 그러자 다른 것은 차치하고 `\parindent` 값이 바뀌어버린 것입니다. 결론: `\parindent`는 `17.607pt`인 데 비해서 제가 작성한 그 환경에서는 `1.5em = 18.0pt`가 되어야 했던 것입니다.

이런 상황은

```
\RequirePackage{font-package}\normalfont
```

를 `\documentclass`보다 이전에 둬으로써 피해갈 수 있습니다.

일반적으로 말해서 어떤 명령을 `\documentclass` 이전에 두라고 하는 것은 조언으로서 적절치 못하다는 점을 알아두자.

### 2.4.2 조판 영역 크기 설정

조판 영역의 높이는 행수의 합과 같아야 한다. 이 클래스는 조판 영역을 설정하는 두 가지 방법을 제공한다. `\settypeblocksize` (아래 설명)는 조판 영역의 크기를 정하고, 그런 다음 다른 명령으로 그것을 용지 위에 위치짓는다. 다른 방법으로 조판 영역의 크기를 그 주변의 여백 크기를 설정함으로써 지정할 수 있다. 이 절의 뒷 부분에서 이에 대하여 설명한다. (`\setlrmarginsandblock`과 `\setulmarginsandblock`을 보라.)

```
\settypeblocksize{height}{width}{ratio}
```

`\settypeblocksize` 명령은 `\settrimmedsize`와 비슷하지만 조판 영역에 해당하는 `\textheight`와 `\textwidth`를 설정한다는 점이 다르다. 인자의 조합 가능성과 그 해당하는 결과를 ?? 페이지의 Table 2.1에 열거하였다. 예를 들면 다음 보기는 조판 영역을 가로 3인치, 세로 6인치로 설정하는 세 가지 방법이다.

```
\settypeblocksize{6in}{3in}{*}
\settypeblocksize{6in}{*}{0.5}
\settypeblocksize{*}{3in}{2}
```



Table 2.4: `\setlrmargins`의 인자와 그 결과

<code>\spine</code>	<code>\edge</code>	<code>\ratio</code>	Result
S	E	r	ambiguous
S	E	*	ambiguous
S	*	r	ambiguous
S	*	*	$E = K_w - S$
*	E	r	ambiguous
*	E	*	$S = K_w - E$
*	*	r	$E + S = K_w, E = rS$
*	*	*	$E + S = K_w, E = S$

조판 영역은 페이지 위에 놓여야 한다. 페이지와 조판 영역, 여백 공간 사이에는 일정한 관계가 있다. 안쪽 여백과 바깥쪽 여백, 그리고 조판 영역의 가로 길이의 합은 페이지의 가로 길이와 같아야 한다. 안쪽 여백은 책등쪽 여백이고 바깥쪽 여백은 오른쪽 페이지의 오른쪽 끝 부분 여백이다. 마찬가지로, 상단 여백과 하단 여백, 그리고 조판 영역의 세로 길이의 합은 페이지의 세로 길이와 같아야 한다. 조판 영역을 페이지에 얹히는 과정은 조판 영역을 페이지의 끝을 기준으로 어디에 놓을지의 문제로 볼 수도 있고 페이지와 조판 영역 사이의 여백의 크기를 정하는 문제로 볼 수도 있다.

페이지 레이아웃은 펼침면으로 정의한다는 사실을 상기하자. 안쪽 여백은 보통 바깥쪽 여백의 반이다. 그래야 공백 공간이 텍스트의 좌우에 고르게 분배된다.

**Note.** `\settypeblocksize` 명령을 사용하고서 그 뒤에 `\setlrmargins`와 `\setulmargins`를 사용하지 않으면 위에서 언급한 관계를 충족하지 못하여(`\textwidth`는 바뀌었지만 여백 길이가 바뀌지 않아서) 오류를 만나게 되는 수가 있다.

이후 버전 *memoir*에서 자동 조절 기능을 추가할 수도 있다.

상단 하단 여백의 비율을 정하는 데 많은 선택지가 있는데 보통 상단 여백을 하단 여백보다 짧게 잡는다. 그래서 조판 영역이 수직 중앙에 놓이지 않는다.

페이지의 수평 길이를 정하는 두 가지 방법이 있다. 하나는 조판 영역의 너비를 고정시키고 여백을 조절하는 것이고 다른 하나는 여백의 크기를 먼저 정하고 결과적으로 조판 영역의 너비가 결정되게 하는 것이다.

`\setlrmargins{\spine}{\edge}{\ratio}`

`\setlrmargins` 명령은 페이지 너비와 조판 영역을 고정시켜놓고 옆 여백을 설정하기 위해 사용한다.<sup>2</sup>

한 개 이상의 인자 값이 필요하다. 값을 주지 않는 인자는 별표로 표시한다. 여러 가지 경우를 고려할 수 있어서 이에 대하여 Table 2.4에 요약하였다.

Table에서  $S$ 는 계산된 안쪽 여백의 값이고  $E$ 는 계산된 바깥쪽 여백의 값이다. 그리고  $P_w$ 와  $B_w$ 는 각각 페이지와 조판 영역의 너비를 나타낸다. `\setlrmargins` 명령은 다음 관계식을 만족한다.

$$S + E = K_w = \text{constant} (= P_w - B_w).$$

Table에서 ambiguous라고 표시된 경우는 인자 값의 특정 조합이 위의 관계식을 보장하지 못하는 경우이다.

<sup>2</sup>Figure 2.3과 2.2에는 안쪽 여백만 표시되어 있다. 바깥쪽 여백은 조판 영역의 반대편이다.

## 2. 페이지 얹히기

Table 2.5: `\setlrmarginsandblock`의 인자와 결과

$\langle \text{spine} \rangle$	$\langle \text{edge} \rangle$	$\langle \text{ratio} \rangle$	Result
S	E	r	$S, E$
S	E	*	$S, E$
S	*	r	$E = rS$
S	*	*	$E = S$
*	E	r	$S = rE$
*	E	*	$S = E$
*	*	r	ambiguous
*	*	*	ambiguous

5인치 너비의 페이지에 조판 영역의 너비를 3인치로 하고 안쪽 여백을 0.8인치, 바깥쪽 여백을 1.2인치로 (즉 바깥쪽 여백이 안쪽 여백의 반만큼 더 크게) 설정하려고 한다고 해보자. 세 가지 방법으로 이것을 해낼 수 있다. (`\paperwidth`와 `\textwidth`는 미리 정해져서 고정되어 있다.)

```
% specify spine margin
\setlrmargins{0.8in}{*}{*}
% specify fore-edge margin
\setlrmargins{*}{1.2in}{*}
% specify fore-edge/spine ratio
\setlrmargins{*}{*}{1.5}
```

`\setlrmarginsandblock{\langle spine \rangle}{\langle edge \rangle}{\langle ratio \rangle}`

`\setlrmarginsandblock` 명령은 페이지 너비는 고정되어 있지만 조판 영역의 너비는 여백 설정에 따라 달라지는 경우에 안쪽 여백과 바깥쪽 여백을 설정하는 데 사용한다. 이 명령의 결과는 Table 2.5에 주어져 있다. 같은 기호를 사용하여 이 경우에 `\setlrmarginsandblock`은 다음 관계를 만족한다.

$$S + B_w + E = \text{constant} (= P_w).$$

조판 영역의 너비는  $B_w = P_w - S - E$ 로 계산된다.

5인치 너비의 페이지에 조판 영역의 너비를 3인치로 하고 안쪽 여백을 0.8인치, 바깥쪽 여백을 1.2인치로 (즉 바깥쪽 여백이 안쪽 여백의 반만큼 더 길도록) 한다고 하자. 이것은 아래와 같은 방법으로 (`\textwidth`가 이미 주어진 `\paperwidth`와 여백 길이로부터 계산되어 나오도록) 할 수 있다.

```
% specify both margins
\setlrmarginsandblock{0.8in}{1.2in}{*}
% specify spine & fore-edge/spine ratio
\setlrmarginsandblock{0.8in}{*}{1.5}
% specify fore-edge & spine/fore-edge ratio
\setlrmarginsandblock{*}{1.2in}{0.667}
```

만약 양쪽 여백을 똑같이 1인치로 하고자 한다면 다음과 같이 하면 된다.

```
% specify both margins
\setlrmarginsandblock{1in}{1in}{*}
% specify spine & fore-edge/spine ratio
```

Table 2.6: `\setulmargins`의 인자와 그 결과

$\langle upper \rangle$	$\langle lower \rangle$	$\langle ratio \rangle$	Result
U	L	r	ambiguous
U	L	*	ambiguous
U	*	r	ambiguous
U	*	*	$L = K_h - U$
*	L	r	ambiguous
*	L	*	$U = K_h - L$
*	*	r	$L + U = K_h, L = rU$
*	*	*	$L + U = K_h, L = U$

```

\setlrmarginsandblock{1in}{*}{1}
% specify spine (fore-edge = spine)
\setlrmarginsandblock{1in}{*}{*}
% specify fore-edge & spine/fore-edge ratio
\setlrmarginsandblock{*}{1in}{1}
% specify fore-edge (spine = fore-edge)
\setlrmarginsandblock{*}{1in}{*}

```

```
\setbinding{<length>}
```

동아시아 고서의 천공제본같은 경우에 안쪽 여백에 제본을 위한 약간의 여백이 추가되는 것이 바람직하다. 이를 위하여 `\setbinding` 명령을 사용할 수 있다.  $\langle length \rangle$  길이만큼 유효 페이지 너비에서 뺀다가 나중에 이 길이를 안쪽 여백에 더하여 준다. 그리하여 페이지 전체의 너비가 원래의 것과 같도록 만든다. `\setbinding`을 사용한다면 반드시 페이지 너비 설정 부분 이후, 안쪽 및 바깥쪽 여백 설정 이전에 해야 된다.

여기까지가 가로 길이를 설정하는 방법에 관한 부분이다. 세로 길이에 대하여서도 비슷한 명령이 제공된다. 이하에서 서술한다.

```
\setulmargins{<upper>}{<lower>}{<ratio>}
```

`\setulmargins` 명령은 페이지의 높이와 조판 영역의 높이가 고정되어 있을 때 상단 여백과 하단 여백을 설정하는 데 사용한다.<sup>3</sup> 이것은 `\setlrmargins`와 비슷하다. 이번에는 살짝 다른 부호를 이용하여  $U$ 가 상단 여백,  $L$ 이 하단 여백,  $P_h$ 와  $B_h$ 를 각각 페이지와 조판 영역의 높이라고 하자. 결과는 Table 2.6에 나타내었다. `\setulmargins` 명령은 다음 관계식을 만족한다.

$$U + L = K_h = \text{constant} (= P_h - B_h).$$

종래 LaTeX의 파라미터 용어로 하자면 memoir의 `\uppermargin`은  $(\text{\topmargin} + \text{\headheight} + \text{\headsep})$ 이다.

```
\setulmarginsandblock{<upper>}{<lower>}{<ratio>}
```

`\setulmarginsandblock` 명령은 페이지의 높이가 고정되어 있고 조판 영역의 높이는 여백 길이에 따라 달라지는 경우에 상단 여백과 하단 여백을 설정하는 데 사용한다. 이 명령의 결과는

<sup>3</sup>Figure 2.3과 2.2에는 상단 여백만이 표시되어 있다. 하단 여백은 조판 영역의 아래쪽 끝에서 페이지의 바닥까지의 길이이다.

## 2. 페이지 얹히기

Table 2.7: `\setulmarginsandblock`의 인자와 그 결과

$\langle upper \rangle$	$\langle lower \rangle$	$\langle ratio \rangle$	Result
U	L	r	$U, L$
U	L	*	$U, L$
U	*	r	$L = rU$
U	*	*	$L = U$
*	L	r	$U = rL$
*	L	*	$U = L$
*	*	r	ambiguous
*	*	*	ambiguous

Table 2.7에 나타내었다. 같은 부호를 사용하여 이 경우를 나타내면 `\setulmarginsandblock` 명령은 다음 관계식을 만족한다.

$$U + B_h + L = \text{constant} (P_h).$$

조판 영역의 높이는  $B_h = P_h - U - L$ 로 계산된다.

**Note.** 여백 면주 디자인의 몇 가지 예를 [Wil09d]에서 찾아볼 수 있다.

`\setcolsepandrule{\langle colsep \rangle}{\langle thickness \rangle}`

이단 조판에서 단 사이 간격을 지정해야 한다. LaTeX에서도 단 사이 중앙에 수직 패션을 그릴 수 있다. `\setcolsepandrule` 매크로는 단 사이 간격의 크기 `\columnsep`을  $\langle colsep \rangle$ 으로 설정하고 패선의 두께 `\columnseprule`을  $\langle thickness \rangle$ 로 설정한다.  $\langle thickness \rangle$ 가 0pt이면 선은 표시되지 않는다. 패선이 보이게 할 때 보통 사용하는 두께는 0.4pt 정도이다. 이단 문서의 총 너비(조판 영역 너비)는 각 단의 본문 너비에 단 사이 간격을 더한 것과 같다.

이리하여 페이지의 주요 부분 즉, 페이지 크기, 조판 영역의 크기, 조판 영역을 둘러싸는 여백의 크기에 해당하는 레이아웃 설정 방법을 모두 알았다.

### 2.5 상단, 하단, 여백에 들어가는 요소

페이지에는 두 가지 요소가 더 있는데 적어도 둘 중 하나는 있다. 상단 면주와 하단 면주가 그것이다. 페이지에 페이지 번호(폴리오)가 붙는다면 상단 면주나 하단 면주에 위치한다. 물론 페이지 번호가 상단이나 하단에 오지 않는 경우도 있기는 하지만 어쨌든 페이지의 상대적으로 일관된 위치에 놓여야 한다. 페이지 번호를 두는 보편적인 위치는 상단이나 하단의 바깥쪽 여백에 가까이 두는 것이다. 그래야 책을 대강 훑어볼 때 쉽게 위치를 가늠할 수 있게 된다. 하단의 중앙에 두는 경우도 있는데, 독자를 학대할 의도가 아니라면 안쪽 여백 가까이 두지는 말아야 한다.

대개 페이지 상단에는 왼쪽에 장 제목, 반대편에 절 제목을 두어서 독자가 책을 훑어보는 것이 가능하게 하고 있다. 어떤 책에는 책 자체의 제목을(주로 왼쪽) 상단에 두는 경우도 있는데 필자가 생각하기에 독자는 이미 자기가 읽는 책 제목 정도는 알고 있을 것으로 봐도 될 터이므로 책 제목을 거기에 두는 게 무슨 의미가 있나 싶다. 차라리 좀더 유용한 정보를 제공하는 자리로 쓰는 게 공간을 낭비하지 않는 일일 것이다.

`\setheadfoot{\langle headheight \rangle}{\langle footskip \rangle}`

Table 2.8: `\setheaderspaces`의 인자와 그 결과

$\langle\text{headdrop}\rangle$	$\langle\text{headsep}\rangle$	$\langle\text{ratio}\rangle$	Result
D	$H_s$	r	ambiguous
D	$H_s$	*	ambiguous
D	*	r	ambiguous
D	*	*	$H_s = C_h - D$
*	$H_s$	r	ambiguous
*	$H_s$	*	$D = C_h - H_s$
*	*	r	$H_s + D = C_h, H_s = rD$
*	*	*	$H_s + D = C_h, H_s = D$

`\setheadfoot` 매크로는 `\headheight` 파라미터를  $\langle\text{headheight}\rangle$  값으로 설정하고 `\footskip` 파라미터를  $\langle\text{footskip}\rangle$  값으로 설정한다. 일반적으로 `\headheight`는 최소한 본문 기본 폰트의 `\baselineskip` 값을 가지도록 한다.

`\setheaderspaces{\langle\text{headdrop}\rangle}{\langle\text{headsep}\rangle}{\langle\text{ratio}\rangle}`

`\setheaderspaces` 명령은 `\setulmargins`와 유사하다.  $U$ 가 상단 여백을 나타내는 부호이고  $H_h$ 를 `\headheight`,  $H_s$ 를 `\headsep`,  $D$ 를 `\headdrop`이라고 하자. 여기서 `\headdrop`이란 트리밍된 페이지의 왼쪽 끝에서 상단 영역의 위쪽 끝까지의 길이를 가리킨다.<sup>4</sup> 그러면 `\setheaderspaces` 매크로는 다음 관계를 충족한다.

$$D + H_s = C_h = \text{constant} (= U - H_h).$$

`\setheaderspaces` 매크로는 페이지 상단의 아래 위 간격을 설정하는 데 사용한다. 줄 수 있는 인자와 그 효과에 대해서 Table 2.8에 나타내었다. 대체로 `\headsep`이 `\headdrop`보다 더 중요하다.

마지막으로 여백 문단에 대하여 해야 할 일이 있다. 이 작업은 레이아웃 설정의 맨 마지막 단계에 와서, 여백에 문단을 넣기에 충분할 만큼의 공간을 확보하고서 해야 한다. 그림 2.2는 여백 문단의 파라미터를 짝수면에 대해 보여주고 있으며 용지 상의 위치를 제어할 수 있는 몇 가지 파라미터를 그림으로 알려준다.

`\setmarginnotes{\langle\text{separation}\rangle}{\langle\text{width}\rangle}{\langle\text{push}\rangle}`

`\setmarginnotes` 명령은 여백 문단의 파라미터를 설정한다. 조판 영역에서 여백 문단까지의 거리 `\marginparsep`를  $\langle\text{separation}\rangle$  값으로 설정하고 여백 문단의 최대 너비 `\marginparwidth`를  $\langle\text{width}\rangle$  값으로 설정하고 여백 문단 서로 간의 거리 최소값 `\marginparpush`를  $\langle\text{push}\rangle$  값으로 설정한다.

**Note.** *memoir v3.6k* 버전에서 `\marginparwidth` 값의 자동 설정 기능을 추가하였다. 그래서 `\setmarginnotes`를 사용하여 특정한 값을 지정하지 않으면 `\marginparwidth`는 G.1.1 절에서 기술하는 알고리즘에 따라 설정된다. 이 알고리즘은 `\marginparmargin`이 (사용된다면) `\checkandfixthelayout` 이전에 와야만 동작한다.

*memoir*의 이후 버전에서 더 많은 자동 조정 기능을 추가할 것이다.

<sup>4</sup>head drop은 Figure 2.3이나 2.2에 표시되지 않았다.

## 2. 페이지 얹히기

---

### 2.6 기타

`\setfootins{<length for normal>}{<length for minipage>}`

각주가 조판 영역에 놓일 때는 `\skip\footins` 만큼의 거리를 본문에 추가한다. 이것은 `skip` 이기 때문에 이를 바꾸려면 특별한 문법이 필요하다. 이 값을 설정할 수 있는 명령을 제공한다.<sup>5</sup> 기본값은 `\bigskipamount`이다.

### 2.7 종합

지금까지 논의한 페이지 레이아웃 파라미터들은 LaTeX이나 LaTeX 패키지에서 활용하는 것과 똑같지 않다. LaTeX가 요청하는 파라미터는 Figure 2.1에서 보였다. 페이지 레이아웃을 바꾸려면 이 클래스의 명령을 사용하든가 아니면 바꾸고자 하는 LaTeX 파라미터에 직접 `\setlength`나 `\addtolength`를 적용하여 수정할 수 있다. 두 번째 방법을 적용하는 경우에 표준 LaTeX 파라미터와 다른 이 클래스의 파라미터는 수정되지 않는다.

자신만의 페이지 레이아웃을 작성하는 일반적 과정은 다음 절차를 따른다.

- 최종 출력 페이지의 크기를 결정하고 그 페이지를 얹힐 수 있는 크기의 용지를 선정한다.
- 필요하다면 `\setstocksize`를 써서 `\stockheight`와 `\stockwidth`의 값을 정하고 그 뒤에 `\settrimmedsize` 명령으로 `\paperheight`와 `\paperwidth`의 값을 지정한다.  
만약 A4를 써서 인쇄하는 경우라면 `a4paper` 클래스 옵션으로 충분하고 `\setstocksize` 같은 것은 불필요하다.
- 용지에 놓이는 페이지의 위치를 정한다. 페이지와 용지의 크기가 동일하다면 `\settrims{0pt}{0pt}`를 선언한다. 크기가 같지 않다면 페이지를 용지 위에 두기 위해서 `\trimtop`과 `\trimedge`의 적절한 값을 결정한 다음에 `\settrimes` 명령으로 이들을 설정한다.
- 조판 영역의 크기를 결정하고 `\settypeblocksize` 명령으로 `\textheight`와 `\textwidth`를 설정한다.
- 제본 영역이 필요하다면 `\setbinding` 명령을 여기서 쓴다.
- 안쪽 여백 크기를 정하고 `\setlrmargins` 명령으로 `\spinemargin`과 `\foremargin`의 값을 설정한다.  
다른 방법으로 `\setlrmarginsandblock` 명령을 사용하여 `\textwidth`의 크기를 양쪽 여백 크기로부터 설정할 수 있다.
- 상단 여백의 크기를 정하고 `\setulmargins` 명령을 써서 `\uppermargin`과 `\lowermargin` 값을 설정한다.  
다른 방법으로 `\setulmarginsandblock` 명령을 이용하여 상단 및 하단 여백의 크기를 정해줌으로써 `\textheight`가 계산되게 할 수 있다.  
조판 영역은 이제 페이지 위에 얹혀졌다.
- `\headheight`와 `\footskip` 값을 결정하고 `\setheadfoot` 명령으로 이를 설정한다.
- `\headskip`의 값을 정하고 `\setheaderspaces` 명령으로 이것과 `\headmargin`을 설정한다.
- 여백 문단을 둘 생각이라면 `\setmarginnotes` 명령을 사용하여 `\marginparsep`, `\marginparwidth`, `\marginparpush` 값을 설정한다.

---

<sup>5</sup>이 명령은 `\twocolumnfootnotes`나 그 유사한 명령이 사용될 때 해당하는 값들도 함께 변경한다.

Table 2.9: 이 클래스와 LaTeX의 페이지 레이아웃 파라미터

Class	LaTeX
<code>\stockheight</code>	
<code>\trimtop</code>	
<code>\trimedge</code>	
<code>\stockwidth</code>	
<code>\paperheight</code>	<code>\paperheight</code>
<code>\paperwidth</code>	<code>\paperwidth</code>
<code>\textheight</code>	<code>\textheight</code>
<code>\textwidth</code>	<code>\textwidth</code>
<code>\columnsep</code>	<code>\columnsep</code>
<code>\columnseprule</code>	<code>\columnseprule</code>
<code>\spinmargin</code>	
<code>\foremargin</code>	
	<code>\oddsidemargin</code>
	<code>\evensidemargin</code>
<code>\uppermargin</code>	
<code>\headmargin</code>	
	<code>\topmargin</code>
<code>\headheight</code>	<code>\headheight</code>
<code>\headsep</code>	<code>\headsep</code>
<code>\footskip</code>	<code>\footskip</code>
<code>\marginparsep</code>	<code>\marginparsep</code>
<code>\marginparwidth</code>	<code>\marginparwidth</code>
<code>\marginparpush</code>	<code>\marginparpush</code>

레이아웃을 설계하고 설정하는 것은 편할 대로 하면 된다. 각 페이지 레이아웃 명령은 서로에 대하여 독립적이다. 어떤 값이 어디에선가 정해지면, 예컨대 `\textwidth`라 할 때 이것은 나중에 어떻게든 바꿀 수 있다. 마지막에 정해진 값만이 실제로 유효하다.

Figure 2.3과 2.1을 비교해보면 이 클래스가 제공하는 파라미터와 표준 LaTeX의 그것이 다르다는 것을 알 수 있다. 편의상 이 그림들이 모든 파라미터를 다 보여주지 않기 때문에 두 종류의 파라미터를 Table 2.9에 열거하여 두었다.

기본 페이지 레이아웃으로 만족할 수 없으면 각 레이아웃 값을 원하는 것으로 바꾼 다음에 `\checkandfixthelayout` 명령을 실행하여 이 설정값이 최종적으로 유효하게 하라.

```
\checkandfixthelayout[<algorithm>]
\checkthelayout[<algorithm>]
\fixthelayout
\baselineskip \topskip
```

`\checkandfixthelayout` 매크로는 `\checkthelayout`을 이용하여 페이지 레이아웃 설정 값을 검토한다. 그런 다음에 최종적으로 `\fixthelayout`을 불러서 그 값이 유효하게 만든다.

`\checkthelayout` 매크로는 이 클래스의 레이아웃 파라미터로 주어진 값이 “유의미한” 값인지 (예를 들면 `\textwidth`가 음수는 아닌지) 검사한다. 그리고 *<algorithm>* 인자에 지정한 방식으로 `\textheight`를 수정한다. 실제로 레이아웃 값을 바꾸지는 않는다.



## 2. 페이지 얹히기

`\flushbottom`을 사용할 때 LaTeX는 `\textheight`가 본문 폰트의 글줄 행수의 정수배로서 들어맞을 것을 예상한다. 만약 그렇지 않으면 “underfull vbox” 메시지를 출력한다. 더 정확하게 말하면  $b$ 가 `\baselineskip`이고  $t$ 가 `\topskip`이고  $N$ 이 정수(조판 영역의 행 수)이고  $T$ 가 `\textheight`라고 할 때 underfull vbox를 만나지 않으려면 다음 관계를 만족해야 한다.

$$T = (N - 1)b + t \quad (2.3)$$

기본적으로 `\checkthelayout`은 최종적인 `\textheight`가 이 조건을 만족하도록 만들어준다. 옵션 인자 `<algorithm>`은 이 일을 어떻게 하게 할 것인지를 제어할 수 있게 한다. 다음에서  $H$ 는 요청한 `\textheight` 값이고 다른 기호는 앞서와 같으며,  $T$ 는 조정된 값이다. 그리고 정수 연산을 이용한다.<sup>6</sup> `<algorithm>`에 올 수 있는 값은 다음 중 하나이다.

`fixed \textheight`를 수정하지 않는다.

$$T = H \quad (2.4)$$

이 옵션을 선택하면 `\flushbottom` 페이지에서 underfull vbox를 만나게 될 것이다.

`classic` 기본값이며 표준 클래스에서 사용하는 방식이다.

$$T = b\lfloor H/b \rfloor + t \quad (2.5)$$

관계식 (2.3)이 유지된다. 이 알고리즘은 아래 것에 비하여 가능한 한  $H$ 에 가까운 값을 얻게 한다.

`lines classic`과 비슷하지만 결과 값이 조금 적어진다.

$$T = b\lfloor (H - b)/b \rfloor + t \quad (2.6)$$

관계식 (2.3)은 유지된다.

`nearest` 관계식 (2.3)을 유지하면서도 최대한 주어진 값에 가까운 값을 계산한다.

$$T = b\lfloor (H - t + b/2)/b \rfloor + t \quad (2.7)$$

`classic`과 비교하자면 `nearest`는  $T$ 가  $H$ 보다 살짝 커지더라도 가능한 한  $H$  값에 가까운 결과를 얻게 한다.

표 2.10은 각각의 `\textheight` 계산의 결과를 보여준다.<sup>7</sup> 모든 경우에 `fixed` 알고리즘은 underfull vbox 결과를 가져온다. 원하는 행수가 고정되어 있다면, 예를 들어 42행이라 할 때,

```
% setting equivalent to \setlength{\textheight}{42\baselineskip}
\checkandfixthelayout[lines]
```

이렇게 선언하는 것이 결과적으로 가장 좋은 `\textheight`를 얻게할 것이다.

`calc` 패키지를 사용한다면 페이지 레이아웃 설정값에서 다음과 같이 하여 계산해낼 수 있다.

```
\setlength{\textheight}{41\baselineskip + \topskip}
\settypeblocksize{41\baselineskip + \topskip}{33pc}{*}
```

<sup>6</sup>여기서 “정수 연산”이라는 것은 나눗셈의 결과가 소수점 아래를 버리는 것임을 뜻한다. 예를 들어 99/10의 “실수 연산” 결과는 9.9이지만 정수 연산으로 결과는 10이 아니라 9가 된다.

<sup>7</sup>비교를 위하여, 10, 11, 12행에 해당하는 관계식 2.3를 만족하는 적정 높이는 각각 118pt, 130pt, 142pt이다.



Table 2.10: `\textheight` 조절의 결과

Requested height	Algorithm			
	fixed	classic	lines	nearest
	adjusted height in pts, (lines)			
10.0 <code>\baselineskip</code>	120.0pt, (10)	130pt, (11)	118pt, (10)	118pt, (10)
10.2 <code>\baselineskip</code>	122.4pt, (10)	130pt, (11)	118pt, (10)	118pt, (10)
10.4 <code>\baselineskip</code>	124.8pt, (10)	130pt, (11)	118pt, (10)	130pt, (11)
10.6 <code>\baselineskip</code>	127.2pt, (10)	130pt, (11)	118pt, (10)	130pt, (11)
10.8 <code>\baselineskip</code>	129.6pt, (10)	130pt, (11)	118pt, (10)	130pt, (11)
11.0 <code>\baselineskip</code>	132.0pt, (11)	142pt, (12)	130pt, (11)	130pt, (11)

`\fixthelayout` 매크로는 최종적으로 레이아웃을 실현한다. 제본 여백이 필요하면 적절한 수정을 행하고 표준 LaTeX 레이아웃 파라미터의 모든 값을 (다른 패키지가 요구하는 값을 활용할 수 있도록) 다시 계산한다. 어떤 식으로든 레이아웃을 이 클래스의 매크로를 이용하여 바꾸었다면 필요한 모든 수정이 이루어진 후에 `\checkandfixthelayout`을 불러야 한다. 덤으로 최종 레이아웃 파라미터의 값이 터미널에 표시되며 로그 파일에 기록된다.

```
\typeoutlayout
\typeoutstandardlayout
\settypeoutlayoutunit{<unit>}
```

`\typeoutlayout`은 현재의 이 클래스 레이아웃 파라미터 값을 터미널과 로그 파일로 출력한다. `\checkandfixthelayout` 명령이 이 매크로를 호출한다. 그러나 원한다면 어느 때라도 사용할 수 있다. `\typeoutstandardlayout` 매크로는 표준 레이아웃 파라미터 값을 터미널과 로그 파일로 출력하여 두 종류의 파라미터 값을 비교할 수 있게 한다.

`\settypeoutlayoutunit` 매크로를 사용하여 레이아웃 리스트를 출력할 때 사용할 단위를 바꿀 수 있다. 디자인 단위가 예컨대 센티미터일 경우에 편리하다. 지원하는 단위는 pt, pc, mm, cm, in, bp, dd, cc이고 기본값은 pt이다. 단위에 관하여 자세한 것은 Table ??을 보라.

## 2.8 양면 여백

twoside 인쇄에서 안쪽 여백은 보통 짝수면과 홀수면에서 동일하게 설정한다. 안쪽 여백과 바깥쪽 여백이 같지 않으면 조판 영역은 홀수면과 짝수면의 인쇄시에 좌우로 왔다갔다한다. 그리고 홀수면과 짝수면에 서로 다른 상단 하단 면주를 가진다. 그러나 oneside 인쇄에서 조판 영역은 변화가 없고 상하단 면주도 짝수면과 홀수면에서 모두 동일하다.

어떤 문서는 예컨대 오른쪽 여백을 매우 넓게 잡아서 삽화를 놓도록 디자인한다. 이 경우 짝수면의 안쪽 여백은 홀수면의 안쪽 여백보다 훨씬 커져야 한다. 이것은 oneside 옵션으로 가능하다. 그러나 짝수면과 홀수면에 서로 다른 상하단 면주가 필요하다면 이 때는 twoside 옵션을 사용하여야 한다. 원하는 효과를 얻기 위해서는 다음과 같이 한다. (이 클래스의 디폴트는 twoside이다.)

```
\documentclass{memoir}
%% set up the recto page layout
\checkandfixthelayout% or perhaps \checkandfixthelayout[lines]
\setlength{\evensidemargin}{\oddsidemargin}% after \checkandfix...
...
```

## 2. 페이지 얹히기

---

### 2.9 출력 페이지 크기

문서의 시작 부분에 이 클래스는 자동적으로 선택한 용지 크기로 출력 형식의 (DVI 또는 PDF) 크기를 설정한다.<sup>8</sup>

### 2.10 예제

A4와 US letterpaper 양쪽 용지에 모두 적합하여 트리밍을 최소한으로 할 수 있도록 페이지를 만들고 싶다고 하자. 필요한 레이아웃은 다음과 같다.

- 조판 영역의 너비는 행당 최적의 글자수로 구하여야 한다.
- 조판 영역의 종횡비가 황금비가 되도록 하자.
- 텍스트는 페이지 상단 끝에서부터 50포인트 아래에서 시작한다. `\headheight`와 `\footskip`의 기본값을 사용할 것이다.
- 바깥쪽 여백의 안쪽 여백에 대한 비율이 황금비가 되도록 하자. 상단 면주의 아래 위 간격의 비도 마찬가지로 한다.
- 여백 문단은 무시한다.

계산은 직접 해도 되지만 LaTeX에게 시켜도 되니까 LaTeX이 계산을 수행하도록 하자. 먼저 해야 할 일은 A4와 letterpaper에서 공통으로 잘라낼 수 있는 최대 크기를 구하는 일이다. A4의 크기는  $297 \times 210$  mm이고 letterpaper는  $11 \times 8.5$  in이다. A4가 세로가 길고 letterpaper 보다 좁다.

```
\settrimmedsize{11in}{210mm}{*}
```

용지 크기는 클래스 옵션으로 정의한다. letterpaper 또는 a4paper일 수 있다. 그러나 용지를 페이지에 맞추어서 트리밍해야 한다. 일을 쉽게 하기 위해 용지의 바깥쪽 여백과 아래만을 트리밍하기로 하자. 그러면 `\trimtop`은 0이 된다. `\trimtop`과 `\trimedge`는 간단히 다음과 같이 정의한다.

```
\setlength{\trimtop}{0pt}
\setlength{\trimedge}{\stockwidth}
\addtolength{\trimedge}{-\paperwidth}
```

아니면 calc 패키지를 이용하여,

```
\settrims{0pt}{\stockwidth - \paperwidth}
```

이렇게 한다. 조판 영역을 설정하는 것도 간단하다.

```
\settypeblocksize{*}{\lxvchars}{1.618}
```

이제 상단 하단 여백을 다음과 같이 하여 설정하겠다.

```
\setulmargins{50pt}{*}{*}
```

안쪽 바깥쪽 여백은 황금비를 이용하여 설정한다.

```
\setlrmargins{*}{*}{1.618}
```

남은 계산은 `\headmargin`과 `\headsep`이다. 이것도 같은 비율을 사용하여,

---

<sup>8</sup>이전 버전에서 `\fixpdflayout`과 `\fixdvipslayout`이라는 매크로가 있었다. 용지 크기를 출력 포맷으로 송출하는 코드를 가지고 있는 것이었으나 최근의 LuaLaTeX 같은 엔진에서는 이런 기능이 필요없게 되어서 이 매크로들은 더이상 사용하지 않는다. (사용하면 경고 메시지만을 보인다.)

```
\setheaderspaces{*}{*}{1.618}
```

정의하였다. 마치기 위해서 변경된 레이아웃 값을 검토하고 활성화한다.

```
\checkandfixthelayout
```

### 2.10.1 이 매뉴얼의 레이아웃

프리앰블에 정의되어 있는 이 매뉴얼의 페이지 레이아웃은 다음과 같다.

```
\settrimmedsize{11in}{210mm}{*}
\setlength{\trimtop}{0pt}
\setlength{\trimedg}{\stockwidth}
\addtolength{\trimedg}{-\paperwidth}
\settypeblocksize{7.75in}{33pc}{*}
\setulmargins{4cm}{*}{*}
\setlrmargins{1.25in}{*}{*}
\setmarginnotes{17pt}{51pt}{\onelineskip}
\setheadfoot{\onelineskip}{2\onelineskip}
\setheaderspaces{*}{*}{2\onelineskip}{*}
\checkandfixthelayout
```

Figure 2.4에 보인 레이아웃 개략은 위의 코드가 적용된 결과인 파라미터 값을 근사적으로 표현한 것이다.

처음에 나는 §2.10에 정의된 레이아웃을 사용했었다. 그것이 납득할 수 있었기 때문이었지만 나중에 위의 정의로 바꾸기로 결심했는데 매뉴얼을 인쇄했을 때 용지를 절약하기 위해서였다. 조판 영역을 넓게 잡은 것도 LaTeX 코드와 같이 하이픈처리 하기 힘든 텍스트가 포함된 글줄을 TeX이 좀더 쉽게 다룰 수 있게 하기 위해서였다.

Rolf Niepraschk<sup>9</sup>가 전해준 바, Andreas Mathias는 A4 용지에 매뉴얼을 인쇄하려면 다음처럼 조판하는 것이 좋을 것이라고 제안하였다 한다.

```
\documentclass[a4paper]{memoir}
...
\settrimmedsize{297mm}{210mm}{*}
\setlength{\trimtop}{0pt}
\setlength{\trimedg}{\stockwidth}
\addtolength{\trimedg}{-\paperwidth}
\settypeblocksize{634pt}{448.13pt}{*}
\setulmargins{4cm}{*}{*}
\setlrmargins{*}{*}{1.5}
\setmarginnotes{17pt}{51pt}{\onelineskip}
\setheadfoot{\onelineskip}{2\onelineskip}
\setheaderspaces{*}{*}{2\onelineskip}{*}
\checkandfixthelayout
```

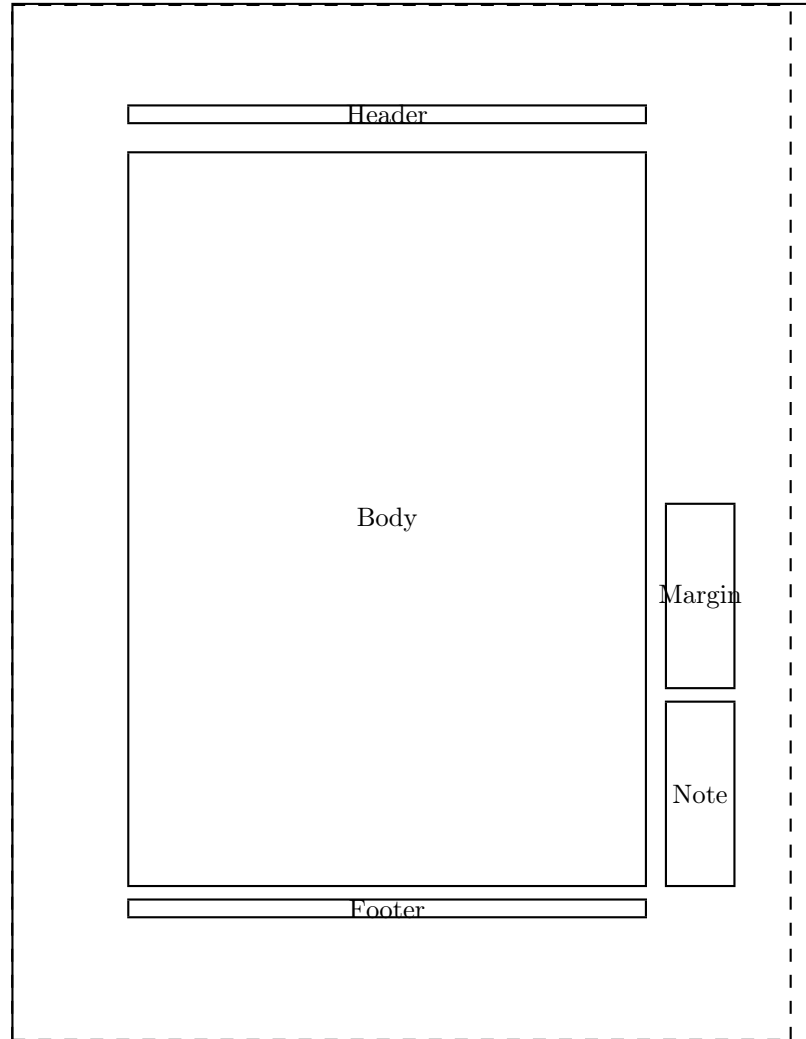
A4나 letterpaper 둘 중 하나에서 항상 인쇄되도록 디자인하는 것이 더 좋기는 하지만 나는 내가 제공하는 레이아웃이 letterpaper와 A4 용지 모두에서 인쇄되도록 하고 싶었다.

<sup>9</sup>[niepraschk@ptb.de](mailto:niepraschk@ptb.de) 2002/02/05일자 이메일

## 2. 페이지 앞하기

---

Dashed lines represent the actual page size after trimming the stock.



Lengths are to the nearest pt.

<code>\stockheight = 795pt</code>	<code>\stockwidth = 614pt</code>
<code>\pageheight = 795pt</code>	<code>\pagewidth = 598pt</code>
<code>\textheight = 562pt</code>	<code>\textwidth = 396pt</code>
<code>\trimtop = 0pt</code>	<code>\trimedger = 17pt</code>
<code>\uppermargin = 114pt</code>	<code>\spinemargin = 90pt</code>
<code>\headheight = 12pt</code>	<code>\headsep = 24pt</code>
<code>\footskip = 24pt</code>	<code>\marginparsep = 17pt</code>
<code>\marginparpush = 12pt</code>	<code>\columnsep = 10pt</code>
<code>\columnseprule = 0.0pt</code>	

Figure 2.4: 이 매뉴얼의 흘수면 레이아웃

## 2.11 미리 정의된 레이아웃

표준 클래스와 마찬가지로 이 클래스도 letterpaper와 a4paper에 대하여 자동적으로 레이아웃을 만들어준다. 페이지가 너무 작을 때나 여백 문단을 위해 할당되는 공간에 약간 문제가 있기는 하지만, layouts 패키지의 [Wil03a]가 페이지 레이아웃을 검토하는 데 유용하다.

몇 종류의 추가적인 레이아웃이 \medievalpage, \isopage, \semiisopage 명령으로 제공된다. 이들은 조판 영역의 크기와 페이지에 대한 상대 위치를 설정해준다. 이 명령 중 하나를 사용한 후에는 (그리고 그밖의 레이아웃 관련 변경을 모두 수행한 후에) \checkandfixthelayout 매크로를 필수적으로 실행해야 한다.

```
\medievalpage[⟨spine⟩]
```

\medievalpage 명령은 조판 영역의 크기와 위치를 중세 필사본과 인쇄 초창기의 조판 규칙을 따라 배치한다. Jan Tschichold [Tsc91]에 묘사된 바와 같다. 기본 규칙은 다음과 같다. 조판 영역의 안쪽, 윗쪽, 바깥쪽, 아랫쪽 여백의 비율이 2:3:4:6이다. 또한 안쪽 여백은 페이지 너비의 1/9로 하고 이것을 \medievalpage의 기본값으로 한다. ⟨spine⟩ 옵션 인자로 바꿀 수 있다. 예를 들면 페이지 너비의 1/12 정도의 더 좁은 안쪽 여백을 설정하려면

```
\medievalpage[12]
```

이와 같이 한다. ⟨spine⟩은 정수여야 한다.

```
\isopage[⟨spine⟩]
\semiisopage[⟨spine⟩]
```

Robert Bringhurst [Bri99]는 (다른 규격 용지에도 잘 적용할 수 있지만) 특히 ISO 규격 용지에 적합한 페이지 레이아웃을 제시하였다. \isopage 명령으로 이 디자인을 구현한다. 안쪽 여백은 페이지 너비의 1/9이고 상단 여백은 페이지 높이의 1/9이며 바깥쪽 여백과 하단 여백은 각각 안쪽 여백과 상단 여백의 2배이다.

\semiisopage 레이아웃은 안쪽 여백이 페이지 너비의 1/9이라는 점에서 비슷하다. 그러나 상단 여백이 안쪽 여백과 같다. 바깥쪽 여백과 하단 여백은 각각 안쪽 여백과 상단 여백의 2배이다.

안쪽 (그리고 상단) 여백은 옵션 인자 ⟨spine⟩을 이용하여 바꿀 수 있다. 이 인자는 정수로 주어야 한다. 예를 들어 안쪽 여백을 페이지 너비의 1/8로 하려면

```
\semiisopage[8]% or \isopage[8]
```

이와 같이 한다. \isopage의 경우에는 왼쪽 여백과 상단 여백에 같은 값이 둘 다 적용된다.

이 레이아웃이 만드는 펼침면의 개략적인 모양을 Figure 2.5부터 2.12까지 보았다. 이 그림을 얻는 데 layouts 패키지의 도움을 받았다.

```
\setpagebl{⟨height⟩}{⟨width⟩}{⟨ratio⟩}
\setpageml{⟨height⟩}{⟨width⟩}{⟨ratio⟩}
\setpagetl{⟨height⟩}{⟨width⟩}{⟨ratio⟩}
```

페이지가 용지보다 작으면 용지에 원하는 만큼의 크기로 트리밍을 적용하여 용지 위에 놓을 위치를 잡아야 한다. \setpagebl 매크로는 \settrimmedsize (12 페이지의 Table 2.1을 보라)와 같은 인자를 취하여 트리밍 값을 계산한 다음 용지의 왼쪽 아래에 페이지를 얹힌다. \setpageml과 \setpagetl은 이와 비슷하게 페이지를 각각 용지의 왼쪽 가운데 (middle left)와 왼쪽 위 (top left)에 가져다놓는다. 예를 들어 최종 트리밍된 크기는 A5이고 용지는 letterpaper라고 하자. 트리밍되는 페이지를 용지의 왼쪽 바닥 부분에 놓으려 한다고 하자.

```
\pagebv % sets page height and width for A5 paper
```

## 2. 페이지 앞하기

---

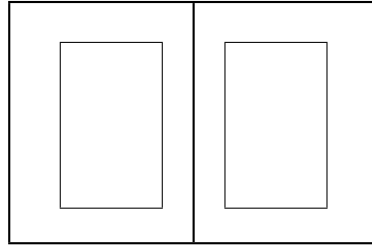


Figure 2.5: letterpaper를 위한 기본 레이아웃



Figure 2.6: letterpaper 레이아웃: 좌 `\medievalpage`, 우 `\medievalpage[12]`



Figure 2.7: letterpaper 레이아웃: 좌 `\isopage`, 우 `\isopage[12]`



Figure 2.8: letterpaper 레이아웃: 좌 `\semiisopage`, 우 `\semiisopage[12]`

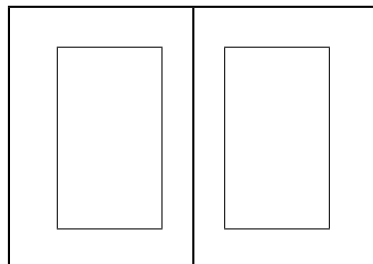


Figure 2.9: a4paper를 위한 기본 레이아웃

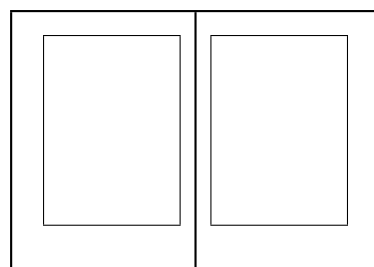
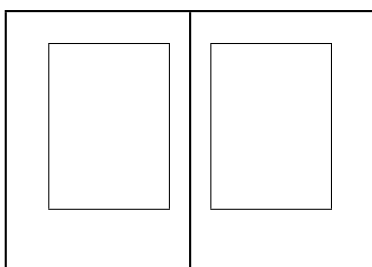


Figure 2.10: a4paper 레이아웃: 좌 `\medievalpage`, 우 `\medievalpage[12]`

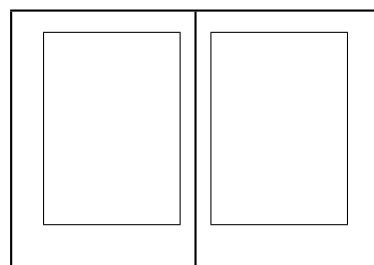
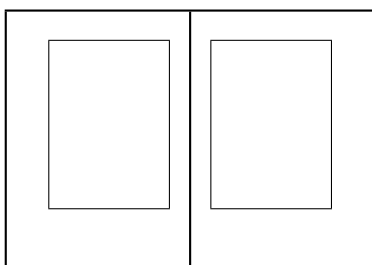


Figure 2.11: a4paper 레이아웃: 좌 `\isopage`, 우 `\isopage[12]`

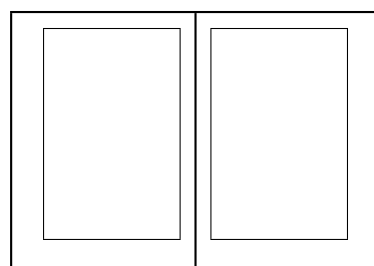
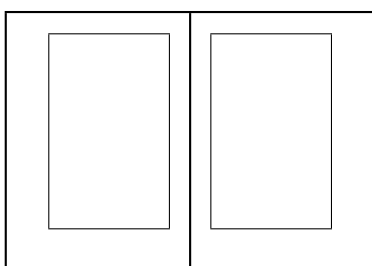


Figure 2.12: a4paper 레이아웃: 좌 `\semiisopage`, 우 `\semiisopage[12]`

## 2. 페이지 얹히기

---

```
\setpagebl{\paperheight}{\paperwidth}{*}  
...  
\checkandfixthelayout
```

이 매크로는 페이지의 위치를 용지의 왼쪽으로 한다. 왜냐하면 용지의 잘라내기는 top, right, bottom에서만 일어나도록 한정되기 때문이다. left는 마지막에 인쇄되어 트리밍된 종이를 모두 모아 제본하여 책등이 될 곳이다. 페이지를 용지의 중앙으로 가져다놓고 싶으면 상단과 하단을 반씩 잘라내도록 다음처럼 한다.

```
\settrims{0.5\trimtop}{0.5\trimedge}  
...  
\checkandfixthelayout
```

```
\setpagetm{\height}{\width}{\ratio}  
\setpagetr{\height}{\width}{\ratio}  
\setpagemr{\height}{\width}{\ratio}  
\setpagebr{\height}{\width}{\ratio}  
\setpagebm{\height}{\width}{\ratio}  
\setpagecc{\height}{\width}{\ratio}
```

`\setpagetm`, `\setpagetr`, `\setpagemr`, `\setpagebr`, `\setpagebm`, `\setpagecc`는 이와 비슷한 명령으로 각각 페이지를 용지의 top middle, top right, middle right, bottom right, bottom middle, center에 놓는다.

레이아웃 관련 설정을 행한 이후에는 변경 사항이 효력을 발휘하도록 하기 위해서 `\checkandfixthelayout`을 실행하여야 한다는 사실을 기억하자.

그림 2.13은 이 아홉 개의 `\setpageXX` 명령의 효과를 시각적으로 보여준다. 여기에 사용된 코드는 다음에 보인 것과 같으며 결과를 축소하여 나타내었다.

```
\documentclass[showtrims]{memoir}  
\trimlmarks  
\setstocksize{18cm}{15cm}  
\makeatletter  
\setpagebl{16cm}{12cm}{*}  
\makeatother  
\setlrmarginsandblock{15mm}{15mm}{*}  
\setulmarginsandblock{15mm}{15mm}{*}  
\setheadfoot{5mm}{5mm}  
\checkandfixthelayout[fixed]  
\pagestyle{empty}  
\AtBeginDocument{\LARGE}  
\begin{document}  
\begin{vplace}  
  \centering  
  \cs{setpagebl}\marg{height}\marg{width}\marg{ratio}  
\end{vplace}  
\end{document}
```





Figure 2.13: 아홉 가지 `\setpageXX` 매크로로써 트리밍된 페이지를 용지에 놓는 예. 이것은 모두 `twoside` 옵션을 준 홀수면이며 짝수면은 왼쪽/오른쪽 트리밍이 반대 방향이다.



# Three

## 텍스트와 글꼴

새로운 문서를 작성할때, 아마 조금이라도 텍스트를 포함할 것이다. 이 챕터에서는 사용할 수 있는 글꼴의 종류와 페이지에 텍스트가 나타나는 방식에 대해 설명하겠다.

### 3.1 글꼴

(La)TeX에는 도널드 커누스(Donald Knuth)가 디자인한 Computer Modern 글꼴 제품군으로 알려진 표준 글꼴 집합이 있다.

커누시안(Knuthian) 글꼴은 Metafont 프로그램 [Knu92, Knu87]을 통해 만들어졌으며 비트맵 형식으로 되어 있다 (즉, 각 문자는 작은 점들로 표시된다). 이런 종류의 글꼴을 *비트맵 글꼴*이라고 한다.

표준 모음에는, 다른 많은 이들에 의해 추가된 광범위한 메타폰트(Metafont) 글꼴들도 있다. 보다 현대적인 디지털 글꼴, 예를 들어 포스트스크립트 혹은 트루타입 글꼴은 문자의 윤곽을 나타내는 곡선으로 표현되며, 인쇄 기계가 외곽선을 (수많은 작은 점들로) 채우는 역할을 한다. 이 유형의 글꼴을 윤곽선 글꼴(*outline fonts*)이라고 한다

윤곽선 글꼴(*outline fonts*)은 표시되기 전에 크기를 조정할 수 있는 것과 달리, Metafont 글꼴은 특정 디스플레이 화질 용도로 설계되어서, 임의의 디스플레이 장치와 일치하도록 합리적으로 조정하는 것이 불가능하다.

사용 가능한 PostScript 및 트루타입 글꼴의 수가 굉장히 많고, 이들 모두 약간의 노력을 하면 LaTeX에서 사용할 수 있다. 이를 수행하는 방법은 이 문서에서 다루지는 않고, 이에 대해 관심이 있다면, Alan Hoenig이 저술한 훌륭한 책 [Hoe98]을 보자. 그리고 여기에는 귀중한 *The LaTeX Companion* [MG<sup>+</sup>04, Chapter 7 Fonts and Encodings(글꼴과 인코딩)]이 있다.

*The LaTeX Graphics Companion*의 초판에는 PostScript 글꼴과 도구에 대한 챕터가 있었지만, 두 번째 판에서는 초판에서의 방대한 분량이 삭제되고 굉장히 조금만 실려있다. 이 자료는 업데이트 되었으며, <http://xml.cern.ch/lgc2>에서 무료로 이용할 수 있다. 또한, XeTeX, Unicode, 그리고 Opentype에 대한 '진행중인 작업'을 얻을 수 있다. 그닥 디테일하진 않지만, 무료이며, CTAN을 통해 가능하고, Philipp Lehman의 *Font Installation Guide*, 폰트 설치 가이드 [Leh04]; 같은 것이 있다. 심지어 너가 만약 PostScript 글꼴을 설치하는 것에 대해 관심이 없더라도, 이것은 LaTeX로 얻을 수 있는 우아한 문서의 예시로 감상하기에 훌륭하다.

PostScript 프린터에 내장된 것과 같이, PostScript 글꼴과 같이 널리 사용되는 글꼴 중 하나를 선택해야 한다면, 너는 너의 문서가 굉장히 잘 완성된다(아름답다)는 것을 느낄 수 있을 것이며, 그저 적당한 package를 사용하기만 하면 된다.

표준 LaTeX 배포판에는 일부 PostScript 글꼴이 포함되어 있으며, 이를 서포트하는 패키지들이 psnfs 안에 있다. 대부분의 글꼴은 일반 텍스트 작업용이지만, *but two supply symbols rather than characters*. 표 3.1 는, 특히 Palatino 용도이지만, 일반적으로 사용 가능한 글리프이다. 표 s 3.2와 3.3는 두 symbol fonts에서의 글리프를 보여준다.

### 3. 텍스트와 글꼴

---

Table 3.1: LaTeX 에 Palatino roman font의 글리프






























































































































































































0	1	2	3	4	5	6	7
8	9	10	11	12	' 13	ı 14	ı 15
ı 16	17	` 18	˘ 19	˘ 20	˘ 21	˘ 22	˘ 23
ı 24	ß 25	æ 26	œ 27	ø 28	Æ 29	Œ 30	Ø 31
32	! 33	" 34	# 35	\$ 36	% 37	& 38	' 39
( 40	) 41	* 42	+ 43	, 44	- 45	. 46	/ 47
0 48	1 49	2 50	3 51	4 52	5 53	6 54	7 55
8 56	9 57	: 58	; 59	< 60	= 61	> 62	? 63
@ 64	A 65	B 66	C 67	D 68	E 69	F 70	G 71
H 72	I 73	J 74	K 75	L 76	M 77	N 78	O 79
P 80	Q 81	R 82	S 83	T 84	U 85	V 86	W 87
X 88	Y 89	Z 90	[ 91	\ 92	] 93	^ 94	_ 95
' 96	a 97	b 98	c 99	d 100	e 101	f 102	g 103
h 104	i 105	j 106	k 107	l 108	m 109	n 110	o 111
p 112	q 113	r 114	s 115	t 116	u 117	v 118	w 119
x 120	y 121	z 122	{ 123	124	} 125	~ 126	¨ 127
^ 128	~ 129	Ç 130	Í 131	Î 132	ã 133	ë 134	è 135
š 136	ž 137	Đ 138	139	140	141	142	143
144	145	Š 146	147	148	149	150	151
Ÿ 152	153	Ž 154	155	156	157	158	159
160	161	¢ 162	£ 163	/ 164	¥ 165	f 166	§ 167
□ 168	© 169	“ 170	« 171	‹ 172	› 173	fi 174	fl 175
° 176	— 177	² 178	³ 179	· 180	181	¶ 182	· 183
, 184	¹ 185	” 186	» 187	¼ 188	½ 189	¾ 190	191
À 192	Á 193	Â 194	Ã 195	Ä 196	Å 197	198	· 199
È 200	É 201	Ê 202	Ë 203	Ì 204	˜ 205	ı 206	İ 207
— 208	Ñ 209	Ò 210	Ó 211	Ô 212	Õ 213	Ö 214	215
216	Û 217	Ü 218	Û 219	Ü 220	Ý 221	Þ 222	223
à 224	á 225	â 226	ª 227	ä 228	å 229	230	ç 231
Ł 232	é 233	ê 234	º 235	ì 236	í 237	î 238	ï 239
240	ñ 241	ò 242	ó 243	ô 244	õ 245	ö 246	247
ł 248	ù 249	ú 250	û 251	ü 252	ý 253	þ 254	ÿ 255

Table 3.2: LaTeX 에 Symbol font가 배부된 글리프

32	! 33	$\forall$ 34	# 35	$\exists$ 36	% 37	& 38	$\ni$ 39
( 40	) 41	* 42	+ 43	, 44	- 45	. 46	/ 47
0 48	1 49	2 50	3 51	4 52	5 53	6 54	7 55
8 56	9 57	: 58	; 59	< 60	= 61	> 62	? 63
$\cong$ 64	A 65	B 66	X 67	$\Delta$ 68	E 69	$\Phi$ 70	$\Gamma$ 71
H 72	I 73	$\vartheta$ 74	K 75	$\Lambda$ 76	M 77	N 78	O 79
$\Pi$ 80	$\Theta$ 81	P 82	$\Sigma$ 83	T 84	Y 85	$\varsigma$ 86	$\Omega$ 87
$\Xi$ 88	$\Psi$ 89	Z 90	[ 91	$\therefore$ 92	] 93	$\perp$ 94	_ 95
$\overline{\phantom{x}}$ 96	$\alpha$ 97	$\beta$ 98	$\chi$ 99	$\delta$ 100	$\epsilon$ 101	$\phi$ 102	$\gamma$ 103
$\eta$ 104	$\iota$ 105	$\varphi$ 106	$\kappa$ 107	$\lambda$ 108	$\mu$ 109	$\nu$ 110	$\omicron$ 111
$\pi$ 112	$\theta$ 113	$\rho$ 114	$\sigma$ 115	$\tau$ 116	$\upsilon$ 117	$\omega$ 118	$\omega$ 119
$\xi$ 120	$\psi$ 121	$\zeta$ 122	{ 123	124	}	$\sim$ 126	127
160	Y 161	' 162	$\leq$ 163	/ 164	$\infty$ 165	f 166	$\clubsuit$ 167
$\blacklozenge$ 168	$\heartsuit$ 169	$\spadesuit$ 170	$\leftrightarrow$ 171	$\leftarrow$ 172	$\uparrow$ 173	$\rightarrow$ 174	$\downarrow$ 175
$\circ$ 176	$\pm$ 177	$^2$ 178	$^3$ 179	$\times$ 180	$\propto$ 181	$\partial$ 182	$\cdot$ 183
$\div$ 184	$^1$ 185	$\equiv$ 186	$\approx$ 187	$\frac{1}{4}$ 188	$\frac{1}{2}$ 189	$\frac{3}{4}$ 190	$\lrcorner$ 191
$\Re$ 192	$\Im$ 193	$\Re$ 194	$\wp$ 195	$\otimes$ 196	$\oplus$ 197	$\oslash$ 198	$\cap$ 199
$\cup$ 200	$\supset$ 201	$\supseteq$ 202	$\not\subset$ 203	$\subset$ 204	$\subseteq$ 205	$\in$ 206	$\notin$ 207
$\angle$ 208	$\nabla$ 209	$\text{\textcircled{R}}$ 210	$\text{\textcircled{C}}$ 211	$\text{\textsuperscript{TM}}$ 212	$\prod$ 213	$\sqrt{\phantom{x}}$ 214	$\cdot$ 215
$\neg$ 216	$\wedge$ 217	$\vee$ 218	$\Leftrightarrow$ 219	$\Leftarrow$ 220	$\Uparrow$ 221	$\Rightarrow$ 222	$\Downarrow$ 223
$\diamond$ 224	$\langle$ 225	$\text{\textcircled{B}}$ 226	$\text{\textcircled{C}}$ 227	$\text{\textsuperscript{TM}}$ 228	$\Sigma$ 229	$\lceil$ 230	$\rfloor$ 231
$\lfloor$ 232	$\lceil$ 233	234	$\lfloor$ 235	$\lceil$ 236	{ 237	$\lfloor$ 238	239
240	$\rangle$ 241	$\int$ 242	$\int$ 243	244	J 245	$\rangle$ 246	247
$\int$ 248	$\int$ 249	250	$\int$ 251	$\int$ 252	{ 253	J 254	255

### 3. 텍스트와 글꼴

Table 3.3: LaTeX 에 Zapf Dingbat font가 배부된 글리프

32	 33	 34	 35	 36	 37	 38	 39
 40	 41	 42	 43	 44	 45	 46	 47
 48	 49	 50	 51	 52	 53	 54	 55
 56	 57	 58	 59	 60	 61	 62	 63
 64	 65	 66	 67	 68	 69	 70	 71
 72	 73	 74	 75	 76	 77	 78	 79
 80	 81	 82	 83	 84	 85	 86	 87
 88	 89	 90	 91	 92	 93	 94	 95
 96	 97	 98	 99	 100	 101	 102	 103
 104	 105	 106	 107	 108	 109	 110	 111
 112	 113	 114	 115	 116	 117	 118	 119
 120	 121	 122	 123	 124	 125	 126	 127
160	 161	 162	 163	 164	 165	 166	 167
 168	 169	 170	 171	 172	 173	 174	 175
 176	 177	 178	 179	 180	 181	 182	 183
 184	 185	 186	 187	 188	 189	 190	 191
 192	 193	 194	 195	 196	 197	 198	 199
 200	 201	 202	 203	 204	 205	 206	 207
 208	 209	 210	 211	 212	 213	 214	 215
 216	 217	 218	 219	 220	 221	 222	 223
 224	 225	 226	 227	 228	 229	 230	 231
 232	 233	 234	 235	 236	 237	 238	 239
240	 241	 242	 243	 244	 245	 246	 247
 248	 249	 250	 251	 252	 253	 254	 255

이들은 PostScript 글꼴을 제공하고, 그들 각각 LaTeX 에서 fontfamily 이름 및 각각의 텍스트 실행 예제는 다음과 같다 :

ITC Avant Garde Gothic 은 Herb Lubalin와 Tom Carnase가 디자인 한 geometric sans type 이며 Avant Garde 잡지의 로고를 기반으로 한다. fontfamily 이름은 pag 이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

‘But aren’t Kafka’s Schloß and Æsop’s Œuvres often naïve vis-à-vis the dæmonic phoenix’s official rôle in fluffy soufflés?’

Ângelâ Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Lăuřa Măria Nătalie Œctave Pauline Quêneau Roxanne Sabine Tăja Urşula Vivian Wendy Xanthippe Yvonne Zăzilie

ITC Bookman 은 원래 스코틀랜드의 Miller & Richard 공장에서 1860 년에 판매되었다. 그것은 Alexander Phemister에 의해 설계되었다. ITC 부흥은 Ed Benguiat에 의한 것이다. fontfamily 이름은 `pbk` 이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

'But aren't Kafka's Schloß and Æsop's Œuvres often naïve vis-à-vis the dæmonic phoenix's official rôle in fluffy soufflés?'

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Laura María Nátaļie Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy Xanthippe Yvonne Zāzilie

Bitstream Charter 는 Matthew Carter가 저해상도 장치 디스플레이 용으로 설계 한 것으로 책 제작을 비롯한 많은 응용 분야에 유용하다. fontfamily 이름은 `bch`이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

'But aren't Kafka's Schloß and Æsop's Œuvres often naïve vis-à-vis the dæmonic phoenix's official rôle in fluffy soufflés?'

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Laura María Nátaļie Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy Xanthippe Yvonne Zāzilie

Courier 는 원래 하워드가 설계 한 고정 폭 (monospaced) 글꼴이다. IBM의 Kettler는 나중에 Adrian Frutiger가 다시 그려 냈다. fontfamily 이름은 `pcr`이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

'But aren't Kafka's Schloß and Æsop's Œuvres often naïve vis-à-vis the dæmonic phoenix's official rôle in fluffy soufflés?'

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Laura María Nátaļie Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy Xanthippe Yvonne Zāzilie

Helvetica 는 원래 Max Miedinger에 의해 스위스의 Haas 파운드리를 위해 설계되었다. 그것은 나중에 Stempel 파운드리에 의해 확장되었고 Linotype에 의해 더 세련되어졌다. fontfamily 이름은 `phv`이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

'But aren't Kafka's Schloß and Æsop's Œuvres often naïve vis-à-vis the dæmonic phoenix's official rôle in fluffy soufflés?'

### 3. 텍스트와 글꼴

---

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Lauīa  
María Nátalie Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy  
Xanthippe Yvonne Zāzilie

New Century Schoolbook 은 Morris Benton이 20 세기 초 ATF (American Type Founders)를 위해 디자인했다. 이름에서 알 수 있듯이 교과서의 가독성을 극대화 할 수 있도록 설계되었다. fontfamily 이름은 pnc이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

'But aren't Kafka's Schloß and Æsop's Œuvres often naïve vis-à-vis the dæmonic phoenix's official rôle in fluffy soufflés?'

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Lauīa  
María Nátalie Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy  
Xanthippe Yvonne Zāzilie

Palatino 는 Hermann Zapf가 디자인했으며 오늘날 가장 인기있는 서체 중 하나다. fontfamily 이름은 pp1이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

'But aren't Kafka's Schloß and Æsop's Œuvres often naïve vis-à-vis the dæmonic phoenix's official rôle in fluffy soufflés?'

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Lauīa  
María Nátalie Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy  
Xanthippe Yvonne Zāzilie

Times Roman 은 The Times 신문을 인쇄 할 때 Monotype Corporation에서 Stanley Morison이 디자인 한 Times New Roman 표지의 Linotype 버전이다. fontfamily 이름은 ptm이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.

'But aren't Kafka's Schloß and Æsop's Œuvres often naïve vis-à-vis the dæmonic phoenix's official rôle in fluffy soufflés?'

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Lauīa  
María Nátalie Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy  
Xanthippe Yvonne Zāzilie

Utopia Utopia는 Robert Slimbach가 디자인했으며 과도기적 기능과 최신 세부 사항을 결합한다. fontfamily 이름은 put이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o'er the lea and I was in the dark.



Table 3.4: Font categorisation and commands

	Shape
Upright shape	<code>\textup{Upright shape}</code>
Italic shape	<code>\textit{Italic shape}</code>
Slanted shape	<code>\textsl{Slanted shape}</code>
Small Caps shape	<code>\textsc{Small Caps shape}</code>
	Series or weight
Medium series	<code>\textmd{Medium series}</code>
Bold series	<code>\textbf{Bold series}</code>
	Family
Roman family	<code>\textrm{Roman family}</code>
Sans serif family	<code>\textsf{Sans serif family}</code>
Typewriter family	<code>\texttt{Typewriter family}</code>

‘But aren’t Kafka’s Schloß and Æsop’s Œuvres often naïve vis-à-vis the dæmonic phoenix’s official rôle in fluffy soufflés?’

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Ļaura  
 María Nátalĭe Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy  
 Xanthippe Yvønne Zāzilie

ITC Zapf Chancery 는 이탈리아 르네상스의 찬사 스타일에 필적하는 스크립트 유형이다. 그것은 Hermann ZapfZapf, Hermann에 의해 만들어졌다. fontfamily 이름은 pzc이다.

It was a dark and stormy night. While all the good men were coming to the aid of the party, the quick brown dog had jumped over the fast red fox to its great surprise. The cattle had wound slowly o’er the lea and I was in the dark.

‘But aren’t Kafka’s Schloß and Æsop’s Œuvres often naïve vis-à-vis the dæmonic phoenix’s official rôle in fluffy soufflés?’

Ångelå Beatrice Claire Diana Érica Françoise Ginette Hélène Iris Jackie Kāren Ļaura  
 María Nátalĭe Øctave Pauline Quêneau Roxanne Sabine Tāja Uršula Vivian Wendy  
 Xanthippe Yvønne Zāzilie

Symbol 는 다양한 기호와 수학적 작업을위한 그리스 문자를 포함한다. 이들은 pifont 패키지를 통해 가장 쉽게 접근 할 수 있다. fontfamily 이름은 psy이다. 사용 가능한 글리프는 Table 3.2에 나와 있다.

Zapf Dingbats 에는 Symbol 문자와 마찬가지로 pifont 패키지를 통해 가장 쉽게 액세스 할 수 있는 다양한 dingbats가 포함되어 있다. fontfamily 이름은 pzd이다. 사용 가능한 글리프는 Table 3.3에 나와 있다.

LaTeX 에는 글꼴에 적용되는 세 가지 특성이 있다. 이것들은 : (a) 모양(shape), (b) 시리즈(series)(또는 무게(weight)), (c) 가족(family) 표 3.4 는 이러한 내용을 보여 주며 다른 글꼴 카테고리에 액세스하는 데 필요한 명령 을 나열한다.

일반 본문 글꼴(텍스트 본문에 사용되는 글꼴) — 대부분의 텍스트에 사용되는 글꼴 — 은 `\documentclass`에 대한 글꼴 크기 옵션으로 지정된 크기의 직립, 중간, 로마자 글꼴이다.

### 3. 텍스트와 글꼴

Table 3.5: Font declarations

Shape	
Upright shape	<code>{\upshape Upright shape}</code>
Italic shape	<code>{\itshape Italic shape}</code>
Slanted shape	<code>{\slshape Slanted shape}</code>
Small Caps shape	<code>{\scshape Small Caps shape}</code>
Series or weight	
Medium series	<code>{\mdseries Medium series}</code>
Bold series	<code>{\bfseries Bold series}</code>
Family	
Roman family	<code>{\rmfamily Roman family}</code>
Sans serif family	<code>{\sffamily Sans serif family}</code>
Typewriter family	<code>{\ttfamily Typewriter family}</code>

Typeset example 3.1: Badly mixed fonts

Mixing different series, **families** and *shapes*, especially in one sentence, is usually highly inadvisable!

```
\normalfont
```

`\normalfont` 선언은 글꼴을 일반 본문 글꼴로 설정한다.

Table 3.5 에 표시된대로 Table 3.4 에 나열된 명령에 해당하는 글꼴 선언 세트가 있다. 명령은 한 두 단어의 글꼴을 변경할 때 가장 유용하지만, 다른 글꼴로 긴 구절을 입력하려고 할 때 선언이 더 편리하다.

3.1 에서와 같이 자신의 작업에 굳이 굉장히 많은 글꼴을 넣으려고 하지는 말자.

Source for example 3.1

```
Mixing \textbf{different series, \textsf{families}} and
\textsl{\texttt{shapes,}} \textsc{especially in one sentence,}
is usually \emph{highly inadvisable!}
```

반면에 예제 3.2에서와 같이 효과적인 효과를 내기 위해 여러 글꼴을 사용할 수있는 경우가 있다.

Source for example 3.2

```
\begin{center}
\textsc{Des Dames du Temps Jadis}
```

## Typeset example 3.2: Sometimes mixed fonts work

Des Dames du Temps Jadis  
 Prince, n'enquerez de sepmaine  
 Ou elles sont, ne de cest an,  
 Qu'a ce reffrain ne vous remaine:  
 Mais ou sont les neiges d'antan?

Prince, do not ask in a week  
 Or yet in a year where they are,  
 I could only give you this refrain:  
 But where are the snows of yesteryear?

François Villon [1431--1463?]

```
\end{center}%
\settowidth{\versewidth}{Or yet in a year where they are}
\begin{verse}[\versewidth] \begin{itshape}
Prince, n'enquerez de sepmaine \\*
Ou elles sont, ne de cest an, \\*
Qu'a ce reffrain ne vous remaine: \\*
Mais ou sont les neiges d'antan?
\end{itshape}

Prince, do not ask in a week \\*
Or yet in a year where they are, \\*
I could only give you this refrain: \\*
But where are the snows of yesteryear?
\end{verse}
\begin{flushright}
{\bfseries Fran\c{c}ois Villon} [1431--1463?]
\end{flushright}
```

`\emph{<text>}`

`\emph` 명령은 위의 계획에 맞지 않는 글꼴 변경 명령이다. 그것은 주변 텍스트와 다른 글꼴을 사용하여 텍스트 인수를 조판하는 것이다. 기본적으로 `\emph`는 직립 모양과 기울임꼴 사이를 전환한다. 다음 예제와 같은 효과를 내기 위해 명령을 중첩할 수 있다.

## Source for example 3.3

The `\verb?\emph?` command is used to produce some text that

### 3. 텍스트와 글꼴

---

#### Typeset example 3.3: Emphasis upon emphasis

---

The `\emph` command is used to produce some text that should be emphasised for some reason and can be infrequently interspersed with some further emphasis just like in this sentence.

---

```
should be \emph{emphasised for some reason and can be  
\emph{infrequently interspersed} with some further emphasis}  
just like in this sentence.
```

`\emminnershape{<shape>}`

기울임 꼴 텍스트 내에서 `\emph` 명령을 사용하면 새롭게 강조된 텍스트는 `\emminnershape` 글꼴 모양을 사용하여 조판된다. 기본 정의는 다음과 같다 :

```
\newcommand*{\emminnershape}{\upshape}
```

원하는 경우 변경할 수 있다.

### 3.2 Font sizes

The Computer Modern Metafont fonts come in a fixed number of sizes, with each size being subtly different in shape so that they blend harmoniously. Traditionally, characters were designed for each size to be cut, and Computer Modern follows the traditional type design. For example, the smaller the size the more likely that the characters will have a relatively larger width. Outline fonts can be scaled to any size, but as the scaling is typically linear, different sizes do not visually match quite as well.

Computer Modern fonts come in twelve sizes which, rounded to a point, are: 5, 6, 7, 8, 9, 10, 11, 12, 14, 17, 20 and 25pt. In LaTeX the size for a particular font is specified by a macro name like `\scriptsize` and not by points; for example `\scriptsize`, not 7pt.<sup>1</sup> The actual size of, say, `\scriptsize` characters, is not fixed but depends on the type size option given for the document.

Standard LaTeX provides ten declarations, illustrated in Table 3.6, for setting the type size, which means that two of the sizes are not easily accessible. Which two depend on the class and the selected point size option. However, for normal typesetting four different sizes should cover the majority of needs, so there is plenty of scope with a mere ten to choose from.

The `\normalsize` is the size that is set as the class option and is the size used for the body text. The `\footnotesize` is the size normally used for typesetting footnotes. The standard classes use the other sizes, usually the larger ones, for typesetting certain aspects of a document, for example sectional headings.

---

<sup>1</sup>It is possible to use points but that is outside the scope of this manual.

Table 3.6: Standard font size declarations

<code>\tiny</code>	tiny	<code>\scriptsize</code>	scriptsize
<code>\footnotesize</code>	footnotesize	<code>\small</code>	small
<code>\normalsize</code>	normalsize	<code>\large</code>	large
<code>\Large</code>	Large	<code>\LARGE</code>	LARGE
<code>\huge</code>	huge	<code>\Huge</code>	Huge

Table 3.7: Standard font sizes

Class option	10pt	11pt	12pt
<code>\tiny</code>	5pt	6pt	6pt
<code>\scriptsize</code>	7pt	8pt	8pt
<code>\footnotesize</code>	8pt	9pt	10pt
<code>\small</code>	9pt	10pt	11pt
<code>\normalsize</code>	10pt	11pt	12pt
<code>\large</code>	12pt	12pt	14pt
<code>\Large</code>	14pt	14pt	17pt
<code>\LARGE</code>	17pt	17pt	20pt
<code>\huge</code>	20pt	20pt	25pt
<code>\Huge</code>	25pt	25pt	25pt

Table 3.8: The memoir class font size declarations

<code>\miniscule</code>	miniscule	<code>\tiny</code>	tiny
<code>\scriptsize</code>	scriptsize	<code>\footnotesize</code>	footnotesize
<code>\small</code>	small	<code>\normalsize</code>	normalsize
<code>\large</code>	large	<code>\Large</code>	Large
<code>\LARGE</code>	LARGE	<code>\huge</code>	huge
<code>\Huge</code>	Huge	<code>\HUGE</code>	HUGE

With respect to the standard classes, the memoir class provides a wider range of the document class type size options and adds two extra font size declarations, namely `\miniscule` and `\HUGE`, one at each end of the range.

The memoir class font size declarations names are given in Table 3.8 together with the name set in the specified size relative to the manual’s `\normalsize` font. The corresponding actual sizes are given in Table 3.9.

Whereas the standard font sizes range from 5pt to 25pt, memoir provides for fonts ranging from 4pt to 132pt. That is:

from the 4pt size (the 9pt `\miniscule` size)

through the 9pt normal size

Table 3.9: The memoir class font sizes

Class option	9pt	10pt	11pt	12pt	14pt	17pt	20pt	25pt	30pt	36pt	48pt	60pt
<code>\miniscule</code>	4pt	5pt	6pt	7pt	8pt	9pt	10pt	11pt	12pt	14pt	17pt	20pt
<code>\tiny</code>	5pt	6pt	7pt	8pt	9pt	10pt	11pt	12pt	14pt	17pt	20pt	25pt
<code>\scriptsize</code>	6pt	7pt	8pt	9pt	10pt	11pt	12pt	14pt	17pt	20pt	25pt	30pt
<code>\footnotesize</code>	7pt	8pt	9pt	10pt	11pt	12pt	14pt	17pt	20pt	25pt	30pt	36pt
<code>\small</code>	8pt	9pt	10pt	11pt	12pt	14pt	17pt	20pt	25pt	30pt	36pt	48pt
<code>\normalsize</code>	9pt	10pt	11pt	12pt	14pt	17pt	20pt	25pt	30pt	36pt	48pt	60pt
<code>\large</code>	10pt	11pt	12pt	14pt	17pt	20pt	25pt	30pt	36pt	48pt	60pt	72pt
<code>\Large</code>	11pt	12pt	14pt	17pt	20pt	25pt	30pt	36pt	48pt	60pt	72pt	84pt
<code>\LARGE</code>	12pt	14pt	17pt	20pt	25pt	30pt	36pt	48pt	60pt	72pt	84pt	96pt
<code>\huge</code>	14pt	17pt	20pt	25pt	30pt	36pt	48pt	60pt	72pt	84pt	96pt	108pt
<code>\Huge</code>	17pt	20pt	25pt	30pt	36pt	48pt	60pt	72pt	84pt	96pt	108pt	120pt
<code>\HUGE</code>	20pt	25pt	30pt	36pt	48pt	60pt	72pt	84pt	96pt	108pt	120pt	132pt

through the  
60pt normal  
size

to the

132pt

size

(the

60pt

\HUGE

size).

This extended range, though, is only accessible if you are using outline fonts and the `extrafont sizes` class option. If you are using bitmap fonts then, for example, the `\HUGE` font will be automatically limited to 25pt, and the minimum size of a `\miniscule` font is 5pt.

### 3.3 Spaces

#### 3.3.1 Paragraphs

In traditional typography the first line of a paragraph, unless it comes immediately after a chapter or section heading, is indented. Also, there is no extra space between paragraphs. Font designers go to great pains to ensure that they look good when set with the normal



leading. Sometimes, such as when trying to meet a University's requirements for the layout of your thesis, you may be forced to ignore the experience of centuries.

If you like the idea of eliminating paragraph indentation and using extra inter-paragraph space to indicate where paragraphs start and end, consider how confused your reader will be if the last paragraph on the page ends with a full line; how will the reader know that a new paragraph starts at the top of the following page?

```
\par
\parskip
\abnormalparskip{<length>}
\nonzeroparskip
\traditionalparskip
```

In the input text the end of a paragraph is indicated either by leaving a blank line, or by the `\par` command. The length `\parskip` is the inter-paragraph spacing, and is normally 0pt. You can change this by saying, for example:

```
\setlength{\parskip}{2\baselineskip}
```

but you are likely to find that many things have changed that you did not expect, because LaTeX uses the `\par` command in many places that are not obvious.

If, in any event, you wish to do a disservice to your readers you can use `\abnormalparskip` to set the inter-paragraph spacing to a value of your own choosing. Using the `\nonzeroparskip` will set the spacing to what might be a reasonable non-zero value.<sup>2</sup> Both these macros try and eliminate the worst of the side effects that occur if you just simply change `\parskip` directly.

Following the `\traditionalparskip` declaration all will be returned to their traditional values.

I based the code for these functions upon the NTG classes [LEB04] which indicated some of the pitfalls in increasing the spacing. The difficulty is that `\par`, and hence `\parskip`, occurs in many places, some unexpected and others deeply buried in the overall code.

```
\parindent
```

The length `\parindent` is the indentation at the start of a paragraph's first line. This is usually of the order of 1 to 1½ em. To make the first line of a paragraph flushleft set this to zero:

```
\setlength{\parindent}{0pt}
```

### 3.3.2 Double spacing

Some of those that have control over the visual appearance of academic theses like them to be 'double spaced'. This, of course, will make the thesis harder to read<sup>3</sup> but perhaps that is the purpose, or maybe they have stock (shares) in papermills and lumber companies, as the theses were usually required to be printed single sided as well.

<sup>2</sup>Except that all values except zero are unreasonable.

<sup>3</sup>I certainly found them so when I was having to read them before examining the candidates for their degrees. The writers of the regulations, which were invariably single spaced, seemed immune to any suggestions.

### 3. 텍스트와 글꼴

---

```
\baselineskip \onelineskip
```

The length `\baselineskip` is the space, or leading, between the baselines of adjacent text lines, and is constant throughout a paragraph. The value may change depending on the size of the current font. More precisely, the `\baselineskip` depends on the font being used at the *end* of the paragraph. The class also provides the length `\onelineskip` which is the default leading for the normal body font.<sup>4</sup> As far as the class is concerned this is a constant value; that is, unlike `\baselineskip`, it never alters `\onelineskip`. You can use (fractions) of `\onelineskip` to specify vertical spaces in terms of normal text lines.

The following is heavily based on the `setspace` package [Tob00], but the names have been changed to avoid any clashes. Like the nonzero `\parskip`, the `\baselineskip` rears its head in many places, and it is hard for a package to get at the internals of the overlying class and kernel code. This is not to say that all is well with trying to deal with it at the class level.

```
\OnehalfSpacing \OnehalfSpacing*  
\DoubleSpacing \DoubleSpacing*
```

The declaration `\OnehalfSpacing` increases the spacing between lines so that they appear to be double spaced (especially to the thesis layout arbiters), while the declaration `\DoubleSpacing` really doubles the spacing between lines which really looks bad; but if you have to use it, it is there. The spacing in footnotes and floats (e.g., captions) is unaltered, which is usually required once the controllers see what a blanket double spacing brings. Sometimes it is also required to make page notes and floats (including captions) in ‘double’ spacing. The starred version of the two macros above takes care of this. Alternatively the spacing in page notes (i.e. footnotes and friends) or floats can be set explicitly using

```
\setPagenoteSpacing{<factor>}  
\setFloatSpacing{<factor>}
```

`\setFloatSpacing` should go after say `\OnehalfSpacing*` if used.

```
\SingleSpacing  
\SingleSpacing*  
\setSingleSpace{<factor>}
```

The `\setSingleSpace` command is meant to be used to adjust *slightly* the normal spacing between lines, perhaps because the font being used looks too cramped or loose. The effect is that the normal `\baselineskip` spacing will be multiplied by `<factor>`, which should be close to 1.0. Using `\setSingleSpace` will also reset the float and page note spacings.

The declaration `\SingleSpacing` returns everything to normal, or at least the setting from `\setSingleSpace` if it has been used. It will also reset float and page note spacings to the same value.

**Note.** `\SingleSpacing` will also issue a `\vskip\baselineskip` at the end (which is ignored if `\SingleSpacing` is used in the preamble). This skip makes sure that coming from `\DoubleSpacing` to `\SingleSpacing` still looks ok.

But in certain cases, this skip is unwanted. Therefore as of 2018 we added a `\SingleSpacing*` that is equal to `\SingleSpacing` but does not add this skip.

---

<sup>4</sup>That is `\onelineskip` is set in the `memX.clo` file corresponding to the font size class option. For 10pt, the size is set via `mem10.clo`.

```
\begin{SingleSpace} ... \end{SingleSpace}
\begin{Spacing}{\langle factor \rangle} ... \end{Spacing}
\begin{OnehalfSpace} ... \end{OnehalfSpace}
\begin{OnehalfSpace*} ... \end{OnehalfSpace*}
\begin{DoubleSpace} ... \end{DoubleSpace}
\begin{DoubleSpace*} ... \end{DoubleSpace*}
```

These are the environments corresponding to the declarations presented earlier, for when you want to change the spacing locally.

```
\setDisplayskipStretch{\langle fraction \rangle}
\memdskipstretch
\noDisplayskipStretch
\memdskips
```

If you have increased the interlinear space in the text you may wish, or be required, to increase it around displays (of maths). The declaration `\setDisplayskipStretch` will increase the before and after displayskips by  $\langle fraction \rangle$ , which must be at least 0.0. More precisely, it defines `\memdskipstretch` to be  $\langle fraction \rangle$ . The `\noDisplayskipStretch` declaration sets the skips back to their normal values. It is equivalent to

```
\setDisplayskipStretch{0.0}
```

The skips are changed within the macro `\memdskips` which, in turn, is called by `\everydisplay`. If you find odd spacing around displays then redefine `\memdskips` to do nothing. Its original specification is:

```
\newcommand*{\memdskips}{%
  \advance\abovedisplayskip \memdskipstretch\abovedisplayskip
  \advance\belowdisplayskip \memdskipstretch\belowdisplayskip
  \advance\abovedisplayshortskip \memdskipstretch\abovedisplayshortskip
  \advance\belowdisplayshortskip \memdskipstretch\belowdisplayshortskip}
```

If you need to use a minipage as a stand-alone item in a widely spaced text then you may need to use the `vminipage` environment instead to get the before and after spacing correct.

### 3.4 Overfull lines

TeX tries very hard to keep text lines justified while keeping the interword spacing as constant as possible, but sometimes fails and complains about an overfull hbox.

```
\fussy \sloppy
\begin{sloppypar} ... \end{sloppypar}
\midsloppy
\begin{midsloppypar} ... \end{midsloppypar}
```

The default mode for LaTeX typesetting is `\fussy` where the (variation of) interword spacing in justified text is kept to a minimum. Following the `\sloppy` declaration there may be a much looser setting of justified text. The `sloppypar` environment is equivalent to:

```
{\par \sloppy ... \par}
```

### 3. 텍스트와 글꼴

---

Additionally the class provides the `\midsloppy` declaration (and the `midsloppy` environment) which allows a setting somewhere between `\fussy` and `\sloppy`. Using `\midsloppy` you will get fewer overfull lines compared with `\fussy` and fewer obvious large interword spaces than with `\sloppy`. I have used `\midsloppy` for this manual; it hasn't prevented overfull lines or noticeably different interword spaces, but has markedly reduced them compared with `\fussy` and `\sloppy` respectively.

#### 3.5 Sloppybottom

TeX does its best to avoid widow and orphan lines — a widow is where the last line of a paragraph ends up at the top of a page, and an orphan<sup>5</sup> is when the first line of a paragraph is at the bottom of a page.

The following is the generally suggested method of eliminating widows and orphans, but it may well result in some odd looking pages, especially if `\raggedbottom` is not used.

```
\clubpenalty=10000
\widowpenalty=10000
\raggedbottom
```

`\enlargethispage{<length>}`

You can use `\enlargethispage` to add or subtract to the text height on a particular page to move a line forwards or backwards between two pages.

Here is one person's view on the matter:

...in experimenting with `raggedbottom`, `widowpenalty`, and `clubpenalty`, I think that I have not found a solution that strikes me as particularly desirable. I think what I would really like is that widows (i.e., left-over single lines that begin on the following page) are resolved not by pushing one extra line from the same paragraph also onto the next page, but by stretching the `textheight` to allow this one extra at the bottom of the same page.

*/iaw (from CTR, widow handling?, May 2006)*

As so often happens, Donald Arseneau came up with a solution.

`\sloppybottom`

The declaration `\sloppybottom` lets TeX put an extra line at the bottom of a page to avoid a widow on the following page.

The `\topskip` must have been increased beforehand for this to work (a 60% increase is reasonable) and this will push the text lower on the page. Run `\checkandfixthelayout` after the change (which may reduce the number of lines per page). For example, in the preamble:

```
\setlength{\topskip}{1.6\topskip}
\checkandfixthelayout
\sloppybottom
```

The late Michael Downes provided the following (from CTR *widow/orphan control package (for 2e)?*, 1998/08/31):

---

<sup>5</sup>Knuth uses the term 'club' instead of the normal typographers' terminology.

For what it's worth here are the penalty values that I use when I don't [want] to *absolutely* prohibit widow/orphan break, but come about as close as TeX permits otherwise. This is copied straight out of some code that I had lying around. I guess I could wrap it into package form and post it to CTAN.

Michael Downes

```
% set \clubpenalty, etc. to distinctive values for use
% in tracing page breaks. These values are chosen so that
% no single penalty will absolutely prohibit a page break, but
% certain combinations of two or more will.
\clubpenalty=9996
\widowpenalty=9999
\brokenpenalty=4991
% Reiterate the default value of \redisplaypenalty, for
% completeness.
% Set postdisplaypenalty to a fairly high value to discourage a
% page break between a display and a widow line at the end of a
% paragraph.
\predisplaypenalty=10000
\postdisplaypenalty=1549
% And then \displaywidowpenalty should be at least as high as
% \postdisplaypenalty, otherwise in a situation where two displays
% are separated by two lines, TeX will prefer to break between the
% two lines, rather than before the first line.
\displaywidowpenalty=1602
```

As you can see, perfect automatic widow/orphan control is problematic though typographers are typically more concerned about widows than orphans — a single line of a paragraph somehow looks worse at the top of a page than at the bottom. If all else fails, the solution is either to live with the odd line or to reword the text.

### 3.6 Text case

The standard kernel `\MakeUppercase{<text>}` and `\MakeLowercase{<text>}` basically upper or lower case everything it can get its hands on. This is not particularly nice if the `<text>` contain, say, math.

In order to help with this we provide the `\MakeTextUppercase` and `\MakeTextLowercase` macros from the `textcase` package ([Car04]) by David Carlisle. The following is DC's own documentation of the provided code changed to match the typography we use.

```
\MakeTextUppercase{<text>}
\MakeTextLowercase{<text>}
```

`\MakeTextUppercase` and `\MakeTextLowercase` are versions of the standard `\MakeUppercase` and `\MakeLowercase` that do not change the case of any math sections in their arguments.

```
\MakeTextUppercase{abc\ae\ \ ( a = b \) and $\alpha \neq a$
or even \ensuremath{x=y} and $\ensuremath{x=y}$}
```

### 3. 텍스트와 글꼴

---

Should produce:

ABCÆ  $a = b$  AND  $\alpha \neq a$  OR EVEN  $x = y$  AND  $x = y$

We incorporate some changes suggested by Donald Arseneau so that as well as math mode, the arguments of `\cite`, `\label` and `\ref` are also prevented from being uppercased. So you can now go

```
\MakeTextUppercase{%
  Text in section~\ref{sec:text-case}, about \cite[pp 2--4]{textcase}}
```

which produces

TEXT IN SECTION 3.6, ABOUT [Car04, PP 2–4]

If, instead, the standard `\MakeUppercase` were used here, the keys ‘sec:text-case’ and ‘textcase’ would be uppercased and generate errors about undefined references to SEC:TEXT-CASE and TEXTCASE.

`\NoCaseChange{\text}`

Sometimes there may be a special section of text that should not be uppercased. This can be marked with `\NoCaseChange`, as follows.

```
\MakeTextUppercase{%
  Text \NoCaseChange{More Text} yet more text}
```

which produces

TEXT More Text YET MORE TEXT

`\NoCaseChange` has other uses. If for some reason you need a tabular environment within an uppercased section, then you need to ensure that the name ‘tabular’ and the preamble (eg ‘ll’) does not get uppercased:

```
\MakeTextUppercase{%
  Text \NoCaseChange{\begin{tabular}{ll}}%
      table&stuff\\goes&here
  \NoCaseChange{\end{tabular}}
  More text}
```

which produces

TEXT	TABLE	STUFF	MORE TEXT
	GOES	HERE	

#### 3.6.1 Nested text

The commands defined here only skip math sections and `\ref` arguments if they are not ‘hidden’ inside a `{ }` brace group. All text inside such a group will be made uppercase just as with the standard `\MakeUppercase`.

```
\MakeTextUppercase{a b {c $d$} $e$}
```

produces

A B C D e

Of course, this restriction does not apply to the arguments of the supported commands `\ensuremath`, `\label`, `\ref`, and `\cite`.

If you cannot arrange for your mathematics to be at the outer level of brace grouping, you should use the following basic technique (which works even with the standard `\MakeUppercase` command). Define a new command that expands to your math expression, and then use that command, with `\protect`, in the text to be uppercased. Note that if the text being uppercased is in a section title or other moving argument you may need to make the definition in the document preamble, rather than just before the section command, so that the command is defined when the table of contents file is read.

```
\MakeTextUppercase{%
  Text \fbox{$a=b$ and $x=y$}}%

\newcommand{\mathexprone}{$a=b$}
\newcommand{\mathexprtwo}{$x=y$}
\MakeTextUppercase{%
  Text \fbox{\protect\mathexprone\ and \protect\mathexprtwo}}%
```

which produces

```
TEXT 

|                            |
|----------------------------|
| $A = B \text{ AND } X = Y$ |
|----------------------------|


TEXT 

|                            |
|----------------------------|
| $a = b \text{ AND } x = y$ |
|----------------------------|


```

See also [Car04] for some information about upper casing citations using a non-numeric style.





# Four

## 표제

표준 클래스들은 표지를 설정하는데 큰 도움이 되지 못하는데, `\maketitle` 명령은 테크니컬 논문집에서 논문의 제목을 생성하는 것이 주목적이기 때문이다. 이는 학위 논문, 보고서나 서적의 표지를 만들기에 불충분하다. 필자는 이를 위해 `\maketitle`을 무시하고, 직접 LaTeX 표준 명령어를 사용해 표지 레이아웃을<sup>1</sup> 디자인할 것을 권장한다.

Ruari McLean [McL80, p. 148]을 인용하자면, 그는 표지에 대해서 다음과 같이 말한다:

표지는 책의 실제 제목과 (있을 경우 부제목을 포함해) 저자의 이름, 출판사, 그리고 간혹 삽화의 개수를 포함하지만, 나아가 그것보다 많은 일을 해야 한다. 디자이너의 관점에서 표지는 책에서 가장 중요한 부분으로, 책의 양식을 정한다. 표지는 독자와의 소통을 시작한다...

만약 책에서 삽화가 큰 비중을 차지한다면, 표지는 이를 시각적으로 보일 수 있거나 그해야 한다. 책에서, 예컨대 장의 시작에서라던지, 어떠한 형태로든 장식이 사용된다면 독자는 이것이 표지에서도 반복될 것을 기대할 것이다.

책의 형식이 어떻든지간에, 표지는 그것의 맛보기를 보여줘야 한다. 만약 책이 줄글로 구성되어 있다면, 표지는 적어도 그것과 조화를 이룰 수 있어야 한다. 표지 자체는 글 영역의 너비보다 넓어서는 안되며, 일반적으로는 더 좁을 것이다...

McLean의 표지를 모방한 것이 Figure 4.1에 나와 있다.

`\maketitle` 명령의 조판 형식은 LaTeX 표준 클래스에서 사실상 고정된 것으로 보아야 한다. 이 클래스는 제목 정보, 즉 `\title`, `\author`, `\date`의 내용이 표시되는 형태를 수정할 수 있는 일련의 형식화 명령들을 제공한다. 또, 이는 위 명령들의 값을 나중에 문서에서 다시 사용할 수 있도록 유지한다.

나아가 이 클래스는 `\maketitle` 명령이 사용된 후에 사용된 명령 값이 자동으로 지워지는 것을 방지한다. 그러므로 하나의 문서 안에서 같거나 다른 표지가, 예를 들면 반표지와 전표지에, 여러 번 나오게 할 수도 있다. `\thanks` 명령은 기능이 확장되어 감사의 말 주석의 표지 부호와 레이아웃을 다양하게 설정할 수 있게 되었다.

일반적으로 `\maketitle` 레이아웃에서 약간의 변화를 넘어서는다면 `\maketitle`을 무시하고 레이아웃 전체를 여러분이 손수 만들어 여러분이 종의의 원하는 곳에 모든 것을 위치시키는 편이 낫다.

### 4.1 표지 양식화

표지를 조판하기 위해 제공되는 도구들은 국한되어 있는데, 이들은 본질적으로 테크니컬 논문집에 출판되는 논문의 제목 형식을 제공해주는 것이 전부이다. 이들은 보고서의 제목을 조판할 때에도 빠르고 지저분한 방법을 제공해줄 수 있지만, 책이나 학위 논문과 같은 중요한 작업의 표지에 대해서는 수작업이 필요하다. 예컨대 나의 학생인 Donal Sanderson은 그의 박사 학위

<sup>1</sup>만약 여러분이 학위 논문을 작성 중이라면, 그것이 어떻게 생겨야 하는지 아마도 정해져 있을 것이다.



Figure 4.1: 타이포그래피에 관한 책의 표지 레이아웃

CONUNDRUMS CONSIDERED AS PUZZLES FOR  
THE MIND

By

The Candidate

A Thesis Submitted to the Graduate

Faculty of The University

in Partial Fulfillment of the

Requirements for the Degree of

DEGREE

Major Subject: Logic

Approved by the  
Examining Committee:

\_\_\_\_\_  
A Professor, Thesis Advisor

\_\_\_\_\_  
Another Professor, Thesis Advisor

\_\_\_\_\_  
A Faculty, Member

\_\_\_\_\_  
Another Faculty, Member

\_\_\_\_\_  
A Third Faculty, Member

The University  
The Address

The Date

Figure 4.2: 박사 학위 논문의 지정 표지 양식의 예시



Figure 4.3: 빅토리아 시대의 표지 예시



Figure 4.4: 책 디자인에 관한 책의 표지 레이아웃



Figure 4.5: 책들에 관한 책의 표지 레이아웃

Typeset example 4.1: 예시 \maketitle 표제

## MEANDERINGS

T. H. E. River and A. Wanderer\*  
Dun Roamin Institute, NY

1 April 1993<sup>†</sup>

⋮

\* Supported by a grant from the R. Ambler's Fund

<sup>†</sup> First drafted on 29 February 1992

논문을 조판하기 위해 LaTeX 을 사용했고, Figure 4.2에 Rensselaer Polytechnic Institute에서 1994년에 지정된 표지 양식이 나와 있다. 이외의 다양한 표지의 예시와, 이들을 만드는데 사용된 코드가 [Wil07a]에 있다.

[Wil07a]에 나오는 또 다른 수작업된 표지가 Figure 4.3에 나와 있다. 이것은 필자가 19세기 말 즈음에 출판된 옛 소책자를 기반으로 한 것이며, 다양한 활자를 표시할 수 있는 빅토리아 시대의 프린터에 대한 애정을 확인할 수 있다. 여기서 패션이 표지의 핵심적인 부분이라고 할 수 있다. 본 매뉴얼을 위해 필자는 LaTeX 표준 배포판에 포함된 New Century Schoolbook 글꼴을 사용했는데, 본래는 SoftMaker/ATF 라이브러리에서 라이선스를 받은, 그리고 Christopher League의 공로[Lea03]로 LaTeX 을 지원하는 FontSite 글꼴 중 하나인 Century Old Style을 선택했었다.

Figure 4.4의 표지는 *The Design of Books* [Wil93]의 양식을 따르며, 페이지는 Nicholas Basbanes의 *A Gentle Madness: Bibliophiles, Bibliomanes, and the Eternal Passion for Books*와 유사한 것이 Figure 4.5에 나와 있다. 이들 모두는 [Wil07a]에서 가져온 것이며 수작업된 것들이다.

반면에 다음 코드는 \maketitle의 표준 레이아웃을 생성한다.

Source for example 4.1

```
\title{MEANDERINGS}
\author{T. H. E. River \and
  A. Wanderer\thanks{Supported by a grant from the
    R. Ambler's Fund}\
  Dun Roamin Institute, NY}
\date{1 April 1993\thanks{First drafted on 29 February 1992}}
...
\maketitle
```

본 클래스의 이 부분은 titling 패키지[Wil01g]를 재구현한 것이다.

#### 4. 표제

---

이 클래스는 설정 가능한 `\maketitle` 명령을 제공한다. `\maketitle` 명령은 이 클래스에서 본질적으로

```
\newcommand{\maketitle}{%
  \vspace*{\droptitle}
  \maketitlehooka
  {\pretitle \title \posttitle}
  \maketitlehookb
  {\preauthor \author \postauthor}
  \maketitlehookc
  {\predate \date \postdate}
  \maketitlehookd
  \thispagestyle{title}
}
```

와 같이 정의되는데, 이때 `title` 페이지 양식은 처음에는 `plain` 페이지 양식과 동일하다. `\maketitle` 내에서 사용되는 각종 매크로는 아래에 설명되어 있다.

```
\pretitle{<text>} \posttitle{<text>}
\preauthor{<text>} \postauthor{<text>}
\predate{<text>} \postdate{<text>}
```

위 여섯 개의 명령들은 각자 하나의 인자 `<text>`를 가지며, 이는 문서에서 `\maketitle` 명령의 표준 요소의 조판을 통제한다. `\title`은 본질적으로 `\pretitle`과 `\posttitle` 사이에서 처리되는데, 다음과 같이

```
{\pretitle \title \posttitle}
```

되며 `\author`과 `\date` 명령에 대해서도 유사하다. 이 명령들은 `report` 클래스의 일반적인 `\maketitle`의 조판 결과를 모방하도록 초기화되어 있다. 즉, 명령들의 기본 정의는 다음과 같다.

```
\pretitle{\begin{center}\LARGE}
\posttitle{\par\end{center}\vskip 0.5em}
\preauthor{\begin{center}
  \large \lineskip 0.5em%
  \begin{tabular}[t]{c}}
\postauthor{\end{tabular}\par\end{center}}
\predate{\begin{center}\large}
\postdate{\par\end{center}}
```

이들은 다른 효과를 내기 위해 바꿀 수 있다. 예를 들어 우측 정렬된 sans-serif 제목과 좌측 정렬된 small caps 날짜를 얻으려면 다음과 같이 하라.

```
\pretitle{\begin{flushright}\LARGE\sffamily}
\posttitle{\par\end{flushright}\vskip 0.5em}
\predate{\begin{flushleft}\large\scshape}
\postdate{\par\end{flushleft}}
```

```
\droptitle
```

`\maketitle` 명령은 제목을 페이지의 특정 높이에 놓는다. 여러분은 제목의 세로 위치를 `\droptitle` 길이를 통해 변경할 수 있다. 여기에 양수를 대입하면 제목을 낮출 것이며, 음수를 대입하면 높일 것이다. 기본 정의는 다음과 같다.



```
\setlength{\droptitle}{0pt}
```

```
\maketitlehooka \maketitlehookb
\maketitlehookc \maketitlehookd
```

이 네 후크 명령은 `\maketitle`에 추가적인 요소를 넣을 수 있도록 제공된다. 이들은 기본적으로 아무것도 하지 않도록 정의되어 있지만, 재정의할 수 있다. 예를 들어, 일부 출판물에서는 논문이 출판된 곳에 대한 문장을 실제 제목 문구 직전에 삽입하는 것을 요구한다. 다음은 `\published` 명령을 정의하여 출판 정보를 담을 수 있도록 하며, `\maketitle`에 의해 자동적으로 출력된다.

```
\newcommand{\published}[1]{%
  \gdef\puB{#1}}
\newcommand{\puB}{}
\renewcommand{\maketitlehooka}{%
  \par\noindent \puB}
```

이후

```
\published{Originally published in
  \textit{The Journal of ...}\thanks{Reprinted with permission}}
...
\maketitle
```

와 같이 하여 출판 정보와 일반적인 제목 정보를 모두 출력할 수 있다. 새로운 `\published` 명령과 함께 `\thanks` 명령어를 사용하기 위해서 추가적인 조치가 필요 없다는 것에 주의하라.

```
\begin{titlingpage} text \end{titlingpage}
\begin{titlingpage*} text \end{titlingpage*}
\titlingpageend{<twoside code>}{<oneside code>}
```

표준 클래스들과 `titlepage` 옵션이 함께 사용되면, `\maketitle`은 제목 요소를 숫자가 붙지 않은 페이지에 넣고 새로운 페이지를 페이지 번호 1로 시작한다. 표준 클래스는 `titlepage` 환경도 제공하여, 번호가 붙지 않은 새로운 장을 시작하고 이후 다시 페이지 번호 1부터 새로운 페이지를 시작한다. 이 표지에 어떤 내용을 넣고 어디에 놓을지는 전적으로 여러분의 책임에 달려 있다. 만약 `\maketitle`이 `titlepage` 환경 안에서 사용된다면 이는 또 다른 페이지를 시작할 것이다.

이 클래스는 `titlingpage` 옵션이나 `titlepage` 환경 둘 중 어느 것도 제공하지 않는다. 대신 이는 `titlepage` 옵션과 `titlepage` 명령 중간쯤 되는 `titlingpage` 환경을 제공한다. 여러분은 `titlingpage` 환경에서 `\maketitle`을 포함한 명령들을 사용할 수 있다. `titlingpage` 페이지 양식이 사용되며, 끝에는 번호 1이 붙은 일반적인 페이지를 시작한다 (`\begin{titlingpage*}`는 페이지 번호를 재설정하지 않는다). `titlingpage` 페이지 양식은 `empty` 페이지 양식과 같게 초기 설정되어 있다.

`titlingpage`의 끝에는 지우기 코드가 실행되는데, 이를 통해 다음 페이지 혹은 다음 우측 페이지로 이동할 수 있다. `\titlingpageend{<twoside code>}{<oneside code>}`를 사용해서 지우기 코드를 지정할 수 있다. 기본값은 각각 `\cleardoublepage`와 `\clearpage`이다.<sup>2</sup> 그러나 그냥 `\clearforchapter`을 따르도록 하는 것이 더 나은 선택이 될 수 있다.

```
\titlingpageend{\clearforchapter}{\clearforchapter}
```

<sup>2</sup>따라서 이 수정은 기존의 문서를 바꾸지 않을 것이다, LM, 2018/03/06.

#### 4. 표제

---

이 값을 사용하면, `titlingpage`는 `openany`와 함께 예상대로 작동할  
예를 들어, *plain* 페이지 양식으로 제목과 요약은 같은 표지에 두고 싶다면 다음과 같이 한다.

```
\begin{document}
\begin{titlingpage}
\aliaspagestyle{titlingpage}{plain}
\setlength{\droptitle}{30pt} lower the title
\maketitle
\begin{abstract}...\end{abstract}
\end{titlingpage}
```

그러나 `\begin{titlingpage}`를 사용해서 표지를 만드는 것이 필수는 아니므로, 여러분은 특수한 환경 없이 일반적인 LaTeX 조판을 사용할 수 있다. 그 방법은 다음과 같을 것이다.

```
\pagestyle{empty}
%% Title, author, publisher, etc., here
\cleardoublepage
...
```

기본적으로, 제목 정보는 조판 영역 너비를 기준으로 가운데 정렬된다. 간혹 누군가 `comp.text.tex` 뉴스 그룹에 표지의 제목 정보를 실물 페이지 기준으로 가운데 정렬하는 방법을 묻고는 한다. 만약 조판 영역이 실제 페이지 기준으로 가운데에 있다면 기본 가운데 정렬로 충분할 것이다. 만약 조판 영역이 실제로 가운데가 아니라면, 제목 정보를 가로 방향으로 이동시키던가, `\maketitle`에게 조판 영역이 가로 방향으로 이동되었다고 믿게할 수 있다. 가장 간단한 해결책은 `\calccentering` 명령과 `adjustwidth*` 환경을 사용하는 것이다. 예를 들면 다음과 같다.

```
\begin{titlingpage}
\calccentering{\unitlength}
\begin{adjustwidth*}{-\unitlength}
\maketitle
\end{adjustwidth*}
\end{titlingpage}
```

```
\title{<text>} \thetitle
\author{<text>} \theauthor
\date{<text>} \thedata
```

일반적인 문서 클래스에서 `\maketitle`을 위해 사용되는 `\title`, `\author`과 `date` 매크로의 내용들 (`<text>`)은 `\maketitle` 사용 이후 접근할 수 없다. 본 클래스는 `\thetitle`, `\theauthor`과 `\thedata` 명령을 제공하여 원한다면 이후 문서에서 제목 요소를 출력하는데 사용할 수 있도록 한다.

```
\and \andnext
```

매크로 `\and`는 `\author` 명령어의 인자 안에 쓰이며, 저자들의 이름 사이에 추가 공백을 넣어준다. 이 클래스의 `\andnext` 매크로는 공백 대신에 새로운 줄을 넣어준다. `\theauthor` 매크로 안에서 `\and`와 `\andnext`는 둘 다 쉼표로 치환된다.

본 클래스는 표준 클래스처럼 `\maketitle` 사용 이후에 표지 명령을 자동으로 끄는 관행을 따르지 않는다. 여러분은 원한다면 문서에 여러 개의 `\title`, `\author`, `date`, 그리고 `\maketitle` 명령들을 넣을 수 있다. 예를 들어, 일부 보고서는 표지로 시작해서 뒤이어 요약문이 따르고, 다르게 표현될 수도 있는 또다른 제목을 본문 앞에 가진다. 이는 다음과 같이 구현할 수 있다.

```

\title{Cover title}
...
\begin{titlingpage}
\maketitle
\end{titlingpage}
...
\title{Body title}
\maketitle
...

```

```

\killtitle \keepthetitle
\emptythanks

```

\killtitle 매크로 사용 후에 \thetitle 등을 포함한 모든 표지 관련 명령을 사용하지 못하도록 한다 (이 명령을 사용해 \thetitle 등과 같은 명령이 필요하지 않을 경우 매크로 공간을 확보할 수 있다). 이 명령은 본 클래스에서 표준 클래스의 자동 종료 수행의 수동 버전이다. \keepthetitle 명령은 비슷한 기능을 하지만, 다른 모든 기능은 끄면서 \thetitle, \theauthor과 \thedata 명령을 유지한다는 차이가 있다.

\emptythanks 명령은 기존 \thanks의 모든 문구를 지운다. 이 명령은 \maketitle이 여러 번 사용될 경우 유용하다. \thanks 명령은 매 사용마다 문구를 쌓아올리므로, \maketitle을 매번 사용할 때 기존의 모든 \thanks 문구가 새 문구와 함께 출력될 것이다. 이를 방지하기 위해서는 \maketitle을 사용하기 전에 매번 \emptythanks를 넣으면 된다.

## 4.2 감사의 말 양식화하기

본 클래스는 설정 가능한 \thanks 명령을 제공한다.

```

\thanksmarkseries{<format>}
\symbolthanksmark

```

모든 \thanks는 표지나 각주에 기호로 표시된다. 명령 \thanksmarkseries는 이러한 표지 양식을 바꾸는데 사용될 수 있다. <format> 인자는 카운터를 출력하는 형식들 중 하나의 이름이다. 이름은 카운터 형식과 같지만 백슬래시를 포함하지 않는다. \thanks가 기호 대신에 소문자로 표시되기 위해서는 다음과 같이 하라.

```

\thanksmarkseries{alph}

```

편의를 위해서 \symbolthanksmark는 목록을 각주 기호로 지정한다. 이 클래스를 사용하면 <format>에는 arabic, roman, Roman, alph, Alph 그리고 fnsymbol이 이름으로 올 수 있다.

```

\continuousmarks

```

\thanks 명령어는 footnote 카운터를 사용하며, 표제 이후에는 각주 표지를 1부터 시작하기 위해 영으로 초기화된다. 만약에 카운터를 영으로 만들고 싶지 않다면 \continuousmarks를 명시하라. 이는 감사의 말 표지가 수로 표기된다면 필요할 수 있다.

```

\thanksheadextra{<pre>}{<post>}

```

\thanksheadextra 명령어는 <pre>와 <post>를 각각 표제 영역에 있는 감사의 말 전후에 삽입할 것이다. 기본적으로 <pre>와 <post>는 비어있다. 예를 들어, 표제 표지를 감싸는 괄호를 넣기 위해서는 다음과 같이 한다.

```

\thanksheadextra{({})}

```

#### 4. 표제

---

`\thanksmark{<n>}`

간혹 여러 저자에게 동일한 감사의 말 문구를 적용해야할 경우가 있는데, 예를 들어 여섯 명 중 첫 세 명과 마지막의 네 저자에게 적용해야한다고 하자. `\thanksmark{<n>}` 명령어는 `\thanks` 명령어의 `<n>`번째 표지와 같은 표지를 출력한다는 점에서 `\footnotemark[<n>]`와 유사하다. 각주의 감사의 말에는 어떠한 변경도 생기지 않는다. 예를 들어, 다음의 Alpha와 Omega 저자는 동일한 표지를 가질 것이다.

```
\title{The work\thanks{Draft}}
\author{Alpha\thanks{ABC},
        Beta\thanks{XYZ} and
        Omega\thanksmark{2}}
\maketitle
```

`\thanksmarkstyle{<defn>}`

기본적으로 각주의 표지는 윗첨자로 조판된다. 본 클래스에서 이는

```
\thanksmarkstyle{\textsuperscript{#1}}
```

와 같이 지정할 수 있으며, 이때 #1는 감사의 말 표지 기호로 치환된다. 여러분이 원한다면 표지 양식을 바꿀 수 있다. 예를 들어, 표지를 괄호로 감싸고 베이스라인에 normal 크기로 조판하고 싶다면 다음과 같이 한다.

```
\thanksmarkstyle{(#1)}
```

`\thanksmarkwidth`

각주의 감사의 말 표지는 너비 `\thanksmarkwidth`의 박스에 오른쪽 정렬되어 조판된다. 감사의 말 문구의 첫 줄은 이 박스 뒤에 시작된다. 초기값은

```
\setlength{\thanksmarkwidth}{1.8em}
```

으로 기본 위치가 설정되어 있다.

`\thanksmarksep`

길이값 `\thanksmarksep`는 감사의 말의 두 번째 및 그 이후 줄의 들여쓰기를 표지 박스 끝에 맞추어 조절한다. 예를 들어서

```
\setlength{\thanksmarksep}{0em}
```

는 여러 줄에 걸친 감사의 말을 왼쪽 끝에 따라 정렬할 것이며

```
\setlength{\thanksmarksep}{-\thanksmarkwidth}
```

는 두 번째와 그 이후 줄을 왼쪽 정렬 할 것이다. 이 마지막 설정이 초기값으로, 기본 설정이다.

`\thanksfootmark`

각주 위치의 감사의 말 표지는 `\thanksfootmark`로 식자된다. 이에 대한 코드는 대략 다음과 같다.

```
\newcommand{\thanksfootmark}{%
  \hbox to\thanksmarkwidth{\hfil\normalfont%
    \thanksscript{\thefootnote}}}
```

여러분이 `\thanksfootmark`의 정의를 바꿀 필요는 없지만, 여기에 사용되는 몇몇 매크로들의 기본 정의를 바꿀 수도 있다.

```
\thanksscript{<text>}
```

이는 기본적으로

```
\newcommand{\thanksscript}[1]{\textsuperscript{#1}}
```

와 같이 정의되어 있어서, 감사의 말의 기본 설정으로 `\thanksscript`가 인자를 윗첨자로 식자하도록 한다.

```
\makethanksmark
\makethanksmarkhook
```

매크로 `\makethanksmark`는 (`\thanksfootmark`를 통해서) 감사의 말 표지와 감사의 말 문구를 둘 다 식자한다. 여러분은 아마도 이의 기본 정의를 바꿀 필요는 없을 것이다. 그래도 혹시 모르니, `\makethanksmark`는 식자하기 전에 먼저 `\makethanksmarkhook`를 부른다. 이의 기본 정의는

```
\newcommand{\makethanksmarkhook}{}%
```

으로 아무것도 하지 않는다.

여러분은 `\makethanksmarkhook`가 유용한 일을 하도록 재정의할 수 있다. 예를 들어, 조금 더 큰 베이스라인 간격이 필요하다면

```
\renewcommand{\makethanksmarkhook}{\fontsize{8}{11}\selectfont}
```

와 같이 할 수 있고, 이때 8과 11는 각각 폰트의 포인트 크기와 베이스라인 간격을 나타낸다. 이 예시에서 8pt는 10pt 문서의 보통 `footnotesize`이며, 11pt는 11pt 문서에서 베이스라인 간격이다 (10pt 문서에서 `\footnotesize`의 보통 베이스라인 간격은 9.5pt이다). 이들 값을 원하는대로 조절하라.

```
\thanksrule
\usethanksrule
\cancelthanksrule
```

기본적으로 `titlingpage` 환경에서 `\thanks` 문구 위에는 선이 없다. 만약 해당 환경에서 선을 그리고 싶다면 `\usethanksrule`을 `\maketitle` 명령 전에 넣어 `\thanksrule`의 현재 정의에 맞게 선을 출력하도록 할 수 있다. `\thanksrule`은 `preamble` 끝에 정의된 `\footnoterule`의 사본으로 초기 설정되어 있다. `\thanksrule`의 정의는 `\begin{document}` 이후에 변경할 수 있다. 만약 `\thanksrule`의 정의가 변경된 후 `\usethanksrule`이 사용되었다면, 각주에 대해서도 동일한 선이 사용될 수 있다. `\cancelthanksrule`을 사용하면 이후로 보통 `\footnoterule` 정의가 사용될 것이다. 나중에 다시 바꾸고 싶다면 `\usethanksrule`을 이후에 다시 쓰면 된다.

각주와 감사의 말 주석의 세로 위치에 대한 매개변수와 기본 `\footnoterule`은 같다 (page 233의 Figure 12.1을 보라.). 각주와 감사의 말 주석의 세로 간격이 달라야 한다면 이들 중 일부를 바꿔야 한다.



# Five

## 요약문

단행본에는 요약문 (abstract)이 없다. 그러나 과학기술 저널의 논문에는 필수적 요소이다. 보고서에는 요약문이 있을 수도 없을 수도 있지만 만약 붙는다면 흔히 ‘개관 (Summary)’이라는 명칭을 더 자주 사용한다. 이보다 훨씬 짧은 요약문으로 ‘개요 (Executive Summary)’라 불리는 것이 있는데 이것은 세부적인 사항에 대해서는 신경 쓸 필요가 없는 사람을 위한 것이다.

표준 클래스의 abstract 환경의 모양은 고정되어 있다. 그러나 이 클래스에서는 abstract 환경의 모양을 조절할 수 있는 방법을 제공한다.

이단 (two-column) 문서에 단단 (one-column) 요약문을 붙이는 방법에 대한 질문은 comp.text.tex 뉴스그룹에 꽤 자주 주기적으로 올라온다. ctt의 답변을 모아놓은 FAQ에 해답이 실려 있지만 이 클래스는 좀더 문서작성자 친화적인 방법을 제공한다.

### 5.1 요약문의 양식

이 부분은 abstract 패키지 [Wil01a]를 재구현한 것이다.

report와 article 클래스의 abstract가 조판되는 형식은 클래스 옵션에 따라 달라진다.<sup>1</sup>

- 클래스 옵션 titlepage: 요약문 표제(즉 \abstractname 명령의 값)가 굵은 글씨로 가운데 정렬되고 텍스트는 정상 폰트와 정상 길이로 식자된다.
- 클래스 옵션 twocolumn: 요약문 표제는 번호없는 절 제목처럼 식자되고 텍스트는 정상 폰트로, 그리고 (단단 문서) 정상 길이로 식자된다.
- 디폴트 (위의 어떤 옵션도 주어지지 않았을 때): 요약문 표제는 작은 볼드 폰트로 가운데 정렬되어 식자되고 텍스트는 작은 (small) 폰트로 quotation 환경과 같이 들여쓰기하여 식자된다.

이 클래스는 abstract 환경을 제공하며 abstract 환경의 조판 형태를 수정할 수 있다.

```
\begin{abstract} text \end{abstract}
```

abstract 환경의 사용법에 특별할 것은 없다. 다음 명령을 이용하여 그 형태를 제어한다.

```
\abstractcol
\abstractintoc
\abstractnum
\abstractrunin
```

요약문의 표준 형식은 볼드체 표제를 가운데정렬하고 텍스트를 작은 (small) 폰트로 찍으면서 양쪽 여백을 조금 두는 것이다

\abstractcol 선언은 twocolumn 클래스 옵션이 주어진 문서에서 요약문은 정상적인 번호붙지 않은 chapter처럼 식자되도록 한다. \abstractintoc 명령은 요약문 표제가 ToC에

<sup>1</sup>book 클래스에는 abstract 환경이 없다.

## 5. 요약문

추가되도록 한다. `\abstractnum`이라고 선언하면 보통의 번호붙는 `chapter`와 같은 모양으로 식자되고 `\abstractrunin`이라 하면 요약문의 표제가 문단을 파고드는 헤딩으로 나타나게 한다. 이 두 가지 선언은 상호배타적이다. `\abstractnum` 선언은 요약문이 `\frontmatter` 부분 안에 놓이면 효과가 없다.

```
\abstractname
\abstractnamefont
\abstracttextfont
```

`\abstractname` (기본값은 “Abstract”) 명령은 `abstract` 환경의 표제로서 `\abstractnamefont` 폰트로 식자한다. 인용문의 본문은 `\abstracttextfont` 폰트를 써서 식자하며 이 두 명령은 원한다면 재정의하여 폰트를 바꿀 수 있다. 디폴트 정의는 다음과 같다.

```
\newcommand{\abstractnamefont}{\normalfont\small\bfseries}
\newcommand{\abstracttextfont}{\normalfont\small}
```

```
\absleftindent \absrightindent
\absparindent \absparsep
```

이 버전의 `abstract`는 `list` 환경을 사용하여 텍스트를 식자한다. 이 네 길이값들은 (`\setlength` 또는 `\addtolength`를 통하여) 왼쪽 오른쪽 여백, 문단 들여쓰기, 또는 문단 사이의 간격을 재설정할 수 있다. 기본값은 `twocolumn` 옵션이 클래스에 주어졌는가 여부에 따라 달라진다. 리스트 환경에 사용되는 레이아웃 파라미터들은 Figure 8.2에 소개되어 있다.

```
\abslabeldelim{<text>}
```

만약 `\abstractrunin` 선언이 주어지면 표제가 문단 첫머리 헤딩으로 식자된다. 즉 표제가 문단 첫 줄의 맨 처음에 나타난다. `\abslabeldelim` 명령의 `<text>` 옵션은 이 파고드는 표제 직후에 놓인다. 기본적으로 아무 것도 오지 않지만 원한다면 예컨대 콜론이나 추가 간격을 줄 수 있다.

```
\abslabeldelim{:\quad}
```

```
\absnamepos
```

만약 `\abstractrunin` 선언이 사용되지 않으면 표제는 `\absnamepos`에 의하여 지정되는 정렬 방식으로 식자한다. 기본값은

```
\newcommand{\absnamepos}{center}
```

으로 되어 있다. `flushleft`, `flushright`, `center` 가운데 하나를 정할 수 있으며 각각 왼쪽 정렬, 오른쪽 정렬, 가운데 정렬한다. 만약 사용중인 패키지가 제공하는 정렬 환경이 있다면 그 환경을 사용할 수 있다.

```
\abstitlekip
```

`\abstractrunin` 선언이 있으면 `\abstitlekip`은 표제의 전후에 오는 수평간격을 설정한다. 예를 들면 `\absparindent`가 0이 아니면

```
\setlength{\abstitlekip}{-\absparindent}
```

이 결과는 표제를 왼쪽 정렬할 것이다.

`\abstractrunin` 선언이 없으면 `\abstitlekip`은 요약문 표제와 본문 사이의 추가 수직 간격(음수일 수도 있고 양수일 수도 있다)을 설정한다.



## 5.2 단단 요약문

twocolumn 문서에서 단단 요약문을 만드는 데 대한 일반적 조언 [FAQ]은 다음과 같이 하라는 것이다.

```
\documentclass[twocolumn...]{...}
...
\twocolumn[
  \begin{@twocolumnfalse}
    \maketitle          need full-width title
    \begin{abstract}
      abstract text...
    \end{abstract}
  \end{@twocolumnfalse}
]
... hand make footnotes for any \thanks commands
...
```

<pre>\begin{onecolabstract} text \end{onecolabstract} \saythanks</pre>
--

이 클래스는 onecolabstract 환경을 제공하는데 이것은 twocolumn 문서에서 단단 요약문을 식자하는 데 사용한다.

```
\documentclass[twocolumn...]{memoir}
...
\twocolumn[
  \maketitle          need full-width title
  \begin{onecolabstract}
    abstract text...
  \end{onecolabstract}
]
\saythanks % typesets any \thanks commands
...
```

\saythanks 명령은 직전의 \maketitle 텍스트에서 사용된 \thanks 명령들이 제대로 인쇄되도록 한다.

onecolabstract 환경은 abstract를 써야 할 곳에 마음대로 사용할 수 있다. \twocolumn 명령의 옵션 인자 안에 있어야 할 필요도 없다. 실제로 onecolabstract는 내부적으로 abstract를 사용하여 식자한다.



## 문서의 장절구분

이 장에서는 *pedersen* 챕터 스타일 (`chapterstyle`) 이 어떻게 나타나는지 알려주고자 한다.

이 장에서는, 먼저 책 내의 여러 종류의 구분과 그것들을 조판하는 명령에 대해 설명한다.

그런 다음 장 (`chapter`) 의 모양과 기타 섹션 제목, 부제목 (`other sectional titles, subheads`) 을 수정하는 클래스 방법 (`class methods`) 을 설명한다. 여기에 설명 된 기능은 `titlesec` [Bez99] 및 `sectsty` [McD98] 패키지를 함께 사용했을 때와 거의 동일한 기능을 제공한다. 그러나 명령은 다르다.

### 6.1 Logical divisions

앞에서 설명한 것처럼 책에는 세 가지 주요 논리적 구분이 있다. `front matter`, `main matter` 그리고 `back matter`. 그리고 이들에 대응하는 세 가지의 LaTeX 명령어는 `\frontmatter`, `\mainmatter` 그리고 `\backmatter` 이다.

```
\frontmatter \frontmatter*
```

`\frontmatter` 명령어는 folios를 소문자 로마 숫자로 인쇄하도록 설정하고 i부터 페이지 번호 매기기를 시작하며 섹션 구분의 번호 매기기를 금지한다. 캡션 (caption), 수식 (equations) 등은 연속적으로 번호가 매겨진다. 별표 버전의 명령어인 `\frontmatter*`는 Folio의 페이지 번호나 인쇄 스타일을 변경하지 않는다는 점을 제외하고 별표가 없는 버전과 유사하다. `\chapter` 및 기타 부서에 번호가 지정되지 않더라도 제목이 목차에 추가된다.

아무것도 사용하지 않으려면 `\frontmatter` 명령어가 텍스트를 설정하기 전에 와야한다. 그렇지 않으면 페이지 매김 체계가 혼란스러워진다. (책에서 페이지 매김이 첫 페이지부터 시작됨).

```
\mainmatter \mainmatter*
```

문서 시작시 기본값인 `\mainmatter` 명령어는 folios를 아라비아 숫자로 인쇄하도록 설정하고 페이지 번호를 1부터 시작하며 이후로는 2,3,4,5.... 점점 커진다. 떠다니는 객체의 캡션 (Float captions), 수식 (equations) 등은 장 (chapter) 마다 번호가 매겨진다. 별표 버전의 명령어인 `\mainmatter*`는 folios의 페이지 번호나 인쇄 스타일을 변경하지 않는다는 점을 제외하고 별표가 없는 버전과 유사하다. `\mainmatter`의 기능을 설명하는 다음 단락이 추가되지 않았다.

`\mainmatter` 는 folio 번호를 아라비아로 변경하고 1에서 다시 시작할뿐만 아니라 다음에 오는 recto 페이지에서 시작되도록 한다. ( `openany` 옵션으로 실행할 때도 ).

```
\backmatter
```

`\backmatter` 명령어는 페이지 매김 또는 folios를 변경하지 않지만, 부분 (sectional) 을 구분하는 번호 매기기를 금지하고 캡션 등은 연속적으로 번호가 매겨진다.

전면 또는 후면에 사용할 수있는 다른 유형의 "떠다니는 개체" (floats) 가 있는 경우, 그림 및 표와 같은 방식으로 번호를 매기도록 일부 내부를 변경할 수 있다. 그것은 다음과 같이

```
\newcommand\@memfront@floats{%
  \counterwithout{figure}{chapter}
  \counterwithout{table}{chapter}}
\newcommand\@memmain@floats{%
  \counterwithin{figure}{chapter}
  \counterwithin{table}{chapter}}
\newcommand\@memback@floats{%
```

## 6. 문서의 장절구분

---

```
\counterwithout{figure}{chapter}
\counterwithout{table}{chapter}
\setcounter{figure}{0}
\setcounter{table}{0}}
```

문서 전체적인 연속적 번호 매기기를 원할 경우, 즉 매크로를 변경할 수도 있다.

```
\makeatletter
\counterwithout{figure}{chapter}
\counterwithout{table}{chapter}
\renewcommand\@memfront@floats{}
\renewcommand\@memmain@floats{}
\newcommand\@memback@floats{}
\makeatother
```

서문에서.

### 6.2 Sectional divisions

memoir 클래스를 사용하면 문서를 8 단계의 명명 된 구분으로 나눌 수 있다. 그것들은 책, 부분, 챕터 및 하위 단락에 이르기까지 다양하다. 특정 섹션 구분은 `\book`, `\part`, `\chapter`, `\section`, `\subsection` 명령 중 하나로 지정된다. 더 미세한 분할이 필요한 경우, `\subsubsection`, `\paragraph`, `\subparagraph`를 쓸 수도 있다. `\book` 및 `\part`를 제외한 섹션적 구분 명령어 (sectional commands)의 형식은 동일하다. 따라서 각각을 따로 설명하는 대신에, 두 명령어를 제외하고 나머지에 대해서는 `\section`을 예시로 들어 설명하겠다.

```
\section[<toc-title>][<head-title>]{<title>}
\section*{<title>}
```

명령어에는 두 가지 형태가 있다. 별표가 표시된 버전이 더 간단하니 이를 먼저 설명하겠다. 문서의 부분 섹션적 구분 형식으로 `<title>`을 입력한다. 별표가 표시된 버전과 마찬가지로 일반 버전도 문서에 `<title>`을 입력하지만 번호가 매겨 질 수 있다. 다음과 같이 목차 (Table of Contents) (ToC) 및 실행중인 머리글에 다른 형식의 구분 제목을 사용할 수 있다.

- argument 0개 : `<title>`은 제목을 구분할 때, 목차 (ToC) 제목, 그리고 페이지 머리글에 사용된다.
- argument 1개 : `<title>`은 제목을 구분할 때 사용된다. `<toc-title>`이 목차 (ToC) 제목, 그리고 페이지 머리글에 사용된다.
- argument 2개 : `<title>`은 제목을 구분할 때 사용된다. `<toc-title>`이 목차 (ToC) 제목에 사용된다, 그리고 `<head-title>`이 페이지 머리글에 사용된다.

`\section` 명령어는 하나에서 모든 `\subsection`의 번호 매기기를 다시 시작한다. 대부분의 곳에서 `<title>`은 명령어 실행 된 페이지에 있다. `\book`, `\part` 그리고 `\chapter` 명령어는 약간 다르게 동작한다.

`\book` 및 `\part` 명령어는 더 단순하며 둘 다 동일한 방식으로 작동한다.

```
\book{<title>}
\part{<title>}
```

`\book{<title>}` 명령어는 책 이름 (기본값 Book), 번호 및 `<title>`을 페이지 자체에 넣는다. books의 번호 매기기는 `\part`들과 또는 `\chapter`들의 번호 매기기에 영향을 미치지 않는다. 마찬가지로 `\part{<title>}` 명령어는 페이지 자체에 부품 이름 (기본값 Part), 번호 및 `<title>`을 넣는다. parts의 번호 매기기는 `\chapter`들의 번호 매기기에 영향을 미치지 않는다.

후에 Part와 같은 LaTeX의 기본 이름 목록을 제공할 것이다.

```
\chapter[⟨toc-title⟩][⟨head-title⟩]{⟨title⟩}
\chapter*[⟨head-title⟩]{⟨title⟩}
```

`\chapter` 명령은 새 페이지를 시작하고 챕터 이름 (기본값 Chapter), 번호 및 `⟨title⟩`을 페이지 맨 위에 놓는다. 하나의 `\section`은 번호를 다시 시작한다. 선택적 argument를 지정하지 않으면 `⟨title⟩`이 ToC항목으로 사용되며 페이지 제목에 사용된다. 하나의 선택적 argument가 지정되면 이는 `⟨toc-title⟩`이며 ToC항목 및 페이지 표제에 사용된다. 두 개의 선택적 argument가 모두 지정되면 페이지 제목에 `⟨head-title⟩`이 사용된다.

`\chapter*`명령은 새 페이지를 시작하고 페이지 맨 위에 `⟨title⟩`을 넣는다. ToC항목을 작성하지 않고 숫자를 변경하지 않으며 기본적으로 페이지 제목을 변경하지 않는다. 선택적인 `⟨head-title⟩` argument가 제공되면 페이지 표제에 사용된다. 선택적 인수를 사용하면 `secnumdepth` 카운터가 `maxsecnumdepth`로 설정되는 부작용이 있다 (자세한 내용은 아래 참조).

그러나 article 옵션이 적용되면 약간 다르다. 새 장이 반드시 새 페이지에서 시작되는 것은 아니다. `\mainmatter` 명령어는 섹션 번호 매기기를 켜고 페이지에 아라비아 번호 매기기를 시작한다. `\backmatter` 명령어는 섹션 번호 매기기를 해제한다. `\tableofcontents` 명령어 및 유사한 명령어들, 그리고 `\newlistof`를 통해 생성된 다른 명령어는 *always*<sup>1</sup> `thispagestyle{chapter}` article 옵션을 사용하는 경우 *chapter* 페이지 스타일이 문서에 일반적으로 사용하는 것과 동일해야 한다.

표준 클래스와 달리 `⟨title⟩`은 조판 오른쪽으로 정렬된다. 즉, `⟨title⟩`에서 줄 바꿈을 강제해야 하는 경우 더 일반적인 `\\` 대신 `\newline`을 사용해야 한다. 예를 들어

```
\section[A broken\\newline title]
```

표준 클래스에서 페이지 하단에 너무 가까운 `\section` 또는 다른 소제목은 다음 페이지의 상단으로 이동한다. 이런 상황이 발생하고 `\flushbottom`이 적용되면 짧은 페이지의 내용이 늘어나 마지막 행이 유형 블록의 맨 아래와 같은 높이가 되도록 한다.

```
\raggedbottomsection
\normalbottomsection
\bottomsectionskip
\bottomsectionpenalty
```

`\raggedbottomsection` 선언은 `\raggedbottom`이 짧은 페이지에 적용된 것처럼 이동 한 서브 헤드로 인해 짧은 페이지를 조판한다. 다른 페이지는 영향을받지 않는다. 길이 `\bottomsectionskip`은 짧은 페이지의 스트레치 양을 제어한다. 이 값을 0으로 설정하면 마지막 행이 타입 블록의 하단과 동일 평면에 놓일 수 있다. 기본 설정인 10mm 범위를 제거하는 것으로 나타난다. `\bottomsectionpenalty`는 이 시점에서 페이지를 나누는 데 드는 페널티를 제어한다. 범위가 일반적으로 충분하므로 기본값은 0이다. 음수로 설정하면 가능한 페이지 나누기에 대해 조금 더 고무적일 수 있다.

기본값인 `\normalbottomsection` 선언은 이전의 `\raggedbottomsection` 선언을 취소한다.

### 6.2.1 Appendices

부록은 일반적으로 본문에서 나오며 일반적으로 번호가 매겨 지므로 `\mainmatter`의 일부로 간주되는 경우가 많다 (`\backmatter` 선언은 모든 섹션 번호를 끈다).

<sup>1</sup>이는 매크로 호출의 내부 타이밍 결과입니다.

## 6. 문서의 장절구분

```
\appendix
\appendixname
```

`\appendix` 선언은 장 번호를 알파벳 형태로 변경하고 장 이름을 `\chaptername` (기본값 Chapter)에서 `\appendixname` (기본 Appendix) 값으로 변경한다. 따라서 `\appendix` 명령 다음의 첫 번째 및 나중의 `\chapter`는 '부록 A ...', 부록 B ... 등이 된다. 표준 클래스가 있지만, 이 클래스는 부록을 다루는 더 많은 방법을 제공한다.

```
\appendixpage
\appendixpage*
\appendixpagename
```

`\appendixpage` 명령은 `\appendixpagename` 값으로 주어진 제목을 가진 부분적인 페이지 (이름이나 번호는 없음)를 생성한다.(기본값 Appendices) 또한 `\addappheadtotoc`를 사용하여 ToC에 항목을 만든다 (아래 참조). 별표가 표시된 버전은 부록 페이지를 생성하지만 ToC 항목은 없다.

```
\addappheadtotoc
\appendixtocname
```

`\addappheadtotoc` 명령은 ToC에 항목을 추가한다. 제목은 `\appendixtocname` (기본값 Appendices)의 값으로 제공됩니다.

```
\begin{appendices} text \end{appendices}
```

appendices 환경은 `\appendix` 명령과 같은 방식으로 챕터의 번호와 이름을 재설정한다. 그러나 환경이 끝나면 장이 원래 상태로 복원되고 appendices 환경이 없었던 것처럼 모든 장 번호가 순서대로 계속된다.

```
\begin{subappendices} text \end{subappendices}
\namedsubappendices \unnamedsubappendices
```

subappendices 환경을 사용하여 장 끝에 부록을 넣을 수 있다. 환경 내에서 `\section`은 새로운 하위 부록을 시작한다. ToC에 표제 항목을 원하면 환경 시작 부분에 `\addappheadtotoc`를 넣을 수 있다.

subappendices 환경 앞에 `\namedsubappendices` 선언을 넣으면 문서 본문의 하위 부록 번호 전에 `\appendixname` 값이 붙는다. 기본값인 `\unnamedsubappendices` 선언을 사용하여 이 동작을 끌 수 있다.

**경고:** 명명 된 하위 부록(subappendices)의 구현은 `\setsecnumformat`을 사용하므로 이 명령을 사용하여 섹션 번호의 형식을 변경 한 경우 subappendices 환경 내에서 특별한 방식으로 작업을 다시 수행해야한다 다음과 같이 하자. (사용자가 섹션 번호에 구식 숫자를 사용하려는 경우)

```
\begin{subappendices}
\setsecnumformat{\sectionname\oldstylenums{\csname the#1\endcsname\quad}}
```

매크로 `sectionname`은 subappendices 환경에 만 있는 특수 매크로이며 `\namedsubappendices`가 적용되는 경우에만 사용할 수 있다.

Table 6.1: 장절명령의 수준

Division	Level
<code>\book</code>	-2
<code>\part</code>	-1
<code>\chapter</code>	0
<code>\section</code>	1
<code>\subsection</code>	2
<code>\subsubsection</code>	3
<code>\paragraph</code>	4
<code>\subparagraph</code>	5

### 6.3 번호 매김

각 장절명령은 Table 6.1에 나와있는 것과 같이 연관된 수준을 갖는다. 만약 `secnumdepth` 카운터의 값이 장절명령의 수준보다 크거나 같다면 장절명령에 번호가 붙는다. 예를 들어, 아래 명령은 subsection에서 part까지에 번호를 붙인다.

```
\setcounter{secnumdepth}{2}
```

```
\setsecnumdepth{<secname>}
\maxsecnumdepth{<secname>}
```

어떤 장절명령에 번호를 붙일 것인지를 정하기 위해 각 수준을 외우는 것 대신 `\setsecnumdepth` 명령을 사용할 수 있다. 이 명령은 `<secname>` 이상의 장절명령에 번호가 붙도록 `secnumdepth`를 정해준다. 인자 `<secname>`은 장절명령의 이름으로 역슬래시가 붙지 않는다. 예를 들어, subsection 이상에 번호가 붙게 하는 명령은 아래와 같다.

```
\setsecnumdepth{subsection}
```

또는 `<secname>`에 `all`이나 `none`을 주어 모든 장절명령에 번호를 붙이거나 붙이지 않을 수 있다.

프리앰블에서 이를 사용하면 `\setsecnumdepth`는 `\mainmatter`가 불렸을 때 한 번만 사용되는 번호매김 수준인 `\maxsecnumdepth`를 호출한다. 번호매김 수준을 (임시로) 바꾸기 위해 `\setsecnumdepth`를 `\mainmatter` 내의 어디서든 사용할 수 있다.

클래스의 기본값은 다음과 같다.

```
\setsecnumdepth{section}
\maxsecnumdepth{section}
```

`\frontmatter` 명령은 번호매김 수준을 `none`으로 설정한다. `\mainmatter`와 `mainmatter*`는 번호매김 수준을 `\maxsecnumdepth`에서 명시한 값으로 설정한다.

번호매김 명령들은 `tocvsec2` 패키지 [Wil99b]에서 가져왔다.

### 6.4 Book과 PART 헤딩

Several aspects of the typesetting of the `\book` and `\part` title are configurable. Ignoring details, such as the optional argument, the code for printing `\part` headings looks like this:

```
\newcommand{\part}[1]{%      % THIS IS A VERY SIMPLIFIED VERSION
  \cleardoublepage          % start a new recto page
```

## 6. 문서의 장절구분

---

```
\thispagestyle{part}      % set the page style
\beforepartskip           % space before Name and Number
\printpartname\partnamenum\printpartnum
\midpartskip              % space after Name and Number
\printparttitle{#1}       % print the title
\partpageend}             % finish off
\newcommand{\partpageend}{% THIS IS SIMPLIFIED
\afterpartskip
% ifblankpage then blank next page and restore twocolumn if necessary
}
```

The code for \book headings is similar.

The general layout for \book, \part and \chapter headings is similar and you may wish to refer to Figure 6.1 which, although it shows the vertical layout for a chapter head, is also applicable to \book and \part heads with appropriate changes in the names of the commands.

```
\beforebookskip \afterbookskip
\beforepartskip \afterpartskip
```

These commands effectively control the spacing before and after the book and part titles. Their default definitions are:

```
\newcommand*{\beforebookskip}{\null\vfil}
\newcommand*{\afterbookskip}{\vfil\newpage}
\newcommand*{\beforepartskip}{\null\vfil}
\newcommand*{\afterpartskip}{\vfil\newpage}
```

Together, these vertically center any typesetting on the page, and then start a new page. To move the \part title upwards on the page, for example, you could do:

```
\renewcommand*{\beforepartskip}{\null\vskip 0pt plus 0.3fil}
\renewcommand*{\afterpartskip}{\vskip 0pt plus 0.7fil \newpage}
```

```
\midbookskip
\midpartskip
```

The macros \midbookskip and \midpartskip are the spacings between the number lines and the titles. The default definitions are:

```
\newcommand{\midbookskip}{\par\vspace 2\onelineskip}
\newcommand{\midpartskip}{\par\vspace 2\onelineskip}
```

and they can be changed.

```
\printbookname \booknamefont
\booknamenum
\printbooknum \booknumfont
\printpartname \partnamefont
\partnamenum
\printpartnum \partnumfont
```

The macro \printbookname typesets the book name (the value of \bookname) using the font specified by \booknamefont. The default is the \bfseries font in the \huge



size. Likewise the book number is typeset by `\printbooknum` using the font specified by `\booknumfont`, which has the same default as `\booknamefont`. The macro `\booknamenum`, which is defined to be a space, is called between printing the book name and the number. All these can be changed to obtain different effects.

Similarly, the macro `\printpartname` typesets the part name (the value of `\partname`) using the font specified by `\partnamefont`. The default is the `\bfseries` font in the `\huge` size. Likewise the part number is typeset by `\printpartnum` using the font specified by `\partnumfont`, which has the same default as `\partnamefont`. The macro `\partnamenum`, which is defined to be a space, is called between printing the part name and the number.

For example, to set a `\part` in a large sans font with the part name flush left:

```
\renewcommand{\partnamefont}{\normalfont\huge\sffamily\raggedright}
\renewcommand{\partnumfont}{\normalfont\huge\sffamily}
```

or to only print the part number in the default font:

```
\renewcommand{\printpartname}{}
\renewcommand{\partnamenum}{}

```

```
\printbooktitle{<title>} \booktitlefont
\printparttitle{<title>} \parttitlefont
```

A book's title is typeset by `\printbooktitle` using the font specified by `\booktitlefont`. By default this is a `\bfseries` font in the `\Huge` size. This can be changed to have, say, the title set raggedleft in a small caps font by

```
\renewcommand{\booktitlefont}{\normalfont\Huge\scshape\raggedleft}
```

Similarly a part's title is typeset by `\printparttitle` using the font specified by `\parttitlefont`. By default this is a `\bfseries` font in the `\Huge` size.

The `\parttitlefont` font is also used by `\appendixpage`, or its starred version, when typesetting an appendix page.

```
\bookpagemark{<title>}
\partmark{<title>}
```

The `\book` code includes `\bookpagemark{<title>}` for capturing the `<title>` of the book division if it is going to be used, for example, in page headers. Its definition is simply:

```
\newcommand*{\bookpagemark}[1]{}
```

There is the corresponding `\partmark` for the title of `\part` divisions.

```
\bookpageend \bookblankpage \nobookblankpage
\partpageend \partblankpage \nopartblankpage
```

The macro `\bookpageend` finishes off a book title page. It first calls `\afterbookskip`. If the `\nobookblankpage` is in effect it does nothing more. If the declaration `\bookblankpage` (the default) is in effect then it finishes the current page, outputs a blank page and then, if `twocolumn` typesetting was in effect before `\book` then it restores `twocolumn` typesetting. The macro `\partpageend` performs similar functions for `\part` pages.

So to add something on the back side of a `\part` page (assuming `twoside`) use something similar to

...

```
\nopartblankpage
\part{Title of the Part}
\thispagestyle{simple}
Text on the following (normally blank page)
\clearpage
...
```

Alternatively you can redefine `\partpageend`.

If you use the declaration `\nopartblankpage` (or `\nobookblankpage`) then you are responsible for setting everything correctly to end off the `\part` (or `\book`) page. This is the default definition of `\partpageend` (that for `\bookpageend` is similar):

```
\newcommand{\partpageend}{%
  \afterpartskip
  \ifm@nopartnewpage%    set by \(\no)partblankpage
  \else%                 default finish off
    \if@twoside
      \if@openright%     output blank page
        \null
        \thispagestyle{afterpart}%
        \newpage
      \fi
    \fi
  \fi
  \if@tempwa%            true if twocolumn was being used
    \twocolumn
  \fi}
```

Here with the default definitions, `\afterpartskip` ends off the `\part` page, and then the rest of the code in `\partpageend` takes care of typesetting the blank back side of the `\part` page (or send us back to `twocolumn` mode).

If on the other hand we actually want to write something below the part title on the `\part` page, then we need a different route. The ‘air’ above and below the part title is by default defined as

```
\newcommand*{\beforepartskip}{\null\vfil}
\newcommand*{\afterpartskip}{\vfil\newpage}
```

Thus we need to redefined this such that it does not change the page and such that it add useful spacing above and below the part titling. Something like this may do the trick

```
\makeatletter
\newcommand*{\beforepartskip}{\null\vskip4cm}
\newcommand*{\afterpartskip}{\par\vskip1cm%
  \@afterindentfalse\@afterheading}
\makeatother
```

#### 6.4.1 Leadpage

<pre>\newleadpage[<i>&lt;page-style&gt;</i>]{<i>&lt;cmdname&gt;</i>}{<i>&lt;title&gt;</i>} \renewleadpage[<i>&lt;page-style&gt;</i>]{<i>&lt;cmdname&gt;</i>}{<i>&lt;title&gt;</i>}</pre>
--

The `\newleadpage`<sup>2</sup> command defines a macro `\cmdname` that when called will typeset an Appendixpage-like page (see §6.2.1) with a title *<title>* using the *<page-style>* as the pagestyle for the page. The default is the *empty* pagestyle. The macro `\renewleadpage` redefines an existing leadpage command. `\cmdname` will add an entry to the TOC, the similarly defined `\cmdname*` will not.

As an example:

```
\newleadpage{plates}{Picture Gallery}
```

creates the new command `\plates` which when called generates an unnumbered part-like page with the title **Picture Gallery**.

```
\leadpagetoclevel
```

When `\(re)newleadpage` is used the resulting command adds *<title>* to the ToC as though it was an unnumbered `\leadpagetoclevel` entry, whose definition is

```
\newcommand*{\leadpagetoclevel}{chapter}
```

If you wished them to be entered like a `\part` header then simply:

```
\renewcommand*{\leadpagetoclevel}{part}
```

The layout of the page matches that for unnumbered `\part` pages, and internally the resulting commands use `\partmark` in case you wish to capture the *<title>* to use in running headers.

## 6.5 장 제목

장 제목은 book 이나 part 제목과 유사하게 조정할 수 있을 뿐만 아니라, 미리 정의되어 있는 장 제목 스타일이나 자신이 원하는 스타일로 설정할 수 있다.

새로운 장은 article 클래스 옵션이 쓰이지 않는 한, 항상 새로운 페이지에서 *chapter* 페이지 스타일로 시작한다. 새로운 장이 시작되는 페이지를 좌우 페이지 중 어느 쪽에 둘지는 클래스 옵션에 따라 설정된다. *oneside* 옵션을 사용할 경우 새로운 장은 바로 다음의 새 페이지에서 시작되지만, *twoside* 옵션을 사용할 경우 새로운 장이 시작하는 페이지가 다음과 같이 달라질 수 있다.

**openright** 새로운 장이 다음의 오른쪽(홀수쪽) 페이지에서 시작하며, 경우에 따라 빈 왼쪽 페이지가 생길 수 있다.

**openleft** 새로운 장이 다음의 왼쪽(짝수쪽) 페이지에서 시작하며, 경우에 따라 빈 오른쪽 페이지가 생길 수 있다.

**openany** 새로운 장이 바로 다음 페이지에서 시작하며, 빈 페이지가 생기지 않는다.

```
\openright \openleft \openany
```

이와 같은 세 명령어는 같은 이름을 가진 옵션과 동일하게 기능한다. 문서의 어느 곳에서나 장의 시작 페이지를 변경하기 위해 사용할 수 있다.

선택적 옵션과 같은 세부적인 사항들을 제외하고는, `\chapter` 제목을 출력하는 코드는 `\book` 이나 `\part` 과 유사하다 (아래의 `\chapterhead` 명령은 클래스의 일부가 아니다).

<sup>2</sup>The suggestions for this came from Danie Els and Lars Madsen.

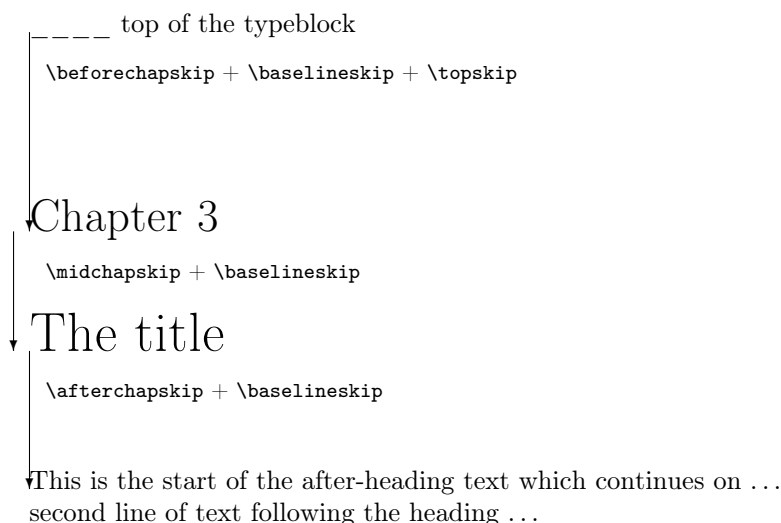


Figure 6.1: 장 제목을 위한 클래스 레이아웃 매개변수들. `\beforechapskip`을 사용하려면 생각해볼 내용이 더 있는데, 본문의 설명을 보면 된다.

```
\newcommand{\chapterhead}[1]{ % THIS IS A SIMPLIFIED VERSION
  \clearforchapter           % move to correct page
  \thispagestyle{chapter} % set the page style
  \insertchapterspace       % Inserts space into LoF and LoT
  \chapterheadstart         % \beforechapskip space before heading
  \printchaptername\chapternamenum\printchapternum
  \afterchapternum          % \midchapskip space between number and title
  \printchaptertertitle{#1} % title
  \afterchaptertertitle}    % \afterchapskip space after title
```

일반적인 레이아웃은 Figure 6.1에 나와 있다.

`\clearforchapter`

새로운 장이 시작하는 페이지를 설정하는 매크로는 `\clearforchapter`다. 클래스 옵션 `openright`, `openleft`, `openany` (또는 그들과 동등한 매크로인 `\openright`, `\openleft`, `\openany`) 는 각각 `\clearforchapter` 이 `\cleartorecto`, `\cleartoverso`, `\clearpage` 이 되게끔 만든다. (§18.13 장을 참조) 보다시피 `\clearforchapter`가 새로운 페이지를 시작하는 것 외의 기능을 하도록 만들 수 있다.

`\memendofchapterhook`

`\chapter` 명령의 가장 앞부분에는 `\clearforchapter`이, 가장 뒷부분에는 `\memendofchapterhook`이 따른다. 보통의 경우 아무 작업을 하지 않지만, 무언가를 삽입하기 위해 사용될 수 있다. 다음은 `\clearpage`를 삽입하는 예시이다:

```
\makeatletter
\renewcommand\memendofchapterhook{%
  \clearpage\m@mindentafterchapter\@afterheading}
\makeatother
```

몇몇 책들은 새로운 장이 시작할 때 왼쪽 페이지에 일러스트나 인용문을 둔 뒤 오른쪽 페이지에서 본문을 시작하기도 한다. 이러한 디자인은 다음과 같이 제작할 수 있다:

```
\openleft           % chapter title on verso page
\chapter{The title}  % chapter title
\begin{centering}    % include a centered illustration
\includegraphics{...}
\end{centering}
\clearpage           % go to recto page
Start of the text    % chapter body
```

```
\chapterheadstart \beforechapskip
\afterchapternum \midchapskip
\afterchaptertitle \afterchapskip
```

`\chapterheadstart` 매크로는 장 이름과 번호를 식자하기 직전에 호출된다. 기본값으로는 `\beforechapskip` 만큼의 공백을 삽입한다. (기본값 50pt)

`\afterchapternum` 매크로는 장 번호를 식자한 직후에 호출된다. 기본값으로는 `\midchapskip` 만큼의 공백을 삽입한다. (기본값 20pt)

`\afterchaptertitle` 매크로는 장 제목을 식자한 직후에 호출된다. 기본값으로는 `\midchapskip` 만큼의 공백을 삽입한다. (기본값 40pt)

`\beforechapskip`, `\midchapskip`, `\afterchapskip` 들은 `\setlength` 이나 `\addtolength` 명령을 통해 수정될 수 있다. 물론 Figure 6.1 에서 언급되었듯 그들은 약간의 설명을 필요로 한다:

`\beforechapskip`

Figure 6.1를 참조. 장의 baseline 과 본문 텍스트 블록의 실제 거리는 `\beforechapskip + \topskip + \baselineskip` 이다. 하지만 `\chapter`의 구현 방식이 `\chapterheadstart`를 통해 `\vspace*`를 사용하기 때문에, `\beforechapskip`를 없애야 하는 헛수고를 들이게 된다. 만약 장 헤딩의 첫 텍스트 직전에 공백이 오는 것을 피하고 싶다면,

```
\setlength\beforechapskip{-\baselineskip}
```

을 사용하거나 `\chapterheadstart`가 아무것도 하지 않도록 재정의하라.

`\midchapskip`

`\afterchapskip`

둘 모두 baseline to baseline 거리를 얻기 위해서는 `\baselineskip`를 더해야 한다.

```
\printchaptername \chapnamefont
\chapternameum
\printchapternum \chapnumfont
```

`\printchaptername` 매크로는 `\chapnamefont`에서 지정된 폰트를 사용하여 장 이름을 식자한다. 장 이름의 기본값은 Chapter 또는 Appendix이며, `\huge` 크기와 `\bfseries` 폰트가 사용된다. 비슷하게, 장 번호는 `\chapnumfont`에서 지정된 폰트로 `\printchapternum`로 식자

## 6. 문서의 장절구분

되며, `\chapnamefont`와 동일한 기본값을 갖는다. `\chapternamenum` 매크로는 장 이름과 번호 사이에 호출되어 보통의 경우 공백을 삽입해준다.

```
\printchapterertitle{<title>} \chaptitelfont
```

장 제목은 `\chaptitelfont`에서 지정된 폰트로 `\printchapterertitle`에 의해 식자된다. 기본값으로는 `\Huge` 크기와 `\bfseries` 폰트가 사용된다.

```
\printchapternonum
```

`\frontmatter` 안에 있거나 `\chapter*`의 사용 등으로 인해 장의 번호가 없을 경우, 식자 시 `\printchapternonum` 명령이 호출되어 장 이름과 번호가 식자되는 것을 대체한다. 아래의 예시를 보라:

```
\newcommand{\chapterhead}[1]{ % THIS IS A SIMPLIFIED VERSION
  \clearforchapter          % move to correct page
  \thispagestyle{chapter} % set the page style
  \insertchapterspace       % Inserts space into LoF and LoT
  \chapterheadstart         % \beforechapskip space before heading
  \printchaptername\chapternamenum\printchapternum
  \afterchapternum          % \midchapskip space between number and title
  \printchapterertitle{#1} % title
  \afterchapterertitle      % \afterchapskip space after title
```

기본값으로는 `\chapter` 뒤에 바로 이어지는 첫 문단은 들여써지지 않는다. 이는 다음에 의해 조정될 수 있다:

```
\indentafterchapter
\noindentafterchapter
```

```
\insertchapterspace
```

기본값으로는 `\chapter`는 그림 목차 (LoF, List of Figures)와 표 목차 (LoT, List of Tables)에 작은 양의 수직 공백을 삽입한다. 이를 하기 위해 `\insertchapterspace`가 호출되며, 정의는 다음과 같다:

```
\newcommand{\insertchapterspace}{%
  \addtocontents{lof}{\protect\addvspace{10pt}}%
  \addtocontents{lot}{\protect\addvspace{10pt}}%
}
```

만약 공백이 없길 원한다면

```
\renewcommand{\insertchapterspace}{}%
```

가 적당할 것이다. `\addvspace` 명령에 있는 길이 인자의 값을 수정하여 다른 양의 공백이 삽입될 수 있다.

위의 매크로들에 적당한 변화를 가하여 레이아웃에 약간의 변화를 줄 수 있을 것이다.

### 6.5.1 장 스타일 정의하기

이 클래스에서는 스스로 `chapter` 헤딩을 구현하고 정의할 수 있는 많은 방법을 제공한다.

```
\chapterstyle{<style>}
```

`\chapterstyle` 매크로는 `\pagestyle` 명령과 비슷하지만, 이후의 어떤 `chapter`에 대해서도 헤딩을 `<style>`이 되도록 설정한다.

이 클래스는 미리 정의된 chapter 스타일을 몇 가지 제공한다. *default* 스타일의 경우 우리에게 익숙한 L<sup>A</sup>T<sub>E</sub>X의 book 클래스와 동일하게 나온다. *fred* 라는 이름의 chapter 스타일을 사용하고 싶은 경우 단순히

```
\chapterstyle{fred}
```

와 같은 명령을 사용하면 된다. 한 문서 내에서 여러 스타일을 사용하는 것 또한 가능하다.

미리 정의된 간단한 스타일들은 아래와 같다:

*default* 기본 L<sup>A</sup>T<sub>E</sub>X book 클래스의 chapter 스타일. 그림 Figure B.1.

*section* 이 헤딩은 section 처럼 식자된다. 즉, 번호만이 표시되고 제목과 번호표제가 같은 줄에 놓인다. 그림 Figure B.2.

*hangnum* *section* 스타일과 비슷하지만 번호표제가 마진 영역에 온다. 그림 Figure B.3.

*companion* L<sup>A</sup>T<sub>E</sub>X *companion* 시리즈와 같은 느낌의 chapter 스타일. 그림 Figure B.4.

*article* 헤딩이 article 클래스의 \section처럼 식자된다. *section* 스타일과 비슷하지만 폰트와 간격주기가 다르다. 그림 Figure B.5.

*reparticle* article 옵션이 쓰일 경우 나타나는 기본 chapter/section 스타일은 article 클래스의 것들과 비슷하지만 완전히 동일하지는 않다. *reparticle* 스타일은 \chapter 명령이 article의 \section 명령과 완전히 동일한 결과물을 내도록 한다.

앞서 소개한 것과 같이 미리 정의된 chapter 스타일을 사용하고자 할 경우 이 절의 나머지 내용을 읽을 필요가 없다. 다만 그 스타일의 결과를 보여주는 그림이 곧 나오니 그것을 챙겨보도록 해라.

\chapterhead 코드의 다양한 매크로는 처음에는 다음과 같이 정의되어 있다: (이는 *default* 스타일이라고도 불린다.)

```
\newcommand{\chapterheadstart}{\vspace*{\beforechapskip}}
\newcommand{\printchaptername}{\chapnamefont \@chapapp}
\newcommand{\chapternamenum}{\space}
\newcommand{\printchapternum}{\chapnumfont \thechapter}
\newcommand{\afterchapternum}{\par\nobreak\vskip \midchapskip}
\newcommand{\printchapternonum}{}
\newcommand{\printchaptertitle}[1]{\chapttitlefont #1}
\newcommand{\afterchaptertitle}{\par\nobreak\vskip \afterchapskip}
\newcommand{\chapnamefont}{\normalfont\huge\bfseries}
\newcommand{\chapnumfont}{\normalfont\huge\bfseries}
\newcommand{\chapttitlefont}{\normalfont\Huge\bfseries}
\setlength{\beforechapskip}{50pt}
\setlength{\midchapskip}{20pt}
\setlength{\afterchapskip}{40pt}
```

(이 신비로운 \@chapapp은 L<sup>A</sup>T<sub>E</sub>X 내부에서 chapter 의 이름을 저장하기 위해 사용되는 매크로다. <sup>3)</sup> 이것은 매번 다른 값을 가질 것이며, 조판하며 자동으로 설정될 것이다. 예를 들어, 본문에서는 Chapter, 부록에서는 Appendix로 보일 것이다. 물론 직접 이를 설정할 수도 있다.

새로운 스타일은 다음에 나오는 마지막 매크로 모음의 정의나 여러 가지 폰트/줄간격 설정을 바꿈으로서 정의된다.

<sup>3</sup>매크로 이름에 @이 있을 경우 @가 letter로 인식되는 곳에서 사용되어야만 한다는 것을 기억하라.

```
\makechapterstyle{<style>}{<text>}
```

chapter 스타일은 `\makechapterstyle` 커맨드로 정의된다. `<style>`은 정의되는 스타일의 이름이며 `<text>`는 스타일을 정의하는 LaTeX 코드다. 여기서 `<text>`는 항상 매크로와 위에 보여진 값들을 리셋하는 것으로 시작함에 주목하라. 당신이 실제로 얻게 될 것은 다음과 같다:

```
\makechapterstyle{<style>}{
\chapterstyle{default}
<text>
}
```

*default* chapter 스타일은 `memoir.cls`에서 보이듯 표준 `book`, `report` 클래스의 chapter 헤딩을 흉내낸다:

```
\makechapterstyle{default}{}
\chapterstyle{default}
```

왜냐하면 *default* 스타일은 `\makechapterstyle` 명령의 초기값이기 때문이다. 실제 코드는 위와 같다.

예로서, *section* 장 스타일 정의 코드를 살펴보자.

```
\makechapterstyle{section}{%
\renewcommand*{\printchaptername}{}
\renewcommand*{\chapternameum}{}
\renewcommand*{\chapnumfont}{\chaptitelfont}
\renewcommand*{\printchapternum}{\chapnumfont \thechapter\space}
\renewcommand*{\afterchapternum}{}
}
```

여기서 `\printchaptername`는 비어있다. 그러므로 ‘Chapter’라는 문자열은 시작되지 않는다. 번호행과 타이틀에 동일한 폰트가 쓰였고, 번호 뒤에 공백 하나가 따라붙는다. `\afterchapternum` 매크로가 비어 있기 때문에 장 제목이 번호 뒤에 바로 식자되는 것이다.

표준 클래스에서 번호가 붙지 않은 장의 제목은 기존에 ‘Chapter’라는 단어가 식자되는 곳과 같은 위치에 온다. `\printchapternonum` 매크로는 번호가 붙지 않은 장 제목이 식자되기 직전에 호출된다. 기본값은 아무것도 하지 않지만 원한다면 `\renewcommand`로 이를 수정할 수 있다. 예를 들면, 번호가 붙은 장과 번호가 붙지 않은 장이 모두 페이지 상에서 같은 높이에 있기를 원한다면 `\printchapternonum`를 재정의하여 ‘Chapter N’ 줄이 차지했을 만큼의 수직 공간을 넣을 수 있다.

*hangnum* 스타일은 장 번호가 마진에 붙는다는 점을 제외하고 *section*과 비슷하다. 정의는 다음과 같다:

```
\makechapterstyle{hangnum}{%
\renewcommand*{\chapnumfont}{\chaptitelfont}
% allow for 99 chapters!
\settowidth{\chapindent}{\chapnumfont 999}
\renewcommand*{\printchaptername}{}
\renewcommand*{\chapternameum}{}
\renewcommand*{\chapnumfont}{\chaptitelfont}
\renewcommand*{\printchapternum}{%
\noindent\llap{\makebox[\chapindent][l]{%
\chapnumfont \thechapter}}}
\renewcommand*{\afterchapternum}{}
}
```



}

장 번호는 세 자리 수가 들어갈 만큼 넉넉한 박스 좌측의 공간에 들어간다. 박스는 조판을 위해 `\llap` 명령을 통해 마진에 놓인다. 그 후 장 제목이 좌측 마진에서 조판되기 시작한다.

```
\chapindent
```

`\chapindent` 명령이 장 스타일을 정의하는 용도로 제공되지만, 그 외에 어떠한 다른 곳에서도 쓸 수 있다.

*companion* 장 스타일의 정의는 더 복잡하다.

```
\makechapterstyle{companion}{%
  \renewcommand*{\chapnamefont}{\normalfont\LARGE\scshape}
  \renewcommand*{\chapnumfont}{\normalfont\Huge}
  \renewcommand*{\printchaptername}{%
    \raggedleft\chapnamefont \@chapapp}
  \setlength{\chapindent}{\marginparsep}
  \addtolength{\chapindent}{\marginparwidth}
  \renewcommand{\printchaptertitle}[1]{%
    \begin{adjustwidth}{-}\chapindent}
    \raggedleft \chaptitelfont ##1\par\nobreak
  \end{adjustwidth}}
}
```

Figure B.4에서 보이듯 장 제목은 소문자로 우측 정렬되어 보인다. 또한, 제목은 마진 노트 영역의 가장 바깥쪽에 놓인다. 이는 `adjustwidth` 환경을 사용하여 구현된다<sup>4</sup>. to make LaTeX think that the typeblock is locally wider than it actually is.

### 6.5.2 더 많은 장 스타일

이 클래스는 이 절에서 보이듯 더 많은 장 스타일을 제공한다. 몇개는 내가 직접 작성한 것이며 다른 몇개는 memoir 사용자에게 의해 ctt 에 포스팅된 것이다. 나는 그 포스팅된 것들의 일부를 수정했다. 부록, 여러 줄에 걸친 제목, 번호 없는 장이 고려되지 않은 경우가 있었기 때문이다. 그 후 어떻게 그 문제들을 해결했는지 보이기 위해 수정된 코드를 공개했다. 그와 별개로 Lars Madsen는 수많은 스타일 [Mad06] 들을 수집했고 그것들이 어떻게 만들어졌는지 보였다.

만약 하나의 문서에서 여러 개의 장 스타일을 사용하고 싶다면, 매 장마다 *default* 스타일을 호출하여 이전 장에서 일어난 스타일 변화가 다음 장에까지 연쇄적으로 적용되지 않도록 하려라.

*bianchi* This style was created by Stefano Bianchi<sup>5</sup> and is a two line centered arrangement with rules above and below the large bold sanserif title line. The chapter number line is in a smaller italic font. An example is in Figure B.6.

*bringhurst* The *bringhurst* chapterstyle described in the manual and illustrated in Figure B.7.

*brotherton* A very simple style designed by William Adams<sup>6</sup> for the science fiction novel *Star Dragon* by Mike Brotherton. The novel is freely downloadable from Brotherton's web site. The style is the same as the *default* except that the number is spelt out in words.

<sup>4</sup>§8.5 장을 참조하라.

<sup>5</sup>ctt, New chapter style: chapter vs chapter\*, 2003/12/09

<sup>6</sup>ctt, An example of a novel?, 2006/12/09

It is demonstrated in Figure B.8. In the novel the chapters are actually untitled i.e., via `\chapter{}`.

*chappell* The name and number are centered above a rule and the title in italics is below, again centered. It is illustrated in Figure B.9.

*crosshead* The number and title are centered and set with a large bold font. It is illustrated in Figure B.10.

*culver* A chapter style I created for Christopher Culver<sup>7</sup> based on the format of ‘ancient’ texts. It is one line, centered, bold and with the number printed as Roman numerals, as shown in Figure B.11.

He also wanted sections to just start with the number and the text to immediately follow on the same line. That can be accomplished like this:

```
\renewcommand*{\thesection}{\arabic{section}}
\renewcommand*{\section}[1]{%
  \refstepcounter{section}%
  \par\noindent
  \textbf{\thesection.}%
  \space\nolinebreak}
```

*dash* A simple two line centered chapterstyle. There is a short dash on either side of the number and a slightly larger version of the regular font is used for both the number and the title. This style is shown in Figure B.12.

*demo2* A two line chapterstyle with a large sanserif title; the number is above, centered and written (e.g., Six instead of 6) in a bold font. There are rules above and below the title. An example is shown in Figure B.13.

*demo3* The chapterstyle used in this document. It is a modified version of the *demo2* chapterstyle, using an italic rather than bold font for the number.

*dowding* A centered style where the name and number are set in a bold font, with the number spelled out. The title is below in a large italic font. The style is based on the design used in Dowding’s *Finer Points* [Dow96]. It is illustrated in Figure B.14.

*ell* A raggedleft sanserif chapterstyle. The number line is separated from the title by rules like an ‘L’ on its side and the number is placed in the margin, as shown in Figure B.15. I will probably use this in my next book.

*ger* This style was created by Gerardo Garcia<sup>8</sup> and is a two line, raggedright, large bold style with rules above and below. It is demonstrated in Figure B.16.

*komalike* A section-like style set with a sans serif type. It is like that in the scrbook class (part of the KOMA bundle). It is illustrated in Figure B.17.

*lyhne* A style created by Anders Lyhne<sup>9</sup> and shown in Figure B.18 where the raggedleft sanserif title is between two rules, with the name and number above. I modified the original to cater for unnumbered chapters.

**Caveat:** The *lyhne* style requires the graphicx package.

*madsen* This was created by Lars Madsen<sup>10</sup> and is shown in Figure B.19. It is a large sanserif

<sup>7</sup>ctt, "Biblical" formatting, how?, 2004/03/29

<sup>8</sup>ctt, Fancy Headings, Chapter Headings, 2002/04/12

<sup>9</sup>ctt, Glossary, 2006/02/09

<sup>10</sup>ctt, New chapter style: chapter vs chapter\*, 2003/12/09

raggedleft style with the number in the margin and a rule between the number and title lines.

**Caveat:** The *madsen* style requires the `graphicx` package.

*ntglike* A smaller version of the standard chapterstyle; it is like that in the NTG classes (boek class) developed by the Dutch TeX User Group. It is illustrated in Figure B.20.

*pedersen* This was created by Troels Pedersen<sup>11</sup> and requires the `graphicx` package, and, to get the full effect, the `color` package as well. The title is raggedright in large italics while the number is much larger and placed in the righthand margin (I changed the means of placing the number). The head of this chapter is set with the *pedersen* style, because it cannot be adequately demonstrated in an illustration.

**Caveat:** The *pedersen* style requires the `graphicx` package.

*southall* This style was created by Thomas Dye. It is a simple numbered heading with the title set as a block paragraph, and with a horizontal rule underneath. It is illustrated in Figure B.21.

*tandh* A simple section-like style in a bold font. It is based on the design used in the Thames & Hudson *Manual of Typography* [McL80] and is illustrated in Figure B.22.

*thatcher* A style created by Scott Thatcher<sup>12</sup> which has the chapter name and number centered with the title below, also centered, and all set in small caps. There is a short rule between the number line and the title, as shown in Figure B.23. I have modified the original to cater for multiline titles, unnumbered chapters, and appendices.

*veelo* This style created by Bastiaan Veelo is shown in Figure B.24 and is raggedleft, large, bold and with a black square in the margin by the number line.

**Caveat:** The *veelo* style requires the `graphicx` package.

*verville* A chapterstyle I created for Guy Verville<sup>13</sup>. It is a single line, large centered style with rules above and below, as in Figure B.25. Unlike my posted version, this one properly caters for unnumbered chapters.

*wilsondob* A one line flushright (raggedleft) section-like style in a large italic font. It is based on the design used in Adrian Wilson's *The Design of Books* [Wil93] and is illustrated in Figure B.26.

여기 주어진 스타일 중 몇개의 코드는 B.1절의 showcase 부록에 주어져 있다. 각각의 장 스타일이 어떻게 정의되었는지에 대한 자세한 사항이 궁금하다면, 설명되어 있는 클래스 코드를 들여다보라. 나중에 당신이 직접 자신만의 스타일을 정의할 때 쓸 아이디어를 줄 것이다.

장 헤딩을 변경하고 싶다고 해서 아예 새로운 장 스타일을 만들어야 하는 것은 아니다. 그냥 각각의 매크로를 직접 수정하는 것으로 충분할 것이다.

### 6.5.3 장 요약

몇몇 고풍스러운 소설이나 현대의 교과서들<sup>14</sup>은 장 헤딩 직후나, ToC 혹은 둘 모두에 장의 내용을 소개하는 짧은 요약문이 있다.

<sup>11</sup>ctt, Chapter style, 2006/01/31

<sup>12</sup>ctt, memoir: chapter headings capitalize math symbols, 2006/01/18

<sup>13</sup>ctt, Headers and special formatting of sections, 2005/01/18

<sup>14</sup>예를 들어, Robert Sedgewick의 *Algorithms*, Addison-Wesley, 1983.

## 6. 문서의 장절구분

```
\chapterprecis{<text>}
```

\chapterprecis 명령은 그의 인자를 문서 내에서 호출된 곳과 .toc 파일 모두에 추가한다. 예를 들어:

```
...
\chapter{}% first chapter
\chapterprecis{Our hero is introduced; family tree; early days.}
...
이제 구체적인 내용을 소개하겠다.
```

```
\prechapterprecisshift
```

\prechapterprecisshift 길이는 \chapterprecis 이전의 수직 공백의 양을 조절한다. 만약 요약문이 \chapter 뒤에 바로 나온다면, article 클래스 옵션이 사용되었는지의 여부에 따라 다른 공백의 양이 사용되어야 할 것이다. 클래스는 그를 다음과 같이 설정한다:

```
\ifartopt
\setlength{\prechapterprecisshift}{0pt}
\else
\setlength{\prechapterprecisshift}{-2\baselineskip}
\fi
```

```
\chapterprecishere{<text>}
\chapterprecistoc{<text>}
```

\chapterprecis 명령은 이 두 명령을 호출하여 문서 내에 <text>를 출력하고 (\chapterprecishere 명령), ToC 에도 넣는다. (\chapterprecistoc 명령). 필요할 경우 둘은 따로 사용될 수 있다.

```
\precisfont
\prechapterprecis \postchapterprecis
```

\chapterprecishere 매크로는 \chapter 바로 뒤에 사용될 목적으로 있다. <text> 인자가 \precisfont 폰트로 quote 환경 안에서 식자된다. 이 매크로의 정의는 다음과 같다:

```
\newcommand{\chapterprecishere}[1]{%
\prechapterprecis #1\postchapterprecis}
```

여기서 \prechapterprecis, \postchapterprecis, \precisfont 의 정의는 다음과 같다:

```
\newcommand{\prechapterprecis}{%
\vspace*{\prechapterprecisshift}%
\begin{quote}\precisfont}
\newcommand{\postchapterprecis}{\end{quote}}
\newcommand*{\precisfont}{\normalfont\itshape}
```

이들의 전부 혹은 일부는 필요에 따라 수정될 수 있다.

다음의 매크로들은 목차 (ToC) 내에서의 요약문의 형식을 설정한다.

```
\precistoc{<text>} \precistocfont \precistocformat
```

\chapterprecistoc 매크로는 \precistoc{<text>}를 toc 파일에 넣는다. 기본값 정의는 다음과 유사하다: (하지만 정확히 동일하지는 않다.<sup>15</sup>)

<sup>15</sup> 내부적으로는 \leftskip와 \rightskip에 대해 다른 이름을 사용하여 위에서 좌로 진행되는 문서들을 조판하거나 bidi 패키지를 사용하기 편하게 한다.

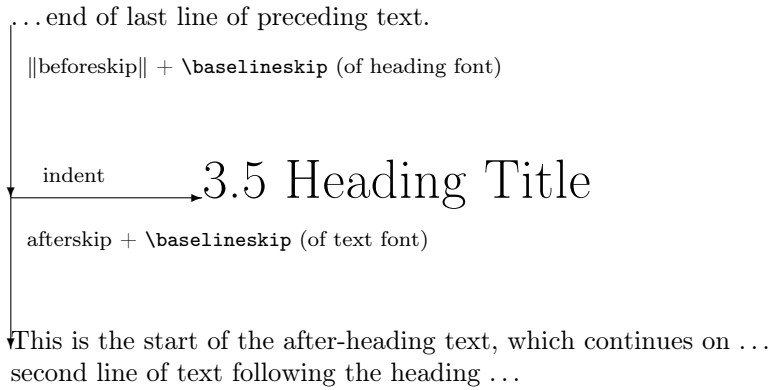


Figure 6.2: Displayed sectional headings

```
\DeclareRobustCommand{\precistoc text}[1]{%
  {\nopagebreak\leftskip \cftchapterindent\relax
   \advance\leftskip \cftchapternumwidth\relax
   \rightskip \@tocrmarg\relax
   \precistocformat\precistocfont #1\par}}
```

ToC \precistoc text는 그 의 인 자 를 \precistocfont (기 본 값 \itshape) 와 \precistocformat (기 본 값 \noindent)를 사용하여 장 제목처럼 식자하게 된다.

## 6.6 Lower level headings

The lower level heads — sections down to subparagraphs — are also configurable, but there is nothing corresponding to chapter styles.

There are essentially three things that may be adjusted for these heads: (a) the vertical distance between the baseline of the text above the heading to the baseline of the title text, (b) the indentation of the heading from the left hand margin, and (c) the style (font) used for the heading title. Additionally, a heading may be run-in to the text or as a display before the following text; in the latter case the vertical distance between the heading and the following text may also be adjusted. Figure 6.2 shows the parameters controlling a displayed sectional heading and Figure 6.3 shows the parameters for a run-in heading. The default values of the parameters for the different heads are in Table 6.2 for the display heads and Table 6.3 for the run-in heads.

In the following I will use S to stand for one of sec, subsec, subsubsec, para or subpara, which are in turn shorthand for section through to subparagraph, as summarised in Table 6.4.

`\setbeforeSskip{<skip>}`

The absolute value of the <skip> length argument is the space to leave above the heading. If the actual value is negative then the first line after the heading will not be indented. The

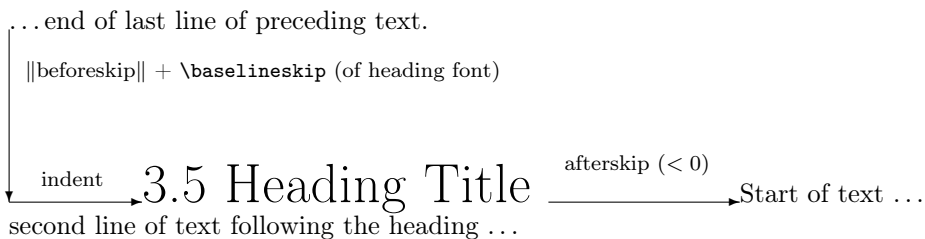


Figure 6.3: Run-in sectional headings

Table 6.2: Default display sectioning layout parameter values

	section	subsection	subsubsection
beforeskip (-ex)	3.5+1-.2	3.25+1-.2	3.25+1-.2
indent	0	0	0
afterskip (ex)	2.3+.2	1.5+.2	1.5+.2
font	$\backslash \text{Large} \backslash \text{bfseries}$	$\backslash \text{large} \backslash \text{bfseries}$	$\backslash \text{bfseries}$

Table 6.3: Default run-in sectioning layout parameter values

	paragraph	subparagraph
beforeskip (+ex)	3.25+1-.2	3.25+1-.2
indent	0	$\backslash \text{parindent}$
afterskip	-1em	-1em
font	$\backslash \text{bfseries}$	$\backslash \text{bfseries}$

Table 6.4: Values for S in section styling macro names.

S	sec	subsec	subsubsec	para	subpara
	section	subsection	subsubsection	paragraph	subparagraph

default  $\langle skip \rangle$  depends on the particular level of heading, but for a `\section` (i.e., when  $S = \text{sec}$ ) it is

```
-3.5ex plus -1ex minus -.2ex
```

where the plus and minus values are the allowable stretch and shrink; note that all the values are negative so that there is no indentation of the following text. If you wanted indentation then you could do

```
\setbeforesecskip{3.5ex plus 1ex minus .2ex}
```

```
\setSindent{\length}
```

The value of the  $\langle length \rangle$  length argument is the indentation of the heading (number and title) from the lefthand margin. This is normally 0pt.

```
\setSheadstyle{\font}
```

This macro specifies the style ( $\langle font \rangle$ ) for the sectional number and title. As before, the default value of the  $\langle font \rangle$  argument depends on the level of the heading. For a `\subsection` (i.e.,  $S = \text{subsec}$ ) it is `\large\bfseries\raggedright`, to typeset in the `\bfseries` font in the `\large` size; the title will also be set ragged right (i.e., there will be no hyphenation in a multiline title).

Note that the very last element in the  $\langle font \rangle$  argument may be a macro that takes one argument (the number and title of the heading). So, if for some reason you wanted `\subsubsection` titles to be all uppercase, centered, and in the normal font, you can do

```
\setsubsubseheadstyle{\normalfont\centering\MakeUppercase}
```

As another example, although I don't recommend this, you can draw a horizontal line under section titles via:

```
\newcommand{\ruledsec}[1]{%
  \Large\bfseries\raggedright #1 \rule{\textwidth}{0.4pt}}
\setseheadstyle{\ruledsec}
```

```
\setafterSskip{\skip}
```

If the value of the  $\langle skip \rangle$  length argument is positive it is the space to leave between the display heading and the following text. If it is negative, then the heading will be run-in and the value is the horizontal space between the end of the heading and the following text. The default  $\langle skip \rangle$  depends on the particular level of heading, but for a `\section` (i.e., when  $S = \text{sec}$ ) it is `2.3ex plus .2ex`, and for a `\subparagraph` (i.e.,  $S = \text{subpara}$ ), which is a run-in heading, it is `-1em`.

\*

```
\@hangfrom{\code}
\sethangfrom{\code}
```

Internally all the titling macros use a macro called `\@hangfrom` which by default makes multiline titles look like a hanging paragraph. The default definition of `\@hangfrom` (in file `ltsect.dtx`) is effectively:

```
\newcommand{\@hangfrom}[1]{\setbox\@tempboxa\hbox{\{#1\}}%
\hangindent \wd\@tempboxa\noindent\box\@tempboxa}
```

The argument is put into a box and its width is measured, then a hanging paragraph is started with the argument as the first thing and second and later lines indented by the argument's width.

The `\sethangfrom` macro redefines `\@hangfrom` to be *<code>*. For example, to have the titles set as block paragraphs instead of hanging paragraphs, simply do:

```
\sethangfrom{\noindent #1}
```

Note that you have to use `#1` at the position in the replacement code for `\@hangfrom` where the argument to `\@hangfrom` is to be located.

```
\@secCNTformat{<code>}
\setsecnumformat{<code>}
```

Internally all the titling macros use a kernel macro called `\@secCNTformat` which defines the formatting of sectional numbers in a title. Its default definition (in file `ltsect.dtx`) is effectively:

```
\newcommand{\@secCNTformat}[1]{\csname the#1\endcsname\quad}
```

which formats the sectional numbers as `\thesec...` with a space afterwards. The command `\setsecnumformat` redefines `\@secCNTformat` to be *<code>*. For example, to put a colon and space after the number

```
\setsecnumformat{\csname the#1\endcsname:\quad}
```

Note that you have to use `#1` where you want the argument (sectional number) of `\@secCNTformat` to go.

Note that `\setsecnumformat` applies to all `\section`, `\subsection`, etc. If you want to change it only for, say, `\subsection`, use the `\setsubsechook` described below.

\*

```
\hangsecnum
\defaultsecnum
```

The macro `\hangsecnum` is a declaration that makes sectional numbers hang in the margin. The macro `\defaultsecnum` is a declaration that reverses the effect of `\hangsecnum`, that is, sectional numbers will be typeset in their familiar places.

```
\Shook
\setShook{<text>}
```

The macro `\Shook` is called immediately before the typesetting of the title; its default definition does nothing. The macro `\setShook` redefines `\Shook` to be *<text>*. You can use this hook, for example, to insert a `\sethangfrom` or `\setsecnumformat` command into the definition of a particular section division command. In that case, remember that if you want to refer to the `#1` argument, in the argument for `\setsecnumformat`, then you have to double the `#`, i.e. use `##1`, see the example below.

Here are some example lower level heads and the code used to produce them.



## Source for example 6.1

```

\setsubsubseheadstyle{\bfseries\raggedright}
  \subsubsection*{Bold raggedright}
\setsubsubseheadstyle{\scshape\raggedright}
  \subsubsection*{Small caps raggedright}
\setsubsubseheadstyle{\itshape\raggedright}
  \subsubsection*{Italic raggedright}
\setsubsubseheadstyle{\Large\centering}
  \subsubsection*{Large centered}
\setsubsubseheadstyle{\large\centering\MakeUppercase}
  \subsubsection*{large centered uppercase}
\setsubsubseheadstyle{\bfseries\centering}
  \subsubsection*{Bold centered}
\setsubsubseheadstyle{\scshape\centering}
  \subsubsection*{Small caps centered}
\setsubsubsecindent{2\parindent}
\setsubsubseheadstyle{\scshape\raggedright}
  \subsubsection*{Small caps indented}
\setsubsubsecindent{0pt}
\setsubsubseheadstyle{\itshape\raggedleft}
  \subsubsection*{Italic flushright}
\newcommand*{\shortcenter}[1]{%
  \sethangfrom{\noindent #1}%
  \normalfont\boldmath\bfseries
  \centering
  \parbox{3in}{\centering #1}\par}
\setsubsubseheadstyle{\shortcenter}
\subsubsection*{Bold centered but taking up no more than 3 inches
  if a long title}

```

Hang the whole heading in the margin

A less traditional style is to put the whole heading into the margin. I have done this here for a `\paragraph` heading (which is not otherwise used in this manual). The code is:

```

\newcommand{\marginbox}[1]{%
  \parbox[t][0pt]{6em}{\itshape\raggedleft\leavevmode #1}}
\newcommand{\marginhead}[1]{%
  {\llap{\marginbox{#1}\kern0.5em}}}
\setparaindent{0em}
\setafterparaskip{0em}
\setparaheadstyle{\marginhead}
\setparahook{\setsecnumformat{\csname the##1\endcsname\ }}
\paragraph{Hang the whole heading in the margin}%

```

The macro `\marginbox` puts its argument, raggedleft, into a zero height `\parbox` of width 6em, aligned at the top. The `\marginhead` macro puts its argument into a `\marginbox` and puts the `\marginbox` 0.5em to the left. The `\paragraph` head style is then set to use

## 6. 문서의 장절구분

---

Typeset example 6.1: A variety of subhead styles

---

Bold raggedright

Small caps raggedright

Italic raggedright

Large centered

LARGE CENTERED UPPERCASE

Bold centered

Small caps centered

Small caps indented

Italic flushright

Bold centered but taking up no more than 3  
inches if a long title

---

`\marginhead` to typeset the heading. The format for the number is reset via `\setparahook` and `\setsecnumformat`.

\*

A different approach is to create new macros, each named by the type of sectional macro it formats, and then make the number format call these macros. In this example we will provide separate formatting for `\section` and `\subsection`.

```
\setsecnumformat{\csname #1secnumformat\endcsname}  
\newcommand\sectionsecnumformat{\thesection:\quad}  
\newcommand\subsectionsecnumformat{\fbox{\enspace\thesubsection\enspace}\enspace}
```

Since the macro is only called in the proper context, we can use `\thesection` directly in the code for `\section`.

### 6.7 번호 없는 장절구획 꾸미기

소설을 쓸 때 종종 본문의 텍스트 사이를 쪼개 이야기의 흐름이 끝났다는 것을 보여줘야 하지만 그렇다고 아예 새로운 장을 열기에는 애매한 경우가 있다. 이 구획은 번호나 제목이 붙지 않기 때문에, 이를 **번호 없는 장절구획**으로 부르곤 한다.

```
\plainbreak{<num>} \plainbreak*{<num>}  
\fancybreak{<text>} \fancybreak*{<text>}
```

`\plainbreak`는 번호 없는 장절구획이다. 이는 typescript 내에 `<num>`개의 빈 줄을 삽입하며, 이어지는 문단의 첫 줄이 들여써지지 않는다. 다른 번호 없는 장절구획 명령에는 `\fancybreak`가 있다. 이는 중앙정렬된 `<text>`를 typescript 내에 삽입하며, 마찬가지로 이어지는 문단의 첫 줄이 들여써지지 않는다. 예를 들어:

```
\fancybreak{*}\{* * *}\{*}
```

은 작은 별 기호 (asterisk) 들로 이루어진 작은 마름모 모양을 만든다.  
스타가 붙은 버전의 명령어들은 첫 줄을 들여쓴다.

```
\plainfancybreak{<space>}{<num>}{<text>}
\plainfancybreak*{<space>}{<num>}{<text>}
```

만약 구획이 페이지의 맨 위나 아래에 등장한다면, 읽는 이는 내용의 구획이 있음을 알아차리기 어렵게 된다. 만약 어떤 페이지에 본문 뒤에 구획을 넣고 나서도 다른 텍스트를 넣을 수 있을 정도로 충분한 공간이 있다면, `\plainfancybreak` 명령어는  $\langle num \rangle$  개의 줄로 이루어진 `\plainbreak`를 사용하게 될 것이다. 그렇지 않다면, (구획이 페이지의 맨 위나 아래에 등장한다면) 이는  $\langle text \rangle$  로 구성된 `\fancybreak`를 사용하게 될 것이다.  $\langle space \rangle$  인자는  $\langle num \rangle$  개의 빈 줄이나 구획 뒤의 본문을 이루는 텍스트의 줄 수 만큼의 높이를 나타낸다. 스타가 붙은 버전의 명령어들은 스타가 붙은 버전의 `\plainbreak`와 `\fancybreak`를 사용한다.

불행하게도 사용자가 요구한 plain, fancy break 공간 사이에는 상호간섭이 있다.  $P$  가 plain break를 위해서 요청된 공간 (행) 이고  $F$  가 fancy break를 위해서 요구되는 공간 (행) 이라고 하자.  $S$  는  $\langle space \rangle$  공간 (행) 이다. 몇 번의 실험을 통해, plain break 페이지의 위쪽 과 아래쪽을 피할 조건은  $SP > 1$  이라는 사실을 알게 되었다. 또한, fancy break가 페이지의 중간에 놓이지 않을 조건 (즉, 상단과 하단이 아닌 위치에 올 조건) 은  $SF < 3$  이다. 예를 들어서, plain break와 fancy break가 동일한 수직 공간을 취하는 경우가  $S = P + 2$  이 만족되면 일어난다. 일반적으로  $F = P + n$  이면 그 조건은  $1 < SP < 3 + n$  이고, 이럴 경우에 `\plainfancybreak` 명령은 fancy break가 항상 plain break에 필요한 공간 만큼을 취하게 된다.

\* \* \*

`\plainfancybreak` 매크로는 페이지의 중간에 plain break 을 넣거나, 구획이 페이지의 맨 위나 아래에 등장한다면 fancy break 를 넣는다.

```
\pfbreak \pfbreak*
\pfbreakskip
\pfbreakdisplay{<text>}
```

`\pfbreak` 매크로는 `\plainfancybreak` 를 대신하여 더 편하게 사용할 수 있다. Plain break를 위한 공백은 `\pfbreakskip`로 나타내어지는 길이로 정해지는데, 이는 두 개의 빈 줄을 만드는 것이 초기 설정이다. Fancy break는 동일한 높이만큼의 공간을 사용하지만, `\pfbreakdisplay` 명령의  $\langle text \rangle$  인자를 사용한다. 정의된 기본값은 앞서 보인 것처럼 3개의 별표 (asterisk) 를 사용하는 것이다.

```
\newcommand*{\pfbreakdisplay}{*\quad*\quad*}
```

♣ ◇ ♣

`\pfbreakdisplay`의 정의를 바꿔 다른 모양으로 보이게 할 수도 있다. 방금 보인 fancy break는 다음의 명령으로 만들어졌다:

```
\renewcommand{\pfbreakdisplay}{%
  \ensuremath{\clubsuit\quad\diamondsuit\quad\clubsuit}}
\pfbreak{\pfbreakdisplay}
```

여기서는 `\fancybreak`를 사용했다. 구획이 페이지 나눔이 될지 어떨지 문서를 작성하는 중에는 알 수 없기 때문이다. 만약 여기서 `\pfbreak`를 사용했다면, 내가 보여주고자 했던 fancy display 대신 단순히 두 개의 빈 줄이 나타났을 수도 있다.

`\pfbreak` 명령 뒤의 문단은 들여쓰이지 않으며, 만약 들여쓰지게 하고 싶다면 별표가 있는 버전 `\pfbreak*`를 사용하면 된다.



방금 나타난 꽃문양의 fancy break는, pifont 패키지의 `\ding` 명령을 사용하여 아래의 코드로 만들어졌다:

```
\renewcommand{\pfbreakdisplay}{%
  \ding{167}\quad\ding{167}\quad\ding{167}}
\pfbreak{\pfbreakdisplay}
```



꽃문양을 이용한 fancy break는 지정하기 간단했다. 또한, LaTeX에서 사용할 수 있는 기호가 많기 때문에 잘 조합하여 위와 같이 예쁜 모양의 fancy break를 만들어내는데에 사용할 수 있다.

다음의 아이디어는 Christina Thiele [Thi98]에 의해 제안되었으며, 수학적 기호들을 묶는 데에 사용될 수 있다. 이는 목차(table of contents)에서의 dot leaders와 같은 원리로 작동한다.

`\motif{<shape>}`와 같은 양식으로 매크로를 지정하라. 여기서 `<shape>`는 체인 안에서 반복될 기호다.

```
\newcommand{\motif}[1]{\cleaders\hbox{#1}\hfil}
```

`\motif`의 정의는 TeX에서 따온 것이며, dot leaders와 같은 것을 만드는 기본 재료다. `\hbox{<stuff>}`는 `<stuff>`를 수평 박스에 넣으며, `\cleaders{<box>}`는 지정된 양만큼의 공백을 채워넣는다. 만약 여러 개의 박스로 채워질 공간이 너무 많다면, 남은 공간은 골고루 분배될 것이다. `\hfil`는 잘 늘어나는 공간이다. 즉, `\motif` 매크로는 `<shape>`들로 공간을 채우는 것이다.

우리는 `\chain{<shape>}{<length>}`와 같은 매크로도 필요로 한다. 여기에서 `{<shape>}`는 `<length>`만큼의 공간을 채우기 위해 필요한 만큼 반복될 문양이다.

```
\newcommand{\chain}[2]{\leavevmode\hbox to #2{\motif{#1}}}
```

`\leavevmode` 명령은 우리가 좌우로 식자하고 있음을 보장시켜주며, `\hbox to <length>{<stuff>}`는 `<stuff>`를 `<length>`만큼의 고정된 길이를 가진 수평 박스에 넣어준다.

우리가 하려고 하던 것이 바로 그것이다. 이제 남은 일은 어떤 모양을 사용할지 결정하는 것이다. 다음은 마름모 문양으로 이루어진 한 예시이다:

```
\makeatletter
\newcommand{\diamonds}{\m@th$\mkern-.6mu \diamond \mkern-.6mu$}
\makeatother
```

`\diamond` 기호는 math mode에서만 사용될 수 있기 때문에 `$...$`로 둘러싸여 있다. 보통 TeX은 수학 기호 주위에 약간의 공백을 주지만 `\m@th`은 그를 막아준다. `\mkern`는 math mode에서의 공백을 조정해주며, 이 경우 우리는 마름모 좌우에 있었을 공백을 제거한다.<sup>16</sup> 최종적으로는 좌우에 0칸의 공백을 가진 마름모 기호를 얻게 된다.

이 절의 시작에 보였던 fancy break는 아래와 같이 조판되었다:

```
% define \motif, \chain, \diamonds and then
\pfbreak{\chain{\diamonds}{0.25\textwidth}}
```

이 코드는 memoir 클래스에 들어있지 않다. 나는 이것을 본문 내에서 직접 정의했다. 프리앰플이나 패키지 안에서 이것을 정의해두는 것이 보통일 것이다. 만약 자신의 패턴을 직접 정의하고 싶다면, 가령 `\clubs`라 할 경우, `\club` 수학 기호를 사용하고 좌우에 약간의 공백을 두는 것이 될 것이다.

<sup>16</sup> 보통 올바른 커닝을 위한 적정값을 찾는 것은 실험을 해봐야 알게 된다.

## 6.8 장절 헤딩 내의 각주

절을 지정하는 명령어에서 필수 인자  $\langle title \rangle$ 의 텍스트는 본문 내에서 그 절의 제목을 지정하는 데에 쓰인다.

선택 인자  $\langle toc-title \rangle$ 가 절 명령어에서 사용될 경우 그는 움직일 수 있게 되므로 모든 fragile 명령어들은 `\protected` 되어야 하며,  $\langle title \rangle$  인자는 고정되어야 한다.  $\langle toc-title \rangle$ 는 다음과 같이 두 가지 장소에서 쓰인다:

1. ToC내의 장 제목으로 쓰인다.
2. 본문 내 페이지의 헤더로 쓰인다.

만약 선택 인자가 없을 경우  $\langle title \rangle$ 가 본문 내 텍스트, ToC의 제목, 그리고 페이지 헤더 이렇게 세 곳에서 다함께 쓰이게 된다.

몇몇 사람들은 장 제목에 각주를 달려고 하는데 이는 지양되어야 한다. 그들이 충분한 인내와 체력을 갖고 있지 않다면 (?) 웬만하면 선택 인자를 사용함과 동시에 `\footnote`는 필수 인자에만 사용하는 것이 좋다. 만약 선택 인자가 사용되지 않는다면 각주 마크와 텍스트가 절 페이지, ToC,  $\langle title \rangle$ 을 포함하는 모든 페이지의 헤더에 널브러져버릴 가능성이 높다. 어느 독자도 이런 일을 원하지 않을 것이다. 결론적으로, 각주를 포함한 절 제목은 아래와 같아야 한다:

```
\chapter[제목]{제목\footnote{정말 이렇게 해야만 하겠습니까?}}
```

## 6.9 미리 정의된 헤딩 스타일

책이나 보고서를 조판하는 데에 쓰이는 모든 LaTeX 클래스들은 section 헤딩 스타일을 정의하는 하나의 스타일을 제공한다. memoir 클래스는 여러 가지 헤딩 스타일을 제공한다는 점에서 특이하다. 각각의 스타일은 구획 헤딩 주변의 공간, 폰트, 글자크기가 다르다. 참조용으로, Table 6.5은 section 헤딩에 사용되는 기본 폰트의 목록을 보여준다. 이 폰트들은 모두 볼드체로 사용되지만 구획 레벨에 따라 다른 크기로 조판된다.

```
\makeheadstyles{\langle name \rangle}{\langle code \rangle}
\headstyles{\langle name \rangle}
```

memoir 에서 제공되는 기본 section 구획 헤딩 스타일들은 *default* 헤딩 스타일을 구성하며, book과 report 클래스의 것과 동일한 생김새로 만들어준다. 각각의 셋은 `\makeheadstyles` 매크로로 생성되며 `headstyles` 선언문을 통해 호출된다.

```
\makeheadstyles{default}{%
  \renewcommand*{\booknamefont}{\normalfont\huge\bfseries}
  %% and so on down to subparagraph specification
  \renewcommand*{\subparaheadstyle}{\normalfont\normalsize\bfseries}
}
\headstyles{default}
```

이 매뉴얼에서는 조금 다른 셋의 헤딩 스타일이 사용되었다. `\makeheadstyles`을 사용할 때는 *default*와 다른 것들만 특정해주면 된다. 이 클래스 내에서 *memman* 셋 헤딩 스타일은 다음과 같이 정의된다:

```
\newcommand*{\addperiod}[1]{\#1.}
\makeheadstyles{memman}{%
% book changes
  \renewcommand*{\booknamefont}{\normalfont\huge\sffamily}
```

Table 6.5: Section 헤딩을 위한 기본 폰트의 목록

<code>\booknamefont</code>	<code>\huge\bfseries</code>	huge
<code>\booknumfont</code>	<code>\huge\bfseries</code>	huge
<code>\booktitlefont</code>	<code>\Huge\bfseries</code>	Huge
<code>\partnamefont</code>	<code>\huge\bfseries</code>	huge
<code>\partnumfont</code>	<code>\huge\bfseries</code>	huge
<code>\parttitlefont</code>	<code>\Huge\bfseries</code>	Huge
<code>\chapnamefont</code>	<code>\huge\bfseries</code>	huge
<code>\chapnumfont</code>	<code>\huge\bfseries</code>	huge
<code>\chapttitlefont</code>	<code>\Huge\bfseries</code>	Huge
<code>\secheadstyle</code>	<code>\Large\bfseries</code>	Large
<code>\subsecheadstyle</code>	<code>\large\bfseries</code>	Large
<code>\subsubsecheadstyle</code>	<code>\normalsize\bfseries</code>	normal
<code>\paraheadstyle</code>	<code>\normalsize\bfseries</code>	normal
<code>\subparaheadstyle</code>	<code>\normalsize\bfseries</code>	normal

```

\renewcommand*{\booknumfont}{\normalfont\huge\sffamily}
\renewcommand*{\booktitlefont}{\normalfont\Huge\sffamily}
\renewcommand*{\midbookskip}{\par\vskip 2\onelineskip}%
% part changes
\renewcommand*{\partnamefont}{\normalfont\huge\sffamily}
\renewcommand*{\partnumfont}{\normalfont\huge\sffamily}
\renewcommand*{\parttitlefont}{\normalfont\Huge\sffamily}
\renewcommand*{\midpartskip}{\par\vskip 2\onelineskip}%
% chapter
\chapterstyle{demo3}
% section
\setbeforesecskip{-1.333\onelineskip
  \@plus -0.5\onelineskip \@minus -.5\onelineskip}%
\setaftersecskip{0.667\onelineskip \@plus 0.1\onelineskip}%
\setsecheadstyle{\normalfont\scshape\raggedright}%
% subsection
\setbeforesubsecskip{-0.667\onelineskip
  \@plus -0.25\onelineskip \@minus -0.25\onelineskip}%
\setaftersubsecskip{0.333\onelineskip \@plus 0.1\onelineskip}%
\setsubsecheadstyle{\normalfont\bfseries\raggedright}%
% subsubsection
\setbeforesubsubsecskip{-0.667\onelineskip
  \@plus -0.25\onelineskip \@minus -0.25\onelineskip}%
\setaftersubsubsecskip{0.333\onelineskip \@plus 0.1\onelineskip}%
\setsubsubsecheadstyle{\normalfont\normalsize\itshape\raggedright}%

```

Table 6.6: 각각의 heading 스타일에서 사용된 폰트 목록.

heading 스타일	chapter	section	subsec	subsubsec	para	subpara
bringhurst	CAPS	s. caps	Italic	s. caps	Italic	Italic
crosshead	Bold	CAPS	Bold	s. caps	Italic	s. caps
default	Bold	Bold	Bold	Bold	Bold	Bold
dowding	Italic	CAPS	s. caps	Italic	Italic	Italic
komalike	Sans	Sans	Sans	Sans	Sans	Sans
memman	Sans	s. caps	Bold	Italic	Italic	Italic
ntglike	Bold	Bold	Bold	Slanted	Slanted	Slanted
tandh	Bold	CAPS	Italic	Bold	Italic	Italic
wilsondob	Italic	CAPS	Italic	s. caps	Italic	Italic

```
% paragraph
\setbeforeparaskip{1.0\onelineskip
\@plus 0.5\onelineskip \@minus 0.2\onelineskip}%
\setafterparaskip{-1em}%
\setparaheadstyle{\normalfont\normalsize\itshape\addperiod}%
% subparagraph
\setsubparaindent{\parindent}%
\setbeforesubparaskip{1.0\onelineskip
\@plus 0.5\onelineskip \@minus 0.2\onelineskip}%
\setaftersubparaskip{-1em}%
\setsubparaheadstyle{\normalfont\normalsize\itshape\addperiod}}
```

이 문서 전체에서 이것의 영향을 볼 수 있을 것이다. 이 장에서는 보통 내가 사용했던 *demo3*와는 다른 *pedersen* chapter 스타일을 사용했기에 조금 다르게 보일 것이다.

다른 여러 heading 셋들도 제공되며, 전체적인 목록은 아래에 나와 있다. Table 6.6에 나와있듯 서로 다른 폰트가 사용되며, 보통의 경우 chapter heading에서는 크게 나오지만 subsection heading이나 그 전 즈음 되어서는 기본 크기로 조판된다.

*bringhurst* Bringhurst의 *Elements of Typographic Style* [Bri99] 책에서 사용되는 셋. 그 책은 *bringhurst* chapterstyle 을 사용한다 (Figure B.7).

*crosshead* 이 셋은 *crosshead* chapterstyle 을 사용하며 더 낮은 단계의 구획 제목에서는 *crosshead* 로 지정된다.

*default* LaTeX 의 book 클래스에 해당되는 기본 셋.

*dowding* Dowding의 *Finer Points* [Dow96]에 기반한 셋. 그 책은 *dowding* chapterstyle 을 사용한다 (Figure B.14).

*komalike* KOMA scrbook 클래스의 heading 종류에 기반한 셋. 모든 글자가 bold sans serif font로 식자되며, 이는 *komalike* chapterstyle 을 사용한다 (Figure B.17).

*memman* *demo3* chapterstyle 을 포함하여 이 문서 내에서 사용된 셋.

*ntglike* NTG (Dutch TUG) 의 boek 클래스의 heading 종류에 기반한 셋. 이는 *ntglike* chapterstyle (Figure B.20) 을 사용하며 기본 셋에 비해 조용하다.

*tandh* Thames 과 Hudson 의 *Manual of Typography* [McL80] 책에서 사용된 heading에 기반한 셋. 이 책은 *tandh* chapterstyle (Figure B.22) 을 사용한다.

## 6. 문서의 장절구분

---

*wilsondob* Adrian Wilson 의 *Design of Books* [Wil93] 책에서 사용된 헤딩에 기반한 셋. 이 책은 *wilsondob* chapterstyle (Figure B.26) 을 사용한다.



# Seven

## 페이지 매김과 머릿글

본 단원은 페이지에 이점표를 표시함으로써 독자가 문서를 더 수월하게 찾을 수 있도록 하는데 집중한다.

### 7.1 페이지 매김과 폴리오

LaTeX 문서의 모든 페이지는 페이지 매김된다. 즉, 각 페이지에는 번호가 할당되며 이것이 page 카운터의 값이다. 이 값은 `\setcounter`나 `\addtocounter`을 통해 언제든지 바꿀 수 있다.

```
\pagenumbering{<rep>}
\pagenumbering*{<rep>}
```

매크로 `\pagenumbering`과 `\pagenumbering*`은 폴리오 (면 번호)가 카운터 표시 `<rep>`를 통해 페이지 번호를 출력하도록 할 수 있는데, `<rep>`는 `Alph`, `alph`, `arabic`, `Roman`, 혹은 `roman`을 사용해 각각 알파벳 대문자와 소문자, 아라비아 숫자, 대문자와 소문자 로마 숫자 중 하나가 될 수 있다. 알파벳에는 26개의 문자만 있기 때문에 `Alph` 혹은 `alph`는 한정된 수의 페이지에만 사용될 수 있다. 사실상 이 매크로들은 `\thepage`가 `\rep{page}`가 되도록 재정의한다.

추가적으로, `\pagenumbering` 명령은 page 카운터를 1로 초기화하며, 별표 붙은 것은 카운터를 변경하지 않는다. 양식이 바뀔 때마다 페이지 번호를 다시 1로 초기화하는 것이 일반적이지만, 간혹 보여지는 형식과는 상관없이 일련의 숫자를 가지도록 해야할 때에는 별표 붙은 버전이 유용하다.

```
\savepagenumber
\restorepagenumber
```

매크로 `\savepagenumber`는 현재 페이지 번호를 저장하며, 매크로 `\restorepagenumber`는 페이지 번호를 저장된 것으로 설정한다. 이 한 쌍의 명령은 페이지 매김을 외관상 중단할 때 사용될 수 있다. 예를 들어, 전면 삽화가 전자 문서에 끼워 넣어질 수 있는데 이 때는 페이지 매김이 불필요하다. 이는 다음과 같이 할 수 있다.

```
\clearpage           % get onto next page
\savepagenumber      % save the page number
\pagestyle{empty}    % no headers or footers
%% insert the illustrations
\clearpage
\pagestyle{...}
\restorepagenumber
...
```

여러분이 이런 비슷한 작업을 한다면, 복원된 페이지 번호를 1 정도 조절해야 할 수도 있다.

## 7. 페이지 매김과 머릿글

---

```
\restorepagenumber
% perhaps \addtocounter{page}{1} or \addtocounter{page}{-1}
```

`\...pagenumber` 명령의 실행 시점과 페이지 나눔에 대한 TeX의 결정에 따라 이런 조정이 필요할 수도, 그렇지 않을 수도 있다.

### 7.2 페이지 양식

본 클래스는 여러분이 쓸 수 있는 페이지 양식 모음을 제공하며, 여러분 마음에 들지 않는다면 직접 정의할 수도 있다.

이 기능들은 `fancyhdr` 패키지 [Oos96]에 영향을 받았으나, 명령어들은 다르다.

표준 클래스들은 홀수와 짝수 페이지에 대한 바닥글과 머릿글을 제공한다. 따라서 페이지 양식에 대한 네 요소를 지정할 수 있다. 이 클래스는 머릿글과 바닥글을 왼쪽, 가운데, 그리고 오른쪽 부분으로 나누어 페이지 양식을 위해 총 12개의 요소를 지정해야 한다. 그러나 내장된 페이지 양식이 충분할 경우에는 이 모든 설정에 대해서 걱정하지 않아도 된다.

```
\pagestyle{<style>}
\thispagestyle{<style>}
```

`\pagestyle`은 현재 페이지 양식을 `<style>`로 정하는데, `<style>`은 문자로만 구성된 단어이다. 특정 페이지에서는 `\thispagestyle`을 사용해 현재 페이지 양식을 해당 쪽만 덮어쓸 수 있다.

클래스의 일부 명령들은 자동으로 `\thispagestyle`을 부른다. 예를 들어,

- `titlingpage` 환경은

```
\thispagestyle{titlingpagestyle}
```

을 부른다.

- 만약 `\cleardoublepage` 이 빈 왼쪽 면을 만든다면

```
\thispagestyle{cleared}
```

를 해당 빈 페이지에서 부른다.

참고로, 전체 목록은 Table 7.1에 주어져 있다.

본 클래스에 의해 제공되는 페이지 양식은 다음과 같다.

`empty` 머릿글과 바닥글이 비어 있다.

`plain` 머릿글이 비어 있고 폴리오 (페이지 번호)는 페이지 하단 중앙에 놓인다.

`headings` 바닥글이 비어 있다. 머릿글은 폴리오를 페이지 바깥쪽에 둔다. 왼쪽 페이지에는 장 이름, 번호와 제목이 기울어진 대문자로 책 등 여백에 놓이고, 오른쪽 페이지에는 절 이름과 대문자 제목이 책 등 여백에 놓인다.

`myheadings` *heading* 양식처럼 바닥글이 비어 있다. 여러분이 머릿글에 들어갈 내용을 지정해야 한다.

`simple` 바닥글이 비어 있고 머릿글은 폴리오 (페이지 번호)를 페이지 바깥쪽에 놓는다. 이는 *headings* 양식과 비슷하지만 제목 문구가 없다.

`ruled` 바닥글이 폴리오를 바깥쪽에 놓는다. 왼쪽 페이지의 머릿글과 제목은 바깥쪽에 `small caps`로, 오른쪽 페이지에서는 절 제목이 `normal` 폰트로 바깥쪽에 식자된다. 머릿글 밑에 선이 그려진다.

`Ruled` 이는 머릿글과 바닥글이 재단 여백으로 확장된다는 것을 제외하고는 *ruled* 양식과 같다.

Table 7.1: `\thispagestyle`의 사용

사용된 곳	양식
<code>\book</code>	book
<code>\chapter</code>	chapter
<code>\cleardoublepage</code>	cleared
<code>\cleartorecto</code>	cleared
<code>\cleartoverso</code>	cleared
<code>\epigraphhead</code>	epigraph
<code>\listoffigures</code>	chapter
<code>\listoftables</code>	chapter
<code>\maketitle</code>	title
<code>\part</code>	part
<code>\tableofcontents</code>	chapter
<code>thebibliography</code>	chapter
<code>theindex</code>	chapter
<code>titlingpage</code>	titlingpage

`companion` 이는 *Companion* 시리즈의 페이지 양식 사본이다 (예시로는 [MG+04]을 보라). 이는 머릿글이 여백 주석의 바깥쪽 모서리까지 이어지는 선을 가지고 있다는 점에서 *Ruled*와 비슷하다. 폴리오는 왼쪽 페이지 머릿글에 볼트체 오른쪽 정렬되어 있으며, 절 이름과 제목이 오른쪽 머릿글에 다시 볼드체로 왼쪽 정렬되어 있다. 바닥글은 없다.

`book` 이는 *plain* 페이지 양식과 같다.

`chapter` 이는 *plain* 페이지 양식과 같다.

`cleared` 이는 *empty* 페이지 양식과 같다.

`part` 이는 *plain* 페이지 양식과 같다.

`title` 이는 *plain* 페이지 양식과 같다.

`titlingpage` 이는 *empty* 페이지 양식과 같다.

`\uppercaseheads \nouppercaseheads`

*headings*에서 `\nouppercaseheads` 정의에 뒤따르는 제목은 자동으로 대문자로 바뀌지 않을 것이다. 기본은 `\uppercaseheads`로, 제목은 자동으로 대문자 처리되도록 지정하는 것이다.

**2012 수정:** `uppercaseheads`에 사용되는 대문자화 매크로는 `MakeTextUppercase`로 변경되어 수식, 참조나 인용을 건드리지 않게 되었다.

위의 *myheadings*을 위해서, 여러분은 머릿글에 들어갈 제목을 직접 정의해야 한다. `\sec`과 같은 장절 명령은 각각 `\secmark`라는 매크로를 부른다. 페이지 양식은 보통 이 명령어를 정의해 `\sec`의 제목이나 번호를 추출한다. 페이지 양식은 이후 이 정보를 용도에 맞게 사용할 수 있다.

`\markboth{<left>}{<right>}`  
`\markright{<right>}`

`\markboth`는 이 명령이 불리운 자리에서 두 표지의 값을 `<left>`와 `<right>`에 설정한다.

`\leftmark \rightmark`

Table 7.2: 페이지 머릿글에 대한 표지 매크로

주 매크로	기본 표지 정의
<code>\book(*)</code>	<code>\newcommand*{\bookpagemark}[1]{}</code>
<code>\part(*)</code>	<code>\newcommand*{\partmark}[1]{}</code>
<code>\chapter(*)</code>	<code>\newcommand*{\chaptermark}[1]{}</code>
<code>\section(*)</code>	<code>\newcommand*{\sectionmark}[1]{}</code>
<code>\subsection(*)</code>	<code>\newcommand*{\subsectionmark}[1]{}</code>
<code>\subsubsection(*)</code>	<code>\newcommand*{\subsubsectionmark}[1]{}</code>
<code>\paragraph(*)</code>	<code>\newcommand*{\paragraphmark}[1]{}</code>
<code>\subparagraph(*)</code>	<code>\newcommand*{\subparagraphmark}[1]{}</code>
<code>\tableofcontents(*)</code>	<code>\newcommand*{\tocmark}[1]{}</code>
<code>\listoffigures(*)</code>	<code>\newcommand*{\lofmark}[1]{}</code>
<code>\listoftables(*)</code>	<code>\newcommand*{\lotmark}[1]{}</code>
<code>\thebibliography</code>	<code>\newcommand*{\bibmark}{}{}</code>
<code>\theindex</code>	<code>\newcommand*{\indexmark}{}{}</code>
<code>\theglossary</code>	<code>\newcommand*{\glossarymark}{}{}</code>
<code>\PoemTitle</code>	<code>\newcommand*{\poemtitlemark}[1]{}</code>
<code>\PoemTitle*</code>	<code>\newcommand*{\poemtitlestarmark}[1]{}</code>

매크로 `\leftmark`는 쪽에서 *마지막* `\markboth` 명령의 *left* 인자의 값을 담는다. 매크로 `\rightmark`는 페이지의 *처음* `\markboth`나 `\markright`의 *right* 인자의 값을 담거나, 해당 명령이 없다면 가장 최근 것의 *right* 인자의 값을 담는다.

페이지 양식은 `\markboth`와 `\markright`으로 `secmark` 명령어를 정의할 수 있고, `\leftmark`와 (혹은) `\rightmark`를 머릿글이나 바닥글에서 쓴다. 이것이 어떻게 되는 것인지 나중에 예시를 보일 것이며, 이는 *myheadings* 양식이 보통 구현되는 방식이다.

모든 장절 구획 명령은 해당 머릿글과 관련해 여러분이 정의할 수 있는 매크로를 포함하고 있다. 다른 명령어들도 여러분이 재정의할 수 있는 표지 설정을 포함한다.

`\...mark` 명령어들이 Table 7.2에 나열되어 있다. 이들이 관련된 주 매크로에 의해 불리우면, 'title'을 인자의 값으로 취한다. 예를 들어, `\chapter` 매크로는 `\chaptermark`이 머릿글이 되도록 제목의 값을 지정하여 부른다.

부디 Table 7.2에 나열된 매크로들이 '제공자' 매크임을 잊지 말아달라. 즉, 이들은 여러분이 `\leftmark`와 `\rightmark`의 정보를 나중에 쓸 수 있도록 제공해 준다. 절 제목에 접근하기 위해서 `\sectionmark`를 머릿글이나 바닥글에 사용하면 안 된다. 매크로가 정보를 제공해주지만, 여러분은 `\sectionmark`를 어떻게 정의했는지에 따라서 `\leftmark` 혹은 `\rightmark`를 사용해 접근해야 한다.

### 7.3 머릿글과 바닥글 만들기

언급하였듯이, 이 클래스는 짝수와 홀수 머릿글과 바닥글의 왼쪽, 가운데, 그리고 오른쪽 영역을 제공한다. 본 절은 여러분이 이 12개의 영역을 사용해 직접 페이지 양식을 만드는 방법을 설명한다. 페이지의 6개 영역은 Figure 7.1에 도표로 나타나 있다.

이 클래스 자체도 이 절의 명령들을 사용한다. 예를 들어, *plain* 페이지 양식은 다음과 같이 정의되어 있다.

```
\makepagestyle{plain}
```

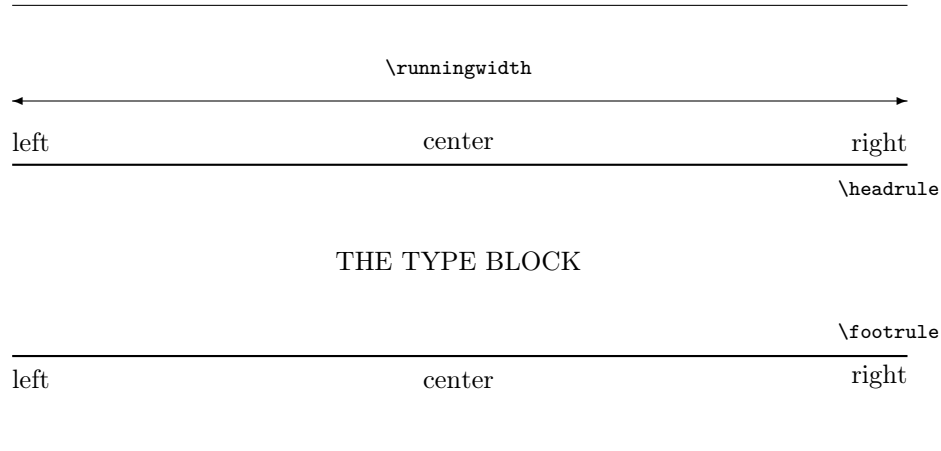


Figure 7.1: 머릿글과 바닥글 영역

```
\makeevenfoot{plain}{\thepage}{}
\makeoddfoot{plain}{\thepage}{}

```

이는 페이지 번호를 페이지 하단에 중앙 정렬한다.

```
\makepagestyle{<style>}
\aliaspagestyle{<alias>}{<original>}
\coppagestyle{<copy>}{<original>}

```

`\makepagestyle` 명령은 `<style>` 페이지 양식을 지정하는데, 이는 초기에 `empty` 페이지 양식과 동일하다. 반면, `\aliaspagestyle`은 `<alias>` 페이지 양식을 `<original>` 페이지 양식과 같도록 정의한다. 후자의 예시로 본 클래스가 다음 코드를 포함한다.

```
\aliaspagestyle{part}{plain}
\aliaspagestyle{chapter}{plain}
\aliaspagestyle{cleared}{empty}

```

`\coppagestyle` 명령은 `<original>` 페이지 양식 설정으로 `<copy>`라는 새로운 페이지 양식을 생성한다.

만약 참조(alias)와 사본(copy) 페이지 양식이 `<original>`을 토대로 생성된 후, `<original>`이 수정되었다면, 참조와 사본은 다르게 행동한다. 참조 페이지 양식은 수정된 `<original>`과 여전히 일치하지만 사본 페이지 양식은 `<original>`의 어떠한 변경에도 영향을 받지 않는다. 여러분은 참조 페이지 양식을 수정할 수 없지만 사본 페이지 양식은 수정할 수 있다.

```
\makeevenhead{<style>}{<left>}{<center>}{<right>}
\makeoddhead{<style>}{<left>}{<center>}{<right>}
\makeevenfoot{<style>}{<left>}{<center>}{<right>}
\makeoddfoot{<style>}{<left>}{<center>}{<right>}

```

매크로 `\makeevenhead`는 짝수 페이지에 대해 `<left>`, `<center>`, 그리고 `<right>` 영역의 `<style>` 페이지 양식 머릿글을 정의한다. 비슷하게 `\makeoddhead`, `\makeevenfoot`, 그리고 `\makeoddfoot`은 홀수 페이지의 `<left>`, `<center>`, `<right>` 영역 `<style>` 머릿글을 정의하고, 홀수와

## 7. 페이지 매김과 머릿글

짝수 페이지의 바닥글을 정의한다. 이  $\langle style \rangle$  명령들은 대응되는  $\langle style \rangle$ 의 `\makepagestyle` 이후에 사용되어야 한다.

```
\makerunningwidth{ $\langle style \rangle$ }[ $\langle footwidth \rangle$ ]{ $\langle headwidth \rangle$ }  
\headwidth
```

매크로 `\makerunningwidth`는  $\langle style \rangle$  페이지 양식의 머릿글과 바닥글의 너비를 지정한다. 머릿글의 너비는  $\langle headwidth \rangle$ 로 설정된다. 만약  $\langle footwidth \rangle$ 가 선택적으로 존재한다면, 바닥글 너비는 이 값으로 설정될 것이며 그렇지 않을 경우에는  $\langle headwidth \rangle$ 로 설정된다. 머릿글 너비는 길이 `\langle style \rangle headrunwidth`로, 바닥글 너비는 `\langle style \rangle footrunwidth`에 저장된다.

`\makepagestyle`은 너비를 본문 너비로 설정하므로, 이 매크로는 다른 너비 값이 필요할 때만 사용된다. 길이 `\headwidth`는 머릿글이나 바닥글, 혹은 다른 목적으로 사용될 수 있도록 (임시) 길이로 제공된다.

```
\makeheadrule{ $\langle style \rangle$ }{ $\langle width \rangle$ }{ $\langle thickness \rangle$ }  
\makefootrule{ $\langle style \rangle$ }{ $\langle width \rangle$ }{ $\langle thickness \rangle$ }{ $\langle skip \rangle$ }  
\makeheadfootruleprefix{ $\langle style \rangle$ }{ $\langle for headrule \rangle$ }{ $\langle for footrule \rangle$ }
```

머릿글은 조판 영역의 위와 자신 사이에 패선이 그려질 수 있으며, 비슷하게 조판 영역 아래와 바닥글 위에 패선이 그려질 수 있다. `\makeheadrule` 매크로는  $\langle style \rangle$  페이지 양식 머릿글 아래 패선의  $\langle width \rangle$ 와  $\langle thickness \rangle$ 를 지정한다. 추가적 인자  $\langle skip \rangle$ 은 바닥 패선의 세로 위치를 지정하는 길이이다 (`\footruleskip`을 보라). `\makepagestyle` 매크로는  $\langle width \rangle$ 를 `\textwidth`로 초기화하고  $\langle thickness \rangle$ 를 0pt로 초기화해서, 기본적으로는 패선이 보이지 않는다. 매크로 `\makeheadfootruleprefix`는 머리/바닥 패선의 대체 색상을 추가할 수 있도록 하는데, 예를 들어 다음과 같다.

```
\makeheadfootruleprefix{mystyle}{\color{red}}{\color{blue}}
```

```
\normalrulethickness
```

`\normalrulethickness`는 보이는 패선의 기본 두께로, 0.4pt이다. 이는 `\setlength`를 통해 바꿀 수 있지만, 필자는 여러분이 적어도 14pt 클래스 옵션을 사용하지 않는 이상 그렇게 하지 않기를 권장한다.

```
\footruleheight  
\footruleskip
```

매크로 `\footruleheight`은 바닥글 위의 기본 선의 높이이다 (기본으로 0). `\footruleskip`은 바닥 선이 조판 영역의 하단과 바닥글 사이에 놓일 것을 보장하는 충분한 길이이다. 길이로 보이기는 하지만, 만약 이 값을 바꾸고 싶다면 `\setlength`이 아닌 `\renewcommand`를 사용하라.

```
\makeheadposition{ $\langle style \rangle$ }  
{ $\langle eheadpos \rangle$ }{ $\langle oheadpos \rangle$ }{ $\langle efootpos \rangle$ }{ $\langle ofootpos \rangle$ }
```

`makeheadposition` 매크로는 짝수와 홀수 머릿글과 바닥글의 가로 위치를  $\langle style \rangle$  페이지 양식에 맞게 지정한다.  $\langle \dots pos \rangle$  인자 각각은 그 뜻이 분명한 `flushleft`, `center`, 혹은 `flushright`이 될 수 있다. 비어있거나 알 수 없는 값은 `center`과 동일하다. 이 매크로는 머릿글/바닥글의 너비가 `textwidth`와 같지 않을 때에만 사용된다.

```
\makepsmarks{ $\langle style \rangle$ }{ $\langle code \rangle$ }
```

`\pagestyle{ $\langle style \rangle$ }`이 하는 마지막 일은  $\langle style \rangle$ 에 대한 `\makepsmarks` 매크로의  $\langle code \rangle$  인자를 부르는 것이다. 이는 특정 페이지 양식에 대한 비표준 코드(이전의 매크로들로는 지정할 수 없는 코드)를 지정할 때 보통 사용된다. 이 코드는 보통 머릿글과 바닥글에서 사용될 표지를 정의한다.

```
\makeheadfootstrut{<style>}{<head strut>}{<foot strut>}
```

머릿글과 바닥글은 세 개의 다른 것들로 구성되어 있다. 처음과 끝에는 <style>과 관련된 특별한 strut가 삽입되어 있다. 기본적으로 (strut가 비어 있는 *empty* 양식을 제외하고) \makepagestyle은 이들을 \strut에 초기화할 것이다. 이 strut들을 다른 것으로 바꿀 때는 위의 매크로를 사용할 수 있다.

### 7.3.1 예시 페이지 양식

여러분이 초고를 준비할 때 각 페이지에 이것이 초고 문서라는 주석을 남기고 싶을 수도 있다. 여러분이 *headings* 페이지 양식과 장 시작에 기본 *plain* 페이지 양식을 사용하고 있다고 가정한다면, 다음을 preamble에 정의할 수 있다(\ifdraftdoc는 클래스에 의해 제공되고, draft 옵션이 사용된다면 true로 설정된다).

```
\ifdraftdoc
  \makeevenfoot{plain}{\thepage}{\textit{Draft: \today}}
  \makeoddfoot{plain}{\textit{Draft: \today}}{\thepage}{}
  \makeevenfoot{headings}{}{}{\textit{Draft: \today}}
  \makeoddfoot{headings}{\textit{Draft: \today}}{}{}
\fi
```

이제 draft 옵션이 쓰이면 단어 ‘Draft:’와 함께 현재 날짜가 이탤릭체로 매 페이지 하단의 책 등 여백 쪽에 식자될 것이다. 만약 *empty* 페이지도 표시되어야 한다면, 해당 양식에도 비슷한 바닥글을 지정하라.

여기에 여러 LaTeX 내부 명령을 사용하는 book 클래스 *headings* 페이지 양식의 표준 정의의 일부가 나와 있다. 그러나 memoir은 이를 사용하지 않는다는 것에 유의하라.

```
\def\ps@headings{%
  \let\@oddfoot\@empty\let\@evenfoot\@empty
  \def\@evenhead{\thepage\hfil\slshape\leftmark}%
  \def\@oddhead{\slshape\rightmark}\hfil\thepage}%
  \def\chaptermark##1{%
    \markboth{\MakeUppercase{%
      \ifnum\c@secnumdepth > \m@ne
        \if@mainmatter
          \@chapapp\ \thechapter. \ %
        \fi
      \fi
    }}{}}%
  \def\sectionmark##1{%
    \markright{\MakeUppercase{%
      \ifnum\c@secnumdepth > \z@
        \thesection. \ %
      \fi
    }}{}}%
  \def\sectionmark##1{}}%
```

이를 이해할 필요는 없지만, 개략적으로 첫 세 줄은 바닥글과 머릿글의 내용을 지정하고, 나머지 코드는 머릿글에 사용될 표지를 지정한다. \leftmark는 ‘chapter’라는 단어 뒤에, \mainmatter에 있으며 secnumdepth가 해당 장에 번호가 붙도록 설정되어 있다면 번호가 붙고, 뒤에 장의 제목이 붙도록 지정된다. 이 모두는 (\MakeUppercase 매크로에 의해) 대문자가 된다. 비슷하게 다른 표지인 \rightmark도 있다면 절 번호와 절의 제목이 모두 대문자로 된다.

이 코드를 memoir의 코딩 양식으로 의역한다면 다음과 같다.

```
\makepagestyle{headings}
\makeevenhead{headings}{\thepage}{\slshape\leftmark}
\makeoddhead{headings}{\slshape\rightmark}{\thepage}
\makepsmarks{headings}{%
  \def\chaptermark##1{%
    \markboth{\MakeUppercase{%
      \ifnum\c@secnumdepth > \m@ne
        \if@mainmatter
          \@chapapp\ thechapter. \ %
        \fi
      \fi
    }##1}}}%
\def\sectionmark##1{%
  \markright{\MakeUppercase{%
    \ifnum\c@secnumdepth > \z@
      \thesection. \ %
    \fi
  }##1}}
\def\tocmark{\markboth{\MakeUppercase{\contentsname}}{}}
\def\lofmark{\markboth{\MakeUppercase{\listfigurename}}{}}
\def\lotmark{\markboth{\MakeUppercase{\listtablename}}{}}
\def\bibmark{\markboth{\MakeUppercase{\bibname}}{}}
\def\indexmark{\markboth{\MakeUppercase{\indexname}}{}}
\def\glossarymark{\markboth{\MakeUppercase{\glossaryname}}{}}
```

여러분이 볼 수 있듯, 페이지 양식의 표지를 정의하는 것이 그렇게 간단하지만은 않은 일이다. 그러나 Lars Madsen의 도움으로 일이 간단해졌다.

```
\createplainmark{<type>}{<marks>}{<text>}
\memUHead{<text>}
\uppercaseheads \nouppercaseheads
\createmark{<sec>}{<marks>}{<show>}{<prefix>}{<postfix>}
```

매크로 `\createplainmark`는 `\<type>mark`를 정의하는데, `<type>`은 번호 붙지 않은 toc, lof, index와 같은 영역의 머릿글로 `<text>`를 표지 값으로 사용하고, `<marks>`는 left, both, 혹은 right이다. 예를 들어

```
\createplainmark{toc}{left}{\contentsname}
\createplainmark{lot}{right}{\listtablename}
\createplainmark{bib}{both}{\bibname}
```

은 다음과 같다.

```
\def\tocmark{\markboth{\memUHead{\contentsname}}{}}
\def\lotmark{\markright{\memUHead{\listtablename}}{}}
\def\lofmark{\markboth{\memUHead{\bibname}}{\memUHead{\bibname}}}
```

`\uppercaseheads`의 정의에 뒤따르는 `\memUHead` 명령은 `\MakeUppercase`와 동일하지만 `\nouppercaseheads`에 뒤따를 때는 (아무것도 하지 않는) `\relax`와 동일하다. `\createplainmark` 매크로는 `\memUHead`를 생성된 `\mark(both/right)` 매크로의 `<text>` 인자



양 옆에 감싼다. `\(no)uppercaseheads` 선언을 사용해 여러분은 대문자나 표지 문구를 조정할 수 있다. 기본은 `\uppercaseheads`이다.

만약 여러분이 사전 정의된 페이지 양식을 쓰고 싶는데 자동 대문자를 사용하고 싶지 않다면, `\nouppercaseheads`를 쓴 후 페이지 양식을 다시 불러야 한다. 예를 들어, memoir의 기본 페이지 양식을 쓴다면 다음과 같이 하라.

```
\nouppercaseheads
\pagestyle{headings}
```

매크로 `\createmark{<sec>}{<marks>}{<show>}{<prefix>}{<postfix>}`는 `<sec>`이 part, chapter, section등과 같은 절 구획에 해당하고, `<show>`(shownumber 혹은 nonnumber)가 `\mainmatter`에 구획 번호가 표시될지 결정할 때, `\<sec>mark`를 정의한다. `<marks>` 인자는 left, both 혹은 right이고, `<prefix>`와 `<postfix>`는 구획 번호 앞과 뒤에 첨부된다. 예를 들어

```
\createmark{section}{left}{nonumber}{}{}
\createmark{section}{both}{nonumber}{}{}
\createmark{section}{right}{nonumber}{}{}
```

는 각각 다음과 같다.

```
\def\sectionmark#1{\markboth{#1}{} }
\def\sectionmark#1{\markboth{#1}{#1}}
\def\sectionmark#1{\markright{#1}{} }
```

`\createmark`와 `\createplainmark`의 차이는, 전자는 인자를 취하는 매크로를 만들고 `\createplainmark`는 그렇지 않다는 것이다.

이 명령들을 사용해서 memoir의 `\makepsmarks{headings}`의 현재 정의는 훨씬 간결하다 (이는 또한 toc 등이 `\leftmark`만이 아니라 `\leftmark`와 `\rightmark` 둘 다 표시하기 때문에 약간 다른 결과를 만든다).

```
\makepsmarks{headings}{%
\createmark{chapter}{left}{shownumber}{\@chapapp\ }{. \ }
\createmark{section}{right}{shownumber}{}{. \ }
\createplainmark{toc}{both}{\contentsname}
\createplainmark{lof}{both}{\listfigurename}
\createplainmark{lot}{both}{\listtablename}
\createplainmark{bib}{both}{\bibname}
\createplainmark{index}{both}{\indexname}
\createplainmark{glossary}{both}{\glossaryname}}
```

memoir이 페이지 양식의 표지 부분을 행할 때, 이는 오래된 표지를 없애지 않는다. 즉, 만약 예전 `\sectionmark`가 존재한다면 우리가 바꾸지 않더라도 이는 여전히 존재한다. 이는 좋을 수도, 나쁠 수도 있는 일이다. 사용자가 이 표지들이 아무것도 하지 않게 재정의할 수 있도록 우리는 다음을 제공한다.

```
\clearplainmark{<type>}
\clearmark{<type>}
```

사용되는 인자 종류는 `\createplainmark` 및 `\createmark`와 같다.

문서 제목이 있는 머릿글

앞서 언급하였듯, 일부 출판사는 책의 제목이 머릿글에 제목이 들어가기를 선호한다. 아마도 이는 기술적인 출판물이 아닐 것이기에 간단한 머릿글이면 충분할 것이다. 여기에 `myheading`의 사용례가 있다.

## 7. 페이지 매김과 머릿글

```
\makeevenhead{myheadings}{\thepage}{\thechapter}{\thepage}{\thepage}
\makeoddhead{myheadings}{\thepage}{\thepage}{\thepage}{\thepage}
```

### 머릿글의 부(部)와 장(章)

일부 문서는 부와 장 구획을 둘 다 가지고 있고, 이런 경우에는 머릿글에 현재 부와 장 제목이 있으면 독자들에게 유용할 수 있다. *headings* 페이지 양식은 부와 장 표지를 재설정함으로써 이를 쉽게 구현할 수 있다.

```
\makepsmarks{headings}{%
  \createmark{part}{left}{shownumber}{\partname\ }{. \ }
  \createmark{chapter}{right}{shownumber}{\@chapapp\ }{. \ }
  \createplainmark{toc}{both}{\contentsname}
  \createplainmark{lof}{both}{\listfigurename}
  \createplainmark{lot}{both}{\listtablename}
  \createplainmark{bib}{both}{\bibname}
  \createplainmark{index}{both}{\indexname}
  \createplainmark{glossary}{both}{\glossaryname}}
```

### Companion 페이지 양식

이 예시는 대부분의 페이지 양식 명령을 보여준다. *LaTeX Companion* 시리즈 [MG<sup>+</sup>04, GM<sup>+</sup>07, GR99]에는 머릿글이 조판 영역보다 넓어 바깥 여백으로 빠져 나와 있고, 아래에 패선이 있다. 페이지 번호는 볼드체로 머릿글 바깥쪽에 있다. 장 제목은 왼쪽 머릿글에 있고 절 제목은 오른쪽 머릿글에 둘 다 볼드체로 안쪽 여백에 있다. 바닥글은 비어 있다.

이 양식을 구현하기 위해서 해야할 첫 번째 일은 여백 주석을 덮는 머릿글의 너비를 계산하는 것이다.

```
\setlength{\headwidth}{\textwidth}
\addtolength{\headwidth}{\marginparsep}
\addtolength{\headwidth}{\marginparwidth}
```

이제 우리는 빈 *companion* 페이지 양식을 만들고 새로운 머릿글과 바닥글 너비를 지정하는 것으로 시작하면 된다.

```
\makepagestyle{companion}
\makerunningwidth{companion}{\headwidth}
```

그리고 머릿글 패선의 너비와 두께를 설정해야 보일 것이다.

```
\makeheadrule{companion}{\headwidth}{\normalrulethickness}
```

머릿글이 재단 여백으로 빠져 나오려면 왼쪽 머릿글은 우측 정렬되어야 하고, 오른쪽 머릿글은 좌측 정렬되어야 한다. 바닥글은 비어 있으므로, 이 영역은 중요하지 않다.

```
\makeheadposition{companion}{flushright}{flushleft}{}
```

현재 장과 절 제목은 `\leftmark`와 `\rightmark` 매크로에서부터 얻는데, 이들은 `\chaptermark`와 `\sectionmark` 매크로로 정의된다. `\leftmark`는 페이지의 마지막 *(left)* 표지이고 `\rightmark`는 첫 *(right)* 표지임을 기억하자.

장 번호는 머릿글에 넣지 않지만 절 번호는 있다면 머릿글에 들어간다. 우리는 이들과 다른 비슷한 요소 `ToC`<sup>1</sup>에 올바른 정의가 사용되었는지 주의를 기울여야 하고, 이때 `\makepsmarks` 매크로를 사용하게 된다.

<sup>1</sup>ToC와 관련 내용은 Chapter 9에 자세히 설명되어 있다.

```

\makepsmarks{companion}{%
  \nouppercaseheads
  \createmark{chapter}{both}{nonnumber}{.}{. \space}
  \createplainmark{toc}{both}{\contentsname}
  \createplainmark{lof}{both}{\listfigurename}
  \createplainmark{lot}{both}{\listtablename}
  \createplainmark{bib}{both}{\bibname}
  \createplainmark{index}{both}{\indexname}
  \createplainmark{glossary}{both}{\glossaryname}

```

준비 작업은 모두 완료되었고, 이제 각 머릿글과 바닥글 영역에 어떤 내용이 들어갈지만 지정하면 된다 (그러나 바닥글은 비어 있다).

```

\makeevenhead{companion}%
  {\normalfont\bfseries\thepage}{.}{. \space}
  \normalfont\bfseries\leftmark}
\makeoddhead{companion}%
  {\normalfont\bfseries\rightmark}{.}{. \space}
  \normalfont\bfseries\thepage}

```

이제 `\pagestyle{companion}` 명령을 주면 *companion* 페이지 양식 머릿글을 가진 페이지가 조판될 것이다. 이 페이지 양식은 본 클래스에 포함되어 있다.

```

\addtopsmarks{<pagestyle>}{<prepend>}{<append>}

```

`\addtopsmarks{<pagestyle>}{<prepend>}{<append>}`는 이 보조 매크로 모음의 마지막 매크로이다. 이는 `<prepend>`와 `<append>`를 `<pagestyle>`에 대한 `\makepsmarks`의 현 정의 전과 후에 삽입한다. 예를 들어, 만약 여러분이 *companion* 페이지 양식의 페이지 머릿글에 `\subsection` 제목이 나타나기를 원한다면 다음과 같이 할 수 있다.

```

\addtopsmarks{companion}{.}{. \space}
  \createmark{subsection}{right}{shownumber}{.}{. \space}}

```

#### ruled 페이지 양식

필자는 실용적인 이유로 장 제목이 머릿글에 적어도 페이지 중앙에, 기술적인 저술에 대해서는 재단 여백 쪽에 있는 페이지 양식을 선호한다. 필자는 또한 페이지 번호가 바깥쪽 모서리에 위치하는 것을 선호한다. 책을 집어 들어 훑어볼 때, 안에 어떤 내용이 있는지 알아보거나 좀 더 구체적인 내용을 찾을 때, 필자는 한 손으로 책 등을 잡고 다른 손으로 페이지를 넘긴다. 이때 책이 반쯤 접혀 있기 때문에 책등 가까이 있는 것보다는 재단 여백 쪽에 위치한 것들이 더 눈에 잘 띈다. ruled 페이지 양식은 이와 같다. 일반적인 내용은 다음과 같다.

```

\makepagestyle{ruled}
\makeevenfoot {ruled}{\thepage}{.}{. \space} % page numbers at the outside
\makeoddfoot  {ruled}{.}{. \space}{\thepage}
\makeheadrule {ruled}{\textwidth}{\normalrulethickness}
\makeevenhead {ruled}{\scshape\leftmark}{.}{. \space} % small caps
\makeoddhead  {ruled}{.}{. \space}{\rightmark}

```

설정의 나머지 부분은 `\chapter`와 `\section` 명령어가 머릿글에 대해서 적절한 표지를 남기도록 한다. 필자는 머릿글에 장 번호는 나오지만 절 번호는 그렇지 않도록 하고 싶었다. 다음 코드는 이와 더불어 다른 문서 요소에 대한 표지를 설정한다.

## 7. 페이지 매김과 머릿글

---

```
\makepsmarks{ruled}{%
  \nouppercaseheads
  \createmark{chapter}{left}{\shownumber}{. \space}
  \createmark{section}{right}{\nonumber}{\}{}
  \createplainmark{toc}{both}{\contentsname}
  \createplainmark{lof}{both}{\listfigurename}
  \createplainmark{lot}{both}{\listtablename}
  \createplainmark{bib}{both}{\bibname}
  \createplainmark{index}{both}{\indexname}
  \createplainmark{glossary}{both}{\glossaryname}
}
```

### 7.3.2 색인 머릿글

여러분이 색인을 보면 머릿글이 해당 페이지의 시작과 마지막 표제어를 보여주는 것을 확인할 수 있다. 색인의 중심 표제어는 다음과 같다.

```
\item \idxmark{entry}, page number(s)
```

그리고 이 책의 프리앰블에서 `\idxmark`는 다음과 같이 정의되어 있다.

```
\newcommand{\idxmark}[1]{\#1\markboth{\#1}{\#1}}
```

이는 표제어를 식자할 뿐만이 아니라, 표제어를 표지로 사용해 처음 표제어는 `\rightmark`에, 마지막 표제어는 `\leftmark`에 넣도록 한다.

색인 표제어는 보통 매우 짧아서, 색인은 두 단으로 되어 있다. 불행히도 LaTeX의 표지 방식이 두 단 페이지에서는 매우 깨지기 쉽다.<sup>2</sup>

색인은 다음에 의해 불러진다.

```
\clearpage
\pagestyle{index}
\renewcommand{\preindexhook}{%
The first page number is usually, but not always,
the primary reference to
the indexed topic.\vskip\onelineskip}
\printindex
```

본 예시의 핵심인 *index* 페이지 양식은 다음과 같이 정의된다.

```
\makepagestyle{index}
\makeheadrule{index}{\textwidth}{\normalrulethickness}
\makeevenhead{index}{\rightmark}{\leftmark}
\makeoddhead{index}{\rightmark}{\leftmark}
\makeevenfoot{index}{\thepage}{\}{}
\makeoddfoot{index}{\}{}{\thepage}
```

여러분이 아마 볼 수 있듯 이는 페이지의 처음과 마지막 색인 표제어를 머릿글의 왼쪽과 오른쪽에 넣고, 폴리오를 바깥 여백의 바닥글에 넣는다.

### 7.3.3 떠다니는 페이지

`\ifonlyfloats{<yes>}{<no>}`

---

<sup>2</sup>이는 L<sup>A</sup>T<sub>E</sub>X 커널에서 고쳐졌지만, fixltx2e 패키지의 기능을 포함한다.

페이지가 글 없이 그림이나 표만을 담고 있을 때, 다른 머릿글을 넣어야 할 때가 있다. 만약 `\ifonlyfloats` 명령어가 글 없이 떠다니는 개체만 있는 페이지에 사용될 경우, *<yes>* 인자가 처리되며 그렇지 않은 일반적인 페이지의 경우 *<no>* 인자가 처리된다. 해당 명령은 떠다니는 개체뿐인 페이지에만 다르게 적용될 페이지 양식을 정의할 때 유용하다.

예컨대 *companion* 페이지 양식을 주로 사용하지만, 떠다니는 개체뿐인 페이지에서는 *plain* 정도의 페이지 양식만 필요하다고 하자. *companion*의 설정에서 일부 코드를 빌려다가 쓴다면 다음과 같이 할 수 있다.

```
\makepagestyle{floatcomp}
% \headwidth has already been defined for the companion style
\makeheadrule{floatcomp}{\headwidth}%
  {\ifonlyfloats{Opt}{\normalrulethickness}}
\makeheadposition{floatcomp}{flushright}{flushleft}{}{}
\makepsmarks{floatcomp}{\companionpshook}
\makeevenhead{floatcomp}%
  {\ifonlyfloats{}{\normalfont\bfseries\thepage}}%
  {}%
  {\ifonlyfloats{}{\normalfont\bfseries\leftmark}}
\makeoddhead{floatcomp}%
  {\ifonlyfloats{}{\normalfont\bfseries\rightmark}}%
  {}%
  {\ifonlyfloats{}{\normalfont\bfseries\thepage}}
\makeevenfoot{floatcomp}{}{\ifonlyfloats{\thepage}{}{}}
\makeoddfoot{floatcomp}{}{\ifonlyfloats{\thepage}{}{}}
```

*floatcomp* 양식에 대한 위 코드를 앞서 나온 *companion* 양식의 것과 비교해보자.

머리패션은 떠다니는 페이지에서 두께가 영이 되어 보이지 않고 다른 페이지에는 `\normalrulethickness`의 두께를 가진다. 머리의 위치는 두 페이지 양식 모두 동일하다. 그러나 *floatcomp*에서 머릿글은 비어있고, 떠다니는 페이지의 바닥글은 가운데에 페이지 번호를 가진다. 일반적인 페이지에서 바닥글은 비어있지만 머릿글은 *companion*의 머릿글과 같다.

다음 코드는 '요령' 하나를 담고 있다. 매크로 `\makepsmarks{x}{code}`는

```
\newcommand{\Xpshook}{code}
```

와 같다. 필자는 이를 다음 코드에 적용하였다.

```
\makepsmarks{floatcomp}{\companionpshook}
```

이는 `\makepsmarks{companion}{...}`, 을 반복하지 않으면서도 코드가 두 페이지 양식에 대해 동일하도록 보장한다.

```
\mergepagefloatstyle{<style>}{<textstyle>}{<floatstyle>}
```

여러분이 하나는 본문 페이지에, 다른 하나는 떠다니는 페이지에 적용할 두 개의 페이지 양식을 이미 가지고 있다면, `\mergepagefloatstyle` 명령어는 위의 *floatcomp* 예시 코드보다 간단하게 페이지 양식을 결합할 수 있도록 제공된다. *<style>* 인자는 정의되고 있는 페이지 양식의 이름이다. *<textstyle>* 인자는 본문 페이지에 대한 페이지 양식의 이름, *<floatstyle>*은 떠다니는 페이지에 적용될 페이지 양식의 이름이다. 이들 둘 다 `\mergepagefloatstyle`를 부르기 전에 정의되어 있어야 한다. 따라서, 필자는 길고 복잡할 수도 있는 코드 대신에 다음의 코드를 사용할 수 있었다.

```
\mergepagefloatstyle{floatcomp}{companion}{plain}
```

어떤 저자는 페이지가 떠다니는 페이지인지, 떠다니는 개체가 페이지의 꼭대기에 있는지, 떠다니는 개체가 페이지의 바닥에 있는지, 혹은 본문이 꼭대기와 바닥에 있는지에 따라서 페이지 머릿글을 다르게 하면 좋을 수 있을 것 같다고 생각하였다.

필자는 이것이 통상적인 요구사항이 아니라고 생각할 뿐만이 아니라, 이를 가능하게 하려면 LaTeX의 출력 과정을 손봐야 하는데, 이는 큰 용기를 필요로 하는 일이다. 만약 이를 해야 한다면 쉽게 무시할 수 있는 패키지로 만들어야 할 것이다. 다음은 이를 위해 해야하는 작업의 윤곽으로, 필자는 권장하지 않는다. 혹여나 여러분이 시도하였는데 모든 작업이 사라져버리더라도 전적으로 여러분의 책임이다.

```
% notefloat.sty
\newif\iffloatattop
\floatattopfalse
\newif\iffloatatbot
\floatatbotfalse

\renewcommand*{\@addtotoporbot}{%
  \@getfpsbit \tw@
  \ifodd \@tempcnta
    \@flsetnum \@topnum
    \ifnum \@topnum>\z@
      \@tempwafalse
      \@flcheckspace \@toproom \@toplist
      \if@tempwa
        \@bitor\@currtype{\@midlist\@botlist}%
        \if@test
          \else
            \@flupdates \@topnum \@toproom \@toplist
            \@inserttrue
          \global\floatattoptrue
        \fi
      \fi
    \fi
  \fi
  \if@insert
    \else
      \@addtobot
    \fi}

\renewcommand*{\@addtobot}{%
  \@getfpsbit 4\relax
  \ifodd \@tempcnta
    \@flsetnum \@botnum
    \ifnum \@botnum>\z@
      \@tempwafalse
      \@flcheckspace \@botroom \@botlist
      \if@tempwa
        \global\maxdepth \z@
```

```

\@flupdates \@botnum \@botroom \@botlist
\@inserttrue
\global\floatatbottrue
\fi
\fi
\fi}

\let\p@wold@output\@outputpage
\renewcommand*{\@outputpage}{%
\p@wold@output
\global\floatatbotfalse
\global\floatatbotfalse}

\endinput

```

만약 떠다니는 개체가 페이지의 꼭대기에 있다면 `\floatatbot`은 아마도 `true`로 설정될 것이고 떠다니는 개체가 페이지의 바닥에 있다면 `\floatatbot`은 아마도 `true`로 설정될 것이다.

#### 7.4 showlocs 페이지 양식

*showlocs* 페이지 양식은 다소 특수하다고 볼 수 있는데, 이는 페이지 판매김 설계를 돕기 위해 만들어졌기 때문이다. 머릿글과 바닥글의 세로 위치를 표시하기 위한 선이 그려지며, 본문 영역 주변으로 상자가 그려진다. 이는 크기가 영인 그림 두 개를 통해 구현하였다.<sup>3</sup>

```

\framepichead
\framepictfoot
\framepichook
\showheadfootlocoff
\showtextblockoff

```

`\framepichead` 매크로는 머릿글 위치에 선을 그리는, 크기가 영인 그림을 생성하며, `\framepictfoot` 매크로는 바닥글 위치에 선을 그리고 조판 영역 주위에 상자를 그리는, 크기가 영인 그림을 생성한다. 매크로 `\framepichead`와 `\framepictfoot`은, `\showheadfootlocoff` 정의 후에는 머릿글과 바닥글 위치에 선을 그리지 않는다. `\showtextblockoff`의 정의는 `\framepictfoot`가 본문 영역 주변에 상자 그리는 것을 방지한다.

만약 여러분이 *showlocs*의 색상을 바꾸고 싶다면, 다음과 같이 간단히 할 수 있다.

```
\renewcommand\framepichook{\color{red}}
```

If you generally want a box around the textblock you may want to create your own pagestyle using `\framepictfoot` and the *showlocs* code as a starting point, see *memoir.cls* for details. 만약 여러분이 본문 영역 주위에 상자를 추가하는 일반적인 방법이 필요하다면, `\framepictfoot`와 *showlocs* 코드를 발판삼아 직접 페이지 양식을 만들어야 할 것인데, 자세한 내용은 *memoir.cls*를 참고하자.

#### 7.5 페이지 양식으로 할 수 있는 다른 일들

이전에 page 111에서 우리는 초고 정보를 추가하는 방법에 대해 살펴보았다. 여기에 더 자세한 예시가 나와 있다.

<sup>3</sup>크기가 영인 그림은 `\begin{picture}(0,0)...`으로 시작된다.

페이지 양식의 흥미로운 사용 중 하나는 바닥글 아래에 추가 정보를 제시하는 것이다. 저작권 정보와 같은 것이 될 수 있다. 혹은 여러분의 문서가 Subversion과 같은 시스템으로 버전 관리가 되고 있고, 모든 단원이 서로 분리된 파일에 담겨 있다면, 단원의 맨 앞에 누가 해당 단원을 언제 수정하였는지에 대한 정보를 추가할 수도 있다. `svn-multi` 패키지([Sch09])와 동일 저자의 `PracTeX` 저널의 논문[Sch07]을 보라. 이 정보는 다음과 같이 매 단원의 시작에 더해질 수 있다.

```
\usepackage[filehooks]{svn-multi}
\makeatletter
% remember to define a darkgray color
\newcommand\addRevisionData{%
  \begin{picture}(0,0)%
    \put(0,-10){%
      \tiny%
      \expandafter\ifmtarg\expandafter{\svnfiledate}{\{%
        \textcolor{darkgray}{Chapter last updated
          \svnfileyear/\svnfilemonth/\svnfileday
          \enspace \svnfilehour:\svnfileminute\ (revision \svnfilerev)}
      }%
    }%
  \end{picture}%
}
\makeatother
% chapter is normally an alias to the plain style, we want to change
% it, so make it a real pagestyle
\makepagestyle{chapter}
\makeoddfoot{chapter}{\addRevisionData}{\thepage}{}
\makeevenfoot{chapter}{\addRevisionData}{\thepage}{}

```



# Eight

## 문단과 리스트

절 구분 내에서 보통 내용은 문단들로 나뉘어진다. 이따금 인용문이나 리스트와 같이 일반적인 문단과는 다르게 나열되는 내용이 있을 수 있다.

### 8.1 문단

기본적으로, 보통 문단의 형태를 조절하는 매개변수가 두 개 있다.

`\parindent \parskip`

길이 `\parindent`는 문단 첫 줄의 들여쓰기이며, 길이 `\parskip`은 문단 사이의 세로 간격로, Figure 8.1에 나타나 있다. `\parskip`의 값은 보통 0pt이고, `\parindent`는 보통 em 단위로 정의되어서 사용되는 글꼴에 따라 들여쓰기가 달라지도록 한다. 만약 `\parindent`가 음의 길이로 설정이 되며, 문단의 첫 줄은 왼쪽 여백으로 ‘내어쓰기’가 될 것이다.

#### 8.1.1 블록 문단

블록 문단은 `\parindent`를 0em으로 설정하여 얻을 수 있다. `\parskip`은 어떤 양의 값으로 설정하여 문단들이 구분될 수 있도록 해야 한다. 대부분의 인쇄기술자는 블록 문단을 진심으로 싫어하는데, 이는 단지 심미적인 측면이 아니라 실용적인 이유에서도 그러하다. 블록 문단의 마지막 줄이 꼭 차 있으면서도 그 페이지의 마지막 줄인 상황을 생각해보자. 이어지는 블록 문단은 다음 페이지의 맨 위에서 시작하지만, 이를 구분할 수 있는 문단 사이의 간격은 없다.

It is important to know that LaTeX typesets paragraph by paragraph. For example, the `\baselineskip` that is used for a paragraph is the value that is in effect at the end of the paragraph, and the font size used for a paragraph is according to the size declaration (e.g., `\large` or `\normalsize` or `\small`) at the end of the paragraph, and the raggedness or

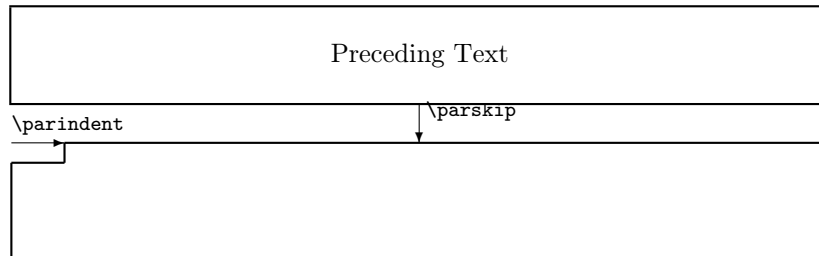


Figure 8.1: 문단의 매개변수

otherwise of the whole paragraph depends on the declaration (e.g., `\centering`) in effect at the end of the paragraph. If a pagebreak occurs in the middle of a paragraph TeX will not reset the part of the paragraph that goes onto the following page, even if the textwidths on the two pages are different. LaTeX은 문단 단위로 조판한다는 사실을 알아두는 것이 중요하다. 예를 들어, `\baselineskip`은

### 8.1.2 Hanging paragraphs

A hanging paragraph is one where the length of the first few lines differs from the length of the remaining lines. (A normal indented paragraph may be considered to be a special case of a hanging paragraph where ‘few = one’).

`\hangpara{<indent>}{<num>}`

Using `\hangpara` at the start of a paragraph will cause the paragraph to be hung. If the length `<indent>` is positive the lefthand end of the lines will be indented but if it is negative the righthand ends will be indented by the specified amount. If the number `<num>`, say `N`, is negative the first `N` lines of the paragraph will be indented while if `N` is positive the `N+1` th lines onwards will be indented. This paragraph was set with `\hangpara{3em}{-3}`. There should be no space between the `\hangpara` command and the start of the paragraph.

`\begin{hangparas}{<indent>}{<num>} text \end{hangparas}`

The `hangparas` environment is like the `\hangpara` command except that every paragraph in the environment will be hung.

The code implementing the hanging paragraphs is the same as for the hanging package [Wil01f]. Examples of some uses can be found in [Thi99].

As noted elsewhere the sectioning commands use the internal macro `\@hangfrom` as part of the formatting of the titles.

`\hangfrom{<text>}`

The `\hangfrom` macro is provided as an author’s version of the internal `\@hangfrom` macro used, among other things, in typesetting section titles.

Simple hung paragraphs (like this one) can be specified using the `\hangfrom` macro. The macro puts `<text>` in a box and then makes a hanging paragraph of the following material. This paragraph commenced with `\hangfrom{Simple hung paragraphs }(like ...` and you are now reading the result.

The commands for hanging paragraphs do not quite work as might be expected when they are used in a list environment, for example inside an `enumerate`. If you wish for a hanging paragraph inside such an environment you will have to define your own commands for this. If you feel capable of doing so then, with my congratulations, move on to the next section. If you are not so confident you could try using the following non-guaranteed code, which is based on an idea by Patrik Nyman which he posted on CTt in January 2004.

```
%\makeatletter
% A version of \hangpara for use in a list
%   \listhanging{indent}{num} text text text ...
\def\listhanging#1#2#3\par{%
  \@tempdima\textwidth \advance\@tempdima -\leftmargin
```

```

\parbox{\@tempdima}{\hangpara{#1}{#2}{#3}\par}
% A version of \hangfrom for use in a list
% \listhangfrom{stuff} text text text ...
\def\listhangfrom#1#2\par{%
  \@tempdima\textwidth \advance\@tempdima -\leftmargin
  \parbox{\@tempdima}{\@hangfrom{#1}{#2}\par}
}%\makeatother

```

## 8.2 Flush and ragged

Flushleft text has the lefthand end of the lines aligned vertically at the lefthand margin and flushright text has the righthand end of the lines aligned vertically at the righthand margin. The opposites of these are raggedleft text where the lefthand ends are not aligned and raggedright where the righthand end of lines are not aligned. LaTeX normally typesets flushleft and flushright.

```

\begin{flushleft} text \end{flushleft}
\begin{flushright} text \end{flushright}
\begin{center} text \end{center}

```

Text in a flushleft environment is typeset flushleft and raggedright, while in a flushright environment is typeset raggedleft and flushright. In a center environment the text is set raggedleft and raggedright, and each line is centered. A small vertical space is put before and after each of these environments.

```
\raggedleft \raggedright \centering
```

The \raggedleft declaration can be used to have text typeset raggedleft and flushright, and similarly the declaration \raggedright causes typesetting to be flushleft and raggedright. The declaration \centering typesets raggedleft and raggedright with each line centered. Unlike the environments, no additional space is added.

```
\centerfloat
```

The contents of floats like tables or figures are usually centered and \centering should be used for this, not the center environment which adds extra, usually undesired, vertical space. For example:

```

\begin{figure}
\centering
...
\caption{...}
\end{figure}

```

However, if the float is wider than the textblock then it is aligned with the left margin and extends into the right margin. The command \centerfloat is a special version of \center that when used in a wide float will center it with respect to the textblock, i.e., it will extend equally into both margins. Note that \centerfloat needs to be applied where there is a known width; if applied to a regular text paragraph it will center the paragraph but put all the text on one line.

```

\raggedyright[<space>]
\ragrparindent

```

## Typeset example 8.1: Setting the source of a quotation

This quotation has a short last line so there there is enough space for the source to be set at the end of the line. I. M. Short

The last line of this quotation turns out to be too long for the source to be set at the end, so it is automatically set flushright on the following line. N. O. Space

When using `\raggedright` in narrow columns the right hand edge tends to be too ragged, and paragraphs are not indented. Text set `\raggedyright` usually fills more of the available width and paragraphs are indented by `\ragrparindent`, which is initially set to `\parindent`. The optional `\space` argument, whose default is 2em, can be used to adjust the amount of raggedness. As examples:

```
\raggedyright[0pt] % typeset flushright
\raggedyright[1fil] % same as \raggedright
\raggedyright[0.5em] % less ragged than \raggedright
```

Remember that LaTeX typesets on a per-paragraph basis, so that putting the sequence of `\centering`, `\raggedleft` declarations in the same paragraph will cause the entire paragraph to be typeset `raggedleft` and `flushright` — the `\centering` declaration is not the one in effect at the end of the paragraph.

## 8.3 Quotations

LaTeX provides two environments that are typically used for typesetting quotations.

```
\begin{quote} text \end{quote}
\begin{quotation} text \end{quotation}
```

In both of these environments the text is set `flushleft` and `flushright` in a measure that is smaller than the normal `textwidth`. The only difference between the two environments is that paragraphs are not indented in the `quote` environment but normal paragraphing is used in the `quotation` environment.

```
\sourceatright[<length>]{<text>}
```

Some quotations are completed by giving the source or author. Using `\sourceatright` at the end of the quotation will typeset `<text>` `flushright` at the end of the line if there is enough space, otherwise it typesets it `flushright` on the next line. A space `<length>` (default 2em) is left between the end of the quote and `<text>`.

## Source for example 8.1

```
\begin{quotation}
This quotation has a short last line so there there is enough space
```

```

for the source to be set at
the end of the line.\sourceatright{I. M. Short}
\end{quotation}

\begin{quotation}
The last line of this quotation turns out to be too long for
the source to be set at the end, so it is automatically
set flushright on the following line.\sourceatright{N. O. Space}
\end{quotation}

```

#### 8.4 Some less common paragraph shapes

The paragraph shapes described in this section are based on a series that I presented in my *Glisterings* column [Wil07e, Wil08b]. Like the earlier `\centering`, etc., paragraph style declarations, the style that applies is the one in effect at the *end* of the paragraph. Thus the general usage is:

```

\bgroupp%    a group to keep changes local % or could be { or \begin...
\paragraphstyle
.... text
\par%        ensure the end of a paragraph
\egroupp%    end the group % or could be } or \end...

```

If you use one of these paragraph shapes then using `\\` to break a line may give a surprising result. If so, the following may help.

```

\atcentercr
\break
\memorigdb
\memorigpar

```

You could try `\atcentercr`, which is user level version of an internal LaTeX command used in some paragraph settings for line breaking, or `\break`, which is a TeX command to end a line.

In some cases the paragraph shaping commands change the definitions of `\\` or `\par`. Just in case you need to restore them, copies of the original definitions are in `\memorigdb` (for `\\`) and `\memorigpar` (for `\par`).

```

\flushleftright

```

If you use one of the shapes listed later in this section and things go wrong, the declaration `\flushleftright` returns all paragraphing parameters<sup>1</sup> to their normal values, thus producing paragraphs as normal — justified left and right with the last line flushleft and raggedright.

##### 8.4.1 Last line not short

On occasion a paragraph may end with a single short word as the last line.

<sup>1</sup>Except for the `\parindent`, which it leaves at its current value.

## 8. 문단과 리스트

---

### Typeset example 8.2: Paragraph's line not too short

---

The last line of this paragraph will be no shorter than a particular length. a b c d e f g h i

The last line of this paragraph will be no shorter than a particular length. a b c d e f g h i j k

---

```
\linenottooshort[⟨length⟩]
```

Following the `\linenottooshort` declaration paragraphs will be set as normal, except that the last line will not be shorter than `⟨length⟩` (default 2em).

### Source for example 8.2

```
\linenottooshort[4em]
The last line of this paragraph will be no shorter than a particular
length. a b c d e f g h i % j k l m n

The last line of this paragraph will be no shorter than a particular
length. a b c d e f g h i j k % l m n
```

#### 8.4.2 Russian typography

Apparently in the Russian typographic tradition the last line of a multiline paragraph must either be at least as long as the `\parindent` and have at least `\parindent` at the end, or it must fill the whole line (i.e., `flushleft` and `flushright`).

```
\russianpar
```

Ending a paragraph with `\russianpar` causes it to be set following Russian typographic rules.

If you have many such paragraphs it may be more convenient to do it like:

```
\let\par\russianpar
... many paragraphs
\let\par\memorigpar
```

or as:

```
\begingroup% start a group
\let\par\russianpar
... many paragraphs
\endgroup% end the group
```

#### 8.4.3 Fill with rules

In some legal documents there must be no space at the end of the lines in order to prevent anyone inserting something at a later date. Typically it is only the last line in a paragraph that needs this treatment.

This paragraph is set following the `\leftcenterright` declaration. We really need  
three,  
or four may be better,  
lines to show the effect of this.

$\begin{array}{l} \backslash\text{lastlinerulefill} \\ \backslash\text{lastlineparrule} \end{array}$
--

## 8. 문단과 리스트

---

```
\justlastraggedleft  
\raggedrightthenleft  
\leftcenterright
```

Following the `\justlastraggedleft` declaration paragraphs will be set justified except the last line will be set raggedleft.

Following the declaration `\raggedrightthenleft` paragraphs will be set with the first line raggedright and the remainder set raggedleft.

Following the declaration `\leftcenterright` paragraphs will be set with the first line flushleft (and raggedright) and the last line flushright (and raggedleft) and those in the middle will be centered. This declaration should be used within a group; also `\everypar{}` should be called at the end.

### Source for example 8.4

```
\justlastraggedleft
```

Paragraphs following the `\verb?\justlastraggedleft?` declaration, as this one does, have their lines justified except for the last which is set raggedleft. The demonstration works best if there are three or more lines.

```
\raggedrightthenleft
```

This paragraph is set following the `\verb?\raggedrightthenleft?` declaration. The first line is set raggedright and all the remaining lines are set raggedleft. The demonstration is better if there are three or more lines.

```
\leftcenterright
```

This paragraph is set following the `\verb?\leftcenterright?` declaration. We really need three, `\\` or four may be better, `\\` lines to show the effect of this.

```
\everypar{}
```

#### 8.4.5 Left spring right

Typically the lines of a paragraph are both flushleft and flushright and filled with text, but sometimes filling is not desired.

```
\leftspringright{<lfrac>}{<rfrac>}{<ltext>}{<rtext>}
```

The `\leftspringright` macro sets `<ltext>` flushleft and raggedright in a column whose width is `<lfrac>` of the textwidth and, in parallel, it also sets `<rtext>` raggedleft and flushright in a column that is `<rfrac>` of the textwidth; the effect is as though there are springs between the lines of the two texts. The sum of `<lfrac>` and `<rfrac>` must be less than one.

### Source for example 8.5

```
\leftspringright{0.3}{0.6}%
```



## Typeset example 8.5: A sprung paragraph

Text at the left is set  
flushleft and raggedright.

But the text at the right is set raggedleft and  
flushright. It's as though there was a spring pushing  
the lines apart.

```
{Text at the left is set flushleft and raggedright.}
{But the text at the right is set raggedleft and flushright.
  It's as though there was a spring pushing the lines apart.}
```

## 8.5 Changing the textwidth

The `quote` and `quotation` environments both locally change the `textwidth`, or more precisely, they temporarily increase the left and right margins by equal amounts. Generally speaking it is not a good idea to change the `textwidth` but sometimes it may be called for.

The commands and environment described below are similar to those in the originally found in the `chngpage` package, but do differ in some respects.

```
\begin{adjustwidth}{<left>}{<right>} text \end{adjustwidth}
\begin{adjustwidth*}{<left>}{<right>} text \end{adjustwidth*}
```

The `adjustwidth` environment temporarily adds the length `<left>` to the lefthand margin and `<right>` to the righthand margin. That is, a positive length value increases the margin and hence reduces the `textwidth`, and a negative value reduces the margin and increases the `textwidth`. The `quotation` environment is roughly equivalent to

```
\begin{adjustwidth}{2.5em}{2.5em}
```

The starred version of the environment, `adjustwidth*`, is really only useful if the left and right margin adjustments are different. The starred version checks the page number and if it is odd then adjusts the left (spine) and right (outer) margins by `<left>` and `<right>` respectively; if the page number is even (a verso page) it adjusts the left (outer) and right (spine) margins by `<right>` and `<left>` respectively.

```
\strictpagecheck \easypagecheck
```

Odd/even page checking may be either strict (`\strictpagecheck`) or easy (or one might call it lazy) (`\easypagecheck`). Easy checking works most of the time but if it fails at any point then the strict checking should be used.

As an example, if a figure is wider than the `textwidth` it will stick out into the righthand margin. It may be desirable to have any wide figure stick out into the outer margin where there is usually more room than at the spine margin. This can be accomplished by

```
\begin{figure}
\centering
```

```
\strictpagecheck
\begin{adjustwidth*}{0em}{-3em}
% the illustration
\caption{...}
\end{adjustwidth*}
\end{figure}
```

A real example in this manual is Table 10.1 on page 179, which is wider than the typeblock. In that case I just centered it by using `adjustwidth` to decrease each margin equally. In brief, like

```
\begin{table}
\begin{adjustwidth}{-1cm}{-1cm}
\centering
...
\end{adjustwidth}
\end{table}
```

Note that the `adjustwidth` environment applies to complete paragraphs; you can't change the width of part of a paragraph except for hanging paragraphs or more esoterically via `\parshape`. Further, if the adjusted paragraph crosses a page boundary the margin changes are constant; a paragraph that is, say, wider at the right on the first page will also be wider at the right as it continues onto the following page.

The `center` environment horizontally centers its contents with respect to the typeblock. Sometimes you may wish to horizontally center some text with respect to the physical page, for example when typesetting a colophon which may look odd centered with respect to the (unseen) typeblock.

The calculation of the necessary changes to the spine and fore-edge margins is simple. Using the same symbols as earlier in §2.4 ( $P_w$  and  $B_w$  are the width of the trimmed page and the typeblock, respectively;  $S$  and  $E$  are the spine and fore-edge margins, respectively) then the amount  $M$  to be added to the spine margin and subtracted from the fore-edge margin is calculated as:

$$M = 1/2(P_w - B_w) - S$$

For example, assume that the `\textwidth` is 5 inches and the `\spinemargin` is 1 inch. On US letterpaper (`\paperwidth` is 8.5 inches) the fore-edge margin is then 2.5 inches, and 0.75 inches<sup>2</sup> must be added to the spine margin and subtracted from the fore-edge to center the typeblock. The `adjustwidth` environment can be used to make the (temporary) change.

```
\begin{adjustwidth*}{0.75in}{-0.75in} ...
```

`\calccentering{<length>}`

If you don't want to do the above calculations by hand, `\calccentering` will do it for you. The `<length>` argument must be the name of a pre-existing length command, including the backslash. After calling `\calccentering`, `<length>` is the amount to be added to the spine margin and subtracted from the fore-edge margin to center the typeblock. An example usage is

---

<sup>2</sup>On A4 paper the result would be different.

```

\calccentering{\mylength}
\begin{adjustwidth*}{\mylength}{-\mylength}
text horizontally centered on the physical page
\end{adjustwidth*}

```

You do not necessarily have to define a new length for the purposes of `\calccentering`. Any existing length will do, such as `\unitlength`, provided it will be otherwise unused between performing the calculation and changing the margins (and that you can, if necessary reset it to its original value — the default value for `\unitlength` is 1pt).

## 8.6 Lists

Standard LaTeX provides four kinds of lists. There is a general `list` environment which you can use to define your own particular kind of list, and the `description`, `itemize` and `enumerate` lists (which are internally defined in terms of the general `list` environment<sup>3</sup>).

This class provides the normal `description` list, plus a couple of others of the same kind, but the `itemize` and `enumerate` lists are extended versions of the normal ones.

```

\begin{description} \item[⟨label⟩] ... \end{description}
\begin{blockdescription} \item[⟨label⟩] ... \end{blockdescription}
\descriptionlabel⟨label⟩
\blockdescriptionlabel⟨label⟩

```

In a `description` list an `\item`'s `⟨label⟩` is typeset by `descriptionlabel`. The default definition is

```

\newcommand*{\descriptionlabel}[1]{\hspace\labelsep
\normalfont\bfseries #1}

```

which gives a bold label. To have, for example, a sans label instead, do

```

\renewcommand*{\descriptionlabel}[1]{\hspace\labelsep
\normalfont\sffamily #1}

```

The only noticeable difference between a `description` list and a `blockdescription` list is that the latter is set as indented block paragraphs; invisibly, it also has its own `\blockdescriptionlabel`.

```

\begin{labelled}{⟨name⟩} \item[⟨label⟩] ... \end{labelled}
\begin{flexlabelled}{⟨name⟩}{⟨labelwidth⟩}{⟨labelsep⟩}{⟨itemindent⟩}%
{⟨leftmargin⟩}{⟨rightmargin⟩}
\item[⟨label⟩] ... \end{flexlabelled}

```

The `labelled` environment is like the `description` environment except that you can specify the label format via the `⟨name⟩` argument where `\name` is the formatting macro. For example, if you wanted the item labels set in italics, then

```

\newcommand*{\itlabel}[1]{\hspace\labelsep \normalfont\itshape #1}
\begin{labelled}{\itlabel}
\item[First] ...

```

<sup>3</sup>The `quote` and `quotation` environments are also defined in terms of the general `list` environment. You may be surprised where it crops up.

## Typeset example 8.6: Smallcap quote style description list

This example shows how the `flexlabelled` list can be used to change the formatting of a description-like list.

First The labels should be typeset using smallcaps and the first paragraph should be set as block paragraph.

Further paragraphs completing an `\item`'s descriptive text will be set with the normal paragraph indent.

Second The list should be indented from each margin like the `quote` and `quotation` environments.

More major changes to a description-like list will probably involve writing the code for a new environment.

...

The `flexlabelled` environment adds additional controls to the `labelled` one. The `<name>` argument is the same as that for `labelled` and the remainder are lengths that correspond to the dimensions shown in Figure 8.2. If you want any of the dimensions to retain their current values, use `*` instead of a length as the value for that particular argument.

## Source for example 8.6

```
This example shows how the \texttt{flexlabelled} list can be used to
change the formatting of a description-like list.
\newcommand*{\sclabel}[1]{\normalfont\scshape #1}
\begin{flexlabelled}{\sclabel}{0pt}{0.5em}{0.5em}{*}{\leftmargin}
\item[First] The labels should be typeset using smallcaps and the first
    paragraph should be set as block paragraph.

    Further paragraphs completing an \cs{item}'s descriptive text
    will be set with the normal paragraph indent.
\item[Second] The list should be indented from each margin like the
    \texttt{quote} and \texttt{quotation} environments.
\end{flexlabelled}
More major changes to a description-like list will probably involve writing
the code for a new environment.
```

The `itemize` and `enumerate` environments below are based on the `enumerate` package [Car98c].

```
\begin{itemize}[<marker>] \item ... \end{itemize}
```

The normal markers for `\items` in an `itemize` list are:

1. bullet (`\textbullet`),

2. bold en-dash (`– \bfseries\textendash`),
3. centered asterisk (`*\textasteriskcentered`), and
4. centered dot (`\cdot\textperiodcentered`).

The optional *marker* argument can be used to specify the marker for the list items in a particular list. If for some reason you wanted to use a pilcrow symbol as the item marker for a particular list you could do

```
\begin{itemize}[\P]
\item ...
...
```

```
\begin{enumerate}[\langle style \rangle] \item ... \end{enumerate}
```

The normal markers for, say, the third item in an `enumerate` list are: 3., c., iii., and C. The optional *style* argument can be used to specify the style used to typeset the item counter. An occurrence of one of the special characters A, a, I, i or 1 in *style* specifies that the counter will be typeset using uppercase letters (A), lowercase letters (a), uppercase Roman numerals (I), lowercase Roman numerals (i), or arabic numerals (1). These characters may be surrounded by any LaTeX commands or characters, but if so the special characters must be put inside braces (e.g., {a}) if they are to be considered as ordinary characters instead of as special styling characters. For example, to have the counter typeset as a lowercase Roman numeral followed by a single parenthesis

```
\begin{enumerate}[i)]
...
```

### Recommended alternative

`memoir` does not provide high level interfaces to configure the appearance. We provide some simple tools to adjust vertical spacing, see below.

Users seeking more control can have a look at the excellent `enumitem` package by Javier Bezos. If loaded as

```
\usepackage[shortlabels]{enumitem}
```

then our

```
\begin{enumerate}[i)]
\item \label{item:tst} ...
```

syntax will work out of the box.

One key difference: In `memoir` `\ref{item:tst}` will give you ‘i’, whereas, if `enumitem` is loaded the full formatting is returned from the cross reference, i.e., ‘i)’. This is fully configurable in `enumitem`.

Note that, `\tightlists`, `\defaultlists`, `\firmlists`, `\firmlists*` presented below, are not supported by `enumitem`, it provides a highlevel key based interface instead.

Another feature from `enumitem` that I (LM) uses a lot is to combine the `\setlist` with `\AtBeginEnvironment` from the `etoolbox` package to specifically adjust `enumerate` used inside certain theorem constructions. That way we can control the appearance of the lists from the preamble and does not need to use `say`

```
\begin{enumerate}[(a)]
every single time.
```

```
\tightlists \defaultlists
\firmlists \firmlists*
```

The normal LaTeX description, itemize and enumerate lists have an open look about them when they are typeset as there is significant vertical space between the items in the lists. After the declaration `\tightlists` is issued, the extra vertical spacing between the list items is deleted. The open list appearance is used after the `\defaultlists` declaration is issued. These declarations, if used, must come *before* the relevant list environment(s). The class initially sets `\defaultlists`. This manual, though, uses `\tightlists`. The spacing following the `\firmlists` declaration is intermediate between `\defaultlists` and `\tightlists`. The starred version, `\firmlists*`, allows slightly less space around the lists when they are preceded by a blank line than does the unstarred `\firmlists`.

**Caveat.** Due to the manner in which `\small` and `\footnotesize` are implemented, `\tightlists` and `\firmlists` will have no effect on lists typeset under `\small` or `\footnotesize`.

*A comprehensible solution can be done via the enumitem package via*

```
% \tightlists equivalent
\usepackage[shortlabels]{enumitem}
\setlist{ noitemsep }
```

```
\firmlist \tightlist
```

The command `\firmlist` or `\tightlist` can be used immediately after the start of a list environment to reduce the vertical space within that list. The `\tightlist` removes all the spaces while the `\firmlist` produces a list that still has some space but not as much as in an ordinary list.

```
\begin{list}{\langle default-label \rangle}{\langle code \rangle} items \end{list}
```

LaTeX's list environments are defined in terms of a general list environment; some other environments, such as the quote, quotation and adjustwidth are also defined in terms of a list. Figure 8.2 shows the parameters controlling the layout of the list environment.

The list environment takes two arguments. The `\langle default-label \rangle` argument is the code that should be used when the `\item` macro is used without its optional `\langle label \rangle` argument. For lists like `enumerate` this is specified but often it is left empty, such as for the `adjustwidth` environment.

The `\langle code \rangle` argument is typically used for setting the particular values of the list layout parameters. When defining your own types of lists it is advisable to set each of the parameters unless you know that the default values are suitable for your purposes. These parameters can all be modified with either the `\setlength` or `\addtolength` commands.

As an example, here is the specification for a description-like list that uses an italic rather than bold font for the items, and is somewhat tighter than the normal description list.

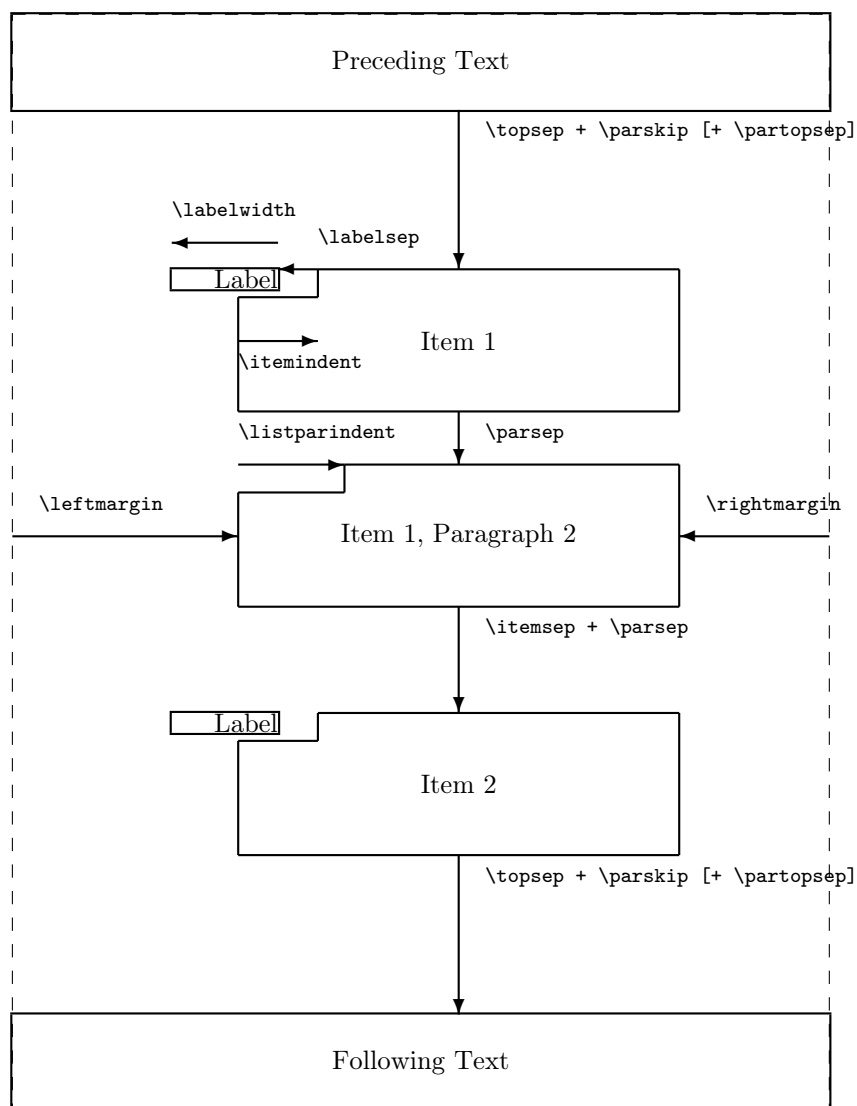


Figure 8.2: The layout parameters for general lists

## 8. 문단과 리스트

---

```
%%%% An italic and tighter description environment
\newcommand{\itlabel}[1]{\hspace\labelsep\normalfont\itshape #1}
\newenvironment{itdesc}{%
  \list{}{%
    \setlength{\labelsep}{0.5em}
    \setlength{\itemindent}{0pt}
    \setlength{\leftmargin}{\parindent}
    \setlength{\labelwidth}{\leftmargin}
    \addtolength{\labelwidth}{-\labelsep}
    \setlength{\listparindent}{\parindent}
    \setlength{\parsep}{\parskip}
    \setlength{\itemsep}{0.5\onelineskip}
    \let\makelabel\itlabel}}{\endlist}
```

This gets used like any other list:

```
\begin{itdesc}
\item[label] ....
\end{itdesc}
```

Here is another kind of list called symbols that might be used for a list of symbols or other similar kind of listing.

```
% Symbol list
\newenvironment{symbols}%
  {\list{}% empty label
    {\setlength{\topsep}{\baselineskip}
     \setlength{\partopsep}{0pt}
     \setlength{\itemsep}{0.5\baselineskip}
     \setlength{\parsep}{0pt}
     \setlength{\leftmargin}{2em}
     \setlength{\rightmargin}{0em}
     \setlength{\listparindent}{1em}
     \setlength{\itemindent}{0em}
     \setlength{\labelwidth}{0em}
     \setlength{\labelsep}{2em}}}%
  {\endlist}
\newcommand{\symb}[1]{\item[#1]\mbox{}}\noprofilebreak}
```

In this case it gets used like this

```
\begin{symbols}
\symb{SYMBOL 1} definition
\symb{SYMBOL 2} ...
\end{symbols}
```

In the code for the symbols list I used the command forms (i.e., `\list` and `\endlist`) for specifying the start and end of a list. It is a matter of taste whether you use the command or `\begin{...}` and `\end{...}` forms, but the latter does make it more obvious that an environment is being dealt with.

Several LaTeX environments are defined in terms of a very simple list, called a `trivlist`. Such a list has little internal structure but like the `list` environment the vertical space before



## Typeset example 8.7: Changing space before and after lists

This example shows that the space around the

## CENTER AND OTHER LIST ENVIRONMENTS

can be minimised by using the

`\zerotrivseps` declaration.

The normal spacing can be restored by using the

`\restoretrivseps` command.

An alternative is to use the `\centering` macro.

and after a `trivlist` (or any list based on it) is set by `\topsep` and `\partopsep`, as shown in Figure 8.2.

```
\zerotrivseps \savetrivseps \restoretrivseps
```

The `center` environment is one of several that is based on a `trivlist`, and so has space before and after it. If you don't want this the `\zerotrivseps` declaration eliminates those spaces. You can think of it as being defined as:

```
\newcommand*\zerotrivseps{%
  \setlength{\topsep}{0pt}%
  \setlength{\partopsep}{0pt}}
```

Before doing this, though, you might consider calling `\savetrivseps` which stores the current values of `\topsep` and `\partopsep`; it is initially defined to store the default values. The command `\restoretrivseps` sets the current values of these lengths to the ones saved by `\savetrivseps`.

## Source for example 8.7

```
This example shows that the space around the
\begin{center}
CENTER AND OTHER LIST ENVIRONMENTS
\end{center}
can be minimised by using the \zerotrivseps
\begin{center}
\verb?\zerotrivseps? declaration.
\end{center}
The normal spacing can be restored by using the \restoretrivseps
\begin{center}
\verb?\restoretrivseps? command.
\end{center}
An alternative is to use the \verb?\centering? macro.
```

Among the environments defined in terms of a `trivlist` are: `flushleft`, `center`, `flushright`, `verbatim`, and others. The example (8.7) shows how it is possible to change the spacing around the center environment, but it applies equally to the other environments.

# Nine

---

## 목차 만들기

---

이 장에서는 목차 (Table of Contents, ToC) 나 그림 목차 (List of Figures, LoF) 의 생김새를 바꾸는 방법을 다룬다. 보통의 클래스에서는 이것들의 디자인은 클래스 내부에 정의되어있기 때문에 고정되어 있으며 거의 바뀌지 않는다.

As well as allowing these lists to appear multiple times in a document, the memoir class gives handles to easily manipulate the design elements. The class also provides means for you to define your own new kinds of “List of…”.

The functionality described is equivalent to the combination of the `tocloft` and `tocbibind` packages [Wil01i, Wil01h].

```
\tableofcontents \tableofcontents*  
\listoffigures \listoffigures*  
\listoftables \listoftables*
```

The commands `\tableofcontents`, `\listoffigures` and `\listoftables` typeset, respectively, the Table of Contents (ToC), List of Figures (LoF) and List of Tables (LoT). In memoir, unlike the standard classes, the unstarred versions add their respective titles to the ToC. The starred versions act like the standard classes’ unstarred versions as they don’t add their titles to the ToC.

This chapter explains the inner workings behind the ToC and friends, how to change their appearance and the appearance of the entries, and how to create new ‘List of…’. If you don’t need any of these then you can skip the remainder of the chapter.

### 9.1 General ToC methods

In §9.2 we will provide the class configuration interface for the various parts of the ToC.

In order to understand how these macros are used, we start by providing some background information this is a general description of how the standard LaTeX classes process a Table of Contents (ToC). As the processing of List of Figures (LoF) and List of Tables (LoT) is similar I will just discuss the ToC. You may wish to skip this section on your first reading.

The basic process is that each sectioning command writes out information about itself — its number, title, and page — to the `toc` file. The `\tableofcontents` command reads this file and typesets the contents.

First of all, remember that each sectional division has an associated level as listed in in Table 6.1 on page 79. LaTeX will not typeset an entry in the ToC unless the value of the `tocdepth` counter is equal to or greater than the level of the entry. The value of the `tocdepth` counter can be changed by using `\setcounter` or `\settocdepth`.

```
\addcontentsline{<file>}{<kind>}{<text>}
```

LaTeX generates a toc file if the document contains a `\tableofcontents` command. The sectioning commands<sup>1</sup> put entries into the toc file by calling the `\addcontentsline` command, where `<file>` is the file extension (e.g., toc), `<kind>` is the kind of entry (e.g., section or subsection), and `<text>` is the (numbered) title text. In the cases where there is a number, the `<text>` argument is given in the form `{\numberline{number}title text}`.

```
\contentsline{<kind>}{<text>}{<page>}
```

The `\addcontentsline` command writes an entry to the given file in the form:

```
\contentsline{<kind>}{<text>}{<page>}
```

where `<page>` is the page number.

For example, if `\section{Head text}` was typeset as ‘3.4 Head text’ on page 27, then there would be the following entry in the toc file:

```
\contentsline{section}{\numberline{3.4} Head text}{27}
```

Extracts from toc, lof and lot files are shown in Figure 9.1.

For each `<kind>` that might appear in a toc (lof, lot) file, LaTeX provides a command: `\l@kind{<title>}{<page>}` which performs the actual typesetting of the `\contentsline` entry.

```
\@pnumwidth{<length>}
\@tocrmarg{<length>}
\@dotsep{<number>}
```

The general layout of a typeset entry is illustrated in Figure 9.2. There are three internal LaTeX commands that are used in the typesetting. The page number is typeset flushright in a box of width `\@pnumwidth`, and the box is at the righthand margin. If the page number is too long to fit into the box it will stick out into the righthand margin. The title text is indented from the righthand margin by an amount given by `\@tocrmarg`. Note that `\@tocrmarg` should be greater than `\@pnumwidth`. Some entries are typeset with a dotted leader between the end of the title text and the righthand margin indentation. The distance, in *math units*<sup>2</sup> between the dots in the leader is given by the value of `\@dotsep`. In the standard classes the same values are used for the ToC, LoF and the LoT.

The standard values for these internal commands are:

- `\@pnumwidth` = 1.55em
- `\@tocrmarg` = 2.55em
- `\@dotsep` = 4.5

The values can be changed by using `\renewcommand`, in spite of the fact that the first two appear to be lengths.

Dotted leaders are not available for Part and Chapter ToC entries.

```
\numberline{<number>}
```

Each `\l@kind` macro is responsible for setting the general *indent* from the lefthand margin, and the *numwidth*. The `\numberline` macro is responsible for typesetting the number flush-left in a box of width *numwidth*. If the number is too long for the box then it will protrude

<sup>1</sup>For figures and tables it is the `\caption` command that populates the lof and lot files.

<sup>2</sup>There are 18mu to 1em.

Parts of a toc file:

```
...
\contentsline{section}{\numberline{10.1}The spread}{77}
\contentsline{section}{\numberline{10.2}Typeblock}{89}
\contentsline{subsection}{\numberline{10.2.1}Color}{77}
...
\contentsline{chapter}{Index}{226}
```

Part of a lof file:

```
...
\contentsline{figure}{\numberline{8.6}Measuring scales}{56}
\addvspace{10pt}
\addvspace{10pt}
\contentsline{figure}{\numberline{10.1}Two subfigures}{62}
\contentsline{subfigure}{\numberline{(a)}Subfigure 1}{62}
\contentsline{subfigure}{\numberline{(b)}Subfigure 2}{62}
...
```

Part of a lot file:

```
...
\contentsline{table}{\numberline{1.7}Font declarations}{11}
\contentsline{table}{\numberline{1.8}Font sizes}{13}
\addvspace
\contentsline{table}{\numberline{3.1}Division levels}{21}
...
```

Figure 9.1: Example extracts from toc, lof and lot files

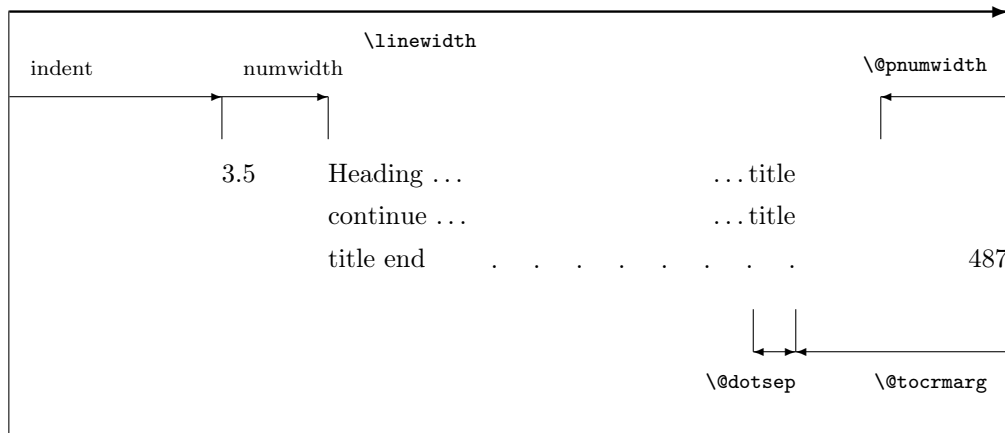


Figure 9.2: Layout of a ToC (LoF, LoT) entry

Table 9.1: Indents and Numwidths (in ems)

Entry	Level	Standard		memoir class	
		indent	numwidth	indent	numwidth
book	-2	—	—	0	—
part	-1	0	—	0	1.5
chapter	0	0	1.5	0	1.5
section	1	1.5	2.3	1.5	2.3
subsection	2	3.8	3.2	3.8	3.2
subsubsection	3	7.0	4.1	7.0	4.1
paragraph	4	10.0	5.0	10.0	5.0
subparagraph	5	12.0	6.0	12.0	6.0
figure/table	(1)	1.5	2.3	0	1.5
subfigure/table	(2)	—	—	1.5	2.3

into the title text. The title text is indented by  $(indent + numwidth)$  from the lefthand margin. That is, the title text is typeset in a block of width  $(\linewidth - indent - numwidth - \@tocrmarg)$ .

Table 9.1 lists the standard values for the *indent* and *numwidth*. There is no explicit *numwidth* for a part; instead a gap of 1em is put between the number and the title text. Note that for a sectioning command the values depend on whether or not the document class provides the `\chapter` command; the listed values are for the book and report classes — in the article class a `\section` is treated like a `\chapter`, and so on. Also, which somewhat surprises me, the table and figure entries are all indented.

```
\@dottedtocline{<level>}{<indent>}{<numwidth>}
```

Most of the `\l@kind` commands are defined in terms of the `\@dottedtocline` command. This command takes three arguments: the *<level>* argument is the level as shown in Table 9.1, and *<indent>* and *<numwidth>* are the *indent* and *numwidth* as illustrated in Figure 9.2. For example, one definition of the `\l@section` command is:

```
\newcommand*{\l@section}{\@dottedtocline{1}{1.5em}{2.3em}}
```

If it is necessary to change the default typesetting of the entries, then it is usually necessary to change these definitions, but memoir gives you handles to easily alter things without having to know the LaTeX internals.

You can use the `\addcontentsline` command to add `\contentsline` commands to a file.

```
\addtocontents{<file>}{<text>}
```

LaTeX also provides the `\addtocontents` command that will insert *<text>* into *<file>*. You can use this for adding extra text and/or macros into the file, for processing when the file is typeset by `\tableofcontents` (or whatever other command is used for *<file>* processing, such as `\listoftables` for a lot file).

As `\addcontentsline` and `\addtocontents` write their arguments to a file, any fragile commands used in their arguments must be `\protected`.

You can make certain adjustments to the ToC, etc., layout by modifying some of the above macros. Some examples are:

- If your page numbers stick out into the righthand margin

```
\renewcommand{\@pnumwidth}{3em}
\renewcommand{\@tocrmarg}{4em}
```

but using lengths appropriate to your document.

- To have the (sectional) titles in the ToC, etc., typeset ragged right with no hyphenation

```
\renewcommand{\@tocrmarg}{2.55em plus1fil}
```

where the value 2.55em can be changed for whatever margin space you want.

- The dots in the leaders can be eliminated by increasing \@dotsep to a large value:

```
\renewcommand{\@dotsep}{10000}
```

- To have dotted leaders in your ToC and LoF but not in your LoT:

```
...
\tableofcontents
\makeatletter \renewcommand{\@dotsep}{10000} \makeatother
\listoftables
\makeatletter \renewcommand{\@dotsep}{4.5} \makeatother
\listoffigures
...
```

- To add a horizontal line across the whole width of the ToC below an entry for a Part:

```
\part{Part title}
\addtocontents{toc}{\protect\mbox{}\protect\hrulefill\par}
```

As said earlier any fragile commands in the arguments to `\addtocontents` and `\addcontentsline` must be protected by preceding each fragile command with `\protect`. The result of the example above would be the following two lines in the `.toc` file (assuming that it is the second Part and is on page 34):

```
\contentsline {part}{II\hspace {1em}Part title}{34}
\mbox {}\hrulefill \par
```

If the `\protect`s were not used, then the second line would instead be:

```
\unhbox \voidb@x \hbox {} \unhbox \voidb@x \leaders \hrule \hfill
\kern \z@ \par
```

which would cause LaTeX to stop and complain because of the commands that included the `@` (see §E.4). If you are modifying any command that includes an `@` sign then this must be done in either a `.sty` file or if in the document itself it must be surrounded by `\makeatletter` and `\makeatother`. For example, if you want to modify `\@dotsep` in the preamble to your document you have to do it like this:

```
\makeatletter
\renewcommand{\@dotsep}{9.0}
\makeatother
```

## 9. 목차 만들기

---

- To change the level of entries printed in the ToC (for example when normally subsections are listed in the ToC but for appendices only the main title is required)

```
\appendix
\addtocontents{toc}{\protect\setcounter{tocdepth}{0}}
\chapter{First appendix}
...
```

### 9.2 The class ToC methods

The class provides various means of changing the look of the ToC, etc., without having to go through some of the above.

```
\tableofcontents \tableofcontents*
\listoffigures \listoffigures*
\listoftables \listoftables*
```

The ToC, LoF, and LoT are printed at the point in the document where these commands are called, as per normal LaTeX. You can use `\tableofcontents`, `\listoffigures`, etc., more than once in a memoir class document.

However, there are two differences between the standard LaTeX behaviour and the behaviour with this class. In the standard LaTeX classes that have `\chapter` headings, the ToC, LoF and LoT each appear on a new page. With this class they do not necessarily start new pages; if you want them to be on new pages you may have to specifically issue an appropriate command beforehand. For example:

```
...
\clearpage
\tableofcontents
\clearpage
\listoftables
...
```

Also, the unstarred versions of the commands put their headings into the ToC, while the starred versions do not.

```
\begin{KeepFromToc} \listof... \end{KeepFromToc}
```

There is at least one package that uses `\tableofcontents` for its own ‘List of...’. When used with the class this will put the package’s ‘List of...’ title into the ToC, and the package doesn’t seem to know about `\tableofcontents*`. The heading of any `\listof...` command that is in the `KeepFromToc` environment will not be added to the ToC. For example:

```
\begin{KeepFromToc}
\listoffigures
\end{KeepFromToc}
```

is equivalent to `\listoffigures*`.

```
\onecoltocetc
\twocoltocetc
\docoltocetc
```



Table 9.2: Values for X in macros for styling the titles of ‘List of...’

toc	lof	lot	...
-----	-----	-----	-----

In the standard classes the ToC, etc., are set in one column even if the document as a whole is set in two columns. This limitation is removed. Following the `\onecoltocetc` declaration, which is the default, the ToC and friends will be set in one column but after the `\twocoltocetc` declaration they will be set in two columns. Following the `\docoltocetc` declaration they will be set in either one or two columns to match the document class `onecolumn` or `twocolumn` option.

```
\maxtocdepth{<secname>}
\settocdepth{<secname>}
```

The class `\maxtocdepth` command sets the `tocdepth` counter. It is currently not used in the memoir class.

The memoir class command `\settocdepth` is somewhat analagous to the `\setsecnumdepth` command described in §6.3. It sets the value of the `tocdepth` counter and puts it into the ToC to (temporarily) modify what will appear. The `\settocdepth` and `\maxtocdepth` macros are from the `tocvsec2` package [Wil99b].

```
\phantomsection
```

**NOTE:** The `hyperref` package [Rahtz02] appears to dislike authors using `\addcontentsline`. To get it to work properly with `hyperref` you normally have to put `\phantomsection` (a macro defined within this class and the `hyperref` package) immediately before `\addcontentsline`.

### 9.2.1 Changing the titles

Commands are provided for controlling the appearance of the ToC, LoF and LoT titles.

```
\contentsname \listfigurename \listtablename
```

Following LaTeX custom, the title texts are the values of the `\contentsname`, `\listfigurename` and `\listtablename` commands.

The commands for controlling the typesetting of the ToC, LoF and LoT titles all follow a similar pattern, so for convenience (certainly mine, and hopefully yours) in the following descriptions I will use X, as listed in Table 9.2, to stand for the file extension for the appropriate ‘List of...’. That is, any of the following:

- toc or
- lof or
- lot.

For example, `\Xmark` stands for `\tocmark` or `\lofmark` or `\lotmark`.

The code for typesetting the ToC title looks like:

```
\toheadstart
\printtoctitle{\contentsname}
\tocmark
\thispagestyle{chapter}
\aftertoctitle
```

where the macros are described below.

`\Xheadstart`

This macro is called before the title is actually printed. Its default definition is

```
\newcommand{\Xheadstart}{\chapterheadstart}
```

`\printXtitle{<title>}`

The title is typeset via `\printXtitle`, which defaults to using `\printchaptertitle` for the actual typesetting.

`\Xmark`

These macros sets the marks for use by the running heads on the ToC, LoF, and LoT pages. The default definition is equivalent to:

```
\newcommand{\Xmark}{\markboth{\...name}{\...name}}
```

where `\...name` is `\contentsname` or `\listfigurename` or `\listtablename` as appropriate. You probably don't need to change these, and in any case they may well be changed by the particular `\pagestyle` in use.

`\afterXtitle`

This macro is called after the title is typeset and by default it is defined to be `\afterchaptertitle`.

Essentially, the ToC, LoF and LoT titles use the same format as the chapter titles, and will be typeset according to the current `chapterstyle`. You can modify their appearance by either using a different `chapterstyle` for them than for the actual chapters, or by changing some of the macros. As examples:

- Doing

```
\renewcommand{\printXtitle}[1]{\hfill\Large\itshape #1}
```

will print the title right justified in a Large italic font.

- For a Large bold centered title you can do

```
\renewcommand{\printXtitle}[1]{\centering\Large\bfseries #1}
```

- Writing

```
\renewcommand{\afterXtitle}{%  
    \thispagestyle{empty}\afterchaptertitle}
```

will result in the first page of the listing using the *empty* pagestyle instead of the default *chapter* pagestyle.

- Doing

```
\renewcommand{\afterXtitle}{%  
    \par\nobreak \mbox{\hfill{\normalfont Page}}\par\nobreak}
```

will put the word 'Page' flushright on the line following the title.

## 9.2.2 Typesetting the entries

Commands are also provided to enable finer control over the typesetting of the different kinds of entries. The parameters defining the default layout of the entries are illustrated as part of the layouts package [Wil03a] or in [MG<sup>+</sup>04, p. 51], and are repeated in Figure 9.2.

Most of the commands in this section start as `\cft...`, where `cft` is intended as a mnemonic for *Table of Contents*, *List of Figures*, *List of Tables*.

```
\cftdot
```

In the default ToC typesetting only the more minor entries have dotted leader lines between the sectioning title and the page number. The class provides for general leaders for all entries. The ‘dot’ in a leader is given by the value of `\cftdot`. Its default definition is `\newcommand{\cftdot}{.}` which gives the default dotted leader. By changing `\cftdot` you can use symbols other than a period in the leader. For example

```
\renewcommand{\cftdot}{\ensuremath{\ast}}
```

will result in a dotted leader using asterisks as the symbol.

```
\cftdotsep
\cftnodots
```

Each kind of entry can control the separation between the dots in its leader (see below). For consistency though, all dotted leaders should use the same spacing. The macro `\cftdotsep` specifies the default spacing. However, if the separation is too large then no dots will be actually typeset. The macro `\cftnodots` is a separation value that is ‘too large’.

```
\setpnumwidth{<length>}
\setrmarg{<length>}
```

The page numbers are typeset in a fixed width box. The command `\setpnumwidth` can be used to change the width of the box (LaTeX’s internal `\@pnumwidth`). The title texts will end before reaching the righthand margin. `\setrmarg` can be used to set this distance (LaTeX’s internal `\@tocrmarg`). Note that the length used in `\setrmarg` should be greater than the length set in `\setpnumwidth`. These values should remain constant in any given document.

This manual requires more space for the page numbers than the default, so the following was set in the preamble:

```
\setpnumwidth{2.55em}
\setrmarg{3.55em}
```

```
\cftparskip
```

Normally the `\parskip` in the ToC, etc., is zero. This may be changed by changing the length `\cftparskip`. Note that the current value of `\cftparskip` is used for the ToC, LoF and LoT, but you can change the value before calling `\tableofcontents` or `\listoffigures` or `\listoftables` if one or other of these should have different values (which is not a good idea).

Again for convenience, in the following I will use *K* to stand for the *kind* of entry, as listed in Table 9.3; that is, any of the following:

- book for `\book` titles.
- part for `\part` titles

## 9. 목차 만들기

Table 9.3: Value of K in macros for styling entries in a ‘List of...’

K	Kind of entry	K	Kind of entry
book	\book title	subparagraph	\subparagraph title
part	\part title	figure	figure caption
chapter	\chapter title	subfigure	subfigure caption
section	\section title	table	table caption
subsection	\subsection title	subtable	subtable caption
subsubsection	\subsubsection title	...	...

- chapter for \chapter titles
- section for \section titles
- subsection for \subsection titles
- subsubsection for \subsubsection titles
- paragraph for \paragraph titles
- subparagraph for \subparagraph titles
- figure for figure \caption titles
- subfigure for subfigure \caption titles
- table for table \caption titles
- subtable for subtable \caption titles

```
\cftbookbreak
\cftpartbreak
\cftchapterbreak
```

When \l@book starts to typeset a \book entry in the ToC the first thing it does is to call the macro \cftbookbreak. This is defined as:

```
\newcommand{\cftbookbreak}{\addpenalty{-\@highpenalty}}
```

which encourages a page break before rather than after the entry. As usual, you can change \cftbookbreak to do other things that you feel might be useful. The macros \cftpartbreak and \cftchapterbreak apply to \part and \chapter entries, respectively, and have the same default definitions as \cftbookbreak.

```
\cftbeforeKskip
```

This length controls the vertical space before an entry. It can be changed by using \setlength.

```
\cftKindent
```

This length controls the indentation of an entry from the left margin (*indent* in Figure 9.2). It can be changed using \setlength.

```
\cftKnumwidth
```

This length controls the space allowed for typesetting title numbers (*numwidth* in Figure 9.2). It can be changed using `\setlength`. Second and subsequent lines of a multiline title will be indented by this amount.

The remaining commands are related to the specifics of typesetting an entry. This is a simplified pseudo-code version for the typesetting of numbered and unnumbered entries.

```
{\cftKfont {\cftKname \cftKpresnum SNUM\cftKaftersnum\hfil} \cftKaftersnumb TITLE}}
{\cftKleader}{\cftKformatpnum{PAGE}}\cftKafterpnum\par
```

```
{\cftKfont TITLE}{\cftKleader}{\cftKformatpnum{PAGE}}\cftKafterpnum\par
```

where SNUM is the section number, TITLE is the title text and PAGE is the page number. In the numbered entry the pseudo-code

```
{\cftKpresnum SNUM\cftKaftersnum\hfil}
```

is typeset within a box of width `\cftKnumwidth`, see the `\...numberlinebox` macros later on.

```
\cftKfont
```

This controls the appearance of the title (and its preceding number, if any). It may be changed using `\renewcommand`.

`\cftKfont` takes no arguments as such, but the the number and title is presented to it as an argument. Thus one may end `\cftKfont` with a macro taking one argument, say `\MakeUppercase`, and which then readjust the text as needed.

**Caveat.** Please read the section entitled [About upper or lower casing TOC entries](#) on page 156 if you consider using upper/lower cased TOC entries and especially if you are also using the `hyperref` package.

```
\cftKname
```

The first element typeset in an entry is `\cftKname`.<sup>3</sup> Its default definition is

```
\newcommand*{\cftKname}{}
```

so it does nothing. However, to put the word ‘Chapter’ before each chapter number in a ToC and ‘Fig.’ before each figure number in a LoF do:

```
\renewcommand*{\cftchaptername}{Chapter\space}
\renewcommand*{\cftfigurename}{Fig.\space}
```

```
\cftKpresnum \cftKaftersnum \cftKaftersnumb
```

The section number is typeset within a box of width `\cftKnumwidth`. Within the box the macro `\cftKpresnum` is first called, then the number is typeset, and the `\cftKaftersnum` macro is called after the number is typeset. The last command within the box is `\hfil` to make the box contents flushleft. After the box is typeset the `\cftKaftersnumb` macro is called before typesetting the title text. All three of these can be changed by `\renewcommand`. By default they are defined to do nothing.

<sup>3</sup>Suggested by Danie Els.

## 9. 목차 만들기

---

```
\numberline{⟨num⟩}  
\partnumberline{⟨num⟩}  
\partnumberline{⟨num⟩}  
\chapternumberline{⟨num⟩}
```

In the ToC, the macros `\booknumberline`, `\partnumberline` and `\chapternumberline` are responsible respectively for typesetting the `\book`, `\part` and `\chapter` numbers, whereas `\numberline` does the same for the sectional siblings. Internally they use `\cftKpresnum`, `\cftKaftersnum` and `\cftKaftersnumb` as above. If you do not want, say, the `\chapter` number to appear you can do:

```
\renewcommand{\chapternumberline}[1]{}
```

```
\numberlinehook{⟨num⟩}  
\cftwhatismyname  
\booknumberlinehook{⟨num⟩}  
\partnumberlinehook{⟨num⟩}  
\chapternumberlinehook{⟨num⟩}  
\numberlinebox{⟨length⟩}{⟨code⟩}  
\booknumberlinebox{⟨length⟩}{⟨code⟩}  
\partnumberlinebox{⟨length⟩}{⟨code⟩}  
\chapternumberlinebox{⟨length⟩}{⟨code⟩}
```

Inside the four `\...numberline` macros, the first thing we do is to give the `\...numberline` argument to a hook. By default this hook does nothing. But, with the right tools,<sup>4</sup> they can be used to record the widths of the sectional number. Which then can be used to automatically adjust the various `⟨numwidth⟩` and `⟨indent⟩` within the `\cftsetindents` macro. In order to tell the section types apart (they all use `\numberline`), the value of the `\cftwhatismyname` macro will locally reflect the current type.

As mentioned earlier, the `\book`, `\part` and `\chapter` numbers are typeset inside a box of certain fixed widths. Sometimes it can be handy *not* having this box around. For this you can redefine one of the four `\...numberlinebox` macros listed above. For example via

```
\renewcommand{\chapternumberlinebox}[2]{#2}
```

The first argument is the width of the box to be made. All four macros are defined similar to this (where `#1` is a length)

```
\newcommand{\chapternumberlinebox}[2]{%  
  \hb@xt@#1{#2\hfil}}
```

```
\cftKleader  
\cftKdotsep
```

`\cftKleader` defines the leader between the title and the page number; it can be changed by `\renewcommand`. The spacing between any dots in the leader is controlled by `\cftKdotsep` (`\@dotsep` in Figure 9.2). It can be changed by `\renewcommand` and its value must be either a number (e.g., 6.6 or `\cftdotsep`) or `\cftnodots` (to disable the dots). The spacing is in terms of *math units* where there are 18mu to 1em.

The default leaders macro is similar to

---

<sup>4</sup>Which we do not currently supply..., but have a look at Snippet C.6 on page 399.

```
\newcommand{\cftsectionleader}{\normalfont\cftdotfill{\cftsectiondotsep}}
```

Note that the spacing of the dots is affected by the font size (as the math unit is affected by the font size). Also note that the `\cftchapterleader` is bold by default.

```
\cftKformatpnum{<pnum>}
\cftKformatpnumhook{<num>}
\cftKpagefont
```

The macro `\cftKformatpnum` typesets an entry's page number, using the `\cftKpagefont`.<sup>5</sup> The default definition is essentially:

```
\newcommand*{\cftKformatpnum}[1]{%
  \cftKformatpnumhook{#1}%
  \hbox to \@pnumwidth{\hfil{\cftKpagefont #1}}}
```

which sets the number right justified in a box `\@pnumwidth` wide. To have, say, a `\part` page number left justified in its box, do:

```
\renewcommand*{\cftpartformatpnum}[1]{%
  \cftpartformatpnumhook{#1}%
  \hbox to \@pnumwidth{\cftpartpagefont #1}}
```

The `\cftKformatpnumhook` does nothing by default (other than eating the argument), but could be redefined to record the widest page number and report it back, even reusing it to auto adjust on the next run to set `\@pnumwidth` (see `\setpnumwidth`).

```
\cftKafterpnum
```

This macro is called after the page number has been typeset. Its default is to do nothing. It can be changed by `\renewcommand`.

```
\cftsetindents{<kind>}{<indent>}{<numwidth>}
```

The command `\cftsetindents` sets the `<kind>` entries *indent* to the length `<indent>` and its *numwidth* to the length `<numwidth>`. The `<kind>` argument is the name of one of the standard entries (e.g., subsection) or the name of entry that has been defined within the document. For example

```
\cftsetindents{figure}{0em}{1.5em}
```

will make figure entries left justified.

This manual requires more space for section numbers in the ToC than the default (which allows for three digits). Consequently the preamble contains the following:

```
\cftsetindents{section}{1.5em}{3.0em}
\cftsetindents{subsection}{4.5em}{3.9em}
\cftsetindents{subsubsection}{8.4em}{4.8em}
\cftsetindents{paragraph}{10.7em}{5.7em}
\cftsetindents{subparagraph}{12.7em}{6.7em}
```

Note that changing the indents at one level implies that any lower level indents should be changed as well.

<sup>5</sup>This addition to the class was suggested by Dan Luecking, ctt Re: setting numbers in toc in their natural width box, 2007/08/15.

## 9. 목차 만들기

---

Various effects can be achieved by changing the definitions of `\cftKfont`, `\cftKaftersnum`, `\cftKaftersnumb`, `\cftKleader` and `\cftKafterpnum`, either singly or in combination. For the sake of some examples, assume that we have the following initial definitions

```
\newcommand*\cftKfont{}\cftKfont{}
\newcommand*\cftKaftersnum{}\cftKaftersnum{}
\newcommand*\cftKaftersnumb{}\cftKaftersnumb{}
\newcommand*\cftKleader{\cftdotfill{\cftKdotsep}}
\newcommand*\cftKdotsep{\cftdotsep}
\newcommand*\cftKpagefont{}\cftKpagefont{}
\newcommand*\cftKafterpnum{}\cftKafterpnum{}
```

Note that the same font should be used for the title, leader and page number to provide a coherent appearance.

- To eliminate the dots in the leader:

```
\renewcommand*\cftKdotsep{\cftnodots}
```

- To put something (e.g., a name) before the title (number):

```
\renewcommand*\cftKname{SOMETHING }
```

- To add a colon after the section number:

```
\renewcommand*\cftKaftersnum{.}
```

- To put something before the title number, add a double colon after the title number, set everything in bold font, and start the title text on the following line:

```
\renewcommand*\cftKfont{\bfseries}
\renewcommand*\cftKleader{\bfseries\cftdotfill{\cftKdotsep}}
\renewcommand*\cftKpagefont{\bfseries}
\renewcommand*\cftKname{SOMETHING }
\renewcommand*\cftKaftersnum{::}
\renewcommand*\cftKaftersnumb{\}
```

If you are adding text in the number box in addition to the number, then you will probably have to increase the width of the box so that multiline titles have a neat vertical alignment; changing box widths usually implies that the indents will require modification as well. One possible method of adjusting the box width for the above example is:

```
\newlength{\mylen} % a "scratch" length
\settowidth{\mylen}{\bfseries\cftKaftersnum}
\addtolength{\cftKnumwidth}{\mylen} % add the extra space
```

- To set the chapter number and title as just 'NUM · TITLE', i.e. un-boxed number plus a symbolic separator, use

```
\renewcommand\cftchapteraftersnumb{\enspace\textperiodcentered\enspace}
\renewcommand\chapternumberlinebox[2]{#2}
```

– of course, it works best, only if the TITLE is a single line.



- Make chapter titles lower case small caps

```
\renewcommand\cftchapterfont{\scshape\MakeTextLowercase}
```

– here we do not touch the case of any math.

- To set the section numbers flushright:

```
\setlength{\mylen}{0.5em} % extra space at end of number
\renewcommand{\cftKpresnum}{\hfill} % note the double 'l'
\renewcommand{\cftKaftersnum}{\hspace*{\mylen}}
\addtolength{\cftKnumwidth}{\mylen}
```

In the above, the added initial `\hfill` in the box overrides the final `\hfil` in the box, thus shifting everything to the right hand end of the box. The extra space is so that the number is not typeset immediately at the left of the title text.

- To set the entry ragged left (but this only looks good for single line titles):

```
\renewcommand{\cftKfont}{\hfill\bfseries}
\renewcommand{\cftKleader}{}
```

- To set the titles ragged right instead of the usual flushright. Assuming that there are more than 100 pages in the document (otherwise adjust the length):

```
\setrmarg{3.55em plus 1fil}
```

where the last four characters before the closing brace are: digit 1, lowercase F, lowercase I, and lowercase L.

- To set the page number immediately after the entry text instead of at the righthand margin:

```
\renewcommand{\cftKleader}{ }
\renewcommand{\cftKafterpnum}{\cftparfillskip}
```

```
\cftparfillskip
```

By default the `\parfillskip` value is locally set to fill up the last line of a paragraph. Just changing `\cftKleader` as in the above example puts horrible interword spaces into the last line of the title. The `\cftparfillskip` command is provided just so that the above effect can be achieved.

```
\cftpagenumbersoff{<kind>}
\cftpagenumberon{<kind>}
```

The command `\cftpagenumbersoff` will eliminate the page numbers for *<kind>* entries in the listing, where *<kind>* is the name of one of the standard kinds of entries (e.g., subsection, or figure) or the name of a new entry defined in the document.

The command `\cftpagenumberon` reverses the effect of a corresponding `\cftpagenumbersoff` for *<kind>*.

For example, to eliminate page numbers for appendices in the ToC:

```
...
\appendix
\addtocontents{toc}{\cftpagenumbersoff{chapter}}
\chapter{First appendix}
```

If there are other chapter type headings to go into the ToC after the appendices (perhaps a bibliography or an index), then it will be necessary to do a similar

```
\addtocontents{toc}{\cftpagenumberson{chapter}}
```

after the appendices to restore the page numbering in the ToC.

Sometimes it may be desirable to make a change to the global parameters for an individual entry. For example, a figure might be placed on the end paper of a book (the inside of the front or back cover), and this needs to be placed in a LoF with the page number set as, say, ‘inside front cover’. If ‘inside front cover’ is typeset as an ordinary page number it will stick out into the margin. Therefore, the parameters for this particular entry need to be changed.

```
\cftlocalchange{<ext>}{<pnumwidth>}{<tocrmarg>}
```

The command `\cftlocalchange` will write an entry into the file with extension `<ext>` to reset the global `\@pnumwidth` and `\@tocrmarg` parameter lengths. The command should be called again after any special entry to reset the parameters back to their usual values. Any fragile commands used in the arguments must be protected.

```
\cftaddtitleline{<ext>}{<kind>}{<title>}{<page>}
\cftaddnumtitleline{<ext>}{<kind>}{<num>}{<title>}{<page>}
```

The command `\cftaddtitleline` will write a `\contentsline` entry into `<ext>` for a `<kind>` entry with title `<title>` and page number `<page>`. Any fragile commands used in the arguments must be protected. That is, an entry is made of the form:

```
\contentsline{<kind>}{<title>}{<page>}
```

The command `\cftaddnumtitleline` is similar to `\cftaddtitleline` except that it also includes `<num>` as the argument to `\numberline`. That is, an entry is made of the form

```
\contentsline{<kind>}{\numberline{<num> } <title>}{<page>}
```

As an example of the use of these commands, noting that the default LaTeX values for `\@pnumwidth` and `\@tocrmarg` are 1.55em and 2.55em respectively, one might do the following for a figure on the frontispiece page.

```
...
this is the frontispiece page with no number
draw or import the picture (with no \caption)
\cftlocalchange{lof}{4em}{5em} % make pnumwidth big enough for
                                % frontispiece and change margin
\cftaddtitleline{lof}{figure}{The title}{frontispiece}
\cftlocalchange{lof}{1.55em}{2.55em} % return to normal settings
\clearpage
...
```

Recall that a `\caption` command will put an entry in the `lof` file, which is not wanted here. If a caption is required, then you can either craft one yourself or, assuming that your general captions are not too exotic, use the `\legend` command (see later). If the illustration is numbered, use `\cftaddnumtitleline` instead of `\cftaddtitleline`.

Inserting stuff into the content lists

The next functions were suggested by Lars Madsen who found them useful if, for example, you had two versions of the ToC and you needed some aspects to be formatted differently.

```
\cftinsertcode{<name>}{<code>}
\cftinserthook{<file>}{<name>}
```

The `\cftinserthook` is somewhat like `\addtocontents` in that it enables you to insert a code hook into the ToC, etc., where `<file>` is the (toc, lof, ...) file and `<name>` is the ‘name’ of the hook. The `<code>` for the hook is specified via `\cftinsertcode` where `<name>` is the name you give to the hook. These can be used to make alterations to a ‘List of...’ on the fly. For example:

```
\cftinsertcode{A}{%
  \renewcommand*{\cftchapterfont}{\normalfont\scshape}
  ... }% code for ToC
...
\frontmatter
\tableofcontents
\cftinsertcode{G}{...}% code for LoF
\cftinsertcode{F}{...}% code for LoF
\listoffigures
...
\cftinserthook{lof}{G}
...
\chapter{...}
...
\mainmatter
\cftinserthook{toc}{A}
\cftinserthook{lof}{F}
\chapter{...}
...
```

If you do not use `\cftinsertcode` *before* calling the command to type the ‘List of...’ that it is intended for then nothing will happen. No harm will come if a matching `\cftinserthook` is never used. No harm occurs either if you call `\cftinserthook` and there is no prior matching `\cftinsertcode`.

One use of these ToC hooks is reusing the ToC data to, say, create chapter ToC’s. The code for this is shown in Snippet C.7 on page 401. In the snippet we use the following two hooks that are executed right before and right after `\chapter`, `\part`, `\book`, `\appendixpage` writes to the ToC. By default they do nothing.<sup>6</sup>

```
\mempreadchaptertotoc
\mempostchaptertotoc
\mempreadparttotoc
\mempostparttotoc
\mempreadbooktotoc
\mempostbooktotoc
\mempreadappagetotoc
\mempostappagetotoc
```

<sup>6</sup>More hooks may be added in later releases.

## 9. 목차 만들기

---

Extra chapter material in the ToC

`\precistoc{<text>} \precistocfont \precistocformat`

The `\chapterprecistoc` macro puts `\precistoc{<text>}` into the toc file. Further information as to the definition of this macro can be found in section 6.5.3.

About upper or lower casing TOC entries

Some designs call for upper (or lower casing) TOC entries. This is possible but the solution depends on whether the `hyperref` package is used or not.

Without `hyperref` one can simply end the `\cftKfont` with say `\MakeTextUppercase` and the K-type entry will be upper cased.

With `hyperref` the possibilities are limited. Explanation: The upper/lower casing macros are not that robust, and need the content to be simple.<sup>7</sup> When `hyperref` is used, the hyperlink is wrapped around the entry before `\cftKfont` gains access to it, and is thus generally too complicated for, say, `\MakeTextUppercase` to handle. The follow workaround draw inspiration from <http://tex.stackexchange.com/q/11892/3929>.

`\settocpreprocessor{<type>}{<code>}`

Here `<type>` is one of `chapter`, `part` or `book`.<sup>8</sup> And `<code>` can be something like this example:

```
\makeatletter
\settocpreprocessor{chapter}{%
  \let\tempf@rtoc\f@rtoc%
  \def\f@rtoc{%
    \texorpdfstring{\MakeTextUppercase{\tempf@rtoc}}{\tempf@rtoc}}%
}
\makeatother
```

Where `\f@rtoc` is a placeholder inside `\chapter`, `\part` and `\book`, holding the material to be written to the actual TOC file before `hyperref` accesses it. This way the upper casing is sneaked into the TOC file, and the bookmark part of `hyperref` will not complain about the `\MakeTextUppercase` in the data. Of course, you will not have upper cased titles in the bookmark list.

### 9.2.3 Example: No section number

There are at least two ways of listing section titles in the ToC without displaying their numbers and both involve the `\numberline` command which typesets the number in a box.

The first method redefines `\numberline` so it throws away the argument. We do this by modifying the `\cftKfont` macro which is called before `\numberline` and the `\cftKafterpnum` which is called after the page number has been typeset.

```
\let\oldcftsf\cftsectionfont% save definition of \cftsectionfont
\let\oldcftspn\cftsectionafterpnum% and of \cftsectionafterpnum
\renewcommand*{\cftsectionfont}{%
  \let\oldnln\numberline% save definition of \numberline
  \renewcommand*{\numberline}[1]{}% change it
```

---

<sup>7</sup>For some definition of simple.

<sup>8</sup>If needed we will attempt to add a similar feature to the rest of the sectional types, please write the maintainer.

---

```

\oldcftsf}                % use original \cftsectionfont
\renewcommand*{\cftsectionafterpnum}{%
\let\numberline\oldnl%    % restore original \numberline
\oldcftspn}               % use original \cftsectionafterpnum

```

Probing a little deeper, the `\numberline` macro is called to typeset section numbers and is defined as:

```

\renewcommand*{\numberline}[1]{%
\hb@xt@{\@tempdima{\@cftbsnum #1\@cftasnum\hfil}\@cftasnumb}

```

Each kind of heading lets the `\@cftbsnum` macro to `\cftKpresnum`, and the `\@cftasnum` macro to `\cftKaftersnum`, and the `\@cftasnumb` macro to `\cftKaftersnumb` as appropriate for the heading. The second method for killing the number uses a TeX method for defining a macro with a delimited argument.

```

\def\cftsectionpresnum #1\@cftasnum{}

```

The interpretation of this is left as an exercise for anyone who might be interested.

#### 9.2.4 Example: Multicolumn entries

If the subsection entries, say, in the ToC are going to be very short it might be worth setting them in multiple columns. Here is one way of doing that which depends on using the `multicol` package [Mit18]. This assumes that subsections will be the lowest heading in the ToC.

```

\newcounter{toccols}
\setcounter{toccols}{3}
\newenvironment{mysection}[1]{%
\section{#1}%
\addtocontents{toc}{\protect\begin{multicols}{\value{toccols}}}%
{\addtocontents{toc}{\protect\end{multicols}}}

```

The counter `toccols` controls the number of columns to be used. For each section where you want subsections to be typeset in multiple columns in the ToC, use the `mysection` environment instead of `\section`, like:

```

\begin{mysection}{Columns}
...
\subsection{Fat}
...
\subsection{Thin}
...
\end{mysection}

```

Any ToC entries generated from within the environment will be enclosed in a `multicols` environment in the ToC. The `\protect`s have to be used because environment `\begin` and `\end` commands are fragile.

#### 9.2.5 Example: Multiple contents

It is easy to have two ToCs, one short and one long, when they are of the same style, like this:

## 9. 목차 만들기

---

```
...
\renewcommand*{\contentsname}{Short contents}
\setcounter{tocdepth}{0}% chapters and above
\tableofcontents
% \clearpage
\renewcommand*{\contentsname}{Contents}
\setcounter{tocdepth}{2}% subsections and above
\tableofcontents
```

(Note that you can't use `\settocdepth` in this case as that writes the change into the ToC, so that the second use would override the first.)

This book has both a short and a long ToC, neither of which look like those typically associated with LaTeX. This is how they were done.

The general style for the ToC, etc., is specified in the `memsty` package file.

```
%%% need more space for ToC page numbers
\setpnumwidth{2.55em}
\setrmarg{3.55em}
%%% need more space for ToC section numbers
\cftsetindents{section}{1.5em}{3.0em}
\cftsetindents{subsection}{4.5em}{3.9em}
\cftsetindents{subsubsection}{8.4em}{4.8em}
\cftsetindents{paragraph}{10.7em}{5.7em}
\cftsetindents{subparagraph}{12.7em}{6.7em}
%%% need more space for LoF & LoT numbers
\cftsetindents{figure}{0em}{3.0em}
\cftsetindents{table}{0em}{3.0em}
%%% remove the dotted leaders
\renewcommand{\cftsectiondotsep}{\cftnodots}
\renewcommand{\cftsubsectiondotsep}{\cftnodots}
\renewcommand{\cftsubsubsectiondotsep}{\cftnodots}
\renewcommand{\cftparagraphdotsep}{\cftnodots}
\renewcommand{\cftsubparagraphdotsep}{\cftnodots}
\renewcommand{\cftfiguredotsep}{\cftnodots}
\renewcommand{\cfttabledotsep}{\cftnodots}
```

Three macros are defined to control the appearance of the short and the long ToC. First, the macro `\setupshorttoc` for the short version. The first few lines ensure that only chapter or part titles will be set, and any chapter precis text or `tocdepth` changes will be ignored. The rest of the code specifies how the chapter titles are to be typeset, and finally the part and book titles.

```
\newcommand*{\setupshorttoc}{%
  \renewcommand*{\contentsname}{Short contents}
  \let\oldchangetocdepth\changetocdepth
  \renewcommand*{\changetocdepth}[1]{%
    \let\oldprecistocetext\precistocetext
    \renewcommand{\precistocetext}[1]{%
      \let\oldcftchapterfillnum\cftchapterfillnum
```

---

```

\setcounter{tocdepth}{0}% chapters and above
\renewcommand*{\cftchapterfont}{\hfill\sffamily}
\renewcommand*{\cftchapterleader}{\textperiodcentered\space}
\renewcommand*{\cftchapterafterpnum}{\cftparfillskip}
%% \setpnumwidth{0em}
%% \setpnumwidth{1.5em}
\renewcommand*{\cftchapterfillnum}[1]{%
  {\cftchapterleader}\nobreak
  \hbox to 1.5em{\cftchapterpagefont ##1\hfil}\cftchapterafterpnum\par}
\setrmarg{0.3\textwidth}
\setlength{\unitlength}{\@tocrmarg}
\addtolength{\unitlength}{1.5em}
\let\oldcftpartformatpnum\cftpartformatpnum
\renewcommand*{\cftpartformatpnum}[1]{%
  \hbox to\unitlength{{\cftpartpagefont ##1}}}}
\let\oldcftbookformatpnum\cftbookformatpnum
\renewcommand*{\cftbookformatpnum}[1]{%
  \hbox to\unitlength{{\cftbookpagefont ##1}}}}

```

You can do many things using the `\cft...` macros to change the appearance of a ToC but they can't be entirely coerced into specifying the paragraphing of the `\subsection` titles. The `\setupparasubsecs` also went in the preamble.

```

\newcommand*{\setupparasubsecs}{%
  \let\oldnumberline\numberline
  \renewcommand*{\cftsubsectionfont}{\itshape}
  \renewcommand*{\cftsubsectionpagefont}{\itshape}
  \renewcommand{\l@section}[2]{%
    \def\numberline####1{\textit{####1}}~}%
    \leftskip=\cftsubsectionindent
    \rightskip=\@tocrmarg
%% \advance\rightskip 0pt plus \hsize % uncomment this for raggedright
%% \advance\rightskip 0pt plus 2em % uncomment this for semi-raggedright
    \parfillskip=\fill
    \ifhmode ,\ \else\noindent\fi
    \ignorespaces
    {\cftsubsectionfont ##1}~{\cftsubsectionpagefont##2}%
    \let\numberline\oldnumberline\ignorespaces}
}
\AtEndDocument{\addtocontents{toc}{\par}}

```

The above code changes the appearance of subsection titles in the ToC, setting each group as a single paragraph (each is normally set with a paragraph to itself). By uncommenting or commenting the noted lines in the code you can change the layout a little.

***Caveat.** We have an interesting caveat regarding `\setupparasubsecs` if you are using `hyperref` and you have subsubsections, that are not shown in the ToC. You may see some inline subsection entries showing up as ‘... text 15 ,...’, that is a strange space appears before the comma.*

## 9. 목차 만들기

---

*This is an artifact due to the way `hyperref` wraps itself around the ToC entries, even the ones that are not typeset, and thus an end of line space survives. We fix it using `\endlinechar`:*

```
\begingroup
\endlinechar=-1
\tableofcontents
\endgroup
```

*Note again that it only happen if you have subsubsections with an inline subsection entry list, and you are using `hyperref`.*

Normally, section titles (and below) are set as individual paragraphs. Effectively the first thing that is done is to end any previous paragraph, and also the last thing is to end the current paragraph. Notice that the main code above neither starts nor finishes a paragraph. If the group of subsections is followed by a section title, that supplies the paragraph end. The last line above ensures that the last entry in the toc file is `\par` as this might be needed to finish off a group of subsections if these are the last entries.

And thirdly for the main ToC, the macro `\setupmaintoc` reverts everything back to normal.

```
\newcommand*{\setupmaintoc}{%
  \renewcommand{\contentsname}{Contents}
  \let\changetocdepth\oldchangetocdepth
  \let\precistotext\oldprecistotext
  \let\cftchapterfillnum\oldcftchapterfillnum
  \addtodef{\cftchapterbreak}{\par}{}
  \renewcommand*{\cftchapterfont}{\normalfont\sffamily}
  \renewcommand*{\cftchapterleader}{%
    \sffamily\cftdotfill{\cftchapterdotsep}}
  \renewcommand*{\cftchapterafterpnum}{}
  \renewcommand{\cftchapterbreak}{\par\addpenalty{-\@highpenalty}}
  \setpnumwidth{2.55em}
  \setrmarg{3.55em}
  \setcounter{tocdepth}{2}
  \let\cftpartformatpnum\oldcftpartformatpnum
  \addtodef{\cftpartbreak}{\par}{}
  \let\cftbookformatpnum\oldcftbookformatpnum
  \addtodef{\cftbookbreak}{\par}{}
}
```

The first few lines restore some macros to their original definitions.

```
\addtodef{\cftchapterbreak}{\par}{}

```

ensures that a chapter entry starts off with a `\par`; this is needed when the previous entry is a group of subsections and their paragraph has to be ended. The remaining code lines simply set the appearance of the chapter titles and restore that for parts and books, as well as ensuring that they start off new paragraphs.

In the document itself, `\tableofcontents` was called twice, after the appropriate setups:

```
...
\setupshorttoc

```



```

\tableofcontents
\clearpage
\setupparasubsecs
\setupmaintoc
\tableofcontents
\setlength{\unitlength}{1pt}
...

```

After all this note that I ensured that `\unitlength` was set to its default value (it had been used as a scratch length in the code for `\setupparasubsecs`).

### 9.3 New ‘List of...’ and entries

```
\newlistof{<listofcom>}{<ext>}{<listofname>}
```

The command `\newlistof` creates a new ‘List of...’, and assorted commands to go along with it. The first argument, `<listofcom>` is used to define a new command called `\listofcom` which can then be used like `\listoffigures` to typeset the ‘List of...’. The `<ext>` argument is the file extension to be used for the new listing. The last argument, `<listofname>` is the title for the ‘List of...’. Unstarred and starred versions of `\listofcom` are created. The unstarred version, `\listofcom`, will add `<listofname>` to the ToC, while the starred version, `\listofcom*`, makes no entry in the ToC.

As an example:

```

\newcommand{\listanswername}{List of Answers}
\newlistof{listofanswers}{ans}{\listanswername}

```

will create a new `\listofanswers` command that can be used to typeset a listing of answers under the title `\listanswername`, where the answer titles are in an `ans` file. It is up to the author of the document to specify the ‘answer’ code for the answers in the document. For example:

```

\newcounter{answer}[chapter]
\renewcommand{\theanswer}{\arabic{answer}}
\newcommand{\answer}[1]{
  \refstepcounter{answer}
  \par\noindent\textbf{Answer \theanswer. #1}
  \addcontentsline{ans}{answer}{\protect\numberline{\theanswer}#1}\par}

```

which, when used like:

```
\answer{Hard} The \ldots
```

will print as:

```

Answer 1. Hard
The ...

```

As mentioned above, the `\newlistof` command creates several new commands in addition to `\listofcom`, most of which you should now be familiar with. For convenience, assume that `\newlistof{...}{X}{...}` has been issued so that `X` is the new file extension and corresponds to the `X` in §9.2.1. Then in addition to `\listofcom` the following new commands will be made available.

## 9. 목차 만들기

---

The four commands, `\Xmark`, `\Xheadstart`, `\printXtitle`, and `\afterXtitle`, are analogous to the commands of the same names described in §9.2.1 (internally the class uses the `\newlistof` macro to define the ToC, LoF and LoT). In particular the default definition of `\Xmark` is equivalent to:

```
\newcommand{\Xmark}{\markboth{listofname}{listofname}}
```

However, this may well be altered by the particular `\pagestyle` in use.

```
Xdepth
```

The counter `Xdepth` is analogous to the standard `tocdepth` counter, in that it specifies that entries in the new listing should not be typeset if their numbering level is greater than `Xdepth`. The default definition is equivalent to

```
\setcounter{Xdepth}{1}
```

```
\insertchapterspace  
\addtocontents{<macro>}{<prepend>}{<append>}
```

Remember that the `\chapter` command uses `\insertchapterspace` to insert vertical spaces into the LoF and LoT. If you want similar spaces added to your new listing then you have to modify `\insertchapterspace`. The easiest way to do this is via the `\addtocontents` macro, like:

```
\addtocontents{ans}{\protect\addvspace{10pt}}
```

The `\addtocontents` macro is described later in §18.10.

The other part of creating a new ‘List of...’, is to specify the formatting of the entries, i.e., define an appropriate `\l@kind` macro.

```
\newlistentry[<within>]{<cntr>}{<ext>}{<level-1>}
```

The command `\newlistentry` creates the commands necessary for typesetting an entry in a ‘List of...’. The first required argument, `<cntr>` is used to define a new counter called `cntr`, unless `cntr` is already defined. The optional `<within>` argument can be used so that `cntr` gets reset to one every time the counter called `within` is changed. That is, the first two arguments when `cntr` is not already defined, are equivalent to calling `\newcounter{<cntr>}[<within>]`. If `cntr` is already defined, `\newcounter` is not called. `cntr` is used for the number that goes along with the title of the entry.

The second required argument, `<ext>`, is the file extension for the entry listing. The last argument, `<level-1>`, is a number specifying the numbering level minus one, of the entry in a listing.

Calling `\newlistentry` creates several new commands used to configure the entry. So in order to configure the list look of our previous answer example we would add

```
\newlistentry{answer}{ans}{0}
```

Assuming that `\newlistentry` is called as `\newlistentry[within]{K}{X}{N}`, where `K` and `X` are similar to the previous uses of them (e.g., `K` is the kind of entry `X` is the file extension), and `N` is an integer number, then the following commands are made available.

The set of commands `\cftbeforeKskip`, `\cftKfont`, `\cftKpresnum`, `\cftKaftersnum`, `\cftKaftersnumb`, `\cftKleader`, `\cftKdotsep`, `\cftKpagefont`, and `\cftKafterpnum`, are

analogous to the commands of the same names described in §9.2.2. Their default values are also as described earlier.

The default values of `\cftKindent` and `\cftKnumwidth` are set according to the value of the  $\langle level-1 \rangle$  argument (i.e.,  $N$  in this example). For  $N=0$  the settings correspond to those for figures and tables, as listed in Table 9.1 for the memoir class. For  $N=1$  the settings correspond to subfigures, and so on. For values of  $N$  less than zero or greater than four, or for non-default values, use the `\cftsetindents` command to set the values.

`\l@K` is an internal command that typesets an entry in the list, and is defined in terms of the above `\cft*K*` commands. It will not typeset an entry if  $X_{depth}$  is  $N$  or less, where  $X$  is the listing’s file extension.

The command `\theK` prints the value of the  $K$  counter. It is initially defined so that it prints arabic numerals. If the optional  $\langle within \rangle$  argument is used, `\theK` is defined as

```
\renewcommand{\theK}{\thewithin.\arabic{K}}
```

otherwise as

```
\renewcommand{\theK}{\arabic{K}}
```

As an example of the independent use of `\newlistentry`, the following will set up for sub-answers.

```
\newlistentry[answer]{subanswer}{ans}{1}
\renewcommand{\thesubanswer}{\theanswer.\alph{subanswer}}
\newcommand{\subanswer}[1]{
  \refstepcounter{subanswer}
  \par\textbf{\thesubanswer} #1
  \addcontentsline{ans}{subanswer}{\protect\numberline{\thesubanswer}#1}
  \setcounter{ansdepth}{2}
}
```

And then:

```
\answer{Harder} The \ldots
\subanswer{Reformulate the problem} It assists \ldots
```

will be typeset as:

<p><b>Answer 2. Harder</b>  The ...  <b>2.a) Reformulate the problem</b> It assists ...</p>
---

By default the answer entries will appear in the List of Answers listing (typeset by the `\listofanswers` command). In order to get the subanswers to appear, the `\setcounter{ansdepth}{2}` command was used above.

To turn off page numbering for the subanswers, do

```
\cftpagenumbersoff{subanswer}
```

As another example of `\newlistentry`, suppose that an extra sectioning division below subparagraph is required, called subsubpara. The `\subsubpara` command itself can be defined via the LaTeX kernel `\@startsection` command. Also it is necessary to define a `\subsubparamark` macro, a new subsubpara counter, a `\thesubsubpara` macro and a `\l@subsubpara` macro. Using `\newlistentry` takes care of most of these as shown below; remember the caveats about commands with @ signs in them (see §E.4).

---

```

\newcommand{\subsubpara}{\@startsection{subpara}
  {6}                                % level
  {\parindent}                      % indent from left margin
  {3.25ex \@plus1ex \@minus .2ex} % skip above heading
  {-1em}                            run-in heading with % 1em between title & text
  {\normalfont\normalsize\itshape} % italic number and title
}
\newlistentry[subparagraph]{subsubpara}{toc}{5}
\cftsetindents{subsubpara}{14.0em}{7.0em}
\newcommand*{\subsubparamark}[1]{% % gobble heading mark

```

Each ‘List of...’ uses a file to store the list entries, and these files must remain open for writing throughout the document processing. TeX has only a limited number of files that it can keep open, and this puts a limit on the number of listings that can be used. For a document that includes a ToC but no other extra ancillary files (e.g., no index or bibliography output files) the maximum number of LoX’s, including a LoF and LoT, is no more than about eleven. If you try and create too many new listings LaTeX will respond with the error message:

No room for a new write

If you get such a message the only recourse is to redesign your document.

### 9.3.1 Example: plates

As has been mentioned earlier, some illustrations may be tipped in to a book. Often, these are called *plates* if they are on glossy paper and the rest of the book is on ordinary paper. We can define a new kind of Listing for these.

```

\newcommand{\listplatenam}{Plates}
\newlistof{listofplates}{lop}{\listplatenam}
\newlistentry{plate}{lop}{0}
\cftpagenumbersoff{plate}

```

This code defines the `\listofplates` command to start the listing which will be titled ‘Plates’ from the `\listplatenam` macro. The entry name is `plate` and the file extension is `lop`. As plate pages typically do not have printed folios, the `\cftpagenumbersoff` command has been used to prohibit page number printing in the listing.

If pages are tipped in, then they are put between a verso and a recto page. The `afterpage` package [Car95] lets you specify something that should happen after the current page is finished. The next piece of code uses the package and its `\afterpage` macro to define two macros which let you specify something that is to be done after the next verso (`\afternextverso`) or recto (`\afternextrecto`) page has been completed.

```

\newcommand{\afternextverso}[1]{%
  \afterpage{\ifodd\c@page #1\else\afterpage{#1}\fi}}
\newcommand{\afternextrecto}[1]{%
  \afterpage{\ifodd\c@page\afterpage{#1}\else #1\fi}}

```

The `\pageref{<labelid>}` command typesets the page number corresponding to the location in the document where `\label{<labelid>}` is specified. The following code defines

two macros<sup>9</sup> that print the page number before (`\priorpageref`) or after (`\nextpageref`) that given by `\pageref`.

```
\newcounter{mempref}
\newcommand{\priorpageref}[1]{%
  \setcounter{mempref}{\pageref{#1}}\addtocounter{mempref}{-1}\themempref}
\newcommand{\nextpageref}[1]{%
  \setcounter{mempref}{\pageref{#1}}\addtocounter{mempref}{1}\themempref}
```

With these preliminaries out of the way, we can use code like the following for handling a set of physically tipped in plates.

```
\afternextverso{\label{tip}
  \addtocontents{lop}{%
    Between pages \priorpageref{tip} and \pageref{tip}
    \par\vspace*{\baselineskip}}
  \addcontentsline{lop}{plate}{First plate}
  \addcontentsline{lop}{plate}{Second plate}
  ...
  \addcontentsline{lop}{plate}{Nth plate}
}
```

This starts off by waiting until the next recto page is started, which will be the page immediately after the plates, and then inserts the label `tip`. The `\addtocontents` macro puts its argument into the plate list `lop` file, indicating the page numbers before and after the set of plates. With the plates being physically added to the document it is not possible to use `\caption`, instead the `\addcontentsline` macros are used to add the plate titles to the `lop` file.

With a few modifications the code above can also form the basis for listing plates that are electronically tipped in but do not have printed folios or `\captions`.

## 9.4 Chapter precis

See section 6.5.3 on page 91.

## 9.5 Contents lists and bookmarks

With the `hyperref` package, the table of contents is often added as a list of bookmarks thus providing a nice navigation for the user. There is one slight problem though: when using, say, parts in the document, all chapters in that part ends up as a child of this part bookmark—including the index and bibliography. A simple fix to this is to add

```
\makeatletter
\renewcommand*{\toclevel@chapter}{-1}
\makeatother
```

just before the material you would like to pull out of the part tree.

A better solution is the `bookmark` package, add it to the preamble, and add

```
\bookmarksetup{startatroot}
```

before the stuff you want to have moved out of, say, a part.

---

<sup>9</sup>These only work for arabic page numbers.



# Ten

---

## Floats and captions

---

A float environment is a particular kind of box — one that LaTeX decides where it should go although you can provide hints as to where it should be placed; all other boxes are put at the point where they are defined. Within reason you can put what you like within a float but it is unreasonable, for example, to put a float inside another float. The standard classes provide two kinds of float environments, namely `figure` and `table`. The only difference between these is the naming and numbering of any caption within the environments — a `\caption` in a `figure` environment uses `\figurename` while a `\caption` in a `table` environment uses `\tablename`. Figures and tables are numbered sequentially but the two numbering schemes are independent of each other.

The class provides means of defining new kinds of floats. It also provides additional forms of captions for use both within and outside float environments together with handles for changing the style of captions.

### 10.1 New float environments

It is often forgotten that the LaTeX float environments come in both starred and unstarred forms. The unstarred form typesets the float contents in one column, which is the most usual form for a book. The starred form typesets the contents of the float across the top of both columns in a `twocolumn` document. In a `onecolumn` document there is no difference between the starred and unstarred forms.

`\newfloat[⟨within⟩]{⟨fenv⟩}{⟨ext⟩}{⟨capname⟩}`

The `\newfloat` command creates two new floating environments called `⟨fenv⟩` and `⟨fenv*⟩`. If there is not already a counter defined for `⟨fenv⟩` a new one will be created to be restarted by the counter `⟨within⟩`, if that is specified. A caption within the environment will be written out to a file with extension `⟨ext⟩`. The caption, if present, will start with `⟨capname⟩`. For example, the `figure` float for the class is defined as:

```
\newfloat[chapter]{figure}{lof}{\figurename}
\renewcommand{\thefigure}{%
  \ifnum\c@chapter>\z@ \thechapter.\fi \@arabic\c@figure}
```

The last bit of the definition is internal code to make sure that if a figure is in the document before chapter numbering starts, then the figure number will not be preceded by a non-existent chapter number.

The captioning style for floats defined with `\newfloat` is the same as for the figures and tables.

The `\newfloat` command generates several new commands, some of which are internal LaTeX commands. For convenience, assume that the command was called as

```
\newfloat{F}{X}{capname}
```

so `F` is the name of the float environment and also the name of the counter for the caption, and `X` is the file extension. The following float environment and related commands are then created.

```
\begin{F} float material \end{F}
\begin{F*} float material \end{F*}
```

The new float environment is called `F`, and can be used as either `\begin{F}` or `\begin{F*}`, with the matching `\end{F}` or `\end{F*}`. It is given the standard default position specification of `[tbp]`.

```
Xdepth
```

The `Xdepth` counter is analogous to the standard `tocdepth` counter in that it specifies that entries in a listing should not be typeset if their numbering level is greater than `Xdepth`. The default definition is

```
\setcounter{Xdepth}{1}
```

To have a subfloat of `X` appear in the listing do

```
\setcounter{Xdepth}{2}
```

As an example, suppose you wanted both figures (which come with the class), and diagrams. You could then do something like the following.

```
\newcommand{\diagramname}{Diagram}
\newcommand{\listdiagramname}{List of Diagrams}
\newlistof{listofdiagrams}{dgm}{\listdiagramname}
\newfloat{diagram}{dgm}{\diagramname}
\newlistentry{diagram}{dgm}{0}
\begin{document}
...
\listoffigures
\listofdiagrams
...
\begin{diagram}
\caption{A diagram} \label{diag1}
...
\end{diagram}
As diagram~\ref{diag1} shows ...
```

```
\setfloatadjustment{<floatname>}{<code>}
```

Often it is useful to add some global configuration to a given type of float such that one will not have to add this to each and every float. For example to have all (floating) figures and tables automatically centered plus have all (floating) tables typeset in `\small` use

```
\setfloatadjustment{figure}{\centering}
\setfloatadjustment{table}{\small\centering}
```



## 10.1.1 Margin floats

We also provide two environments to insert an image or table into the margin (using `\marginpar`). The construction is inspired by the Tufte  $\LaTeX$  collection.

```
\begin{marginfigure}[<len>] float material \end{marginfigure}
\begin{margintable}[<len>] float material \end{margintable}
```

Because this is inserted differently than the ordinary figure or table floats, one might get into the situation where a figure float inserted before a margin float, might float *past* the margin float and thus have different caption numbering. For this reason the margin float contain a float blocking device such that any unplaced floats are forced to be placed before we start typesetting a margin figure.

The `marginfigure` and `margintable` environments can of course be adjusted using `\setfloatadjustment`, default

```
\setfloatadjustment{marginfigure}{\centering}
\setfloatadjustment{margintable}{\centering}
```

It may be useful to adjust the captioning separately, for this we have added

```
\setmarginfloatcaptionadjustment{<float>}{<code>}
```

where *<float>* is figure or table. The intent is to enable the user to choose a different captioning style (or similar) within a margin float, for example typesetting the caption ragged left/right depending on the page.

This *left/right depending on the page* is a little hard to do, so for the `\marginpar` (which the margin float use internally) we provide the following two macros

```
\setmpjustification{<at left of textblock>}{<at right of textblock>}
\mpjustification
```

Basically `\mpjustification` execute *<at left of textblock>* when it is executed at the left of the text block and vice versa. For it to work the margin into which the `marginpar` should do, *has* to be specified using `marginparmargin`. The default is

```
\setmpjustification{\raggedleft}{\raggedright}
```

To have both a margin figure and its caption typeset ragged against the text block, use

```
\setfloatadjustment{marginfigure}{\mpjustification}
\setmarginfloatcaptionadjustment{figure}{\captionstyle{\mpjustification}}
```

It may be useful to allow hyphenation within the raggedness, which can be done using the `ragged2e` package and

```
\setmpjustification{\RaggedLeft}{\RaggedRight}
```

## 10.2 Setting off a float

Sometimes it is desirable to set off a float, more probably an illustration than a tabular, from its surroundings. The `framed` environment, described later in Chapter 15, might come in handy for this.

The following code produces the example Figures 10.1 and 10.2.

FRAMED FIGURE

Figure 10.1: Example framed figure

FRAMED FIGURE AND CAPTION

Figure 10.2: Example framed figure and caption

```
\begin{figure}
\centering
\begin{framed}\centering
FRAMED FIGURE
\end{framed}
\caption{Example framed figure}\label{fig:framef}
\end{figure}

\begin{figure}
\begin{framed}\centering
FRAMED FIGURE AND CAPTION
\caption{Example framed figure and caption}\label{fig:framefcap}
\end{framed}
\end{figure}
```

If framing seems overkill then you can use rules instead, as in the example code below which produces Figures [10.3](#) and [10.4](#).

```
\begin{figure}
\centering
\hrule\vspace{\onelineskip}
RULED FIGURE
\vspace{\onelineskip}\hrule
\vspace{\onelineskip}
\caption{Example ruled figure}\label{fig:rulef}
\end{figure}

\begin{figure}
\centering
\hrule\vspace{\onelineskip}
RULED FIGURE AND CAPTION
\vspace{\onelineskip}\hrule
\vspace{0.2pt}\hrule
\vspace{\onelineskip}
\caption{Example ruled figure and caption}\label{fig:rulefcap}
```

---

 RULED FIGURE
 

---

Figure 10.3: Example ruled figure

---

 RULED FIGURE AND CAPTION
 

---

Figure 10.4: Example ruled figure and caption

## ILLUSTRATION 1

## ILLUSTRATION 2

Figure 10.5: Example float with two illustrations

```
\hrule
\end{figure}
```

## 10.3 Multiple floats

You can effectively put what you like inside a float box. Normally there is just a single picture or tabular in a float but you can include as many of these as will fit inside the box.

Three typical cases of multiple figures/tables in a single float come to mind:

- Multiple illustrations/tabulars with a single caption.
- Multiple illustrations/tabulars each individually captioned.
- Multiple illustrations/tabulars with one main caption and individual subcaptions.

Figure 10.5 is an example of multiple illustrations in a single float with a single caption. The figure was produced by the following code.

```
\begin{figure}
\centering
\hspace*{\fill}
{ILLUSTRATION 1} \hspace*{\fill} {ILLUSTRATION 2}
\hspace*{\fill}
\caption{Example float with two illustrations} \label{fig:mult1}
\end{figure}
```

## GRAPHIC 1

Figure 10.6: Graphic 1 in a float

## GRAPHIC 2

Figure 10.7: Graphic 2 in same float

The `\hspace*{\fill}` and `\hfill` commands were used to space the two illustrations equally. Of course `\includegraphics` or `tabular` environments could just as well be used instead of the `{ILLUSTRATION N}` text.

The following code produces Figures 10.6 and 10.7 which are examples of two separately captioned illustrations in one float.

```
\begin{figure}
\centering
\begin{minipage}{0.4\textwidth}
\centering
GRAPHIC 1
\caption{Graphic 1 in a float} \label{fig:mult2}
\end{minipage}
\hfill
\begin{minipage}{0.4\textwidth}
\centering
GRAPHIC 2
\caption{Graphic 2 in same float} \label{fig:mult3}
\end{minipage}
\end{figure}
```

In this case the illustrations (or graphics or tabulars) are put into separate `minipage` environments within the float, and the captions are also put within the `minipages`. Note that any required `\label` must also be inside the `minipage`. If you wished, you could add yet another (main) caption after the end of the two `minipages`.

It is slightly more complex if you want to put, say, both a tabulation captioned as a table and a graph, captioned as a figure, which illustrates the tabulation, as a float only permits one kind of caption. The class solves this problem by letting you define ‘fixed’ captions which are independent of the particular kind of the float. These are described in detail later.

Things do get a little trickier, though, if the bodies and/or the captions in a float are different heights (as in Figures 10.6 and 10.7) and you want to align them horizontally. Here are some examples.

This code produces Figures 10.8 and 10.9. The new `\hhrrule` macro produces a rule twice as thick as `\hrule` does.

```
\newcommand*{\hhrrule}{\hrule height 0.8pt}% double thickness

\begin{figure}
\hhrrule \vspace{\onelineskip}
\null\hfill\parbox{0.45\linewidth}{%
\centering
```

Aligned to the center of the right figure

This is the right figure which is taller  
than the first one (the one at the left)

Figure 10.8: Left center aligned

Figure 10.9: Right figure. This has  
more text than the adjacent caption  
(10.8) so the heights are unequal

```

    Aligned to the center of the right figure
}\hfill
\parbox{0.45\linewidth}{%
    \centering
    This is the right figure which is taller
    than the first one (the one at the left)
}\hfill\null
\vspace{\onelineskip}\hrule
\null\hfill\parbox[t]{0.4\linewidth}{%
    \caption{Left figure}\label{fig:left1}%
}\hfill
\parbox[t]{0.4\linewidth}{%
    \caption{Right figure. This has more text than the adjacent
        caption (\ref{fig:left1}) so the heights are unequal}%
    \label{fig:right1}%
}\hfill\null
\hhrule
\end{figure}

```

The following code produces Figures 10.10 and 10.11.

```

\begin{figure}
\hhrule \vspace{0.5\onelineskip}
\null\hfill\parbox[t]{0.45\linewidth}{%
    \centering
    Aligned to the top of the right figure
}\hfill
\parbox[t]{0.45\linewidth}{%
    \centering
    This is the right figure which is taller
    than the first one (the one at the left)
}\hfill\null
\vspace{0.5\onelineskip}\hrule
\null\hfill\parbox[t]{0.4\linewidth}{%
    \caption{Left top aligned}\label{fig:left2}%
}\hfill

```

Aligned to the top of the right figure

This is the right figure which is taller than the first one (the one at the left)

Figure 10.10: Left top aligned

Figure 10.11: Right figure. This has more text than the adjacent caption (10.10) so the heights are unequal

```
\parbox[t]{0.4\linewidth}{%
  \caption{Right figure. This has more text than the adjacent
    caption (\ref{fig:left2}) so the heights are unequal}%
  \label{fig:right2}%
}\hfill\null
\hrule
\end{figure}
```

The next code produces Figures 10.12 and 10.13.

```
\begin{figure}
\hrule \vspace{0.5\onelineskip}
\null\hfill\parbox[b]{0.45\linewidth}{%
  \centering
  Aligned to the bottom of the right figure
}\hfill
\parbox[b]{0.45\linewidth}{%
  \centering
  This is the right figure which is taller
  than the first one (the one at the left)
}\hfill\null
\vspace{0.5\onelineskip}\hrule
\null\hfill\parbox[t]{0.4\linewidth}{%
  \caption{Left bottom aligned}\label{fig:left3}%
}\hfill
\parbox[t]{0.4\linewidth}{%
  \caption{Right figure. This has more text than the adjacent
    caption (\ref{fig:left3}) so the heights are unequal}%
  \label{fig:right3}%
}\hfill\null
\hrule
\end{figure}
```

```
\newsubfloat{<float>}
```

The `\newsubfloat` command creates subcaptions (`\subcaption`, `\subtop` and `\subbottom`) for use within the float environment `<fenv>` previously defined via

Aligned to the bottom of the right figure	This is the right figure which is taller than the first one (the one at the left)
Figure 10.12: Left bottom aligned	Figure 10.13: Right figure. This has more text than the adjacent caption (10.12) so the heights are unequal

`\newfloat[⟨...⟩]{⟨fenv⟩}{⟨...⟩}`. Subcaptions are discussed below in §10.9.

#### 10.4 Where LaTeX puts floats

The general format for a float environment is:

`\begin{float}[⟨loc⟩] ... \end{float}` or for double column floats:

`\begin{float*}[⟨loc⟩] ... \end{float*}`

where the optional argument `⟨loc⟩`, consisting of one or more characters, specifies a location where the float may be placed. Note that the `multicol` package only supports the starred floats and it will not let you have a single column float. The possible `⟨loc⟩` values are one or more of the following:

- b *bottom*: at the bottom of a page. This does not apply to double column floats as they may only be placed at the top of a page.
- h *here*: if possible exactly where the float environment is defined. It does not apply to double column floats.
- p *page*: on a separate page containing only floats (no text); this is called a *float page*.
- t *top*: at the top of a page.
- ! make an extra effort to place the float at the earliest place specified by the rest of the argument.

The default for `⟨loc⟩` is `tbp`, so the float may be placed at the top, or bottom, or on a float page; the default works well 95% of the time. Floats of the same kind are output in definition order, except that a double column float may be output before a later single column float of the same kind, or *vice-versa*<sup>1</sup>. A float is never put on an earlier page than its definition but may be put on the same or later page of its definition. If a float cannot be placed, all succeeding floats will be held up, and LaTeX can store no more than 16 held up floats. A float cannot be placed if it would cause an overfull page, or it otherwise cannot be fitted according the float placement parameters. A `\clearpage` or `\cleardoublepage` or `\end{document}` flushes out all unprocessed floats, irrespective of the `⟨loc⟩` and float parameters, putting them on float-only pages.

`\setfloatlocations{⟨float⟩}{⟨locs⟩}`

You can set the location for all floats of type `⟨float⟩` to `⟨locs⟩` with the `\setfloatlocations` declaration. The class initialises these using:

<sup>1</sup>As of 2015 this has been fixed in the L<sup>A</sup>T<sub>E</sub>X kernel.

## 10. Floats and captions

---

```
\setfloatlocations{figure}{tbp}  
\setfloatlocations{table}{tbp}
```

```
\suppressfloats[⟨pos⟩]
```

You can use the command `\suppressfloats` to suppress floats at a given  $\langle pos \rangle$  on the current page. `\suppressfloats[t]` prevents any floats at the top of the page and `\suppressfloats[b]` prevents any floats at the bottom of the page. The simple `\suppressfloats` prevents both top and bottom floats.

```
\FloatBlock  
\FloatBlockAllowAbove  
\FloatBlockAllowBelow
```

Contrary to `\suppressfloats` `\FloatBlock`<sup>2</sup> will block floats from passing this point, i.e. it demands L<sup>A</sup>T<sub>E</sub>X to place any unprocessed floats before proceeding. It is similar to `\clearpage` but it does not necessarily introduce a page break before proceeding.

`\FloatBlockAllowAbove` lessens the restriction a little, in a situation like this

```
\FloatBlock  
some float here
```

`\FloatBlockAllowAbove` will allow the float to be placed at the top of the same page as `\FloatBlock`. `\FloatBlockAllowBelow` is the reverse situation.

It may be beneficial to be able to add `\FloatBlock` to sectional commands. This can be done via

```
\setFloatBlockFor{⟨sectional name⟩}
```

where  $\langle sectional name \rangle$  is *without* the `\`, i.e.

```
\setFloatBlockFor{section}
```

The `flafter` package, which should have come with your LaTeX distribution, provides a means of preventing floats from moving backwards from their definition position in the text. This can be useful to ensure, for example, that a float early in a `\section{...}` is not typeset before the section heading.

Figures 10.14 and 10.15 illustrate the many float parameters and Table 10.1 lists the float parameters and the typical standard default values. The lengths controlling the spaces surrounding floats are listed in Table 10.2; typical values are shown as they depend on both the class and the size option.

Given the displayed defaults, the height of a top float must be less than 70% of the `textheight` and there can be no more than 2 top floats on a text page. Similarly, the height of a bottom float must not exceed 30% of the `textheight` and there can be no more than 1 bottom float on a text page. There can be no more than 3 floats (top, bottom and here) on the page. At least 20% of a text page with floats must be text. On a float page (one that has no text, only floats) the sum of the heights of the floats must be at least 50% of the `textheight`. The floats on a float page should be vertically centered.

---

<sup>2</sup>Yes, it is the same as `\FloatBarrier` from the `placeins` package, kudos to Donald Arseneau. For various reasons we cannot emulate the `placeins` package and its options, thus we have verbatimly copied and renamed it instead.



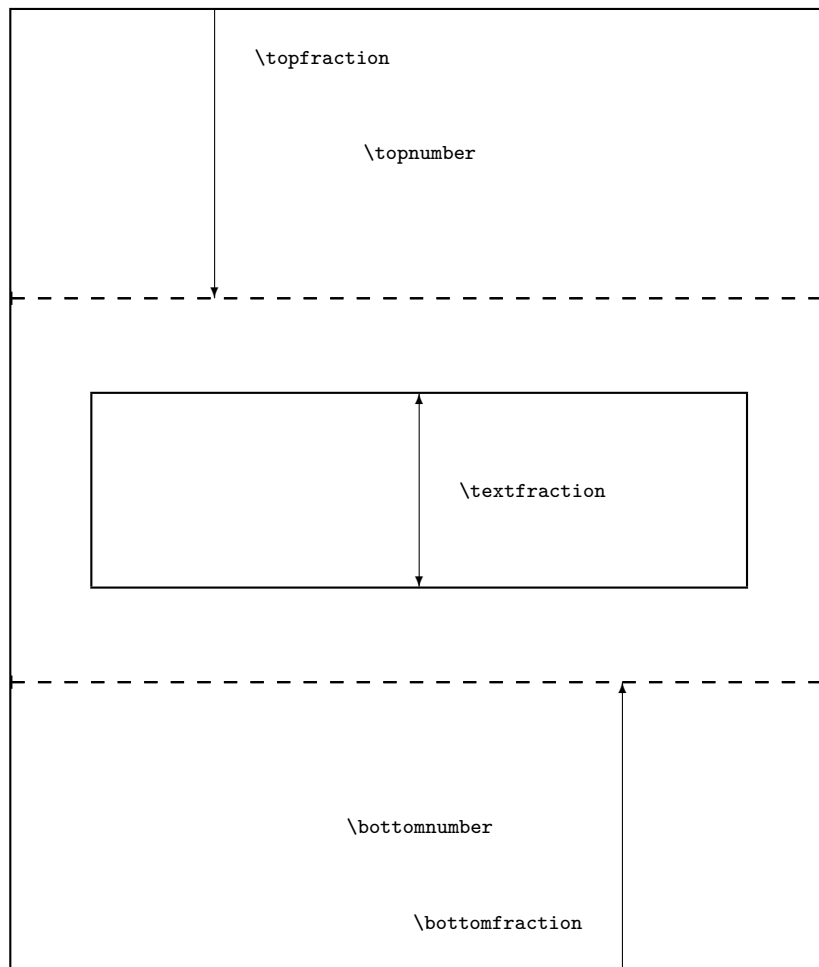


Figure 10.14: Float and text page parameters

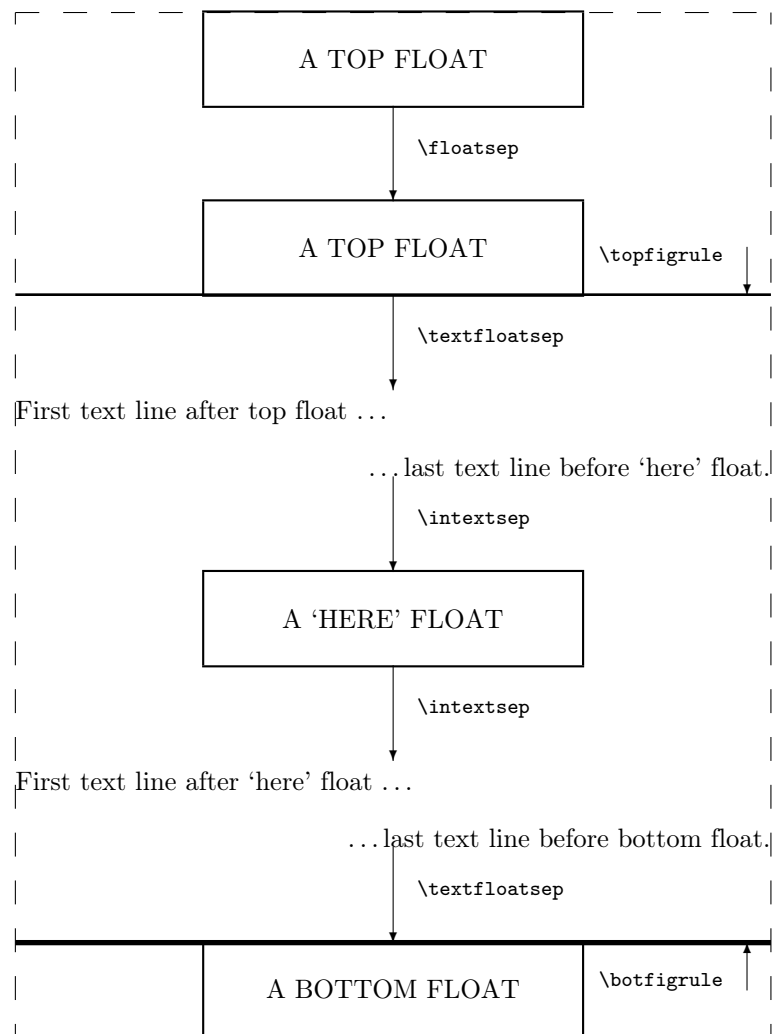


Figure 10.15: Float parameters

Table 10.1: Float placement parameters

Parameter	Controls	Default
Counters — change with <code>\setcounter</code>		
<code>topnumber</code>	max number of floats at top of a page	2
<code>bottomnumber</code>	max number of floats at bottom of a page	1
<code>totalnumber</code>	max number of floats on a text page	3
<code>dbltopnumber</code>	like <code>topnumber</code> for double column floats	2
Commands — change with <code>\renewcommand</code>		
<code>\topfraction</code>	max fraction of page reserved for top floats	0.7
<code>\bottomfraction</code>	max fraction of page reserved for bottom floats	0.3
<code>\textfraction</code>	min fraction of page that must have text	0.2
<code>\dbltopfraction</code>	like <code>\topfraction</code> for double column floats	0.7
<code>\floatpagefraction</code>	min fraction of a float page that must have float(s)	0.5
<code>\dblfloatpagefraction</code>	like <code>\floatpagefraction</code> for double column floats	0.5

Table 10.2: Float spacing parameters

Parameter	Controls	Default
Text page lengths — change with <code>\setlength</code>		
<code>\floatsep</code>	vertical space between floats	12pt
<code>\textfloatsep</code>	vertical space between a top (bottom) float and succeeding (preceeding) text	20pt
<code>\intextsep</code>	vertical space above and below an h float	12pt
<code>\dblfloatsep</code>	like <code>\floatsep</code> for double column floats	12pt
<code>\dbltextfloatsep</code>	like <code>\textfloatsep</code> for double column floats	20pt
Float page lengths — change with <code>\setlength</code>		
<code>\@fptop</code>	space at the top of the page	0pt plus 1fil
<code>\@fpsep</code>	space between floats	8pt plus 2fil
<code>\@fpbot</code>	space at the bottom of the page	0pt plus 1fil
<code>\@dblfp top</code>	like <code>\@fptop</code> for double column floats	0pt plus 1fil
<code>\@dblfp sep</code>	like <code>\@fpsep</code> for double column floats	8pt plus 2fil
<code>\@dblfp bot</code>	like <code>\@fpbot</code> for double column floats	0pt plus 1fil

Under certain extreme and unlikely conditions and with the defaults LaTeX might have trouble finding a place for a float. Consider what will happen if a float is specified as a bottom float and its height is 40% of the `textheight` and this is followed by a float whose height is 90% of the `textheight`. The first is too large to actually go at the bottom of a text page but too small to go on a float page by itself. The second has to go on a float page but it is too large to share the float page with the first float. LaTeX is stuck!

At this point it is worthwhile to be precise about the effect of a one character `<loc>` argument:

- b means: ‘put the float at the bottom of a page with some text above it, and nowhere else’. The float must fit into the `\bottomfraction` space otherwise it and subsequent floats will be held up.
- h means: ‘put the float at this point and nowhere else’. The float must fit into the space left on the page otherwise it and subsequent floats will be held up.
- p means: ‘put the float on a page that has no text but may have other floats on it’. There must be at least ‘`\floatpagefraction`’ worth of floats to go on a float only page before the float will be output.
- t means: ‘put the float at the top of a page with some text below it, and nowhere else’. The float must fit into the `\topfraction` space otherwise it and subsequent floats will be held up.
- !... means: ‘ignore the `\...fraction` values for this float’.

You must try and pick a combination from these that will let LaTeX find a place to put your floats. However, you can also change the float parameters to make it easier to find places to put floats. Some examples are:

- Decrease `\textfraction` to get more ‘float’ on a text page, but the sum of `\textfraction` and `\topfraction` and the sum of `\textfraction` and `\bottomfraction` should not exceed 1.0, otherwise the placement algorithm falls apart. A minimum value for `\textfraction` is about 0.10 — a page with less than 10% text looks better with no text at all, just floats.
- Both `\topfraction` and `\bottomfraction` can be increased, and it does not matter if their sum exceeds 1.0. A good typographic style is that floats are encouraged to go at the top of a page, and a better balance is achieved if the float space on a page is larger at the top than the bottom.
- Making `\floatpagefraction` too small might have the effect of a float page just having one small float. However, to make sure that a float page never has more than one float on it, do:

```
\renewcommand{\floatpagefraction}{0.01}  
\setlength{\@fpsep}{\textheight}
```

- Setting `\@fptop` and `\@dblftop` to 0pt, `\@fpsep` to 8pt, and `\@fpbot` and `\@dblfpbot` to 0pt plus 1fil will force floats on a float page to start at the top of the page.
- Setting `\@fpbot` and `\@dblfpbot` to 0pt, `\@fpsep` to 8pt, and `\@fptop` and `\@dblftop` to 0pt plus 1fil will force floats on a float page to the bottom of the page.

If you are experimenting, a reasonable starting position is:

```

\setcounter{topnumber}{3}
\setcounter{bottomnumber}{2}
\setcounter{totalnumber}{4}
\renewcommand{\topfraction}{0.85}
\renewcommand{\bottomfraction}{0.5}
\renewcommand{\textfraction}{0.15}
\renewcommand{\floatpagefraction}{0.7}

```

and similarly for double column floats if you will have any. Actually, there is no need to try these settings as they are the default for this class.

One of LaTeX's little quirks is that on a text page, the 'height' of a float is its actual height plus `\textfloatsep` or `\floatsep`, while on a float page the 'height' is the actual height. This means that when using the default *loc* of `[tbp]` at least one of the text page float fractions (`\topfraction` and/or `\bottomfraction`) must be larger than the `\floatpagefraction` by an amount sufficient to take account of the maximum text page separation value.

## 10.5 Captions

Some publishers require, and some authors prefer, captioning styles other than the one style provided by standard LaTeX. Further, some demand that documents that include multi-part tables use a *continuation caption* on all but the first part of the multi-part table. For the times where such a table is specified by the author as a set of tables, the class provides a simple 'continuation' caption command to meet this requirement. It also provides a facility for an 'anonymous' caption which can be used in any float environment. Captions can be defined that are suitable for use in non-float environments, such as placing a picture in a minipage and captioning it just as though it had been put into a normal figure environment.

The commands described below are very similar to those supplied by the `ccaption` package [Wil01d].

## 10.6 Caption styling

Just as a reminder, the default appearance of a caption for, say, a table looks like this:

Table 11.7: Title for the table

That is, it is typeset in the normal body font, with a colon after the number.

The class uses the following to specify the standard LaTeX caption style:

```

\captionnamefont{}
\captiontitlefont{}
\captionstyle{}
\captionwidth{\linewidth}
\normalcaptionwidth
\normalcaption
\captiondelim{: }

```

These macros are explained in detail below.

`\captiondelim{\delim}`

The default captioning style is to put a delimiter in the form of a colon between the caption number and the caption title. The command `\captiondelim` can be used to change the delimiter. For example, to have an en-dash instead of the colon, `\captiondelim{-- }` will do the trick. Notice that no space is put between the delimiter and the title unless it is specified in the `\delim` parameter. The class initially specifies `\captiondelim{: }` to give the normal delimiter.

```
\captionnamefont{<fontspec>}
```

The `<fontspec>` specified by `\captionnamefont` is used for typesetting the caption name; that is, the first part of the caption up to and including the delimiter (e.g., the portion “Table 3:”). `<fontspec>` can be any kind of font specification and/or command and/or text. This first part of the caption is treated like:

```
{\captionnamefont Table 3: }
```

so font declarations, not font text-style commands, are needed for `<fontspec>`. For instance,

```
\captionnamefont{\Large\sffamily}
```

to specify a large sans-serif font. The class initially specifies `\captionnamefont{}` to give the normal font.

```
\captiontitlefont{<fontspec>}
```

Similarly, the `<fontspec>` specified by `\captiontitlefont` is used for typesetting the title text of a caption. For example, `\captiontitlefont{\itshape}` for an italic title text. The class initially specifies `\captiontitlefont{}` to give the normal font.

```
\captionstyle[<short>]{<style>}  
\raggedleft \centering \raggedright \centerlastline
```

By default the name and title of a caption are typeset as a block (non-indented) paragraph. `\captionstyle` can be used to alter this. Sensible values for `<style>` are: `\centering`, `\raggedleft` or `\raggedright` for styles corresponding to these declarations. The `\centerlastline` style gives a block paragraph but with the last line centered. The class initially specifies `\captionstyle{}` to give the normal block paragraph style.

If a caption is less than one line in length it may look odd if the `<style>` is `\raggedright`, say, as it will be left justified. The optional `<short>` argument to `\captionstyle` can be used to specify the style for such short captions if it should differ from that for multiline captions. For example, I think that short captions look better centered:

```
\captionstyle[\centering]{\raggedright}
```

```
\hangcaption  
\indentcaption{<length>}  
\normalcaption
```

The declaration `\hangcaption` causes captions to be typeset with the second and later lines of a multiline caption title indented by the width of the caption name. The declaration `\indentcaption` will indent title lines after the first by `<length>`. These commands are independent of the `\captionstyle{...}` and have no effect on short captions. Note that a caption will not be simultaneously hung and indented. The `\normalcaption` declaration undoes any previous `\hangcaption` or `\indentcaption` declaration. The class initially specifies `\normalcaption` to give the normal non-indented paragraph style.

```
\changecaptionwidth
\captionwidth{<length>}
\normalcaptionwidth
```

Issuing the declaration `\changecaptionwidth` causes the captions to be typeset within a total width `<length>` as specified by `\captionwidth`. Issuing the declaration `\normalcaptionwidth` causes captions to be typeset as normal full width captions. The class initially specifies

```
\normalcaptionwidth
\captionwidth{\linewidth}
```

to give the normal width. If a caption is being set within the side captioned environments from the `sidecap` package [NG98] then it must be a `\normalcaptionwidth` caption.

```
\precaption{<pretext>}
\captiontitlefinal{<text>}
\postcaption{<posttext>}
```

The commands `\precaption` and `\postcaption` specify `<pretext>` and `<posttext>` that will be processed at the start and end of a caption. For example

```
\precaption{\rule{\linewidth}{0.4pt}}\par
\postcaption{\rule{\linewidth}{0.4pt}}
```

will draw a horizontal line above and below the captions. The class initially specifies

```
\precaption{}
\postcaption{}
```

to give the normal appearance.

The argument to `\captiontitlefinal` is put immediately after the title text but will not appear in the LoF or LoT. The default is

```
\captiontitlefinal{}
```

but it could be used instead as, say

```
\captiontitlefinal{.}
```

to put a period (full stop) after the title.

If any of the above commands are used in a float, or other, environment their effect is limited to the environment. If they are used in the preamble or the main text, their effect persists until replaced by a similar command with a different parameter value. The commands do not affect the appearance of the title in any ‘List of...’.

```
\\[<length>]
\\*[<length>]
```

The normal LaTeX command `\\` can be used within the caption text to start a new line. Remember that `\\` is a fragile command, so if it is used within text that will be added to a ‘List of...’ it must be protected. As examples:

```
\caption{Title with a \protect\\ new line in
both the body and List of}
\caption[List of entry with no new line]%
{Title with a \\ new line}
```

Table 10.3  
Redesigned table caption style

three	III
five	V
eight	VIII

```
\caption[List of entry with a \protect\\ new line]%  
  {Title text}
```

Effectively, a caption is typeset as though it were:

```
\precaption  
{\captionnamefont NAME NUMBER\captiondelim}  
{\captionstyle\captiontitlefont THE TITLE\captiontitlefinal}  
\postcaption
```

Replacing the above commands by their defaults leads to the simple format:

```
{NAME NUMBER: }{THE TITLE}
```

As well as using the styling commands to make simple changes to the captioning style, more noticeable modifications can also be made. To change the captioning style so that the name and title are typeset in a sans font it is sufficient to do:

```
\captionnamefont{\sffamily}  
\captiontitlefont{\sffamily}
```

A more obvious change in styling is shown in Table 10.3, which was coded as:

```
\begin{table}  
  \centering  
  \captionnamefont{\sffamily}  
  \captiondelim{}  
  \captionstyle{\}\}  
  \captiontitlefont{\scshape}  
  \setlength{\belowcaptionskip}{10pt}  
  \caption{Redesigned table caption style} \label{tab:style}  
  \begin{tabular}{lr} \toprule  
    ...  
  \end{table}
```

This leads to the approximate caption format (processed within `\centering`):

```
{\sffamily NAME NUMBER}{\ \scshape THE TITLE}
```

Note that the newline command (`\`) cannot be put in the first part of the format (i.e., the `{\sffamily NAME NUMBER}`); it has to go into the second part, which is why it is specified via `\captionstyle{\}` and not `\captiondelim{\}`.

If a mixture of captioning styles will be used you may want to define a special caption command for each non-standard style. For example for the style of the caption in Table 10.3:



```

\newcommand{\mycaption}[2][\@empty]{
  \captionnamefont{\sffamily\hfill}
  \captiondelim{\hfill}
  \captionstyle{\centerlastline\}
  \captiontitlefont{\scshape}
  \setlength{\belowcaptionskip}{10pt}
  \ifx \@empty#1 \caption{#2}\else \caption{#1}{#2}\fi}

```

Remember that any code that involves the @ sign must be either in a package (sty) file or enclosed between a \makeatletter ... \makeatother pairing (see §E.4).

The code for the Table 10.3 example can now be written as:

```

\begin{table}
\centering
\mycaption{Redesigned table caption style} \label{tab:style}
\begin{tabular}{lr} \toprule
...
\end{table}

```

Note that in the code for \mycaption I have added two \hfill commands and \centerlastline compared with the original specification. It turned out that the original definitions worked for a single line caption but not for a multiline caption. The additional commands makes it work in both cases, forcing the name to be centered as well as the last line of a multiline title, thus giving a balanced appearance.

## 10.7 Continuation captions and legends

`\contcaption{text}`

The \contcaption command can be used to put a ‘continued’ or ‘concluded’ caption into a float environment. It neither increments the float number nor makes any entry into a float listing, but it does repeat the numbering of the previous \caption command.

Table 10.4 illustrates the use of the \contcaption command. The table was produced from the following code.

```

\begin{table}
\centering
\caption{A multi-part table} \label{tab:m}
\begin{tabular}{lcl} \toprule
just a single line & 1 & \bottomrule
\end{tabular}
\end{table}

\begin{table}
\centering
\contcaption{Continued}
\begin{tabular}{lcl} \toprule
just a single line & 2 & \bottomrule
\end{tabular}
\end{table}

```

Table 10.4: A multi-part table

just a single line	1
--------------------	---

Table 10.4: Continued

just a single line	2
--------------------	---

Table 10.4: Concluded

just a single line	3
--------------------	---

```
\begin{table}
\centering
\contcaption{Concluded}
\begin{tabular}{lc} \toprule
just a single line & 3 \\ \bottomrule
\end{tabular}
\end{table}
```

`\legend{<text>}`

The `\legend` command is intended to be used to put an anonymous caption, or legend into a float environment, but may be used anywhere.

For example, the following code was used to produce the two-line Table 10.5. The `\legend` command can be used within a float independently of any `\caption` command.

```
\begin{table}
\centering
\caption{Another table} \label{tab:legend}
\begin{tabular}{lc} \toprule
A legendary table & 5
with two lines & 6
\end{tabular}
\legend{The legend}
```

Table 10.5: Another table

A legendary table	5
with two lines	6

The legend

Legendary table

An anonymous table	5
with two lines	6

```
A legendary table & 5 \\
with two lines    & 6 \\ \bottomrule
\end{tabular}
\legend{The legend}
\end{table}
```

Captioned floats are usually thought of in terms of the `table` and `figure` environments. There can be other kinds of float. As perhaps a more interesting example, the following code produces the titled marginal note which should be displayed near here.

```
\marginpar{\legend{LEGEND}
           This is a marginal note with a legend.}
```

LEGEND  
This is a  
marginal  
note with a  
legend.

If you want the legend text to be included in the ‘List of...’ you can do it like this with the `\addcontentsline` macro.

```
\legend{Legend title}
% left justified
\addcontentsline{lot}{table}{Legend title}    % or
% indented
\addcontentsline{lot}{table}{\protect\numberline{}Legend title}
```

The first of these forms will align the first line of the legend text under the normal table numbers. The second form will align the first line of the legend text under the normal table titles. In either case, second and later lines of a multi-line text will be aligned under the normal title lines.

As an example, the *Legendary table* is produced by the following code:

```
\begin{table}
\centering
\captiontitlefont{\sffamily}
\legend{Legendary table}
\addcontentsline{lot}{table}{Legendary table (toc 1)}
\addcontentsline{lot}{table}{\protect\numberline{}
                             Legendary table (toc 2)}
\begin{tabular}{lc} \toprule
  An anonymous table & 5 \\
  with two lines    & 6 \\ \bottomrule
\end{tabular}
\end{table}
```

Look at the List of Tables to see how the two forms of `\addcontentsline` are typeset.

```
\namedlegend[<short-title>]{<long-title>}
```

Table: Named legendary table

seven	VII
eight	VIII

As a convenience, the `\namedlegend` command is like the `\caption` command except that it does not number the caption and, by default, puts no entry into a ‘List of...’ file. Like the `\caption` command, it picks up the name to be prepended to the title text from the float environment in which it is called (e.g., it will use `\tablename` if called within a table environment). The following code is the source of the *Named legendary table*.

```
\begin{table}
\centering
\captionnamefont{\sffamily}
\captiontitlefont{\itshape}
\namedlegend{Named legendary table}
\begin{tabular}{lr} \toprule
seven & VII \\
eight & VIII \\ \bottomrule
\end{tabular}
\end{table}
```

```
\flegfloat{<name>}
\flegtocfloat{<title>}
```

The macro `\flegfloat`, where `float` is the name of a float environment (e.g., `figure`) is called by the `\namedlegend` macro. It is provided as a hook that defines the `<name>` to be used as the name in `\namedlegend`. Two defaults are provided, `\flegtable` and `\flegfigure` defined as:

```
\newcommand{\flegtable}{\tablename}
\newcommand{\flegfigure}{\figurename}
```

which may be altered via `\renewcommand` if desired.

The macro `\flegtocfloat`, where again `float` is the name of a float environment (e.g., `table`) is also called by the `\namedlegend` macro. It is provided as a hook that can be used to add `<title>` to the ‘List of...’. Two exemplars are provided, `\flegtocfigure` and `\flegtocfigure`. By default they are defined to do nothing, and can be changed via `\renewcommand`. For instance, one could be changed for tables as:

```
\renewcommand{\flegtocfigure}[1]{
\addcontentsline{lot}{table}{#1}}
```

The `\legend` command produces a plain, unnumbered heading. It can also be useful sometimes to have named and numbered captions outside a floating environment, perhaps in a minipage, if you want the table or picture to appear at a precise location in your document.

```

\newfixedcaption[⟨capcommand⟩]{⟨command⟩}{⟨float⟩}
\renewfixedcaption[⟨capcommand⟩]{⟨command⟩}{⟨float⟩}
\providefixedcaption[⟨capcommand⟩]{⟨command⟩}{⟨float⟩}

```

The `\newfixedcaption` command, and its friends, can be used to create or modify a captioning `⟨command⟩` that may be used outside the float environment `⟨float⟩`. Both the environment `⟨float⟩` and a captioning command, `⟨capcommand⟩`, for that environment must have been defined before calling `\newfixedcaption`. Note that `\namedlegend` can be used as `⟨capcommand⟩`.

For example, to define a new `\figcaption` command for captioning pictures outside the figure environment, do

```
\newfixedcaption{\figcaption}{figure}
```

The optional `⟨capcommand⟩` argument is the name of the float captioning command that is being aliased. It defaults to `\caption`. As an example of where the optional argument is required, if you want to create a new continuation caption command for non-floating tables, say `\ctabcaption`, then do

```
\newfixedcaption{\ctabcaption}{\ctabcaption}{table}
```

Captioning commands created by `\newfixedcaption` will be named and numbered in the same style as the original `⟨capcommand⟩`, can be given a `\label`, and will appear in the appropriate ‘List of...’. They can also be used within floating environments, but will not use the environment name as a guide to the caption name or entry into the ‘List of...’. For example, using `\ctabcaption` in a figure environment will still produce a **Table**... named caption.

Sometimes captions are required on the opposite page to a figure, and a fixed caption can be useful in this context. For example, if figure captions should be placed on an otherwise empty page immediately before the actual figure, then this can be accomplished by the following hack:

```

\newfixedcaption{\figcaption}{figure}
...
\afterpage{ % fill current page then flush pending floats
  \clearpage
  \begin{midpage} % vertically center the caption
    \figcaption{The caption} % the caption
  \end{midpage}
  \clearpage
  \begin{figure}THE FIGURE, NO CAPTION HERE\end{figure}
  \clearpage
} % end of \afterpage

```

Note that the `afterpage` package [Car95] is needed, which is part of the required tools bundle. The `midpage` package supplies the `midpage` environment, which can be simply defined as:

```
\newenvironment{midpage}{\vspace*{\fill}}{\vspace*{\fill}}
```

The code, in particular the use of `\clearpage`, might need adjusting to meet your particular requirements.

- `\clearpage` gets you to the next page, which may be odd or even.

- `\cleardoublepage` gets you to the next odd-numbered page.
- `\cleartoevenpage` ensures that you get to the next even-numbered page.

As a word of warning, if you mix both floats and fixed environments with the same kind of caption you have to ensure that they get printed in the correct order in the final document. If you do not do this, then the ‘List of...’ captions will come out in the wrong order (the lists are ordered according the page number in the typeset document, *not* your source input order).

### 10.8 Bilingual captions

Some documents require bilingual (or more) captions. The class provides a set of commands for bilingual captions. Extensions to the set, perhaps to support trilingual captioning, are left as an exercise for the document author. Essentially, the bilingual commands call the `\caption` command twice, once for each language.

Several commands for bilingual captions are provided. They all produce the same appearance in the text but differ in what they put into the ‘List of...’.

```
\bitwocaption[⟨label⟩]{⟨short1⟩}{⟨long1⟩}%  
{⟨NAME⟩}{⟨short2⟩}{⟨long2⟩}  
\bionewcaption[⟨label⟩]{⟨short1⟩}{⟨long1⟩}%  
{⟨NAME⟩}{⟨short2⟩}{⟨long2⟩}
```

Bilingual captions can be typeset by the `\bitwocaption` command which has six arguments. The first, optional argument `⟨label⟩`, is the name of a label, if required. `⟨short1⟩` and `⟨long1⟩` are the short (i.e., equivalent to the optional argument to the `\caption` command) and long caption texts for the main language of the document. The value of the `⟨NAME⟩` argument is used as the caption name for the second language caption, while `⟨short2⟩` and `⟨long2⟩` are the short and long caption texts for the second language. For example, if the main and secondary languages are English and German and a figure is being captioned:

```
\bitwocaption{Short}{Long}{Bild}{Kurz}{Lang}
```

If the short title text(s) is not required, then leave the appropriate argument(s) either empty or as one or more spaces, like:

```
\bitwocaption[fig:bi1]{}{Long}{Bild}{ }{Lang}
```

Both language texts are entered into the appropriate ‘List of...’, and both texts are numbered.

Figure 10.16, typeset from the following code, is an example.

```
\begin{figure}  
\centering  
EXAMPLE FIGURE WITH BITWOCAPTION  
\bitwocaption[fig:bi1]%  
  {}{Long \cs{bitwocaption}}%  
  {Bild}{ }{Lang \cs{bitwocaption}}  
\end{figure}
```

Both `\bionewcaption` and `\bitwocaption` take the same arguments. The difference between the two commands is that `\bionewcaption` does not number the second

## EXAMPLE FIGURE WITH BITWONUMCAPTION

Figure 10.16: Long \bitwonumcaption

Bild 10.16: Lang \bitwonumcaption

## EXAMPLE FIGURE WITH BIONENUMCAPTION

Figure 10.17: Long English \bionenumcaption

Bild 10.17: Lang Deutsch \bionenumcaption

language text in the ‘List of...’. Figure 10.17, typeset from the following, is an example of this.

```
\begin{figure}
\centering
EXAMPLE FIGURE WITH BIONENUMCAPTION
\bionenumcaption[fig:bi3]%
  {}{Long English \cs{bionenumcaption}}%
  {Bild}{ }{Lang Deutsch \cs{bionenumcaption}}
\end{figure}
```

```
\bication[⟨label⟩]{⟨short1⟩}{⟨long1⟩}%
{⟨NAME⟩}{⟨long2⟩}
```

When bilingual captions are typeset via the `\bication` command the second language text is not put into the ‘List of...’. The command takes 5 arguments. The optional `⟨label⟩` is for a label if required. `⟨short1⟩` and `⟨long1⟩` are the short and long caption texts for the main language of the document. The value of the `⟨NAME⟩` argument is used as the caption name for the second language caption. The last argument, `⟨long2⟩`, is the caption text for the second language (which is not put into the ‘List of...’).

For example, if the main and secondary languages are English and German:

```
\bication{Short}{Long}{Bild}{Langlauf}
```

If the short title text is not required, then leave the appropriate argument either empty or as one or more spaces.

Figure 10.18 is an example of using `\bication` and was produced by the following code:

```
\begin{figure}
\centering
EXAMPLE FIGURE WITH A RULED BICATION
\precaption{\rule{\linewidth}{0.4pt}\par}
\midbication{\precaption}%
  \postcaption{\rule{\linewidth}{0.4pt}}
\bication[fig:bi2]%
```

## EXAMPLE FIGURE WITH A RULED BICAPTION

Figure 10.18: Longingly

Bild 10.18: Langlauf

---

```
{Short English \cs{bicaption}}{Longingly}%  
{Bild}{Langlauf}  
\end{figure}
```

```
\bicontcaption{<long1>}%  
{<NAME>}{<long2>}
```

Bilingual continuation captions can be typeset via the `\bicontcaption` command. In this case, neither language text is put into the ‘List of...’. The command takes 3 arguments. `<long1>` is the caption text for the main language of the document. The value of the `<NAME>` argument is used as the caption name for the second language caption. The last argument, `<long2>`, is the caption text for the second language. For example, if the main and secondary languages are again English and German:

```
\bicontcaption{Continued}{Bild}{Fortgefahren}
```

```
\midbicaption{<text>}
```

The bilingual captions are implemented by calling `\caption` twice, once for each language. The command `\midbicaption`, which is similar to the `\precaption` and `\postcaption` commands, is executed just before calling the second `\caption`. Among other things, this can be used to modify the style of the second caption with respect to the first. For example, if there is a line above and below normal captions, it is probably undesirable to have a double line in the middle of a bilingual caption. So, for bilingual captions the following may be done within the float before the caption:

```
\precaption{\rule{\linewidth}{0.4pt}\par}  
\postcaption{}  
\midbicaption{\precaption{}%  
               \postcaption{\rule{\linewidth}{0.4pt}}}
```

This sets a line before the first of the two captions, then the `\midbicaption{...}` nulls the pre-caption line and adds a post-caption line for the second caption. The class initially specifies `\midbicaption{}`.

### 10.9 Subcaptions

The subfigure package enables the captioning of sub-figures within a larger figure, and similarly for tables. The subfigure package may be used with the class, or you can use the class commands described below; these commands can only be used inside a float environment for which a subfloat<sup>3</sup> has been specified via `\newsubfloat`.

---

<sup>3</sup>See §10.3.



```
\subcaption[<list-entry>]{<subtitle>}
```

The `\subcaption` command is similar to the `\caption` command and can only be used inside a float environment. It typesets an identified *<subtitle>*, where the identification is an alphabetic character enclosed in parentheses. If the optional *<list-entry>* argument is present, *<list-entry>* is added to the caption listings for the float. If it is not present, then *<subtitle>* is added to the listing.

The *<subtitle>* is typeset within a box which is the width of the surrounding environment, so `\subcaption` should only be used within a fixed width box of some kind, for example a `minipage` as shown below.

```
\begin{figure}
\centering
\begin{minipage}{0.3\textwidth}
\verb?Some verbatim text?
\subcaption{First text}
\end{minipage}
\hfill
\begin{minipage}{0.3\textwidth}
\verb?More verbatim text?
\subcaption{Second text}
\end{minipage}
\caption{Verbatim texts}
\end{figure}
```

As the example code shows, the `\subcaption` command provides a means of putting verbatim elements into subfigures.

```
\subtop[<list-entry>][<subtitle>]{<text>}
\subbottom[<list-entry>][<subtitle>]{<text>}
```

The command `\subtop` puts a subcaption identifier on top of *<text>*. If both optional arguments are present, *<list-entry>* will be added to the appropriate listing, and *<subtitle>* is placed above the *<text>* with the identifier. If only one optional argument is present this is treated as being *<subtitle>*; the identifier and *<subtitle>* are placed above the *<text>* and *<subtitle>* is added to the listing. Regardless of the optional arguments the identifier is always added to the listing and placed above the *<text>*.

The `\subbottom` command is identical to `\subtop` except that the identifier, and potentially the *<subtitle>*, is placed below the *<text>*. Note that verbatim text cannot be used in the *<text>* argument to `\subbottom` or `\subtop`.

The main caption can be at either the top or the bottom of the float. The positioning of the main and subcaptions are independent. For example

```
\begin{figure}
\subbottom{...} % captioned as (a) below
\subtop{...}    % captioned as (b) above
\caption{...}
\end{figure}
```

If a figure that includes subfigures is itself continued then it may be desirable to continue the captioning of the subfigures. For example, if Figure 3 has three subfigures, say A, B and C, and Figure 3 is continued then the subfigures in the continuation should be D, E, etc.

```

\contsubcaption[⟨list-entry⟩]{⟨subtitle⟩}
\contsubtop[⟨list-entry⟩][⟨subtitle⟩]{⟨text⟩}
\contsubbottom[⟨list-entry⟩][⟨subtitle⟩]{⟨text⟩}
\subconcluded

```

The `\contsubcaption`, `\contsubtop` and `\contsubbottom` commands are the continued versions of the respective subcaptioning commands. These continue the subcaption numbering scheme across (continued) floats. In any event, the main caption can be at the top or bottom of the float. The `\subconcluded` command is used to indicate that the continued (sub) float has been concluded and the numbering scheme is reinitialized. The command should be placed immediately before the end of the last continued environment. For example:

```

\begin{figure}
\subbottom{...} captioned as (a) below
\subbottom{...} captioned as (b) below
\caption{...}
\end{figure}
\begin{figure}
\contsubtop{...} captioned as (c) above
\contsubtop{...} captioned as (d) above
\contcaption{Concluded}
\subconcluded
\end{figure}
...
\begin{table}
\caption{...}
\subtop{...} captioned as (a) above
\subbottom{...} captioned as (b) below
\end{table}

```

```

\label{⟨bookmark⟩}{⟨labstr⟩}
\subcaptionref{⟨labstr⟩}

```

A `\label` command may be included in the `⟨subtitle⟩` argument of the subcaptioning commands. Using the normal `\ref` macro to refer to the label will typeset the number of the float (obtained from a `\labeled` main `\caption`) and the subcaption identifier. If the `\subcaptionref` macro is used instead of `\ref` then only the subcaption identifier is printed.

In cases where the `hyperref` package is used, the `\label` command when used inside the `⟨subtitle⟩` argument can take an optional `⟨bookmark⟩` argument, *enclosed in parentheses not square brackets*, which will create a bookmark field of the form ‘Subfigure 4.7(d)’.

As an example to show the difference between `\subcaptionref` and `\ref`, Figure 10.19 and the paragraph immediately following this one were produced by the code shown below.

Figure 10.19 has two subfigures, namely 10.19(a) and (b).

```

Figure \ref{fig:twosubfig} has two subfigures,
namely \ref{sf:1} and \subcaptionref{sf:2}.
\begin{figure}

```

SUBFIGURE ONE

(a) Subfigure 1

SUBFIGURE TWO

(b) Subfigure 2

Figure 10.19: Figure with two subfigures

```

\centering
\subbottom[Subfigure 1]{\fbox{SUBFIGURE ONE}\label{sf:1}}
\hfill
\subbottom[Subfigure 2]{\fbox{SUBFIGURE TWO}\label{sf:2}}
\caption{Figure with two subfigures} \label{fig:twosubfig}
\end{figure}

```

```
\tightsubcaptions \loosesubcaptions
```

As with many other aspects of typesetting the style of subcaptions may be specified. There is a small amount of vertical space surrounding a subcaption. More space is used after the `\loosesubcaptions` declaration compared to that produced after the default `\tightsubcaptions` declaration.

```

\subcaptionsize{<size>}
\subcaptionlabelfont{<fontspec>}
\subcaptionfont{<fontspec>}

```

The size of the font used for subcaptions is specified by `\subcaptionsize`, and the fonts for the identifier and text are specified by `\subcaptionlabelfont` for the identifier and by `\subcaptionfont` for the title text. The defaults are:

```

\subcaptionsize{\footnotesize}
\subcaptionlabelfont{\normalfont}
\subcaptionfont{\normalfont}

```

```

\subcaptionstyle{<style>}
\raggedleft \centering \raggedright \centerlastline

```

The identifier and title of a subcaption is typeset as a block (i.e., non-indented) paragraph by specifying

```
\subcaptionstyle{}
```

Other styles are available by calling `\subcaptionstyle` with a styling *<cmd>*. Values that you might use are: `\centering` for a centered paragraph, `\raggedleft` or `\raggedright` for ragged left or right paragraphs, or `\centerlastline` which calls for a block paragraph with the last line centered.

```

\hangsubcaption
\shortsubcaption
\normalsubcaption

```

The `\hangsubcaption` declaration causes subcaptions to be typeset with the identifier above the title. Following the `\shortsubcaption` declaration subcaptions

that are less than a full line in length are typeset left justified instead of centered. The `\normalsubcaption` declaration, which is the default, undoes any previous `\hangsubcaption` or `\shortsubcaption` declaration, so that subcaptions are normally centered.

#### 10.10 Side captions

Typically captions are put either above or below the element they are describing. Sometimes it is desirable to put a caption at the side of the element instead.

```
\begin{sidecaption}[\langle fortoc \rangle]{\langle title \rangle}[\langle label \rangle]
the body of the float
\end{sidecaption}
```

The `sidecaption` environment is used for a sidecaption rather than a macro. The body of the float is put inside the environment. For example:

```
\begin{figure}
\begin{sidecaption}{An illustration}[fig:ill]
\centering
\includegraphics{...}
\end{sidecaption}
\end{figure}
```

whereby the caption, ‘Figure N: An illustration’, will be placed in the margin alongside the graphic, and for reference purposes will be given given the `\label fig:ill`.

```
\sidecapwidth \sidecapsep
\setsidecaps{\langle sep \rangle}{\langle width \rangle}
```

The caption is set in a box `\sidecapwidth` wide (the default is `\marginparwidth`) offset `\sidecapsep` (default `\marginparsep`) into the margin. The command `\setsidecaps` sets the `\sidecapsep` and `\sidecapwidth` to the given values. Changing the `marginpar` parameters, for example with `\setmarginnotes`, will not change the side caption settings. Note also that `\checkandfixthelayout` neither checks nor fixes the side caption parameters.

```
\sidecapmargin{\langle margin \rangle}
\ifscapmargleft \scapmarglefttrue \scapmargleftfalse
```

If the float is a single column float in a twocolumn document then the caption is always<sup>4</sup> placed in the adjacent margin, otherwise the `\sidecapmargin` command controls the margin where the sidecaption will be placed. The possible values for `\langle margin \rangle` are one of: `left`, `right`, `inner`, or `outer`. If `left` or `right` is specified the caption will go into the left or right margin. If `inner` or `outer` is specified then in a two sided document the caption will be on different sides of the typeblock according to whether it is a recto or verso page; in a one sided document the caption margin is fixed. The left margin is the default.

When the caption is to be set in the left margin, `\ifscapmargleft` is set true, and for a right margin it is set false.

```
\setsidecappos{\langle pos \rangle}
```

---

<sup>4</sup>Well, nearly always. See the `\overridescapmargin` command later.

By default a sidecaption is vertically centered with respect to the float it is captioning. This can be altered by using the `\setsidecappos` declaration. The allowed values for  $\langle pos \rangle$  are:

- t** — the top of the caption is aligned with the top of the float
- c** — (the default) the center of the caption is aligned with the center of the float
- b** — the bottom of the caption is aligned with the bottom of the float

The other kinds of simple captions can also be put at the side of a float. The positioning and styling commands for these are exactly those for `sidecaption`. Bilingual captions, which are not considered to be simple, can only be placed above or below a float; no facilities are provided for setting them at the side..

```
\begin{sidecontcaption}{\langle title \rangle} [\langle label \rangle]
the body of the float
\end{sidecontcaption}
```

Sidecaptions may be continued with the `sidecontcaption` environment.

```
\begin{sidenamedlegend} [\langle fortoc \rangle] {\langle title \rangle}
the body of the float
\end{sidenamedlegend}
```

Named legends may be set at the side with the `sidenamedlegend` environment.

```
\begin{sidelegend}{\langle title \rangle}
the body of the float
\end{sidelegend}
```

Legends may be set at the side with the `sidelegend` environment.

**Caveat:** Note that the `side...` envs expect the body of the float to be *taller* than the typeset caption/legend. In case you write a long caption/legend for a short float, you may want to visit this answer: <http://tex.stackexchange.com/a/228412/3929>.

### 10.10.1 Tweaks

```
\sidecapstyle
```

Just before the caption is set, the `\sidecapstyle` command is called. This may be used to set the styling for the particular caption. By default it sets captions that are in the left margin `raggedleft`, and those that are in the right margin are set `raggedright`. The default definition is:

```
\newcommand*\sidecapstyle{%
%% \captionnamefont{\bfseries}
\ifscapmargleft
\captionstyle{\raggedleft}%
\else
\captionstyle{\raggedright}%
\fi}
```

You can change the command to suit your purposes; for example, uncommenting the `\captionnamefont` line would result in the caption's float name being set in a bold font.

Table 10.6: Permitted arguments for some sidecaption related commands

<code>\sidecapmargin</code>	<code>\overridescapmargin</code>
left	left
right	right
inner	
outer	

```
\overridescapmargin{<margin>}
\sidecapraise
```

Sometimes the caption may not be placed exactly where you want it — it may be in the wrong margin or at the wrong height.

The command `\overridescapmargin` will force the following caption into the `<margin>` you specify which can only be `left` or `right`. In a twosided document where `\sidecapmargin` is `inner` or `outer` and the caption goes in the wrong margin, it is likely that the declaration `\strictpagecheck` will solve the problem. The wrong margin might be chosen in a twocolumn document where the float is in the second column; use

```
\overridescapmargin{right}
```

to fix this.

The caption may not be at quite the height you want with respect to the float. The caption will be raised by the length `\sidecapraise` in addition to the calculated movement (or lowered if `\sidecapraise` is negative).

```
\sidecapfloatwidth{<length>}
```

The float is set in a minipage with width `sidecapfloatwidth`, whose default definition is

```
\newcommand*{\sidecapfloatwidth}{\linewidth}
```

That is, the normal width is the same as the current `\linewidth`. For a narrow table, say, you may want to reduce this, for example to half by

```
\renewcommand*{\sidecapfloatwidth}{0.5\linewidth}
```

Note that `\sidecapfloatwidth` is a macro, not a length, so it must be altered by using a `\renewcommand*`, *not* by `\setlength`.

If you do reduce the `\sidecapfloatwidth` you may notice that the sidecaption is actually placed a distance `\sidecapsep` with respect to the float's minipage, not with respect to the text block.

Table 10.6 was created by the following code.

```
\newlength{\mylength}
\setlength{\mylength}{\linewidth}
\addtolength{\mylength}{-\sidecapsep}
\addtolength{\mylength}{-\sidecapwidth}
\begin{table}
```

```

\sidecapmargin{left}%
\renewcommand*{\sidecapfloatwidth}{\mylength}%
\raggedleft
\begin{sidecaption}{%
  Permitted arguments for some sidecaption related commands}[scap:one]
\centering
\begin{tabular}{cc} \toprule
\cs{sidecapmargin} & \cs{overridescapmargin} \\ \midrule
\texttt{left}      & \texttt{left}      \\
\texttt{right}     & \texttt{right}     \\
\texttt{inner}     & \\
\texttt{outer}     & \\ \bottomrule
\end{tabular}
\end{sidecaption}
\end{table}

```

The calculations on the `\mylength` length are so that the sidecaption and float will just fit inside the typeblock.

Note that the `\raggedleft` command before the `sidecaption` environment makes the float's minipage be placed raggedleft (i.e., moved across to the right hand edge of the typeblock) while the `\centering` centers the `tabular` within the minipage. You can get a variety of horizontal placements by judicious use of `\raggedright`, `\centering` and `\raggedleft` commands. If you do move the float sideways to leave space for the caption make sure that the caption will go to the side you want. In the example code I 'moved' the float to the right so I made sure that the caption would go on the left by explicitly setting

```
\sidecapmargin{left}
```

As far as TeX is concerned a sidecaption takes no horizontal space. If you use a sidecaption in a wrapped float from, say, the `wrapfig` package, make sure that the sidecaption gets placed where it won't be overlaid by the main text.

## 10.11 How LaTeX makes captions

This section provides an overview of how LaTeX creates captions and gives some examples of how to change the captioning style directly. The section need not be looked at more than once unless you like reading LaTeX code or you want to make changes to LaTeX's style of captioning not supported by the class.

The LaTeX kernel provides tools to help in the definition of captions, but it is the particular class that decides on their format.

```
\caption[short]{long}
```

The kernel (in `lfloat.dtx`) defines the caption command via

```

\def\caption{%
  \refstepcounter{@captype} \dblarg{\@caption\@captype}}

```

```
\@captype
```

`\@capttype` is defined by the code that creates a new float environment and is set to the environment's name (see the code for `\@xfloat` in `ltfloat.dtx`). For a figure environment, there is an equivalent to

```
\def\@capttype{figure}
```

```
\@caption{<type>}[<short>]{<long>}
```

The kernel also provides the `\@caption` macro as:

```
\long\def\@caption#1[#2]#3{\par
  \addcontentsline{\csname ext@#1\endcsname}{#1}%    <-
    {\protect\numberline{\csname the#1\endcsname}%
      {\ignorespaces #2}}
  \begingroup
    \@parboxrestore
    \if@minipage
      \@setminipage
    \fi
    \normalsize
    \@makecaption{\csname fnum@#1\endcsname}%        <-
      {\ignorespaces #3}\par
  \endgroup}
```

where `<type>` is the name of the environment in which the caption will be used. Putting these three commands together results in the user's view of the caption command as `\caption[<short>]{<long>}`.

It is the responsibility of the class (or package) which defines floats to provide definitions for `\ext@type`, `\fnum@type` and `\@makecaption` which appear in the definition of `\@caption` (in the lines marked `<-` above).

```
\ext@type
```

This macro holds the name of the extension for a 'List of...' file. For example for the figure float environment there is the definition equivalent to

```
\newcommand{\ext@figure}{lof}
```

```
\fnum@type
```

This macro is responsible for typesetting the caption number. For example, for the figure environment there is the definition equivalent to

```
\newcommand{\fnum@figure}{\figurename~\thefigure}
```

```
\@makecaption{<number>}{<text>}
```

The `\@makecaption` macro, where `<number>` is a string such as 'Table 5.3' and `<text>` is the caption text, performs the typesetting of the caption, and is defined in the standard classes (in `classes.dtx`) as the equivalent of:

```
\newcommand{\@makecaption}[2]{
  \vskip\abovecaptionskip    <- 1
  \sbox\@tempboxa{#1: #2}    <- 2
  \ifdim \wd\@tempboxa >\hsize
```



## A THOUSAND WORDS...

Figure 10.20: A picture is worth a thousand words

```

#1: #2\par                                <- 3
\else
  \global \@minipagefalse
  \hb@xt@\hsize{\hfil\box\@tempboxa\hfil}
\fi
\vskip\belowcaptionskip                  <- 4

```

```
\abovecaptionskip \belowcaptionskip
```

Vertical space is added before and after a caption (lines marked 1 and 4 in the code for `\@makecaption` above) and the amount of space is given by the lengths `\abovecaptionskip` and `\belowcaptionskip`. The standard classes set these to 10pt and 0pt respectively. If you want to change the space before or after a caption, use `\setlength` to change the values. In figures, the caption is usually placed below the illustration. The actual space between the bottom of the illustration and the baseline of the first line of the caption is the `\abovecaptionskip` plus the `\parskip` plus the `\baselineskip`. If the illustration is in a center environment then additional space will be added by the `\end{center}`; it is usually better to use the `\centering` command rather than the center environment.

The actual typesetting of a caption is effectively performed by the code in lines marked 2 and 3 in the code for `\@makecaption`; note that these are where the colon that is typeset after the number is specified. If you want to make complex changes to the default captioning style you may have to create your own version of `\@caption` using `\renewcommand`. On the other hand, many such changes can be achieved by changing the definition of the the appropriate `\fnum@type` command(s). For example, to make the figure name and number bold:

```
\renewcommand{\fnum@figure}{\textbf{\figurename~\thefigure}}
```

REMEMBER: If you are doing anything involving commands that include the `@` character, and it's not in a class or package file, you have to do it within a `\makeatletter` and `\makeatother` pairing (see §E.4). So, if you modify the `\fnum@figure` command anywhere in your document it has to be done as:

```

\makeatletter
\renewcommand{\fnum@figure}{.....}
\makeatother

```

As an example, Figure 10.20 was created by the following code:

```

\makeatletter
\renewcommand{\fnum@figure}{\textsc{\figurename~\thefigure}}
\makeatother
\begin{figure}
\centering

```

ANOTHER THOUSAND WORDS...

Figure 10.21 — A different kind of figure caption

```
A THOUSAND WORDS\ldots
\caption{A picture is worth a thousand words}\label{fig:sc}
\end{figure}
```

As another example, suppose that you needed to typeset the `\figurename` and its number in a bold font, replace the colon that normally appears after the number by a long dash, and typeset the actual title text in a sans-serif font, as is illustrated by the caption for Figure 10.21. The following code does this.

```
\makeatletter
\renewcommand{\fnum@figure}[1]{\textbf{\figurename~\thefigure}
--- \sffamily}
\makeatother
\begin{figure}
\centering
ANOTHER THOUSAND WORDS\ldots
\caption{A different kind of figure caption}\label{fig:sf}
\end{figure}
```

Perhaps a little description of how this works is in order. Doing a little bit of TeX's macro processing by hand, the typesetting lines in `\@makecaption` (lines 2 and 3) get instantiated like:

```
\fnum@figure{\figurename~\thefigure}: text
```

Redefining `\fnum@figure` to take one argument and then not using the value of the argument essentially gobbles up the colon. Using

```
\textbf{\figurename~\thefigure}
```

in the definition causes `\figurename` and the number to be typeset in a bold font. After this comes the long dash. Finally, putting `\sffamily` at the end of the redefinition causes any following text (i.e., the actual title) to be typeset using the sans-serif font.

If you do modify `\@makecaption`, then spaces in the definition may be important; also you must use the comment (%) character in the same places as I have done above. Hopefully, though, the class provides the tools that you need to make most, if not all, of any likely caption styles.

#### 10.12 Footnotes in captions

If you want to have a caption with a footnote, think long and hard as to whether this is really essential. It is not normally considered to be good typographic practice, and to rub the point in LaTeX does not make it necessarily easy to do. However, if you (or your publisher) insists, read on.

If it is present, the optional argument to `\caption` is put into the ‘List of...’ as appropriate. If the argument is not present, then the text of the required argument is put into the ‘List of...’. In the first case, the optional argument is moving, and in the second case the required argument is moving. The `\footnote` command is fragile and must be `\protected` (i.e., `\protect\footnote{}`) if it is used in a moving argument. If you don’t want the footnote to appear in the ‘List of...’, use a footnoteless optional argument and a footnoted required argument.

You will probably be surprised if you just do, for example:

```
\begin{figure}
...
\caption[For LoF]{For figure\footnote{The footnote}}
\end{figure}
```

because (a) the footnote number may be greater than you thought, and (b) the footnote text has vanished. This latter is because LaTeX won’t typeset footnotes from a float. To get an actual footnote within the float you have to use a minipage, like:

```
\begin{figure}
\begin{minipage}{\linewidth}
...
\caption[For LoF]{For figure\footnote{The footnote}}
\end{minipage}
\end{figure}
```

If you are using the standard classes you may now find that you get two footnotes for the price of one. Fortunately this will not occur with this class, nor will an unexpected increase of the footnote number.

When using a minipage as above, the footnote text is typeset at the bottom of the minipage (i.e., within the float). If you want the footnote text typeset at the bottom of the page, then you have to use the `\footnotemark` and `\footnotetext` commands like:

```
\begin{figure}
...
\caption[For LoF]{For figure\footnotemark}
\end{figure}
\footnotetext{The footnote}
```

This will typeset the argument of the `\footnotetext` command at the bottom of the page where you called the command. Of course, the figure might have floated to a later page, and then it’s a matter of some manual fiddling to get everything on the same page, and possibly to get the footnote marks to match correctly with the footnote text.

At this point, you are on your own.

## 10.13 The class versus the caption package (and its friends)

For some, the configurations for captions provided by the class, are either a bit too complicated or not complicated enough.

The caption package by Alex Sommerfeldt may provide a simpler and much more extensive configuration interface for captions. The package can be used with the class, but there are a few caveats:

## 10. Floats and captions

---

- (a) All of the special configuration macros provided by the class will no longer have any effect (caption overwrites the core, and thus our interfaces will have no effect),
- (b) `\abovecaptionskip` will be reset to 10pt, and `\belowcaptionskip` to zero. (The class would set both to `0.5\onelineskip`, so if you need to change these, move the change until after caption has been loaded)

# Eleven

---

## Rows and columns

---

The class provides extensions to the standard `array` and `tabular` environments. These are based partly on a merging of the `array` [MC18], `dcolumn` [Car14], `delarray` [Car14], `tabularx` [Car16], and `booktabs` [Fea16] packages. Much of the material in this chapter strongly reflects the documentation of these packages.

***Note.** As of September 2018: The `array`, `delarray`, `tabularx` and `dcolumn` packages are no longer embedded into the class, but rather being autoloaded from the L<sup>A</sup>T<sub>E</sub>X installation.<sup>1</sup> As the embedded versions were just carbon copies,<sup>2</sup> we get the same result but just loading the packages, with less maintenance. Plus these packages are part of the L<sup>A</sup>T<sub>E</sub>X core packages and thus is available in all L<sup>A</sup>T<sub>E</sub>X installations.*

*We have kept the documentation we had written for the manual (and updated it slightly), but refer to [MC18], [Car14], [Car16] and [Car14] for the 100% up to date documentation.*

Additionally, new kinds of tabular environments are also provided.

### 11.1 General

```
\[ \begin{array}[\langle pos \rangle]{\langle preamble \rangle} rows \end{array} \]  
\begin{tabular}[\langle pos \rangle]{\langle preamble \rangle} rows \end{tabular}  
\begin{tabular*}[\langle width \rangle][\langle pos \rangle]{\langle preamble \rangle} rows \end{tabular*}  
\begin{tabularx}[\langle width \rangle][\langle pos \rangle]{\langle preamble \rangle} rows \end{tabularx}
```

The `array` and `tabular` environments are traditional and the others are extensions. The `array` is for typesetting math and has to be within a math environment of some kind. The `tabular` series are for typesetting ordinary text.

The optional `\langle pos \rangle` argument can be one of `t`, `c`, or `b` (the default is `c`), and controls the vertical position of the array or tabular; either the top or the center, or the bottom is aligned with the baseline. Each row consists of elements separated by `&`, and finished with `\\`. There may be as many rows as desired. The number and style of the columns is specified by the `\langle preamble \rangle`. The width of each column is wide enough to contain its longest entry and the overall width of the array or tabular is sufficient to contain all the columns. However, the `tabular*` and `tabularx` environments provide more control over the width through their `\langle width \rangle` argument.

---

<sup>1</sup>As the embedded versions were more or less carbon copies, it makes much more sense to let the L<sup>A</sup>T<sub>E</sub>X-team maintain them, than us having to replace the embedded copy each time they are updated or bug fixed.

<sup>2</sup>With edited error messages.

Table 11.1: The array and tabular preamble options.

<code>l</code>	Left adjusted column.
<code>c</code>	Centered adjusted column.
<code>r</code>	Right adjusted column.
<code>p{&lt;width&gt;}</code>	Equivalent to <code>\parbox[t]{&lt;width&gt;}</code> .
<code>m{&lt;width&gt;}</code>	Defines a column of width <code>&lt;width&gt;</code> . Every entry will be centered in proportion to the rest of the line. It is somewhat like <code>\parbox{&lt;width&gt;}</code> .
<code>b{&lt;width&gt;}</code>	Coincides with <code>\parbox[b]{&lt;width&gt;}</code> .
<code>&gt;{&lt;decl&gt;}</code>	Can be used before an <code>l</code> , <code>r</code> , <code>c</code> , <code>p</code> , <code>m</code> or a <code>b</code> option. It inserts <code>&lt;decl&gt;</code> directly in front of the entry of the column.
<code>&lt;{&lt;decl&gt;}</code>	Can be used after an <code>l</code> , <code>r</code> , <code>c</code> , <code>p{...}</code> , <code>m{...}</code> or a <code>b{...}</code> option. It inserts <code>&lt;decl&gt;</code> right after the entry of the column.
<code> </code>	Inserts a vertical line. The distance between two columns will be enlarged by the width of the line.
<code>@{&lt;decl&gt;}</code>	Suppresses inter-column space and inserts <code>&lt;decl&gt;</code> instead.
<code>!{&lt;decl&gt;}</code>	Can be used anywhere and corresponds with the <code> </code> option. The difference is that <code>&lt;decl&gt;</code> is inserted instead of a vertical line, so this option doesn't suppress the normally inserted space between columns in contrast to <code>@{...}</code> .
<code>*{&lt;num&gt;}{&lt;opts&gt;}</code>	Equivalent to <code>&lt;num&gt;</code> copies of <code>&lt;opts&gt;</code>
<code>w{&lt;align&gt;}{&lt;width&gt;}</code>	New in <i>array</i> v2.4h, 2018. Here <code>&lt;align&gt;</code> is one of <code>l</code> , <code>c</code> or <code>r</code> . The construction corresponds to every cell in the column being formatted as <code>\makebox[&lt;width&gt;][&lt;align&gt;]{&lt;cell&gt;}</code> . It will silently overprint if the contents are wider than <code>&lt;width&gt;</code> .
<code>W{&lt;align&gt;}{&lt;width&gt;}</code>	New in <i>array</i> v2.4h, 2018. Similar to <code>w</code> , but issues an overfull warning if the contents is too wide.
<code>D{&lt;ssep&gt;}{&lt;osep&gt;}{&lt;places&gt;}</code>	Column entries aligned on a 'decimal point'

## 11.2 The preamble

You use the *<preamble>* argument to the array and tabular environments to specify the number of columns and how you want column entries to appear. The preamble consists of a sequence of options, which are listed in Table 11.1.

Examples of the options include:

- A flush left column with bold font can be specified with `>{\bfseries}l`.

```

\begin{center}
\begin{tabular}{>{\large}c >{\large\bfseries}l >{\large\itshape}c}
\toprule
A    & B    & C    \\
100  & 10   & 1     \\
\bottomrule
\end{tabular}

```

`\end{center}`

A	B	C
100	<b>10</b>	1

- In columns which have been generated with p, m or b, the default value of `\parindent` is 0pt.

```
\begin{center}
\begin{tabular}{m{1cm}m{1cm}m{1cm}} \toprule
1 1 1 1 1 1 1 1 1 1 1 &
2 2 2 2 2 2 2 2 &
3 3 3 3 & \bottomrule
\end{tabular}
\end{center}
```

1 1 1 1	2 2 2 2	3 3 3 3
1 1 1 1	2 2 2 2	
1 1 1 1		

The `\parindent` for a particular column can be changed with, for example

```
>\setlength{\parindent}{1cm}}p
```

```
\begin{center}
\begin{tabular}{>\setlength{\parindent}{5mm}}p{2cm} p{2cm}} \toprule
1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 &
1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 & \bottomrule
\end{tabular}
\end{center}
```

1 2 3 4 5 6	1 2 3 4 5 6 7 8
7 8 9 0 1 2 3 4	9 0 1 2 3 4 5 6
5 6 7 8 9 0	7 8 9 0

- The specification `>{$}c<{$}` generates a column in math mode in a `tabular` environment. When used in an `array` environment the column is in LR mode (because the additional `$`'s cancel the existing `$`'s).
- Using `c!\hspace{1cm}}c` you get space between two columns which is enlarged by one centimeter, while `c@{\hspace{1cm}}c` gives you exactly one centimeter space between two columns.
- Elsewhere reasons are given why you should not use vertical lines (e.g., the `|` option) in tables. Any examples that use vertical lines are for illustrative purposes only where it is advantageous to denote column boundaries, for example to show different spacing effects.

### 11.2.1 D column specifiers

**Recommended alternative**

As an alternative to the D column (through using the dcolumn package), you can use the siunitx package which have the added bonus of many more configuration and formatting features. See [Wri18] for details.

In financial tables dealing with pounds and pence or dollars and cents, column entries should be aligned on the separator between the numbers. The D column specifier is provided for columns which are to be aligned on a ‘decimal point’. The specifier takes three arguments.

$D\{\langle ssep \rangle\}\{\langle osep \rangle\}\{\langle places \rangle\}$

$\langle ssep \rangle$  is the single character which is used as the separator in the source .tex file. Thus it will usually be ‘.’ or ‘,’.

$\langle osep \rangle$  is the separator in the output, this may be the same as the first argument, but may be any math-mode expression, such as  $\backslash cdot$ . A D column always uses math mode for the digits as well as the separator.

$\langle places \rangle$  should be the maximum number of decimal places in the column (but see below for more on this). If this is negative, any number of decimal places can be used in the column, and all entries will be centred on (the leading edge of) the separator. Note that this can cause a column to be too wide; for instance, compare the first two columns in the example below.

Here are some example specifications which, for convenience, employ the  $\backslash newcolumnntype$  macro described later.

```
 $\backslash newcolumnntype{d}[1]{D\{.\}\{\backslash cdot\}\{#1\}}$ 
```

This defines d to be a column specifier taking a single argument specifying the number of decimal places, and the .tex file should use ‘.’ as the separator, with  $\backslash cdot$  (.) being used in the output.

```
 $\backslash newcolumnntype\{.\}{D\{.\}\{-1\}}$ 
```

The result of this is that ‘.’ specifies a column of entries to be centered on the ‘.’.

```
 $\backslash newcolumnntype\{,\}{D\{,\}\{2\}}$ 
```

And the result of this is that ‘,’ specifies a column of entries with at most two decimal places after a ‘,’.

The following table is typeset from this code:

```
 $\backslash begin{center}$ 
 $\backslash begin{tabular}\{ | d\{-1\} | d\{2\} | . | , | \}$ 
1.2 & 1.2 & & 1.2 & & 1,2 & \\\
1.23 & 1.23 & & 12.5 & & 300,2 & \\\
1121.2 & 1121.2 & & 861.20 & & 674,29 & \\\
184 & 184 & & 10 & & 69 & \\\
.4 & .4 & & & & ,4 & \\\
& & & .4 & & & \\
 $\backslash end{tabular}$ 
 $\backslash end{center}$ 
```



1.2	1.2	1.2	1,2
1.23	1.23	12.5	300,2
1121.2	1121.2	861.20	674,29
184	184	10	69
.4	.4		,4
		.4	

Note that the first column, which had a negative  $\langle places \rangle$  argument is wider than the second column, so that the decimal point appears in the middle of the column.

The third  $\langle places \rangle$  argument may specify *both* the number of digits to the left and to the right of the decimal place. The third column in the next table below is set with  $D\{. \}{. \}{5.1}$  and in the second table,  $D\{. \}{. \}{1.1}$ , to specify ‘five places to the left and one to the right’ and ‘one place to the left and one to the right’ respectively. (You may use ‘,’ or other characters, not necessarily ‘.’ in this argument.) The column of figures is then positioned such that a number with the specified numbers of digits is centred in the column.

Be careful if you have table headings inserted, say, with

```
\multicolumn{1}{c}{...}
```

to over-ride the D column type, as the overall result may not look quite as good as you might expect. In the next pair of tabulars the first column is set with

```
D\{. \}{. \}{-1}
```

to produce a column centered on the ‘,’ and the second column is set with

```
D\{. \}{. \}{1}
```

to produce a right aligned column.

#### Source for example 11.1

```
\begin{center}\small
\begin{tabular}[t]{|D\{. \}{-1}|D\{. \}{1}|D\{. \}{5.1}|}
\multicolumn{1}{|c|}{head} &
\multicolumn{1}{c|}{head} &
\multicolumn{1}{c|}{head} & \\
1 & 2 & 3 & \\
1.2 & 1.2 & 1.2 & \\
11212.2 & 11212.2 & 11212.2 & \\
.4 & .4 & .4 & \\
\end{tabular}
\hfill
\begin{tabular}[t]{|D\{. \}{-1}|D\{. \}{1}|D\{. \}{1.1}|}
\multicolumn{1}{|c|}{wide heading} &
\multicolumn{1}{c|}{wide heading} &
\multicolumn{1}{c|}{wide heading} & \\
1 & 2 & 3 & \\
1.2 & 1.2 & 1.2 & \\
\end{tabular}
```

Typeset example 11.1: Tabular with narrow and wide headings

head	head	head	wide heading	wide heading	wide heading
1	2	3	1	2	3
1.2	1.2	1.2	1.2	1.2	1.2
11212.2	11212.2	11212.2	.4	.4	.4
.4	.4	.4			

```
.4      & .4      & .4
\end{tabular}
\end{center}
```

In both of these tables the first column is set with `D{.}{.}{-1}` to produce a column centered on the ‘.’, and the second column is set with `D{.}{.}{1}` to produce a right aligned column.

The centered (first) column produces columns that are wider than necessary to fit in the numbers under a heading as it has to ensure that the decimal point is centered. The right aligned (second) column does not have this drawback, but under a wide heading a column of small right aligned figures is somewhat disconcerting.

The notation for the *places* argument also enables columns that are centred on the mid-point of the separator, rather than its leading edge; for example

```
D{+}{\, \pm \,}{3,3}
```

will give a symmetric layout of up to three digits on either side of a  $\pm$  sign.

### 11.2.2 Defining new column specifiers

You can easily type

```
>{\<some declarations>}{c}<{\<some more declarations>}}
```

when you have a one-off column in a table, but it gets tedious if you often use columns of this form. The `\newcolumntype` lets you define a new column option like, say

```
\newcolumntype{x}{>{\<some declarations>}{c}<{\<some more declarations>}}
```

and you can then use the *x* column specifier in the preamble wherever you want a column of this kind.

```
\newcolumntype{<char>}[<nargs>]{<spec>}
```

The *char* argument is the character that identifies the option and *spec* is its specification in terms of the regular preamble options. The `\newcolumntype` command is similar to `\newcommand` — *spec* itself can take arguments with the optional *nargs* argument declaring their number.

For example, it is commonly required to have both math-mode and text columns in the same alignment. Defining:

```
\newcolumntype{C}{>{\$}c<{\$}}
\newcolumntype{L}{>{\$}l<{\$}}
```

```
\newcolumnntype{R}{>{\$}r<{\$}}
```

Then C can be used to get centred text in an array, or centred math-mode in a tabular. Similarly L and R are for left- and right-aligned columns.

The *spec* in a `\newcolumnntype` command may refer to any of the primitive column specifiers (see table 11.1 on page 206), or to any new letters defined in other `\newcolumnntype` commands.

```
\showcols
```

A list of all the currently active `\newcolumnntype` definitions is sent to the terminal and log file if the `\showcols` command is given.

### 11.2.3 Surprises

- A preamble of the form `{wx*{0}{abc}yz}` is treated as `{wxyz}`
- An incorrect positional argument, such as `[Q]`, is treated as `[t]`.
- A preamble such as `{cc*{2}}` with an error in a `*`-form will generate an error message that is not particularly helpful.
- Error messages generated when parsing the column specification refer to the preamble argument *after* it has been re-written by the `\newcolumnntype` system, not to the preamble entered by the user.
- Repeated `<` or `>` constructions are allowed. `>{\decs1}>{\decs2}` is treated the same as `>{\decs2}{\decs1}`.

The treatment of multiple `<` or `>` declarations may seem strange. Using the obvious ordering of `>{\decs1}{\decs2}` has the disadvantage of not allowing the settings of a `\newcolumnntype` defined using these declarations to be overridden.

- The `\extracolsep` command may be used in `@`-expressions as in standard LaTeX, and also in `!`-expressions.

The use of `\extracolsep` is subject to the following two restrictions. There must be at most one `\extracolsep` command per `@`, or `!` expression and the command must be directly entered into the `@` expression, not as part of a macro definition. Thus

```
\newcommand{\ef}{\extracolsep{\fill}} ... @{\ef}
```

does not work. However you can use something like

```
\newcolumnntype{e}{@{\extracolsep{\fill}}}
```

instead.

- As noted by the LaTeX book [Lam94], a `\multicolumn`, with the exception of the first column, consists of the entry and the *following* inter-column material. This means that in a tabular with the preamble `|1|1|1|1|` input such as `\multicolumn{2}{|c|}` in anything other than the first column is incorrect.

In the standard array/tabular implementation this error is not noticeable as a `|` takes no horizontal space. But in the class the vertical lines take up their natural width and you will see two lines if two are specified — another reason to avoid using `|`.

## 11.3 The array environment

Mathematical arrays are usually produced using the array environment.

```
\[ \begin{array}[\langle pos \rangle]{\langle preamble \rangle} rows \end{array} \]  
\[ \begin{array}[\langle pos \rangle]{\langle left \rangle}{\langle preamble \rangle}{\langle right \rangle} rows \end{array} \]
```

Math formula are usually centered in the columns, but a column of numbers often looks best flush right, or aligned on some distinctive feature. In the latter case the D column scheme is very handy.

```
\[ \begin{array}{lcr}  
a +b +c & d - e - f & 123 \\  
g-h & j k & 45 \\  
l & m & 6  
\end{array} \]
```

$$\begin{array}{lcr} a + b + c & d - e - f & 123 \\ g - h & jk & 45 \\ l & m & 6 \end{array}$$

Arrays are often enclosed in brackets or vertical lines or brackets or other symbols to denote math constructs like matrices. The delimiters are often large and have to be indicated using `\left` and `\right` commands.

```
\[ \left[ \begin{array}{cc}  
x_{1} & x_{2} \\  
x_{3} & x_{4} \\  
\end{array} \right] \]
```

$$\begin{bmatrix} x_1 & x_2 \\ x_3 & x_4 \end{bmatrix}$$

The class's array environment is an extension of the standard environment in that it provides a system of implicit `\left` `\right` pairs. If you want an array surrounded by parentheses, you can enter:

```
\[ \begin{array}({cc})a&b\\c&d\end{array} \]
```

$$\begin{pmatrix} a & b \\ c & d \end{pmatrix}$$

Or, a little more complex

```
\[ \begin{array}({c})  
 \begin{array}{|cc|}  
 x_{1} & x_{2} \\  
 x_{3} & x_{4} \\  
 \end{array} \\  
 y \\  
 z  
 \end{array} \]
```

$$\left( \begin{array}{cc|c} x_1 & x_2 & \\ x_3 & x_4 & \\ & y & \\ & z & \end{array} \right)$$

And you can do things like this:

```
\[ a = {\begin{array}{|*{20}{c}|}
      x-\lambda & 1 & & 0 \\
      0 & & x-\lambda & 1 \\
      0 & & & x-\lambda \\
\end{array}}
      ^{\{2\}} \]
```

$$a = \begin{vmatrix} x - \lambda & 1 & 0 \\ 0 & x - \lambda & 1 \\ 0 & & x - \lambda \end{vmatrix}^2$$

As another example, a construct equivalent to plain TeX's `\cases` could be defined by:

```
\[ f(x)={\begin{array}{\{lL\}.
      0 & \& \text{if } \$x=0\$\\
      \sin(x)/x & \& \text{otherwise}
\end{array}} \]
```

$$f(x) = \begin{cases} 0 & \text{if } x = 0 \\ \sin(x)/x & \text{otherwise} \end{cases}$$

Here L denotes a column of left aligned L-R text, as described earlier. Note that as the delimiters must always be used in pairs, the ‘.’ must be used to denote a ‘null delimiter’.

This feature is especially useful if the `[t]` or `[b]` arguments are also used. In these cases the result is not equivalent to surrounding the environment by `\left\cdots\right`, as can be seen from the following example:

```
\begin{array}[t]{c} 1\!/\!2\!/\!3 \end{array}
\begin{array}[c]{c} 1\!/\!2\!/\!3 \end{array}
\begin{array}[b]{c} 1\!/\!2\!/\!3 \end{array}
\quad\quad\quad
\left(\begin{array}[t]{c} 1\!/\!2\!/\!3 \end{array}\right)
\left(\begin{array}[c]{c} 1\!/\!2\!/\!3 \end{array}\right)
\left(\begin{array}[b]{c} 1\!/\!2\!/\!3 \end{array}\right)
```

$$\begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} \quad \text{not} \quad \left( \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} \right) \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix}$$

Table 11.2: Demonstrating the parts of a table

stub	head subhead	spanner		head
		head subhead	head	
A	a	b	c	d
B	e	f	g	h
cut-in head				
C	i	j	k	l
D	m	n	o	p

## 11.4 Tables

A table is one way of presenting a large amount of information in a limited space. Even a simple table can presents facts that could require several wordy paragraphs — it is not only a picture that is worth a thousand words.

A table should have at least two columns, otherwise it is really a list, and many times has more. The leftmost column is often called the *stub* and it typically contains a vertical listing of the information categories in the other columns. The columns have *heads* (or *headings*) at the top indicating the nature of the entries in the column, although it is not always necessary to provide a head for the stub if the heading is obvious from the table’s caption. Column heads may include subheadings, often to specify the unit of measurement for numeric data.

A less simple table may need two or more levels of headings, in which case *decked heads* are used. A decked head consists of a *spanner head* and the two or more column heads it applies to. A horizontal *spanner rule* is set between the spanner and column heads to show which columns belong to the spanner.

Double decking, and certainly triple decking or more, should be avoided as it can make it difficult following them down the table. It may be possible to use a *cut-in head* instead of double decking. A cut-in head is one that cuts across the columns of the table and applies to all the matter below it. To try and clarify, the parts of a table are shown diagrammatically in Table 11.2.

No mention has been made of vertical rules in a table, and this is deliberate. There should be no vertical rules in a table. Rules, if used at all, should be horizontal only, and these should be single, not double or triple. It’s not that ink is expensive, or that practically no typesetting is done by hand any more, it is simply that the visual clutter should be eliminated.

For example, in Table 11.3 which was produced from the code below, Table 11.3(a) is from the LaTeX book and Table 11.3(b) is how Simon Fear [Fea16] suggests it should be cleaned up. Notice how both the revised code and the table are generally simpler than the originals.

```
\begin{table}
\centering
\caption{Two views of one table} \label{tab:twoviews}
```

Table 11.3: Two views of one table

(a) Before			(b) After		
gnats	gram	\$13.65	Item		
	each	.01	Animal	Description	Price (\$)
gnu	stuffed	92.50	Gnat	per gram	13.65
emu		33.33		each	0.01
armadillo	frozen	8.99	Gnu	stuffed	92.50
			Emu	stuffed	33.33
			Armadillo	frozen	8.99

```

\subtop[Before]{\label{tab:before}%
\begin{tabular}{|l|lr|} \hline
gnats      & gram      & $13.65 \\ \cline{2-3}
           & each      & .01 \\ \hline
gnu        & stuffed   & 92.50 \\ \cline{1-1} \cline{3-3}
emu        &           & 33.33 \\ \hline
armadillo & frozen    & 8.99 \\ \hline
\end{tabular}}
\hfill
\subtop[After]{\label{tab:after}%
\begin{tabular}{@{}llr@{}} \toprule
\multicolumn{2}{c}{Item} \\ \cmidrule(r){1-2}
Animal & Description & Price ($) \\ \midrule
Gnat   & per gram    & 13.65 \\
       & each        & 0.01 \\
Gnu    & stuffed     & 92.50 \\
Emu    & stuffed     & 33.33 \\
Armadillo & frozen     & 8.99 \\ \bottomrule
\end{tabular}
}
\end{table}

```

Columns of numbers often end with a line giving the total or result. A horizontal rule may be drawn to separate the result from the rest but a small amount of white space may do just as well, as in Table 11.4.

Some other points are:

- Put the units in the column heading (not in the body of the table).
- Always precede a decimal point by a digit; thus 0.1 *not* just .1.
- Do not use ‘ditto’ signs or any other such convention to repeat a previous value. In many circumstances a blank will serve just as well. If it won’t, then repeat the value.

Not every table requires all the elements mentioned above. For instance, in Charles Dickens’s *David Copperfield* (1849–1850) Mr Wilkins Micawber states:

Table 11.4: Micawber’s law

Income	£20-0-0	£20-0-0
Expenditure	£19-0-6	£20-0-6
Result	happiness	misery

Table 11.5: A narrow table split half and half

Relative contents of odd isotopes for heavy elements					
Element	Z	$\gamma$	Element	Z	$\gamma$
Sm	62	1.480	W	74	0.505
Gd	64	0.691	Os	76	0.811
Dy	66	0.930	Pt	78	1.160
...			...		

‘Annual income twenty pounds, annual expenditure nineteen six, result happiness. Annual income twenty pounds, annual expenditure twenty pounds ought and six, result misery.’

This can also be represented in tabular form<sup>3</sup> as in Table 11.4.

Long narrow tables do not look well on the page. In such cases the table could be set half and half instead, as in Table 11.5.

### 11.5 Fear’s rules

Simon Fear disapproves of the default LaTeX table rules and wrote the booktabs package [Fea16] to provide better horizontal rules. Like many typographers, he abhors vertical rules. The following is taken almost verbatim from the booktabs package.

In the simplest of cases a table begins with a top rule, has a single row of column headings, then a dividing rule, and after the columns of data it is finished off with a final rule. The top and bottom rules are normally set heavier (i.e., thicker or darker) than any intermediate rules.

```
\toprule[⟨width⟩] \bottomrule[⟨width⟩] \heavyrulewidth
\midrule[⟨width⟩] \lightrulewidth
\aboverulesep \belowrulesep \doublerulesep
```

All the rule commands here go immediately after the closing `\` of the preceding row (except of course `\toprule`, which comes right after the start of the environment). Each rule has an optional length argument, `⟨width⟩`, which you can use to locally change the default width of the rule.

`\toprule` draws a rule (with a default width of `\heavyrulewidth`), and `\belowrulesep` vertical space inserted below it.

`\midrule` draws a rule (default `\lightrulewidth` width) with `\aboverulesep` space above it and `\belowrulesep` below it.

<sup>3</sup>But putting Josh Billings’ (Henry Wheeler Shaw) corollary: ‘Live within your income, even if you have to borrow to do it.’ into tabular form would not work.



`\bottomrule` draws a rule with a default width of `\heavyrulewidth`. There is `\aboverulesep` space above it and `\belowrulesep` space below it.

If a rule immediately follows another the space between them is `\doublerulesep`, but as you are not going to use double rules you won't be concerned about this.

```
\cmidrule[⟨width⟩](⟨trim⟩){⟨m-n⟩}
\cmidrulewidth \cmidrulekern
```

Spanner rules do not extend the full width of the table, and the `\cmidrule` is provided for that purpose. This draws a rule, default thickness `\cmidrulewidth`, across columns `⟨m⟩` to `⟨n⟩` inclusive (where `⟨m⟩` and `⟨n⟩` are column numbers, with `⟨m⟩` not greater than `⟨n⟩`).

Generally, this rule should not come to the full width of the end columns, and this is especially the case if you have to begin a `\cmidrule` straight after the end of another one. You can use the optional trimming argument commands, which are `(r)`, `(l)` and `(rl)` or `(lr)`, indicated whether the right and/or left ends of the rule should be trimmed. Note the exceptional use of parentheses instead of brackets for this optional argument.

`\cmidrule` draws a rule from column `m` to `n` with a default thickness of `\cmidrulewidth`. Adjacent `\cmidrules`, for example

```
... \ \cmidrule{2-3}\cmidrule{5-7}
```

have the same vertical alignment. It is best not to leave any space between these commands. The space above and below is normally `\aboverulesep` and `\belowrulesep`.

If you are forced into having double spanner rules then you will reluctantly have to insert the command `\morecmidrules` between the commands for the upper and lower rules. For example:

```
... \ \cmidrule{2-3}\cmidrule{5-7}\morecmidrules\cmidrule{2-3}
```

will draw double rules across columns 2 and 3. You must finish off the rules for one row before starting the lower set of rules. There must not be any space surrounding the `\morecmidrules` macro. The upper and lower rules are separated by `\cmidrulesep`.

```
\addlinespace[⟨width⟩] \defaultaddspace
```

Occasionally extra space between certain rows of a table may be helpful; for example, before the last row if this is a total. This is simply a matter of inserting `\addlinespace` after the `\ \` alignment marker. You can think of `\addlinespace` as being a white rule of width `⟨width⟩`. The default space is `\defaultaddspace` which gives rather less than a whole line space. If another rule follows the amount of whitespace is increased by `\doublerulesep`.

```
\specialrule{⟨width⟩}{⟨abovespace⟩}{⟨belowspace⟩}
```

You can, but should not, generate peculiar spacing between rules by using `\specialrule`. The three required arguments are the width, `⟨width⟩`, of the rule and the spaces above (`⟨abovespace⟩`) and below (`⟨belowspace⟩`). `\specialrule` ignores a preceding rule but if there is a following one then `⟨belowspace⟩` will be increased by `\doublerulesep`.

The default dimensions are

```
\heavyrulewidth = 0.08em
\lightrulewidth = 0.05em
\cmidrulewidth = 0.03em
\belowrulesep = 0.65ex
\aboverulesep = 0.4ex
```

```
\defaultaddspace = 0.5em
\cmidrulekern = 0.25em
```

The last of these, `\cmidrulekern`, is the amount by which a `\cmidrule` is trimmed at the ends indicated in the `()` option. In the construction

```
\cmidrule(r){1-2}\cmidrule(l){3-4}
```

there is a total of 0.5em separating the two rules. Currently the only way to get special effects is to reset `\cmidrulekern` as appropriate; the amount of trimming is not available as an argument in the current implementation of `\cmidrule`.

An example of the commands in use was given by the code to produce Table 11.3(b) on page 215:

```
\begin{tabular}{@{}llr@{}} \toprule
\multicolumn{2}{c}{Item} \\\cmidrule(r){1-2}
Animal & Description & Price (\$)\\ \midrule
Gnat   & per gram   & 13.65 \\\
        & each       & 0.01 \\\
Gnu    & stuffed    & 92.50 \\\
Emu    & stuffed    & 33.33 \\\
Armadillo & frozen    & 8.99 \\\bottomrule
\end{tabular}
```

### 11.5.1 Fills

The rules described previously go between rows. Sometimes it may be desirable to put a rule or something similar within a row.

```
\downbracefill \hrulefill \upbracefill
```

Examples of `\downbracefill`, `\hrulefill`, and `\upbracefill` are illustrated in Table 11.6, typeset from the code below. Surprisingly these are ordinary text commands, not math mode commands.

```
\begin{table}
\centering
\caption{Example table with fills} \label{tab:fills}
\begin{tabular}{rrrrr}
1 & 2 & 3 & 4 & 5 \\\
Q & & fgh & jklm & qwerty \\\
v & as & x & y & z \\\
g & nnn & \multicolumn{3}{c}{\upbracefill} \\\
\multicolumn{3}{c}{\downbracefill} & pq & dgh \\\
k & j & t & co & ytrewq \\\
1 & 2 & 3 & \multicolumn{2}{c}{\hrulefill}
\end{tabular}
\end{table}
```

Here are the same fills, but this time in an array environment. are shown afterwards. Notice the `$$` in the array surrounding the fills. Normally `$. . . $` is used to typeset a small amount of math mode material in the middle of text. In this case, as the array is already in math mode the `$. . . $` are used to typeset a small amount of text material within math mode.

Table 11.6: Example table with fills

1	2	3	4	5
Q		fgh	jklm	qwerty
v	as	x	y	z
g	nnn			
			pq	dgh
k	j	t	co	ytrewq
1	2	3		

```

\begin{displaymath}
\begin{array}{rrrrr}
1 & 2 & & 3 & 4 & & 5 \\
Q & & & fgh & jklm & & qwerty \\
v & as & & x & y & & z \\
g & nnn & & \multicolumn{3}{c}{\upbracefill} \\
\multicolumn{3}{c}{\downbracefill} & pq & dgh \\
k & j & & t & co & & ytrewq \\
1 & 2 & & 3 & \multicolumn{2}{c}{\hrulefill}
\end{array}
\end{displaymath}

```

1	2	3	4	5
<i>Q</i>		<i>fgh</i>	<i>jklm</i>	<i>qwerty</i>
<i>v</i>	<i>as</i>	<i>x</i>	<i>y</i>	<i>z</i>
<i>g</i>	<i>nnn</i>			
			<i>pq</i>	<i>dgh</i>
<i>k</i>	<i>j</i>	<i>t</i>	<i>co</i>	<i>ytrewq</i>
1	2	3		

You can define your own ‘fill’. For example:

```

\newcommand*\upbracketfill{%
  \vrule height 4pt depth 0pt\hrulefill%
  \vrule height 4pt depth 0pt}

```

is a fill that has the appearance of a (horizontal) bracket. It can be used like this:

```

\begin{displaymath}
\begin{array}{cccc}
1 & 2 & 3 & 4 \\
a & \multicolumn{2}{c}{\upbracketfill} & d \\
A & B & C & D
\end{array}
\end{displaymath}

```

1	2	3	4
<i>a</i>	<i>┌───┐</i>		<i>d</i>
<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>

Figure 11.1: Example of a regular `tabular`

Multicolumn entry!		THREE	FOUR
one	The width of this column is fixed (5.5pc).	three	Column four will act in the same way as column two, with the same width.

### 11.6 Tabular environments

```
\begin{tabular}[\langle pos \rangle]{\langle format \rangle} rows \end{tabular}
\begin{tabular*}[\langle width \rangle][\langle pos \rangle]{\langle format \rangle} rows \end{tabular*}
\begin{tabularx}[\langle width \rangle][\langle pos \rangle]{\langle format \rangle} rows \end{tabularx}
```

A table created using the `tabular` environment comes out as wide as it has to be to accomodate the entries. On the other hand, both the `tabular*` and `tabularx` environments let you specify the overall width of the table via the additional `\langle width \rangle` argument.

The `tabular*` environment makes any necessary adjustment by altering the intercolumn spaces while the `tabularx` environment alters the column widths. Those columns that can be adjusted are noted by using the letter `X` as the column specifier in the `\langle format \rangle`. Once the correct column widths have been calculated the `X` columns are converted to `p` columns.

#### 11.6.1 Examples

The following code is used for a regular `tabular`.

```
\begin{figure}
\centering
\caption{Example of a regular \texttt{tabular}}
\begin{tabular}{|c|p{5.5pc}|c|p{5.5pc}|} \hline
\multicolumn{2}{|c|}{Multicolumn entry!} & THREE & FOUR \\ \hline
one & 
\raggedright\arraybackslash The width of this column is fixed
(5.5pc). & three & 
\raggedright\arraybackslash Column four will act in the same
way as column two, with the same width. \\ \hline
\end{tabular}
\end{figure}
```

The following examples use virtually the same contents, the major differences are the specifications of the environment.

Note that the horizontal rules extend beyond the last column. There are no `X` columns and the total width required to set the `tabular*` is less than the 250pt specified for the width.

Compare the previous narrow `tabular*` with the next one which is set with

```
\begin{tabular*}{300pt}%
```

Figure 11.2: Example `tabularx` and `tabular*` with widths of 250pt

\begin{tabularx}{250pt}{ c X c X }		THREE	FOUR
one	Multicolumn entry! The width of this column depends on the width of the table. <sup>4</sup>	three	Column four will act in the same way as column two, with the same width.

\begin{tabular*}{250pt}{ c p{5.5pc} c p{5.5pc} }		THREE	FOUR
one	Multicolumn entry! The width of this column is fixed (5.5pc).	three	Column four will act in the same way as column two, with the same width.

Figure 11.3: Example `tabularx` and `tabular*` with widths of 300pt

\begin{tabularx}{300pt}{ c X c X }		THREE	FOUR
one	Multicolumn entry! The width of this column depends on the width of the table.	three	Column four will act in the same way as column two, with the same width.

\begin{tabular*}{300pt}{ @{\extracolsep{\fill}}c p{5.5pc} c p{5.5pc} }		THREE	FOUR
one	Multicolumn entry! The width of this column's text is fixed (5.5pc).	three	Column four will act in the same way as column two, with the same width.

{|@{\extracolsep{\fill}}c|p{5.5pc}|c|p{5.5pc}|}

The main differences between the `tabularx` and `tabular*` environments are:

- `tabularx` modifies the widths of the *columns*, whereas `tabular*` modifies the widths of the intercolumn *spaces*.
- `tabular` and `tabular*` environments may be nested with no restriction, however if one `tabularx` environment occurs inside another, then the inner one *must* be enclosed by `{ }`.

- The body of the `tabularx` environment is in fact the argument to a command, and so certain constructions which are not allowed in command arguments (like `\verb`) may not be used.<sup>5</sup>
- `tabular*` uses a primitive capability of TeX to modify the inter column space of an alignment. `tabularx` has to set the table several times as it searches for the best column widths, and is therefore much slower. Also the fact that the body is expanded several times may break certain TeX constructs.

`\tracingtabularx`

Following the `\tracingtabularx` declaration all later `tabularx` environments will print information about column widths as they repeatedly re-set the tables to find the correct widths.

By default the `X` specification is turned into `p{<some value>}`. Such narrow columns often require a special format, which can be achieved by using the `>` syntax. For example, `>\small X`. Another format which is useful in narrow columns is `raggedright`, however LaTeX's `\raggedright` macro redefines `\` in a way which conflicts with its use in `tabular` or `array` environments.

`\arraybackslash`

For this reason the command `\arraybackslash` is provided; this may be used after a `\raggedright`, `\raggedleft` or `\centering` declaration. Thus a `tabularx` format may include

```
>\raggedright\arraybackslashX
```

These format specifications may of course be saved using the command, `\newcolumntype`. After specifying, say,

```
\newcolumntype{Y}{>\small\raggedright\arraybackslashX}
```

then `Y` could be used in the `tabularx` format argument.

`\tabularxcolumn`

The `X` columns are set using the `p` column, which corresponds to `\parbox[t]`. You may want them set using, say, the `m` column, which corresponds to `\parbox[c]`. It is not possible to change the column type using the `>` syntax, so another system is provided. `\tabularxcolumn` should be defined to be a macro with one argument, which expands to the `tabular` format specification that you want to correspond to `X`. The argument will be replaced by the calculated width of a column.

The default definition is

```
\newcommand{\tabularxcolumn}[1]{p{#1}}
```

This may be changed, for instance

```
\renewcommand{\tabularxcolumn}[1]{>\small m{#1}}
```

so that `X` columns will be typeset as `m` columns using the `\small` font.

Normally all `X` columns in a single table are set to the same width, however it is possible to make `tabularx` set them to different widths. A format argument of

---

<sup>5</sup>Actually, `\verb` and `\verb*` may be used, but they may treat spaces incorrectly, and the argument can not contain an unmatched `{` or `}`, or a `%` character.

```
{>{\hsize=.5\hsize}X>{\hsize=1.5\hsize}X}
```

specifies two columns, where the second will be three times as wide as the first. If you think you need to do things like this try and redesign your table. However, if you must you should follow these two rules.

- Make sure that the sum of the widths of all the X columns is unchanged. (In the above example, the new widths still add up to twice the default width, the same as two standard X columns.)
- Do not use `\multicolumn` entries which cross any X column.

`tabularx` will not set X columns to a negative width. If the widths of the ‘normal’ columns of the table already total more than the requested total width you will get the warning ‘X columns too narrow (table too wide)’. The X columns will be set to a width of 1em and so the table itself will be wider than the requested total width given in the argument to the environment.

The standard `\verb` macro does not work inside a `tabularx`, just as it does not work in the argument to any macro.

```
\TX@verb
```

The ‘poor man’s `\verb`’ (and `\verb*`) defined here is based on page 382 of the *TeXbook*. As explained there, doing verbatim this way means that spaces are not treated correctly, and so `\verb*` may well be useless. The mechanism is quite general, and any macro which wants to allow a form of `\verb` to be used within its argument may

```
\let\verb=\TX@verb
```

It must ensure that the real definition is restored afterwards.

This version of `\verb` and `\verb*` are subject to the following restrictions:

1. Spaces in the argument are not read verbatim, but may be skipped according to TeX’s usual rules.
2. Spaces will be added to the output after control words, even if they were not present in the input.
3. Unless the argument is a single space, any trailing space, whether in the original argument, or added as in (2), will be omitted.
4. The argument must not end with `\`, so `\verb|\|` is not allowed, however, because of (3), `\verb|\ |` produces `\`.
5. The argument must be balanced with respect to `{` and `}`. So `\verb|{|` is not allowed.
6. A comment character like `%` will not appear verbatim. It will act as usual, commenting out the rest of the input line!
7. The combinations `?‘` and `!‘` will appear as `?`` and `!`` if the Computer Typewriter font is being used.

## 11.7 Spaces and rules

### 11.7.1 Spacing

Sometimes tabular rows appear vertically challenged.

```
\arraystretch
```

The macro `\arraystretch` controls the spacing between rows. The normal space is multiplied by the value of `\arraystretch`, whose default definition is

```
\newcommand{\arraystretch}{1.0}
```

If this is changed to 1.25, for example, the row spacing is increased by 25%.

```
\extrarowheight
```

If the length `\extrarowheight` is positive, its value is added to the normal height of every row of the array or table, while the depth will remain the same. This is important for tables with horizontal lines because those lines normally touch the capital letters. For example

```
\begin{table}
\centering
\caption{The array and tabular format options.}%
\label{tab:tabpream}
\setlength{\extrarowheight}{1pt}
\begin{tabular}{cp{9cm}} \toprule
...

```

was used for Table [11.1](#).

```
\arraycolsep \tabcolsep
```

The length `\arraycolsep` is half the width of the horizontal space between columns in an array environment and similarly the length `\tabcolsep` is half the space between columns in an `tabular` or `tabular*` environment.

```
\arrayrulewidth \doublerulesep
```

The length `\arrayrulewidth` is the width of the line created by a `|` in the format, or by an `\hline`, `\cline` or `\vline` command. The length `\doublerulesep` is the space between lines created by two successive `|` options in the format or by successive `\hline` commands.

### 11.7.2 Special variations on horizontal lines

The family of `tabular` environments allows vertical positioning with respect to the baseline of the text in which the environment appears. By default the environment appears centered, but this can be changed to align with the first or last line in the environment by supplying a `t` or `b` value to the optional position argument. However, this does not work when the first or last element in the environment is a `\hline` command — in that case the environment is aligned at the horizontal rule.

Here is an example:

Tables with no `hline` commands versus tables with some `hline` commands used.

```
with some
hline
commands
```

```
Tables
\begin{tabular}[t]{l}
with no\\ hline\\ commands
\end{tabular} versus tables
\begin{tabular}[t]{|l|}
\hline
with some\\ hline\\ commands\\
\hline
\end{tabular} used.
```



```
\firstline \lastline
\extratabsurround
```

Using `\firstline` and `\lastline` will cure the problem, and the tables will align properly as long as their first or last line does not contain extremely large objects.

Tables	with no	versus	Tables
	line		<code>\begin{tabular}[t]{l}</code>
	commands		with no <code>\\ line\\ commands</code>
tables	with some	used.	<code>\end{tabular}</code> versus tables
	line		<code>\begin{tabular}[t]{ l }</code>
	commands		<code>\firstline</code>
			with some <code>\\ line\\ commands\\</code>
			<code>\lastline</code>
			<code>\end{tabular}</code> used.

The implementation of these two commands contains an extra dimension, which is called `\extratabsurround`, to add some additional space at the top and the bottom of such an environment. This is useful if such tables are nested.

### 11.7.3 Handling of rules

There are two possible approaches to the handling of horizontal and vertical rules in tables:

1. rules can be placed into the available space without enlarging the table, or
2. rules can be placed between columns or rows thereby enlarging the table.

The class implements the second possibility while the default implementation in the LaTeX kernel implements the first concept.

With standard LaTeX adding rules to a table will not affect the width or height of the table (unless double rules are used), e.g., changing a format from `l|l` to `l|l|l` does not affect the document other than adding rules to the table. In contrast, with the class a table that just fits the `\textwidth` might now produce an overfull box. (But you shouldn't have vertical rules in the first place.)

## 11.8 Free tabulars

All the tabular environments described so far put the table into a box, which LaTeX treats like a large complex character, and characters are not broken across pages. If you have a long table that runs off the bottom of the page you can turn to, say, the `longtable` [Car98b] or `xtab` [Wil00e] packages which will automatically break tables across page boundaries. These have various bells and whistles, such as automatically putting a caption at the top of each page, repeating the column heads, and so forth.

### 11.8.1 Continuous tabulars

```
\begin{ctabular}[\langle pos \rangle]{\langle format \rangle} rows \end{ctabular}
```

The `ctabular` environment is similar to `tabular`, but with a couple of differences, the main one being that the table will merrily continue across page breaks. The `\langle format \rangle` argument is the same as for the previous `array` and `tabular` environments, but the optional `\langle pos \rangle` argument controls the horizontal position of the table, not the vertical. The possible argument value is one of the following characters:

l left justified,  
c centered, or  
r right justified;  
the default is c.

```
\begin{ctabular}{lcr} \toprule
LEFT & CENTER & RIGHT \\ \midrule
l & c & r \\
l & c & r \\
l & c & r \\
l & c & r \\ \bottomrule
\end{ctabular}
```

LEFT	CENTER	RIGHT
l	c	r
l	c	r
l	c	r
l	c	r

An example use is for setting two texts in parallel, for instance a poem and its translation, without having to be concerned about page breaks.

Je suis François, dont il me pois,	I am François, which is unfortunate,
Né de Paris emprès Pointoise,	born in Paris near Pointoise,
Et de la corde d'une toise	and with a six-foot stretch of rope,
Sçaura mon col que mon cul poise.	my neck will know my arse's weight.
	François Villon, 1431–1463?

The `ctabular` environment will probably not be used within a table environment (which defeats the possibility of the table crossing page boundaries). To caption a `ctabular` you can define a fixed caption. For example:

```
\newfixedcaption{\freetabcaption}{table}
```

And then `\freetabcaption` can be used like the normal `\caption` within a table float.

### 11.8.2 Automatic tabulars

A `tabular` format may be used just to list things, for example the names of the members of a particular organisation, or the names of LaTeX environments.

Especially when drafting a document, or when the number of entries is likely to change, it is convenient to be able to tabulate a list of items without having to explicitly mark the end of each row.

`\autorows[ $\langle width \rangle$ ]{ $\langle pos \rangle$ }{ $\langle num \rangle$ }{ $\langle style \rangle$ }{ $\langle entries \rangle$ }`

The `\autorows` macro lists the  $\langle entries \rangle$  in rows; that is, the entries are typeset left to right and top to bottom. The  $\langle num \rangle$  argument is the number of columns. The  $\langle entries \rangle$  argument is a comma-separated list of the names to be tabulated; there must be no comma after the last of the names before the closing brace. Table 11.7 was set by `\autorows` using:

Table 11.7: Example automatic row ordered table

one	two	three	four	five
six	seven	eight	nine	ten
eleven	twelve	thirteen	fourteen	

```

\begin{figure}
\freetabcaption{Example automatic row ordered table}
\label{tab:autorows}
\autorows{c}{5}{c}{one, two, three, four, five,
             six, seven, eight, nine, ten,
             eleven, twelve, thirteen, fourteen }
\end{figure}

```

The  $\langle pos \rangle$  argument controls the horizontal position of the tabular and the  $\langle style \rangle$  argument specifies the location of the entries in the columns; each column is treated identically. The value of a  $\langle pos \rangle$  or  $\langle style \rangle$  argument is one of the following characters:

- l left justified,
- c centered, or
- r right justified.

Each column is normally the same width, which is large enough to accomodate the widest entry in the list. A positive  $\langle width \rangle$  (e.g.,  $\{0.8\text{\textwidth}\}$ ), defines the overall width of the table, and the column width is calculated by dividing  $\langle width \rangle$  by the number of columns. Any negative value for the  $\langle width \rangle$  width lets each column be wide enough for the widest entry in that column; the column width is no longer a constant.

The examples in Figure 11.4 illustrate the effect of the  $\langle width \rangle$  argument (the default value is 0pt). The principal elements of the code for the Figure are:

```

\begin{figure}
...
\autorows[-1pt]{c}{5}{c}{one, two, three, four, five,
             six, seven, eight, nine, ten,
             eleven, twelve, thirteen, fourteen }
...
\autorows[0pt]{c}{5}{c}{one, two, three,
             ... fourteen }
...
\autorows[0.9\textwidth]{c}{5}{c}{one, two, three,
             ... fourteen }
\caption{Changing the width of a row ordered table}
\label{fig:arw}
\end{figure}

```

$\backslash\text{autocol}s[\langle width \rangle][\langle pos \rangle][\langle num \rangle][\langle style \rangle][\langle entries \rangle]$

The  $\backslash\text{autocol}s$  macro lists its  $\langle entries \rangle$  in columns, proceeding top to bottom and left to right. The arguments, are the same as for  $\backslash\text{autorows}$ , except that a negative  $\langle width \rangle$  is treated as if it were zero. The column width is always constant throughout the table and

$\langle width \rangle = -1pt$				
one	two	three	four	five
six	seven	eight	nine	ten
eleven	twelve	thirteen	fourteen	
$\langle width \rangle = 0pt$ (the default)				
one	two	three	four	five
six	seven	eight	nine	ten
eleven	twelve	thirteen	fourteen	
$\langle width \rangle = 0.9\text{\textwidth}$				
one	two	three	four	five
six	seven	eight	nine	ten
eleven	twelve	thirteen	fourteen	

Figure 11.4: Changing the width of a row ordered table

$\langle width \rangle = 0pt$ (the default)				
one, two	five	eight	eleven	thirteen
three	six	nine	twelve	fourteen
four	seven	ten		
$\langle width \rangle = 0.9\text{\textwidth}$				
one, two	five	eight	eleven	thirteen
three	six	nine	twelve	fourteen
four	seven	ten		

Figure 11.5: Changing the width of a column ordered table

is normally sufficient for the widest entry. A positive or zero  $\langle width \rangle$  has the same effect as for `\autorows`.

If you need to include a comma within one of the entries in the list for either `\autorows` or `\autocols` you have to use a macro. For instance:

```
\newcommand*{\comma}{,}
```

The examples in Figure 11.5, from the following code elements, illustrate these points.

```
\begin{figure}
...
\autocols{c}{5}{c}{one\comma} two, three, four, five,
        six, seven, eight, nine, ten,
        eleven, twelve, thirteen, fourteen }
...
\autocols[0.9\textwidth]{c}{5}{c}{one\comma} two, three,
        ... fourteen }
\caption{Changing the width of a column ordered table}
\label{fig:acw}
\end{figure}
```

# Twelve

---

## Page notes

---

The standard classes provide the `\footnote` command for notes at the bottom of the page. The class provides several styles of footnotes and you can also have several series of footnotes for when the material gets complicated. The normal `\marginpar` command puts notes into the margin, which may float around a little if there are other `\marginpars` on the page. The class additionally supplies commands for fixed marginal notes and sidebars.

### 12.1 Footnotes

A footnote can be considered to be a special kind of float that is put at the bottom of a page.

`\footnote[<num>]{<text>}`

In the main text, the `\footnote` command puts a marker at the point where it is called, and puts the *<text>*, preceded by the same mark, at the bottom of the page. If the optional *<num>* is used then its value is used for the mark, otherwise the footnote counter is stepped and provides the mark's value. The `\footnote` command should be used in paragraph mode where it puts the note at the bottom of the page, or in a `minipage` where it puts the note at the end of the `minipage`. Results are likely to be peculiar if it is used anywhere else (like in a `tabular`).

`\footnotemark[<num>]`  
`\footnotetext[<num>]{<text>}`

You can use `\footnotemark` to put a marker in the main text; the value is determined just like that for `\footnote`. Footnote text can be put at the bottom of the page via `\footnotetext`; if the optional *<num>* is given it is used as the mark's value, otherwise the value of the footnote counter is used. It may be helpful, but completely untrue, to think of `\footnote` being defined like:

```
\newcommand{\footnote}[1]{\footnotemark\footnotetext{#1}}
```

In any event, you can use a combination of `\footnotemark` and `\footnotetext` to do footnoting where LaTeX would normally get upset.

`\footref{<label>}`

On occasions it may be desirable to make more than one reference to the text of a footnote. This can be done by putting a `\label` in the footnote and then using `\footref` to refer to the label; this prints the footnote mark. For example:

```
...\footnote{...values for the kerning.\label{fn:kerning}} ...  
...
```

```
... The footnote\footref{fn:kerning} on \pref{fn:kerning} ... \\\
```

In this manual, the last line above prints:

```
... The footnote16 on page 100 ...
```

```
\multfootsep
```

In the standard classes if two or more footnotes are applied sequentially<sup>1,2</sup> then the markers in the text are just run together. The class, like the footmisc [Fai00] and ledmac packages, inserts a separator between the marks. In the class the macro `\multfootsep` is used as the separator. Its default definition is:

```
\newcommand*{\multfootsep}{\textsuperscript{\normalfont,}}
```

```
\feetabovelfloat  
\feetbelowfloat
```

In the standard classes, footnotes on a page that has a float at the bottom are typeset before the float. I think that this looks peculiar. Following the `\feetbelowfloat` declaration footnotes will be typeset at the bottom of the page below any bottom floats; they will also be typeset at the bottom of `\raggedbottom` pages as opposed to being put just after the bottom line of text. The standard positioning is used following the `\feetabovelfloat` declaration, which is the default.

### 12.1.1 A variety of footnotes

```
\verbfootnote[⟨num⟩]{⟨text⟩}
```

The macro `\verbfootnote` is like the normal `\footnote` except that its `⟨text⟩` argument can contain verbatim material. For example, the next two paragraphs are typeset by this code:

```
Below, footnote~\ref{fn1} is a \verb?\footnote? while  
footnote~\ref{fn2} is a \verb?\verbfootnote?.
```

```
The \verb?\verbfootnote? command should  
appear\footnote{There may be some problems if color is  
used.\label{fn1}}  
to give identical results as the normal \verb?\footnote?,  
but it can include some verbatim  
text\verbfootnote{The \verb?\footnote? macro, like all  
other macros except for \verb?\verbfootnote?,  
can not contain verbatim text in its  
argument.\label{fn2}}  
in the \meta{text} argument.
```

Below, footnote 3 is a `\footnote` while footnote 4 is a `\verbfootnote`.

The `\verbfootnote` command should appear<sup>3</sup> to give identical results as the normal `\footnote`, but it can include some verbatim text<sup>4</sup> in the `⟨text⟩` argument.

---

<sup>1</sup>One footnote

<sup>2</sup>Immediately followed by another

<sup>3</sup>There may be some problems if color is used.

<sup>4</sup>The `\footnote` macro, like all other macros except for `\verbfootnote`, can not contain verbatim text in its argument.

```
\plainfootnotes
\twocolumnfootnotes
\threecolumnfootnotes
\paragraphfootnotes
```

Normally, each footnote starts a new paragraph. The class provides three other styles, making four in all. Following the `\twocolumnfootnotes` declaration footnotes will be typeset in two columns, and similarly they are typeset in three columns after the `\threecolumnfootnotes` declaration. Footnotes are run together as a single paragraph after the `\paragraphfootnotes` declaration. The default style is used after the `\plainfootnotes` declaration.

The style can be changed at any time but there may be odd effects if the change is made in the middle of a page when there are footnotes before and after the declaration. You may find it interesting to try changing styles in an article type document that uses `\maketitle` and `\thanks`, and some footnotes on the page with the title:

```
\title{...\thanks{...}}
\author{...\thanks{...}...}
...
\begin{document}
\paragraphfootnotes
\maketitle
\plainfootnotes
...
```

```
\footfudgefiddle
```

Paragraphed footnotes may overflow the bottom of a page. TeX has to estimate the amount of space that the paragraph will require once all the footnotes are assembled into it. It then chops off the main text to leave the requisite space at the bottom of the page, following which it assembles and typesets the paragraph. If it underestimated the size then the footnotes will run down the page too far. If this happens then you can change `\footfudgefiddle` to make TeX be more generous in its estimation. The default is 64 and a value about 10% higher should fix most overruns.

```
\renewcommand*{\footfudgefiddle}{70}
```

You must use an integer in the redefinition as the command is going to be used in a place where TeX expects an integer.

```
\newfootnoteseries{<series>}
\plainfootstyle{<series>}
\twocolumnfootstyle{<series>}
\threecolumnfootstyle{<series>}
\paragraphfootstyle{<series>}
```

If you need further series you can create your own. A new footnote series is created by the `\newfootseries` macro, where `<series>` is an alphabetic identifier for the series. This is most conveniently a single (upper case) letter, for example P.

Calling, say, `\newfootnoteseries{Q}` creates a set of macros equivalent to those for the normal `\footnote` but with the `<series>` appended. These include `\footnoteQ`,

`\footnotemarkQ`, `\footnotetextQ` and so on. These are used just like the normal `\footnote` and companions.

By default, a series is set to typeset using the normal style of a paragraph per note. The series' style can be changed by using one of the `\...footstyle` commands.

For example, to have a 'P' (for paragraph) series using roman numerals as markers which, in the main text are superscript with a closing parenthesis and at the foot are on the baseline followed by an endash, and the text is set in italics at the normal footnote size:

```
\newfootnoteseries{P}
\paragraphfootstyle{P}
\renewcommand{\thefootnoteP}{\roman{footnoteP}}
\footmarkstyleP{#1--}
\renewcommand{\@makefnmarkP}{%
    \hbox{\textsuperscript{\@thefnmarkP}}}%
\renewcommand{\foottextfontP}{\itshape\footnotesize}
```

This can then be used like:

```
.... this sentence\footnoteP{A 'p' footnote\label{fnp}}
includes footnote~\footrefP{fnp}.
```

The `\newfootnoteseries` macro does not create series versions of the footnote-related length commands, such as `\footmarkwidth` and `\footmarksep`, nor does it create versions of `\footnoterule`.

At the foot of the page footnotes are grouped according to their series; all ordinary footnotes are typeset, then all the first series footnotes (if any), then the second series, and so on. The ordering corresponds to the order of `\newfootnoteseries` commands.

If you can't specify a particular footnote style using the class facilities the `footmisc` package [Fai00] provides a range of styles. A variety of styles also comes with the `ledmac` package [Wil03b] which additionally provides several classes of footnotes that can be mixed on a page.

### 12.1.2 Styling

The parameters controlling the vertical spacing of footnotes are illustrated in Figure 12.1.

There is a discussion in §4.2 starting on page 67 about how to style the `\thanks` command; footnotes can be similarly styled.

The `\footnote` macro (and its relations) essentially does three things:

- Typesets a marker at the point where `\footnote` is called;
- Typesets a marker at the bottom of the page on which `\footnote` is called;
- Following the marker at the bottom of the page, typesets the text of the footnote.

<pre>\@makefnmark \@thefnmark</pre>
-------------------------------------

The `\footnote` macro calls the kernel command `\@makefnmark` to typeset the footnote marker at the point where `\footnote` is called (the value of the marker is kept in the macro `\@thefnmark` which is defined by the `\footnote` or `\footnotemark` macros). The default definition typesets the mark as a superscript and is effectively

```
\newcommand*{\@makefnmark}{\hbox{\textsuperscript{\@thefnmark}}}
```



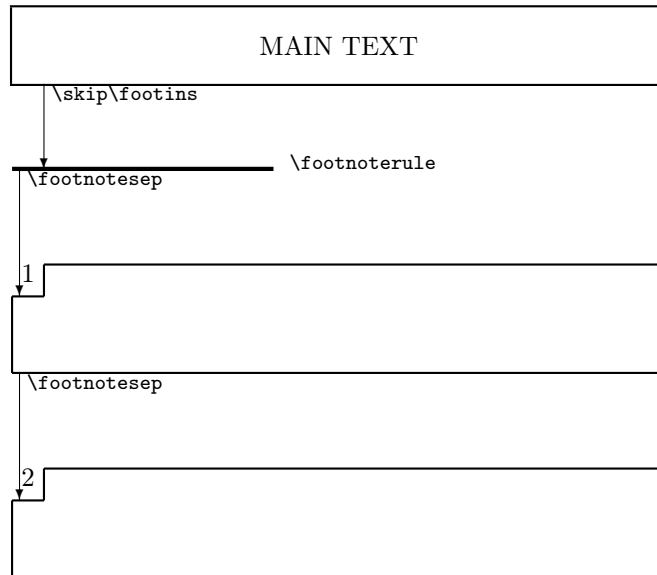


Figure 12.1: Footnote layout parameters

You can change this if, for example, you wanted the marks to be in parentheses at the baseline.

```
\renewcommand*{\@makefnmark}{\footnotesize (\@thefnmark)}
```

or, somewhat better to take account of the size of the surrounding text

```
\renewcommand*{\@makefnmark}{\slashfracstyle{(\@thefnmark)}}
```

```
\footfootmark
\footmarkstyle{<arg>}
```

The class macro for typesetting the marker at the foot of the page is `\footfootmark`. The appearance of the mark is controlled by `\footmarkstyle`. The default specification is

```
\footmarkstyle{\textsuperscript{#1}}
```

where the `#1` indicates the position of `\@thefnmark` in the style. The default results in the mark being set as a superscript. For example, to have the marker set on the baseline and followed by a right parenthesis, do

```
\footmarkstyle{#1) }
```

```
\footmarkwidth \footmarksep \footparindent
```

The mark is typeset in a box of width `\footmarkwidth`. If this is negative, the mark is outdented into the margin, if zero the mark is flush left, and when positive the mark is indented. The mark is followed by the text of the footnote. Second and later lines of the text are offset by the length `\footmarksep` from the end of the box. The first line of a paragraph within a footnote is indented by `\footparindent`. The default values for these lengths are:

Table 12.1: Some footnote text styles

\footmarkwidth	\footmarksep	Comment
1.8em	-1.8em	Flushleft, regular indented paragraph (the default)
1.8em	0em	Indented, block paragraph hung on the mark
0em	0em	Flushleft, block paragraph
-1.8em	1.8em	Block paragraph, flushleft, mark in the margin
-1sp	0em	Block paragraph, flushleft, mark in the margin but flush against the text

```
\setlength{\footmarkwidth}{1.8em}  
\setlength{\footmarksep}{-\footmarkwidth}  
\setlength{\footparindent}{1em}
```

\foottextfont
---------------

The text in the footnote is typeset using the `\foottextfont` font. The default is `\footnotesize`.

Altogether, the class specifies

```
\footmarkstyle{\textsuperscript{#1}}  
\setlength{\footmarkwidth}{1.8em}  
\setlength{\footmarksep}{-1.8em}  
\setlength{\footparindent}{1em}  
\newcommand{\foottextfont}{\footnotesize}
```

to replicate the standard footnote layout.

You might like to try the combinations of `\footmarkwidth` and `\footmarksep` listed in Table 12.1 to see which you might prefer. Not listed in the Table, to get the marker flushleft and then the text set as a block paragraph you can try:

```
\setlength{\footmarkwidth}{1.8em}  
\setlength{\footmarksep}{0em}  
\footmarkstyle{#1\hfill}
```

As an example of a rather different scheme, in at least one discipline the footnoted text in the main body has a marker at each end. It is possible to define a macro to do this:

```
\newcommand{\wrapfootnote}[1]{\stepcounter{\@mpfn}  
% marks in the text  
\protected@xdef\@thefnmark{\thempfn}%  
\@footnotemark #1\@footnotemark%  
% marks at the bottom  
\protected@xdef\@thefnmark{\thempfn--\thempfn}%  
\@footnotetext}
```

The macro is based on a posting to `CTT` by Donald Arseneau in November 2003, and is used like this:

Some  
`\wrapfootnote{disciplines}{For example, Celtic studies.}`  
 require double marks in the text.

Some <sup>5</sup>disciplines<sup>5</sup> require double marks in the text.

```
\fnsymbol{<counter>}
\@fnsymbol{<num>}
```

Any footnotes after this point will be set according to:

```
\setlength{\footmarkwidth}{-1.0em}
\setlength{\footmarksep}{-\footmarkwidth}
\footmarkstyle{#1}
```

The `\fnsymbol` macro typesets the representation of the counter *<counter>* like a footnote symbol. Internally it uses the kernel `\@fnsymbol` macro which converts a positive integer *<num>* to a symbol. If you are not fond of the standard ordering of the footnote symbols, this is the macro to change. Its original definition is:

```
\def\@fnsymbol#1{\ensuremath{%
  \ifcase#1\or *\or \dagger\or \ddagger\or
  \mathsection\or \mathparagraph\or \|\or **\or
  \dagger\dagger \or \ddagger\ddagger \else\@ctrerr\fi}}
```

This, as shown by `\@fnsymbol{1}, \dots \@fnsymbol{9}` produces the series:

\*, †, ‡, §, ¶, ||, \*\*, ††, and ‡‡.

Robert Bringhurst quotes the following as the traditional ordering (at least up to ¶):

\*, †, ‡, §, ||, ¶, \*\*, ††, and ‡‡.

You can obtain this sequence by redefining `\@fnsymbol` as:

```
\renewcommand*\@fnsymbol[1]{\ensuremath{%
  \ifcase#1\or *\or \dagger\or \ddagger\or
  \mathsection\or \|\or \mathparagraph\or **\or \dagger\dagger
  \or \ddagger\ddagger \else\@ctrerr\fi}}
```

not forgetting judicious use of `\makeatletter` and `\makeatother` if you do this in the preamble. Other authorities or publishers may prefer other sequences and symbols.

To get the footnote reference marks set with symbols use:

```
\renewcommand*\thefootnote{\fnsymbol{footnote}}
```

or to use roman numerals instead of the regular arabic numbers:

```
\renewcommand*\thefootnote{\roman{footnote}}
```

```
\footnoterule
```

The rule separating footnotes from the main text is specified by `\footnoterule`:

---

<sup>5--5</sup>For example, Celtic studies.

```
\newcommand*{\footnoterule}{%  
  \kern-3pt%  
  \hrule width 0.4\columnwidth  
  \kern 2.6pt}
```

If you don't want a rule (but you might later), then the easiest method is:

```
\let\oldfootnoterule\footnoterule  
\renewcommand*{\footnoterule}{}
```

and if you later want rules you can write:

```
\let\footnoterule\oldfootnoterule
```

In Figure 12.1 we see that the footnotes are separated from the text by `\skip\footins`. We provide a special interface to set this skip:

```
\setfootins{<length for normal>}{<length for minipage>}
```

The default is similar to

```
\setfootins{\bigskipamount}{\bigskipamount}
```

Internally `\setfootins` also sets the skips being used by `\twocolumnfootnotes` and friends.

## 12.2 Marginal notes

Some marginalia can also be considered to be kinds of floats. The class provides the standard margin notes via `\marginpar`. Remember that the width of the margin note, the separation from the text, and the separation from one `\marginpar` to another is controlled by `\setmarginnotes`, see Section 2.5 on page 20.

```
\marginpar[<left-text>]{<text>}  
\marginparmargin{<placement>}  
\reversemarginpar  
\normalmarginpar
```

Just as a reminder, the `\marginpar` macro puts `<text>` into the margin alongside the type-block — the particular margin depends on the document style and the particular page.

The interface for specifying which margin `\marginpar` (and friends) write to, have long been quite cluttered, so we have in 2010 adopted a more textual and natural interface. For `\marginpar` the macro is named `\marginparmargin{<placement>}` with possible placements: *left*, *right*, *outer*, and *inner*. The interpretation of which is explained in Figure 12.2. The default corresponds to `\marginparmargin{outer}`.

The original convoluted methods of specifying the margin for `\marginpar` is deprecated, although still supported; if you need to know what they are then you can read all about them in `memoir.dtx`.

Sometimes LaTeX gets confused near a page break and a note just after a break may get put into the wrong margin (the wrong margin for the current page but the right one if the note fell on the previous page). If this occurs then inserting the `\strictpagecheck` declaration before any `\marginpar` command is used will prevent this, at the cost of at least one additional LaTeX run.

`\Xmargin{⟨placement⟩}` for possible placements: left, right, outer, and inner

**Two column document** If the note is placed in the first column, to the left, otherwise to the right, irrespective the document being one- or two-side and of the users choices

**One sided document** If user specified left, notes are placed to the left, otherwise to the right.

**Two sided document** depends on whether a recto or verso page:

**Recto (odd) page** note is placed on the right if the user specified right or outer, otherwise the note is placed on the left.

**Verso (even) page** note is placed on the left if the user specified left or outer, otherwise the note is placed on the right.

Figure 12.2: Interpretation of the arguments to the `\Xmargin` commands for specifying the side in which to place side note like material. X here equals `marginpar`, `sidepar`, `sidebar`, or `sidefoot`.

### 12.3 Side notes

The vertical position of margin notes specified via `\marginpar` is flexible so that adjacent notes are prevented from overlapping.

```
\sidepar[⟨left⟩]{⟨right⟩}
\sideparmargin{⟨placement⟩}
\sideparfont
\sideparform
\sideparvshift
```

The `\sidepar` macro is similar to `\marginpar` except that it produces side notes that do not float — they may overlap.

The same spacing is used for both `\marginpar` and `\sidepar`, namely the lengths `\marginparsep` and `\marginparwidth`. See `\setmarginnotes`, in Section 2.5 on page 20.

The length `\sideparvshift` can be used to make vertical adjustments to the position of `\sidepar` notes. By default this is set to a value of 0pt which should align the top of the note with the text line.

The command `\sideparfont` is used to specify the font used for the `\sidepar`, default is `\normalfont\normalsize`.

While `\sideparfont` holds the font settings for the sidepar, the local adjustment is kept in `\sideparform`, the default is

```
\newcommand*{\sideparform}{%
  \ifmetortm\raggedright\else\raggedleft\fi}
```

Which is a special construction the makes the text go flush against the text block on side specified via `\sideparmargin`. Since the margin par area is usually quite narrow it might be an idea to use a ragged setup which enables hyphenation. This can be achieved by

```
\usepackage{ragged2e}
\newcommand*{\sideparform}{%
  \ifmetortm\RaggedRight\else\RaggedLeft\fi}
```

The macro `\sideparmargin{<placement>}` can be used to specify which margin the side note should go to. *<placement>* should be one of *left*, *right*, *outer*, or *inner*. Interpretation of which is explained in Figure 12.2. For some now forgotten reason the default corresponds to `\sideparmargin{left}`.<sup>6</sup>

By default the *<right>* argument is put in the left margin. When the *twoside* option is used the *<right>* argument is put into the right margin on the verso (even numbered) pages; however, for these pages the optional *<left>* argument is used instead if it is present. For two column text the relevant argument is put into the ‘outer’ margin with respect to the column.

The original convoluted methods of specifying the margin for `\sidepar` is deprecated, although still supported; if you need to know what they are then you can read all about them in `memoir.dtx`.

`\parnopar`

When LaTeX is deciding where to place the side notes it checks whether it is on an odd or even page and sometimes TeX doesn’t realise that it has just moved onto the next page. Effectively TeX typesets paragraph by paragraph (including any side notes) and at the end of each paragraph sees if there should have been a page break in the middle of the paragraph. If there was it outputs the first part of the paragraph, inserts the page break, and retains the second part of the paragraph, without retypesetting it, for eventual output at the top of the new page. This means that side notes for any given paragraph are in the same margin, either left or right. A side note at the end of a paragraph may then end up in the wrong margin. The macro `\parnopar` forces a new paragraph but without appearing to (the first line in the following paragraph follows immediately after the last element in the prior paragraph with no line break). You can use `\parnopar` to make TeX to do its page break calculation when you want it to, by splitting what appears to be one paragraph into two paragraphs.

Bastiaan Veelo has kindly provided example code for another form of a side note, the code is shown in Snippet C.3 on page 398.

Bastiaan also noted that it provided an example of using the `\foremargin` length. If you want to try it out, either put the code in your preamble, or put it into a package (i.e., `.sty` file) without the `\makeat... commands`.

#### 12.4 Sidebars

Sidebars are typeset in the margin and usually contain material that is ancillary to the main text. They may be long and extend for more than one page.<sup>7</sup>

`\sidebar{<text>}`

The `\sidebar` command is like `\marginpar` in that it sets the *<text>* in the margin. However, unlike `\marginpar` the *<text>* will start near the top of the page, and may continue onto later pages if it is too long to go on a single page. If multiple `\sidebar` commands are used on a page, the several *<text>*s are set one after the other.

`\sidebarmargin{<margin>}`

---

<sup>6</sup> As not to change existing documents, we have decided to leave it like that.

<sup>7</sup> Donald Arseneau’s help has been invaluable in getting the sidebar code to work.

The macro `\sidebarmargin{⟨placement⟩}` can be used to specify which margin the side note should go to. *⟨placement⟩* should be one of *left*, *right*, *outer*, or *inner*. Interpretation of which is explained in Figure 12.2. The default corresponds to `\sidebarmargin{outer}`.

```
\sidebarfont \sidebarform
```

The sidebar *⟨text⟩* is typeset using the `\sidebarfont`, whose initial definition is

```
\newcommand{\sidebarfont}{\normalsize\normalfont}
```

Sidebars are normally narrow so the text is set `raggedright` to reduce hyphenation problems and stop items in environments like `itemize` from overflowing. More accurately, the text is set according to `\sidebarform` which is defined as:

```
\newcommand*{\sidebarform}{%
  \ifmemtortm\raggedright\else\raggedleft\fi}
```

Which is a special construction that makes the text go flush against the text block on side specified via `\sidebarmargin`. Since the margin par area is usually quite narrow it might be an idea to use a ragged setup which enables hyphenation. This can be achieved by

```
\usepackage{ragged2e}
\newcommand*{\sidebarform}{%
  \ifmemtortm\RaggedRight\else\RaggedLeft\fi}
```

You may run into problems if the `\sidebar` command comes near a pagebreak, or if the sidebar text gets typeset alongside main text that has non-uniform line spacing (like around a `\section`). Further, the contents of sidebars may not be typeset if they are too near to the end of the document.

```
\sidebarwidth \sidebarhsep \sidebarvsep
```

The *⟨text⟩* of a `\sidebar` is typeset in a column of width `\sidebarwidth` and there is a horizontal gap of `\sidebarhsep` between the main text and the sidebar. The length `\sidebarvsep` is the vertical gap between sidebars that fall on the same page; it also has a role in controlling the start of sidebars with respect to the top of the page.

```
\sidebartopsep
\setsidebarheight{⟨height⟩}
```

The length `\sidebartopsep` controls the vertical position of the top of a sidebar. The default is 0pt which aligns it with the top of the typeblock. The command `\setsidebarheight` sets the height of sidebars to *⟨height⟩*, without making any allowance for `\sidebartopsep`. The *⟨length⟩* argument should be equivalent to an integral number of lines. For example:

```
\setsidebarheight{15\onelineskip}
```

The default is the `\textheight`.

Perhaps you would like sidebars to start two lines below the top of the typeblock but still end at the bottom of the typeblock? If so, and you are using the `calc` package [TJ05], then the following will do the job:

```
\setlength{\sidebartopskip}{2\onelineskip}
\setsidebarheight{\textheight-\sidebartopskip}
```

The alignment of the text in a sidebar with the main text may not be particularly good and you may wish to do some experimentation (possibly through a combination of `\sidebarvsep` and `\setsidebarheight`) to improve matters.

Although you can set the parameters for your sidebars individually it is more efficient to use the `\setsidebars` command; it *must* be used if you change the font and/or the height.

`\setsidebars{<hsep>}{<width>}{<vsep>}{<topsep>}{<font>}{<height>}`

The `\setsidebars` command can be used to set the sidebar parameters. `\sidebarhsep` is set to `<hsep>`, `\sidebarwidth` is set to `<width>`, `\sidebarvsep` is set to `<vsep>`, `\sidebartopsep` is set to `<topsep>`, `\sidebarfont` is set to `<font>`, and finally `\setsidebarheight` is used to set the height to `<height>`. The default is:

```
\setsidebars{\marginparsep}{\marginparwidth}{\onelineskip}%
             {0pt}{\normalsize\normalfont}{\textheight}
```

Any, or all, of the arguments can be a `*`, in which case the parameter corresponding to that argument is unchanged. Repeating the above example of changing the topskip and the height, assuming that the other defaults are satisfactory except that the width should be 3cm and an italic font should be used:

```
\setsidebars{*}{3cm}{*}{2\onelineskip}{\itshape}%
             {\textheight-\sidebartopsep}
```

Changing the marginpar parameters, for example with `\setmarginnotes`, will not affect the sidebar parameters.

Note that `\checkandfixthelayout` neither checks nor fixes any of the sidebar parameters. This means, for instance, that if you change the `\textheight` from its default value and you want sidebars to have the same height then after changing the `\textheight` you have to call `\checkandfixthelayout` and then call `\setsidebars` with the (new) `\textheight`. For instance:

```
...
\settypeblocksize{40\baselineskip}{5in}{*}
...
\checkandfixthelayout
\setsidebars{...}{...}{...}{...}{...}{\textheight}
```

Unfortunately if a sidebar is on a double column page that either includes a double column float or starts a new chapter then the top of the sidebar comes below the float or the chapter title. I have been unable to eliminate this ‘feature’.

### 12.5 Side footnotes

Besides three already mentioned macros for writing in the margin (`\marginpar`, `\sidepar`, and `\sidebar`) memoir also provide a functionality to add side footnotes. Actually two ways: one is to internally make `\footnote` use `\marginpar` to write in the margin, the other is to collect all side footnotes bottom up in the margin.

`\footnotesatfoot`  
`\footnotesinmargin`

`\footnotesatfoot` (the default) causes `\footnote` to place its text at the bottom of the page. By issuing `footnotesinmargin` `\footnote` (and friends like `\footnotetext`) will internally use `\marginpar` to write the footnote to the page.



## 12.5.1 Bottom aligned side footnotes

Bottom aligned footnotes works just like regular footnotes, just with a separate macro `\sidefootnote{<text>}`, and here the side footnotes are placed at the bottom of the specified margin (more or like as if one had taken the footnotes from the bottom of the page and moved it to the margin instead). All the major functionality is the same as for the normal `\footnote` command.<sup>8</sup>

```
\sidefootnote[<num>]{<text>}
\sidefootnotemark[<num>]
\sidefootnotetext[<num>]{<text>}
```

By default the regular footnotes and the side footnotes use different counters. If one would like them to use the same counter, issue the following in the preamble:

```
\letcountercounter{sidefootnote}{footnote}
```

12.5.2 Setting the layout for `\sidefootnote`

There are several possibilities to change the appearance of the `\sidefootnote`:

Specifying the margin in which the side footnote should go, is done by

```
\sidefootmargin{<keyword>}
```

where `<keyword>` can be *left*, *right*, *outer*, and *inner*, and their meaning is explained in Figure 12.2. The default is *outer*.

```
\sidefoothsep
\sidefootwidth
\sidefootvsep
```

`\sidefoothsep` is a length controlling the separation from the text to the side footnote column, default `\marginparsep`. `\sidefootwidth` is length controlling the width of the side footnote column, default `\marginparwidth`, and `\sidefootvsep` is the vertical distance between two side footnotes, default `\onelineskip`.

```
\sidefootadjust
\setsidefootheight{<height>}
\sidefootfont
```

`\sidefootadjust` is a length which specifies the placement of the side footnote column in relation to the bottom of the text block, the default is 0pt. `\setsidefootheight` sets the maximal height of the side footnote column, default `textwidth`. Lastly `\sidefootfont` holds the general font setting for the side footnote,<sup>9</sup> default `\normalfont\footnotesize`.

The macro

```
\setsidefeet{<hsep>}{<width>}{<vsep>}{<adj>}{<font>}{<height>}
```

sets the specifications all six settings above in one go.. An `'*`' means 'use the current value'. So memoir internally use the following default

```
\setsidefeet{\marginparsep}{\marginparwidth}%
{\onelineskip}{0pt}%
{\normalfont\footnotesize}{\textheight}%
```

<sup>8</sup> `\sidefootnote` does not make sense inside minipages...

<sup>9</sup> There is a similar macro to control the font of the text alone.

It is recommended to use this macro along with the other macros in the preamble to specify document layout.

### 12.5.3 Styling `\sidefootnote`

`\sidefootmarkstyle{<code>}`

controls how the side footnote counter is typeset in the side footnote. The default is

```
\sidefootmarkstyle{\textsuperscript{#1}}
```

The mark is typeset in a box of width `\sidefootmarkwidth`. If this is negative, the mark is outdented into the margin, if zero the mark is flush left, and when positive the mark is indented. The mark is followed by the text of the footnote. Second and later lines of the text are offset by the length `\sidefootmarksep` from the end of the box. The first line of a paragraph within a footnote is indented by `\sidefootparindent`. The default values for these lengths are:

```
\setlength{\sidefootmarkwidth}{0em}
\setlength{\sidefootmarksep}{0em}
\setlength{\sidefootparindent}{1em}
```

Caveat: It is natural to specify a length as `\sidefootparindent` as a  $\text{\LaTeX}$  length, but it has a down side. If, as we do here, set the value to `1em`, then since the size of the `em` unit changes with the current font size, one will actually end up with an indent corresponding to the font size being used when the

```
\setlength{\sidefootparindent}{1em}
```

was issued, not when it has used (where the font size most often will be `\footnotesize`).

At this point we consider this to be a *feature* not an error. One way to get pass this problem is the following

```
\begingroup% keep font change local
\sidefoottextfont
\global\setlength{\sidefootparindent}{1em}
\endgroup
```

Then it will store the value of `em` corresponding to the font being used.

`\sidefoottextfont`

holds the font being used by the side footnote, default `\normalfont\footnotesize`.

`\sidefootform`

is used to specify the raggedness of the text. Default

```
\newcommand*{\sidefootform}{\rightskip=\z@ \@plus 2em}
```

which is much like `\raggedright` but allows some hyphenation. One might consider using

```
\usepackage{ragged2e}
\newcommand*{\sidefootform}{\RaggedRight}
```

Which does something similar.

## 12.5.4 Side footnote example

In the margin you will find the result of the following code:

```
Testing\sidefootnote{This is test} bottom aligned
footnotes.\sidefootnote{This is another side
footnote, spanning several lines.
```

```
And several paragraphs}\sidefootnote{And number three}
```

Testing<sup>1</sup> bottom aligned footnotes.<sup>2,3</sup>

## 12.6 Endnotes

*Reimplemented, December 2010*<sup>10</sup>

Endnotes are often used instead of footnotes so as not to interrupt the flow of the main text. Although endnotes are normally put at the end of the document, they may instead be put at the end of each chapter.

The endnotes package already uses the command `\endnote` for an endnote, so the class uses `\pagenote` for an endnote so as not to clash if you prefer to use the package.

```
\makepagenote
\pagenote[⟨id⟩]{⟨text⟩}
\printpagenotes \printpagenotes*
```

The general principle is that notes are written out to a file which is then input at the place where the notes are to be printed. The note file has an `ent` extension, like the table of contents file has a `toc` extension.

You have to put `\makepagenote` in your preamble if you want endnotes. This will open the `ent` note file which is called `\jobname.ent`.

In the body of the text use `\pagenote` to create an endnote, just as you would use `\footnote` to create a footnote. In the books that I have checked there are two common methods of identifying an endnote:

1. Like a footnote, put a number in the text at the location of the note and use the same number to identify the note when it finally gets printed.
2. Put no mark in the text, but when it is finally printed use a few words from the text to identify the origin of the note. The page number is often used as well with this method.

The `⟨text⟩` argument of `\pagenote` is the contents of the note and if the optional `⟨id⟩` argument is not used the result is similar to having used `\footnote` — a number in the main text and the corresponding number in the endnotes listing (as in 1 above). For the second reference style (2 above) use the optional `⟨id⟩` argument for the ‘few words’, and no mark will be put into the main text but `⟨id⟩` will be used as the identification in the listing.

For one set of endnotes covering the whole document put `\printpagenotes` where you want them printed, typically before any bibliography or index. The `\printpagenotes` macro inputs the `ent` endnote file for printing and then closes it to any further notes.

<sup>10</sup> The former implementation had some difficulties handling certain types of input. A few of the macros used to format the output are no longer supported/used in the new implementation.

<sup>1</sup>This is test

<sup>2</sup>This is another side footnote, spanning several lines.

And several paragraphs

<sup>3</sup>And number three

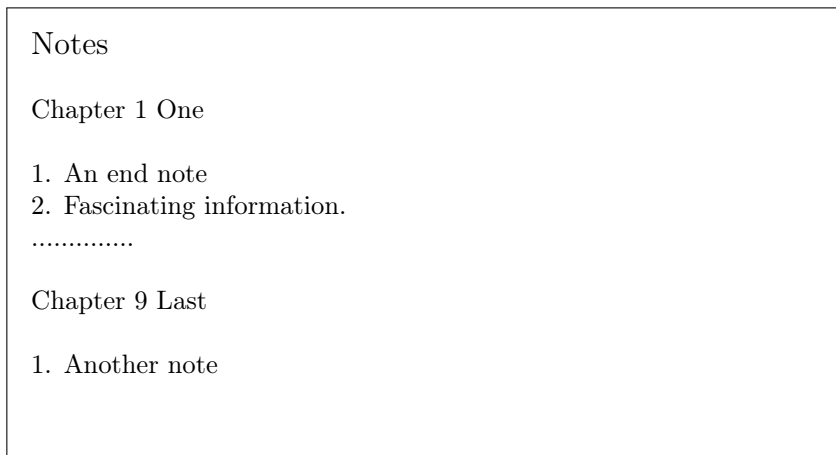


Figure 12.3: Example endnote listing

For notes at the end of each chapter put `\printpagenotes*`, which inputs the `ent` file for printing then empties it ready for more notes, at the end of each chapter.

The simple use is like this:

```
\documentclass[...]{memoir}
...
\makepagenote
...
\begin{document}
\chapter{One}
... \pagenote{An end note.} ...
... \pagenote{Fascinating information.}
...
\chapter{Last}% chapter 9
... \pagenote{Another note.}% 30th note
...
...
\printpagenotes
...
\end{document}
```

This will result in an endnote listing looking like Figure 12.3.

For notes at the end of each chapter:

```
\documentclass[...]{memoir}
...
\makepagenote
...
\begin{document}
\chapter{One}
... \pagenote{An end note.} ...
```

```

...
\printpagenotes*
\chapter{Last}
... \pagenote{Another note.} ...
...
\printpagenotes*
%%% no more chapters
...
\end{document}

```

```

\continuousnotenums
\notepageref

```

The `\pagenote` counter is used for the notes. By default the endnotes are numbered per chapter. If you want the numbering to be continuous throughout the document use the `\continuousnotenums` declaration. Normally the information on which page a note was created is discarded but will be made available to notes in the endnote listing following the `\notepageref` declaration. Both `\continuousnotenums` and `\notepageref` can only be used in the preamble.

```

\notesname
\notedivision

```

When `\printpagenotes` (or `\printpagenotes*`) is called the first thing it does is call the macro `\notedivision`. By default this is defined as:

```
\newcommand*{\notedivision}{\chapter{\notesname}}
```

with

```
\newcommand*{\notesname}{Notes}
```

In other words, it will print out a heading for the notes that will be read from the `.ent` file. `\print...` then closes the `.ent` file for writing and after this `\inputs` it to get and process the notes.

### 12.6.1 Changing the appearance

In the text

```
\notenumintext{<num>}
```

The `\pagenote` counter is used for `\pagenotes`. The macro `\notenumintext` is called by `\pagenote` with the value of the `\pagenote` counter as the `<num>` argument to print the value of the `\pagenote` counter in the main text. By default it is printed as a superscript, but this can be changed, or even eliminated.

```
\newcommand*{\notenumintext}[1]{\textsuperscript{#1}}
```

In the page note list

To better understand how a page note entry is formatted in the page note list, we start with the following pseudo code (it is not exactly what you will see in the `.ent` file, but macros will end up being called in this manner)

```
\prenoteinnotes
\noteidinnotes{<notenum>}{<id>}
\pageinnotes{<auto generated note label key>}
\prenotetext
  <Page note text>
\postnotetext
\postnoteinnotes
```

At the start and end we have the two macros `\prenoteinnotes` and `\postnoteinnotes`, they take care of preparing for and ending an entry in the list. The list is typeset in a manner where each item is (at least) a paragraph, so the default definition is

```
\newcommand{\prenoteinnotes}{\par\noindent}
\newcommand{\postnoteinnotes}{\par}
```

A user could change this to make it look a bit more like a list construction. For example the following would give a hanging indentation

```
\renewcommand{\prenoteinnotes}{\par\noindent\hangindent 2em}
```

The `\noteidinnotes` calls `\idtextinnotes` to print the note `<id>` if it was given as the optional argument to `\pagenote`, otherwise it calls `\notenuminnotes` to print the note number.

```
\noteidinnotes{<notenum>}{<id>}
\idtextinnotes{<id>}
\notenuminnotes{<num>}
```

These are defined respectively as:

```
\newcommand*{\idtextinnotes}[1]{[#1]\space}
\newcommand*{\notenuminnotes}[1]{\normalfont #1.\space}
```

Next we execute `\pageinnotes{<note label key>}` which does nothing by default. But if `\notepageref` is issued in the preamble two things happen, (1) each page note issues a label such that we can refer back to its page, and (2) `\pageinnotes` calls `\printpageinnotes` (or if `hyperref` is loaded `\printpageinnoteshyperref`)

```
\pageinnotes{<auto generated note label key>}
\printpageinnotes{<auto generated note label key>}
\printpageinnoteshyperref{<auto generated note label key>}
\pagerefname
```

Default definitions

```
\newcommand*{\printpageinnotes}[1]{%
  (\pagerefname\ \pageref{#1})\space}
\newcommand\printpageinnoteshyperref[1]{%
  (\hyperref[#1]{\pagerefname\ \pageref*{#1}})\space}
```

That is if `hyperref` is loaded the entire text `<page 3>` will be the text of a hyperlink.

```
\prenotetext
\postnotetext
```

The actual text part of the page note is enclosed by `\prenotetext` and `postnotetext`. By default they do nothing, but could easily be redefined such that (only) the entry text would be in italic:

```
\renewcommand\prenotetext{\begingroup\itshape}
\renewcommand\postnotetext{\endgroup}
```

```
\addtonotes{<text>}
```

The macro `\addtonotes` inserts `<text>` into the ent file.

**Note.** As the argument to `\pagenote` and `\addtonotes` is moving you may have to `\protect` any fragile commands. If you get strange error messages, try using `\protect` and see if they go away.

Internally in `\pagenote` `\addtonotes` is used to provide chapter divisions into the note list. It will detect both numbered and unnumbered chapters. The actual text is provided using

```
\pagenotesubhead{<chapapp>}{<num>}{<title>}
\pagenotesubheadstarred{<chapapp>}{<num>}{<title>}
\pnchap \pnschap
```

The macro `\pagenotesubhead` typesets the subheadings in an endnote list. The `<chapapp>` argument is normally `\chaptername` but if the notes are from an appendix then `\appendixname` is used instead. `<num>` is the number of the chapter, or blank if there is no number. Lastly, `<title>` is `\pnchap` for regular chapters which defaults to the ToC entry, or `\pnschap` for starred chapters which defaults to the normal title. The default definition of `\pagenotesubhead` is very simply:

```
\newcommand*{\pagenotesubhead}[3]{%
  \section*{#1 #2 #3}}
\newcommand\pagenotesubheadstarred{\pagenotesubhead} % i.e. the same
```

By default this means that the header for starred chapters will be something like »Chapter Title«, which may look odd. In that case redefine `\pagenotesubheadstarred` to something similar to

```
\renewcommand\pagenotesubheadstarred[3]{\section*{#3}}
```

Just remember that unless you have specified `\continuousnotenums` in the preamble the note counter (`pagenote`) will only be reset at the start of any numbered chapters (because it is tied to changes in the chapter counter).

The scheme is set up under the assumption that notes will only be printed at the end of the document. If you intend to put them at the end of each chapter, then you will probably want to change the definitions of the `\notedivision` and `\pagenotesubhead` macros. For example:

```
\renewcommand*{\notedivision}{\section*{\notesname}}
\renewcommand*{\pagenotesubhead}[3]{}
```

and remember to use `\printpagenotes*` at each place you want the current set of notes to be printed.

Say you have written a document with footnotes, but later on decide on using end notes (page notes) instead. In that case you can use `\foottopagenote` to make `\footnote`, `\footnotemark` and `\footnotetext` works as if it was implemented using end notes. On the other hand `\pagetofootnote` makes all page notes into footnotes (note that this might not work, because there are places where page notes can be issued but foot notes cannot).

<code>\foottopagenote</code> <code>\pagetofootnote</code>
--

In either conversion the optional argument will be ignored as for `\pagenote` it can be arbitrary text whereas for `\footnote` it must be a number.



# Thirteen

---

## Decorative text

---

Too servile a submission to the books and opinions of the ancients has spoiled many an ingenious man, and plagued the world with an abundance of pedants and coxcombs.

---

James Puckle (1677?–1724)

By now we have covered most aspects of typesetting. As far as the class is concerned this chapter describes the slightly more fun task of typesetting epigraphs.

Some authors like to add an interesting quotation at either the start or end of a chapter. The class provides commands to assist in the typesetting of a single epigraph. Other authors like to add many such quotations and the class provides environments to cater for these as well. Epigraphs can be typeset at either the left, the center or the right of the typeblock. A few example epigraphs are exhibited here, and others can be found in an article by Christina Thiele [Thi99] where she reviewed the epigraph package [Wil00a] which is included in the class.

### 13.1 Epigraphs

The original inspiration for `\epigraph` was Doug Schenck’s for the epigraphs in our book [SW94]. That was hard wired for the purpose at hand. The version here provides much more flexibility.

```
\epigraph{<text>}{<source>}
```

The command `\epigraph` typesets an epigraph using `<text>` as the main text of the epigraph and `<source>` being the original author (or book, article, etc.) of the quoted text. By default the epigraph is placed at the right hand side of the typeblock, and the `<source>` is typeset at the bottom right of the `<text>`.

```
\begin{epigraphs}
\qitem{<text>}{<source>}
...
\end{epigraphs}
```

The `epigraphs` environment typesets a list of epigraphs, and by default places them at the right hand side of the typeblock. Each epigraph in an `epigraphs` environment is specified

by a `\qitem` (analogous to the `\item` command in ordinary list environments). By default, the  $\langle source \rangle$  is typeset at the bottom right of the  $\langle text \rangle$ .

### 13.2 General

Example is the school of mankind,  
and they will learn at no other.

---

*Letters on a Regicide Peace*  
EDMUND BURKE

The commands described in this section apply to both the `\epigraph` command and the `epigraphs` environment. But first of all, note that an epigraph immediately after a heading will cause the first paragraph of the following text to be indented. If you want the initial paragraph to have no indentation, then start it with the `\noindent` command.

```
\epigraphwidth  
\epigraphposition{ $\langle flush \rangle$ }
```

The epigraphs are typeset in a minipage of width `\epigraphwidth`. The default value for this can be changed using the `\setlength` command. Typically, epigraphs are typeset in a measure much less than the width of the typeblock. The horizontal position of an epigraph in relation to the main typeblock is controlled by the  $\langle flush \rangle$  argument to the `\epigraphposition` declaration. The default value is `flushright`, so that epigraphs are set at the right hand side of the typeblock. This can be changed to `flushleft` for positioning at the left hand side or to `center` for positioning at the center of the typeblock.

```
\epigraphtextposition{ $\langle flush \rangle$ }
```

In order to avoid bad line breaks, the epigraph  $\langle text \rangle$  is normally typeset `raggedright`. The  $\langle flush \rangle$  argument to the `\epigraphtextposition` declaration controls the  $\langle text \rangle$  typesetting style. By default this is `flushleft` (which produces `raggedright` text). The sensible values are `center` for centered text, `flushright` for `raggedleft` text, and `flushleftright` for normal justified text.

If by any chance you want the  $\langle text \rangle$  to be typeset in some other layout style, the easiest way to do this is by defining a new environment which sets the paragraphing parameters to your desired values. For example, as the  $\langle text \rangle$  is typeset in a minipage, there is no paragraph indentation. If you want the paragraphs to be indented and justified then define a new environment like:

```
\newenvironment{myparastyle}{\setlength{\parindent}{1em}}{}
```

and use it as:

```
\epigraphtextposition{myparastyle}
```

```
\epigraphsourceposition{ $\langle flush \rangle$ }
```

The  $\langle flush \rangle$  argument to the `\epigraphsourceposition` declaration controls the position of the  $\langle source \rangle$ . The default value is `flushright`. It can be changed to `flushleft`, `center` or `flushleftright`.

For example, to have epigraphs centered with the  $\langle source \rangle$  at the left, add the following to your document.

```
\epigraphposition{center}
\epigraphsourceposition{flushleft}
```

```
\epigraphfontsize{<fontsize>}
```

Epigraphs are often typeset in a smaller font than the main text. The *<fontsize>* argument to the `\epigraphfontsize` declaration sets the font size to be used. If you don't like the default value (`\small`), you can easily change it to, say `\footnotesize` by:

```
\epigraphfontsize{\footnotesize}
```

```
\epigraphrule
```

By default, a rule is drawn between the *<text>* and *<source>*, with the rule thickness being given by the value of `\epigraphrule`. The value can be changed by using `\setlength`. A value of 0pt will eliminate the rule. Personally, I dislike the rule in the list environments.

```
\beforeepigraphskip
\afterepigraphskip
```

The two `...skip` commands specify the amount of vertical space inserted before and after typeset epigraphs. Again, these can be changed by `\setlength`. It is desirable that the sum of their values should be an integer multiple of the `\baselineskip`.

Note that you can use normal LaTeX commands in the *<text>* and *<source>* arguments. You may wish to use different fonts for the *<text>* (say *roman*) and the *<source>* (say *italic*).

The epigraph at the start of this section was specified as:

```
\epigraph{Example is the school of mankind,
          and they will learn at no other.}
{\textit{Letters on a Regicide Peace}}\ \textsc{Edmund Burke}}
```

### 13.3 Epigraphs before chapter headings

If all else fails, immortality can  
always be assured by spectacular  
error.

---

John Kenneth Galbraith

The `\epigraph` command and the `epigraphs` environment typeset an epigraph at the point in the text where they are placed. The first thing that a `\chapter` command does is to start off a new page, so another mechanism is provided for placing an epigraph just before a chapter heading.

```
\epigraphhead[<distance>]{<text>}
```

The `\epigraphhead` macro stores *<text>* for printing at *<distance>* below the header on a page. *<text>* can be ordinary text or, more likely, can be either an `\epigraph` command or an `epigraphs` environment. By default, the epigraph will be typeset at the righthand margin. If the command is immediately preceded by a `\chapter` or `\chapter*` command, the epigraph is typeset on the chapter title page.

The default value for the optional *<distance>* argument is set so that an `\epigraph` consisting of a single line of quotation and a single line denoting the source is aligned with the

bottom of the ‘Chapter X’ line produced by the `\chapter` command using the *default* chapterstyle. In other cases you will have to experiment with the  $\langle distance \rangle$  value. The value for  $\langle distance \rangle$  can be either a integer or a real number. The units are in terms of the current value for `\unitlength`. A typical value for  $\langle distance \rangle$  for a single line quotation and source for a `\chapter*` might be about 70 (points). A positive value of  $\langle distance \rangle$  places the epigraph below the page heading and a negative value will raise it above the page heading.

Here’s some example code:

```
\chapter*{Celestial navigation}
\epigraphhead[70]{\epigraph{Star crossed lovers.}{\textit{The Bard}}}
```

The  $\langle text \rangle$  argument is put into a minipage of width `\epigraphwidth`. If you use something other than `\epigraph` or epigraphs for the  $\langle text \rangle$  argument, you may have to do some positioning of the text yourself so that it is properly located in the minipage. For example

```
\chapter{Short}
\renewcommand{\epigraphflush}{center}
\epigraphhead{\centerline{Short quote}}
```

The `\epigraphhead` command changes the page style for the page on which it is specified, so there should be no text between the `\chapter` and the `\epigraphhead` commands. The page style is identical to the *plain* page style except for the inclusion of the epigraph. If you want a more fancy style for epigraphed chapters you will have to do some work yourself.

```
\epigraphforheader[\langle distance \rangle]{\langle text \rangle}
\epigraphpicture
```

The `\epigraphforheader` macro takes the same arguments as `\epigraphhead` but puts  $\langle text \rangle$  into a zero-sized picture at the coordinate position  $(0, -\langle distance \rangle)$ ; the macro `\epigraphpicture` holds the resulting picture. This can then be used as part of a chapter pagestyle, as in

```
\makepagestyle{mychapterpagestyle}
...
\makeoddhead{mychapterpagestyle}{\}\{\epigraphpicture}
```

Of course the  $\langle text \rangle$  argument for `\epigraphforheader` need not be an `\epigraph`, it can be arbitrary text.

```
\dropchapter{\langle length \rangle}
\undodrop
```

If a long epigraph is placed before a chapter title it is possible that the bottom of the epigraph may interfere with the chapter title. The command `\dropchapter` will lower any subsequent chapter titles by  $\langle length \rangle$ ; a negative  $\langle length \rangle$  will raise the titles. The command `\undodrop` restores subsequent chapter titles to their default positions. For example:

```
\dropchapter{2in}
\chapter{Title}
\epigraphhead{long epigraph}
\undodrop
```

`\cleartoevenpage[⟨text⟩]`

On occasions it may be desirable to put something (e.g., an epigraph, a map, a picture) on the page facing the start of a chapter, where the something belongs to the chapter that is about to start rather than the chapter that has just ended. In order to do this in a document that is going to be printed doublesided, the chapter must start on an odd numbered page and the pre-chapter material put on the immediately preceding even numbered page. The `\cleartoevenpage` command is like `\cleardoublepage` except that the page following the command will be an even numbered page, and the command takes an optional argument which is applied to the skipped page (if any).

Here is an example:

```
... end previous chapter.
\cleartoevenpage
\begin{center}
\begin{picture}... \end{picture}
\end{center}
\chapter{Next chapter}
```

If the style is such that chapter headings are put at the top of the pages, then it would be advisable to include `\thispagestyle{empty}` (or perhaps `plain`) immediately after `\cleartoevenpage` to avoid a heading related to the previous chapter from appearing on the page.

If the something is like a figure with a numbered caption and the numbering depends on the chapter numbering, then the numbers have to be hand set (unless you define a special chapter command for the purpose). For example:

```
... end previous chapter.
\cleartoevenpage[\thispagestyle{empty}] % a skipped page to be empty
\thispagestyle{plain}
\addtocounter{chapter}{1} % increment the chapter number
\setcounter{figure}{0}    % initialise figure counter
\begin{figure}
...
\caption{Pre chapter figure}
\end{figure}

\addtocounter{chapter}{-1} % decrement the chapter number
\chapter{Next chapter}    % increments chapter & resets figure numbers
\addtocounter{figure}{1}  % to account for pre-chapter figure
```

### 13.3.1 Epigraphs on book or part pages

If you wish to put an epigraphs on `\book` or `\part` pages you have to do a little more work than in other cases. This is because these division commands do some page flipping before and after typesetting the title.

One method is to put the epigraph into the page header as for epigraphs before `\chapter` titles. By suitable adjustments the epigraph can be placed anywhere on the page, independently of whatever else is on the page. A similar scheme may be used for epigraphs on other kinds of pages. The essential trick is to make sure that the *epigraph* pagestyle is

used for the page. For an epigraphed bibliography or index, the macros `\prebibhook` or `\preindexhook` can be appropriately modified to do this.

The other method is to subvert the `\beforepartskip` command for epigraphs before the title, or the `\afterpartskip` command for epigraphs after the title (or the equivalents for `\book` pages).

For example:

```
\let\oldbeforepartskip\beforepartskip % save definition
\renewcommand*{\beforepartskip}{%
  \epigraph{...}{...}% an epigraph
  \vfil}
\part{An epigraphed part}
...
\renewcommand*{\beforepartskip}{%
  \epigraph{...}{...}% another epigraph
  \vfil}
\part{A different epigraphed part}
...
\let\beforepartskip\oldbeforepartskip % restore definition
\part{An unepigraphed part}
...
```

# Fourteen

---

## Poetry

---

The typesetting of a poem should ideally be dependent on the particular poem. Individual problems do not usually admit of a general solution, so this manual and code should be used more as a guide towards some solutions rather than providing a ready made solution for any particular piece of verse.

The doggerel used as illustrative material has been taken from [Wil??].

Note that for the examples in this section I have made no attempt to do other than use the minimal (La)TeX capabilities; in particular I have made no attempt to do any special page breaking so some stanzas may cross onto the next page — most undesirable for publication.

The standard LaTeX classes provide the `verse` environment which is defined as a particular kind of list. Within the environment you use `\\` to end a line, and a blank line will end a stanza. For example, here is the text of a single stanza poem:

```
\newcommand{\garden}{  
  I used to love my garden \\  
  But now my love is dead \\  
  For I found a bachelor's button \\  
  In black-eyed Susan's bed.  
}
```

When this is typeset as a normal LaTeX paragraph (with no paragraph indentation), i.e.,

```
\noindent\garden
```

it looks like:

```
I used to love my garden  
But now my love is dead  
For I found a bachelor's button  
In black-eyed Susan's bed.
```

Typesetting it within the `verse` environment produces:

```
  I used to love my garden  
  But now my love is dead  
  For I found a bachelor's button  
  In black-eyed Susan's bed.
```

The stanza could also be typeset within the `alltt` environment, defined in the standard `alltt` package [Bra97], using a normal font and no `\\` line endings.

```
\begin{alltt}\normalfont
I used to love my garden
But now my love is dead
For I found a bachelor's button
In black-eyed Susan's bed.
\end{alltt}
```

which produces:

```
I used to love my garden
But now my love is dead
For I found a bachelor's button
In black-eyed Susan's bed.
```

The `alltt` environment is like the `verbatim` environment except that you can use LaTeX macros inside it. In the `verse` environment long lines will be wrapped and indented but in the `alltt` environment there is no indentation.

Some stanzas have certain lines indented, often alternate ones. To typeset stanzas like this you have to add your own spacing. For instance:

```
\begin{verse}
There was an old party of Lyme \\
Who married three wives at one time. \\
\hspace{2em} When asked: 'Why the third?' \\
\hspace{2em} He replied: 'One's absurd, \\
And bigamy, sir, is a crime.'
\end{verse}
```

is typeset as:

```
There was an old party of Lyme
Who married three wives at one time.
    When asked: 'Why the third?'
    He replied: 'One's absurd,
And bigamy, sir, is a crime.'
```

Using the `alltt` environment you can put in the spacing via ordinary spaces. That is, this:

```
\begin{alltt}\normalfont
There was an old party of Lyme
Who married three wives at one time.
    When asked: 'Why the third?'
    He replied: 'One's absurd,
And bigamy, sir, is a crime.'
\end{alltt}
```

is typeset as

```
There was an old party of Lyme
```



Who married three wives at one time.  
 When asked: ‘Why the third?’  
 He replied: ‘One’s absurd,  
 And bigamy, sir, is a crime.’

More exotically you could use the TeX `\parshape` command<sup>1</sup>:

```
\parshape = 5 0pt \linewidth 0pt \linewidth
           2em \linewidth 2em \linewidth 0pt \linewidth
\noindent There was an old party of Lyme \\
Who married three wives at one time. \\
When asked: ‘Why the third?’ \\
He replied: ‘One’s absurd, \\
And bigamy, sir, is a crime.’ \par
```

which will be typeset as:

There was an old party of Lyme  
 Who married three wives at one time.  
 When asked: ‘Why the third?’  
 He replied: ‘One’s absurd,  
 And bigamy, sir, is a crime.’

This is about as much assistance as standard (La)TeX provides, except to note that in the `verse` environment the `\\*` version of `\\` will prevent a following page break. You can also make judicious use of the `\needspace` macro to keep things together.

Some books of poetry, and especially anthologies, have two or more indexes, one, say for the poem titles and another for the first lines, and maybe even a third for the poets’ names. If you are not using `memoir` then the index [Jon95] and `multind` [Lon91] packages provide support for multiple indexes in one document.

## 14.1 Classy verse

The code provided by the `memoir` class is meant to help with some aspects of typesetting poetry but does not, and cannot, provide a comprehensive solution to all the requirements that will arise.

The main aspects of typesetting poetry that differ from typesetting plain text are:

- Poems are usually visually centered on the page.
- Some lines are indented, and often there is a pattern to the indentation.
- When a line is too wide for the page it is broken and the remaining portion indented with respect to the original start of the line.

These are the ones that the class attempts to deal with.

```
\begin{verse}[\length] ... \end{verse}
\versewidth
```

<sup>1</sup> See the TeXbook for how to use this.

The `verse` environment provided by the class is an extension of the usual LaTeX environment. The environment takes one optional parameter, which is a length; for example `\begin{verse}[4em]`. You may have noticed that the earlier verse examples are all near the left margin, whereas verses usually look better if they are typeset about the center of the page. The length parameter, if given, should be about the length of an average line, and then the entire contents will be typeset with the mid point of the length centered horizontally on the page.

The length `\versewidth` is provided as a convenience. It may be used, for example, to calculate the length of a line of text for use as the optional argument to the `verse` environment:

```
\settowidth{\versewidth}{This is the average line,}
\begin{verse}[\versewidth]
```

```
\vleftmargin
```

In the basic LaTeX `verse` environment the body of the verse is indented from the left of the typeblock by an amount `\leftmargini`, as is the text in many other environments based on the basic LaTeX `list` environment. For the class's version of `verse` the default indent is set by the length `\vleftmargin` (which is initially set to `\leftmargini`). For poems with particularly long lines it could perhaps be advantageous to eliminate any general indentation by:

```
\setlength{\vleftmargin}{0em}
```

If necessary the poem could even be moved into the left margin by giving `\vleftmargin` a negative length value, such as `-1.5em`.

```
\stanzaskip
```

The vertical space between stanzas is the length `\stanzaskip`. It can be changed by the usual methods.

```
\vin
\vgap
\vindent
```

The command `\vin` is shorthand for `\hspace*{\vgap}` for use at the start of an indented line of verse. The length `\vgap` (initially `1.5em`) can be changed by `\setlength` or `\addtolength`. When a verse line is too long to fit within the typeblock it is wrapped to the next line with an initial indent given by the value of the length `\vindent`. Its initial value is twice the default value of `\vgap`.

```
\\[<length>]
\\*[<length>]
\\![<length>]
```

Each line in the `verse` environment, except possibly for the last line in a stanza, must be ended by `\\`, which comes in several variants. In each variant the optional `<length>` is the vertical space to be left before the next line. The `\\*` form prohibits a page break after the line. The `\\!` form is to be used only for the last line in a stanza when the lines are being numbered; this is because the line numbers are incremented by the `\\` macro. It would normally be followed by a blank line.

```
\verselinebreak[⟨length⟩]
\\>[⟨length⟩]
```

Using `\verselinebreak` will cause later text in the line to be typeset indented on the following line. If the optional `⟨length⟩` is not given the indentation is twice `\vgap`, otherwise it is `⟨length⟩`. The broken line will count as a single line as far as the `altverse` and `patverse` environments are concerned. The macro `\\>` is shorthand for `\verselinebreak`, and unlike other members of the `\\` family the optional `⟨length⟩` is the indentation of the following partial line, not a vertical skip. Also, the `\\>` macro does not increment any line number.

```
\vinphantom{⟨text⟩}
```

Verse lines are sometimes indented according to the space taken by the text on the previous line. The macro `\vinphantom` can be used at the start of a line to give an indentation as though the line started with `⟨text⟩`. For example here are a few lines from the portion of *Fridthjof's Saga* where Fridthjof and Ingeborg part:

#### Source for example 14.1

```
\settowidth{\versewidth}{Nay, nay, I leave thee not,
                        thou goest too}
\begin{verse}[\versewidth]
\ldots \\*
His judgement rendered, he dissolved the Thing. \\*
\flagverse{Ingeborg} And your decision? \\*
\flagverse{Fridthjof} \vinphantom{And your decision?}
                        Have I ought to choose? \\*
Is not mine honour bound by his decree? \\*
And that I will redeem through Angantyr \\*
His paltry gold doth hide in Nastrand's flood. \\*
Today will I depart. \\*
\flagverse{Ingeborg} \vinphantom{Today will I depart.}
                        And Ingeborg leave? \\*
\flagverse{Fridthjof} Nay, nay, I leave thee not,
                        thou goest too. \\*
\flagverse{Ingeborg} Impossible! \\*
\flagverse{Fridthjof} \vinphantom{Impossible!}
                        O! hear me, ere thou answerest.
\end{verse}
```

Use of `\vinphantom` is not restricted to the start of verse lines — it may be used anywhere in text to leave some blank space. For example, compare the two lines below, which are produced by this code:

```
\noindent Come away with me and be my love --- Impossible. \\
Come away with me \vinphantom{and be my love} --- Impossible.
```

Come away with me and be my love — Impossible.  
 Come away with me — Impossible.

```
\vleftofline{⟨text⟩}
```

## Typeset example 14.1: Phantom text in verse

	...
Ingeborg	His judgement rendered, he dissolved the Thing.
Fridthjof	And your decision?
	Have I ought to choose?
	Is not mine honour bound by his decree?
	And that I will redeem through Angantyr
	His paltry gold doth hide in Nastrand's flood.
	Today will I depart.
Ingeborg	And Ingeborg leave?
Fridthjof	Nay, nay, I leave thee not, thou goest too.
Ingeborg	Impossible!
Fridthjof	O! hear me, ere thou answerest.

A verse line may start with something, for example open quote marks, where it is desirable that it is ignored as far as the alignment of the rest of the line is concerned<sup>2</sup> — a sort of ‘hanging left punctuation’. When it is put at the start of a line in the `verse` environment the `<text>` is typeset but ignored as far as horizontal indentation is concerned. Compare the two examples.

## Source for example 14.2

```
\noindent ‘‘No, this is what was spoken by the prophet Joel:
\begin{verse}
‘\,‘\,‘‘In the last days,’’ God says, \
‘‘I will pour out my spirit on all people. \
Your sons and daughters will prophesy, \
\ldots \
And everyone who calls \ldots ’\,‘
\end{verse}
```

## Source for example 14.3

```
\noindent ‘‘No, this is what was spoken by the prophet Joel:
\begin{verse}
\leftline{‘\,‘\,‘‘In the last days,’’ God says, \
\leftline{‘‘}I will pour out my spirit on all people. \
Your sons and daughters will prophesy, \
\ldots \}
```

<sup>2</sup> Requested by Matthew Ford who also provided the example text.

## Typeset example 14.2: Verse with regular quote marks

---

“No, this is what was spoken by the prophet Joel:  
 ““In the last days,” God says,  
 “I will pour out my spirit on all people.  
 Your sons and daughters will prophesy,  
 ...  
 And everyone who calls ...””

---

## Typeset example 14.3: Verse with hanging left quote marks

---

“No, this is what was spoken by the prophet Joel:  
 ““In the last days,” God says,  
 “I will pour out my spirit on all people.  
 Your sons and daughters will prophesy,  
 ...  
 And everyone who calls ...””

---

```
And everyone who calls \ldots ''\,'
\end{verse}
```

## 14.1.1 Indented lines

Within the `verse` environment stanzas are normally separated by a blank line in the input.

```
\begin{altverse} ... \end{altverse}
```

Individual stanzas within `verse` may, however, be enclosed in the `altverse` environment. This has the effect of indenting the 2nd, 4th, etc., lines of the stanza by the length `\vgap`.

```
\begin{patverse} ... \end{patverse}
\begin{patverse*} ... \end{patverse*}
\indentpattern{<digits>}
```

As an alternative to the `altverse` environment, individual stanzas within the `verse` environment may be enclosed in the `patverse` environment. Within this environment the indentation of each line is specified by an indentation pattern, which consists of an array of digits,  $d_1$  to  $d_n$ , and the  $n$ th line is indented by  $d_n$  times `\vgap`. However, the first line is not indented, irrespective of the value of  $d_1$ .

The indentation pattern for a `patverse` or `patverse*` environment is specified via the `\indentpattern` command, where `<digits>` is a string of digits (e.g., 3213245281). With the `patverse` environment, if the pattern is shorter than the number of lines in the stanza, the

trailing lines will not be indented. However, in the `patverse*` environment the pattern keeps repeating until the end of the stanza.

#### 14.1.2 Numbering

```
\flagverse{<flag>}  
\leftskip
```

Putting `\flagverse` at the start of a line will typeset `<flag>`, for example the stanza number, ending at a distance `\leftskip` before the line. The default for `\leftskip` is 3em.

The lines in a poem may be numbered.

```
\linenumberfrequency{<nth>}  
\setverselinenums{<first>}{<startat>}
```

The declaration `\linenumberfrequency{<nth>}` will cause every `<nth>` line of succeeding verses to be numbered. For example, `\linenumberfrequency{5}` will number every fifth line. The default is `\linenumberfrequency{0}` which prevents any numbering. The `\setverselinenums` macro can be used to specify that the number of the first line of the following verse shall be `<first>` and the first printed number shall be `<startat>`. For example, perhaps you are quoting part of a numbered poem. The original numbers every tenth line but if your extract starts with line 7, then

```
\linenumberfrequency{10}  
\setverselinenums{7}{10}
```

is what you will need.

```
\thepoemline  
\linenumberfont{<font-decl>}
```

The poemline counter is used in numbering the lines, so the number representation is `\thepoemline`, which defaults to arabic numerals, and they are typeset using the font specified via `\linenumberfont`; the default is

```
\linenumberfont{\small\rmfamily}
```

for small numbers in the roman font.

```
\verselinenumbersright  
\verselinenumbersleft  
\rightskip
```

Following the declaration `\verselinenumbersright`, which is the default, any verse line numbers will be set in the righthand margin. The `\verselinenumbersleft` declaration will set any subsequent line numbers to the left of the lines. The numbers are set at a distance `\rightskip` (default 1em) into the margin.

#### 14.2 Titles

The `\PoemTitle` command is provided for typesetting titles of poems.

```
\PoemTitle[<fortoc>][<forhead>]{<title>}  
\NumberPoemTitle  
\PlainPoemTitle  
\thepoem
```

The `\PoemTitle` command takes the same arguments as the `\chapter` command; it typesets the title for a poem and adds it to the ToC. Following the declaration `\NumberPoemTitle` the title is numbered but there is no numbering after the `\PlainPoemTitle` declaration.

```
\poemtoc{<sec>}
```

The kind of entry made in the ToC by `\PoemTitle` is defined by `\poemtoc`. The initial definition is:

```
\newcommand{\poemtoc}{section}
```

for a section-like ToC entry. This can be changed to, say, `chapter` or `subsection` or `...`.

```
\poemtitlemark{<forhead>}
\poemtitlepstyle
```

The macro `\poemtitlemark` is called with the argument `<forhead>` so that it may be used to set marks for use in a page header via the normal mark process. The `\poemtitlepstyle` macro, which by default does nothing, is provided as a hook so that, for example, it can be redefined to specify a particular pagestyle that should be used. For example:

```
\renewcommand*{\poemtitlemark}[1]{\markboth{#1}{#1}}
\renewcommand*{\poemtitlepstyle}{%
  \pagestyle{headings}%
  \thispagestyle{empty}}
```

```
\PoemTitle*{<forhead>}{<title>}
\poemtitlestarmark{<forhead>}
\poemtitlestarpstyle
```

The `\PoemTitle*` command produces an unnumbered title that is not added to the ToC. Apart from that it operates in the same manner as the unstarred version. The `\poemtitlestarmark` and `\poemtitlestarpstyle` can be redefined to set marks and pagestyles.

#### 14.2.1 Main Poem Title layout parameters

```
\PoemTitleheadstart
\printPoemTitlenonum
\printPoemTitlenum
\afterPoemTitlenum
\printPoemTitletitle{<title>}
\afterPoemTitle
```

The essence of the code used to typeset a numbered `<title>` from a `\PoemTitle` is:

```
\PoemTitleheadstart
\printPoemTitlenum
\afterPoemTitlenum
\printPoemTitletitle{title}
\afterPoemTitle
```

If the title is unnumbered then `\printPoemTitlenonum` is used instead of the `\printPoemTitlenum` and `\afterPoemTitlenum` pair of macros.

The various elements of this can be modified to change the layout. By default the number is centered above the title, which is also typeset centered, and all in a `\large` font.

The elements are detailed in the next section.

#### 14.2.2 Detailed Poem Title layout parameters

```
\beforePoemTitleskip  
\PoemTitlenumfont  
\midPoemTitleskip  
\PoemTitlefont  
\afterPoemTitleskip
```

As defined, `\PoemTitleheadstart` inserts vertical space before a poem title. The default definition is:

```
\newcommand*{\PoemTitleheadstart}{\vspace{\beforePoemTitleskip}}  
\newlength{\beforePoemTitleskip}  
\setlength{\beforePoemTitleskip}{1\onelineskip}
```

`\printPoemTitlenum` typesets the number for a poem title. The default definition, below, prints the number centered and in a large font.

```
\newcommand*{\printPoemTitlenum}{\PoemTitlenumfont \thepoem}  
\newcommand*{\PoemTitlenumfont}{\normalfont\large\centering}
```

The definition of `\printPoemTitlenonum`, which is used when there is no number, is simply

```
\newcommand*{\printPoemTitlenonum}{}
```

`\afterPoemTitlenum` is called between setting the number and the title. It ends a paragraph (thus making sure any previous `\centering` is used) and then may add some vertical space. The default definition is:

```
\newcommand*{\afterPoemTitlenum}{\par\nobreak\vskip \midPoemTitleskip}  
\newlength{\midPoemTitleskip}  
\setlength{\midPoemTitleskip}{0pt}
```

The default definition of `\printPoemTitletitle` is below. It typesets the title centered and in a large font.

```
\newcommand*{\printPoemTitletitle}[1]{\PoemTitlefont #1}  
\newcommand*{\PoemTitlefont}{\normalfont\large\centering}
```

The macro `\afterPoemTitle` finishes off the title typesetting. The default definition is:

```
\newcommand*{\afterPoemTitle}{\par\nobreak\vskip \afterPoemTitleskip}  
\newlength{\afterPoemTitleskip}  
\setlength{\afterPoemTitleskip}{1\onelineskip}
```

#### 14.3 Examples

Here are some sample verses using the class facilities.

First a Limerick, but titled and centered:



```

\renewcommand{\poemtoc}{subsection}
\PlainPoemTitle
\PoemTitle{A Limerick}
\settowidth{\versewidth}{There was a young man of Quebec}
\begin{verse}[\versewidth]
There was a young man of Quebec \\
Who was frozen in snow to his neck. \\
\vin When asked: 'Are you friz?' \\
\vin He replied: 'Yes, I is, \\
But we don't call this cold in Quebec.'
\end{verse}

```

which gets typeset as below. The `\poemtoc` is redefined to `subsection` so that the `\poemtitle` titles are entered into the ToC as subsections. The titles will not be numbered because of the `\PlainPoemTitle` declaration.

#### A Limerick

There was a young man of Quebec  
 Who was frozen in snow to his neck.  
     When asked: 'Are you friz?'  
     He replied: 'Yes, I is,  
 But we don't call this cold in Quebec.'

Next is the Garden verse within the `altverse` environment. Unlike earlier renditions this one is titled and centered.

```

\settowidth{\versewidth}{But now my love is dead}
\PoemTitle{Love's lost}
\begin{verse}[\versewidth]
\begin{altverse}
\garden
\end{altverse}
\end{verse}

```

Note how the alternate lines are automatically indented in the typeset result below.

#### Love's lost

I used to love my garden  
     But now my love is dead  
 For I found a bachelor's button  
     In black-eyed Susan's bed.

It is left up to you how you might want to add information about the author of a poem. Here is one example of a macro for this:

```

\newcommand{\attrib}[1]{%
  \nopagebreak{\raggedleft\footnotesize #1\par}}

```

This can be used as in the next bit of doggerel.

```
\PoemTitle{Fleas}
\settowidth{\versewidth}{What a funny thing is a flea}
\begin{verse}[\versewidth]
What a funny thing is a flea. \\
You can't tell a he from a she. \\
But he can. And she can. \\
Whoopee!
\end{verse}
\attrib{Anonymous}
```

#### Fleas

What a funny thing is a flea.  
You can't tell a he from a she.  
But he can. And she can.  
Whoopee!

Anonymous

The next example demonstrates the automatic line wrapping for overlong lines.

```
\PoemTitle{In the beginning}
\settowidth{\versewidth}{And objects at rest tended to
                           remain at rest}
\begin{verse}[\versewidth]
Then God created Newton, \\
And objects at rest tended to remain at rest, \\
And objects in motion tended to remain in motion, \\
And energy was conserved
    and momentum was conserved
    and matter was conserved \\
And God saw that it was conservative.
\end{verse}
\attrib{Possibly from \textit{Analog}, circa 1950}
```

#### In the beginning

Then God created Newton,  
And objects at rest tended to remain at rest,  
And objects in motion tended to remain in motion,  
And energy was conserved and momentum was conserved and  
matter was conserved  
And God saw that it was conservative.

Possibly from *Analog*, circa 1950



```
\end{patverse}  
\end{verse}
```

Note that I used the `\needspace` command to ensure that the limerick will not get broken across a page.

### The Young Lady of Ryde

There was a young lady of Ryde  
Who ate some apples and died.  
The apples fermented  
Inside the lamented  
And made cider inside her inside.

The next example is a song you may have heard of. This uses `\flagverse` for labelling the stanzas, and because the lines are numbered they can be referred to.

```
\settowidth{\versewidth}{In a cavern, in a canyon,}  
\PoemTitle{Clementine}  
\begin{verse}[\versewidth]  
\linenumberfrequency{2}  
\begin{altverse}  
\flagverse{1.} In a cavern, in a canyon, \\  
Excavating for a mine, \\  
Lived a miner, forty-niner, \label{vs:49} \\  
And his daughter, Clementine. \\\!  
\end{altverse}  
  
\begin{altverse}  
\flagverse{\textsc{chorus}} Oh my darling, Oh my darling, \\  
Oh my darling Clementine. \\  
Thou art lost and gone forever, \\  
Oh my darling Clementine.  
\end{altverse}  
\linenumberfrequency{0}  
\end{verse}  
The ‘forty-niner’ in line~\ref{vs:49} of the song  
refers to the gold rush of 1849.
```

### Clementine

1.	In a cavern, in a canyon, Excavating for a mine, Lived a miner, forty-niner, And his daughter, Clementine.	2 4
CHORUS	Oh my darling, Oh my darling,	

Oh my darling Clementine.  
Thou art lost and gone forever,  
Oh my darling Clementine.

6

The ‘forty-niner’ in line 3 of the song refers to the gold rush of 1849.

The last example is a much more ambitious use of `\indentpattern`. In this case it is defined as:

```
\indentpattern{0135554322112346898779775545653222345544456688778899}
```

and the result is shown on the next page.

Mouse's Tale

Fury said to  
a mouse, That  
he met  
in the  
house,  
'Let us  
both go  
to law:  
I will  
prosecute  
*you*. —  
Come, I'll  
take no  
denial;  
We must  
have a  
trial:  
For  
really  
this  
morning  
I've  
nothing  
to do.'  
Said the  
mouse to  
the cur,  
Such a  
trial,  
dear sir,  
With no  
jury or  
judge,  
would be  
wasting  
our breath.'  
'I'll be  
judge,  
I'll be  
jury.'  
Said  
cunning  
old Fury;  
'I'll try  
the whole  
cause  
and  
condemn  
you  
to  
death.'

Lewis Carroll, *Alice's Adventures in Wonderland*, 1865

# Fifteen

---

## Boxes, verbatims and files

---

The title of this chapter indicates that it deals with three disconnected topics, but there is method in the seeming peculiarity. By the end of the chapter you will be able to write LaTeX code that lets you put things in your document source at one place and have them typeset at a different place, or places. For example, if you are writing a text book that includes questions and answers then you could write a question and answer together yet have the answer typeset at the end of the book.

Writing in one place and printing in another is based on outputting stuff to a file and then inputting it for processing at another place or time. This is just how LaTeX produces the ToC. It is often important when writing to a file that LaTeX does no processing of any macros, which implies that we need to be able to write verbatim. One use of verbatim in LaTeX is to typeset computer code or the like, and to clearly distinguish the code from the main text it is often typeset within a box. Hence the chapter title.

The class extends the kinds of boxes normally provided, extends the default verbatims, and provides a simple means of writing and reading files.

One problem with verbatims is that they can not be used as part of an argument to a command. For example to typeset something in a framed minipage the obvious way is to use the minipage as the argument to the `\fbox` macro:

```
\fbox{\begin{minipage}{6cm}
      Contents of framed minipage
\end{minipage}}
```

This works perfectly well until the contents includes some verbatim material, whereupon you will get nasty error messages. However this particular conundrum is solvable, even if the solution is not particularly obvious. Here it is.

We can put things into a box, declared via `\newsavebox`, and typeset the contents of the box later via `\usebox`. The most common way of putting things into a save box is by the `\sbox` or `\savebox` macros, but as the material for saving is one of the arguments to these macros this approach fails. But, `lrbox` is an environment form of `\sbox`, so it can handle verbatim material. The code below, after getting a new save box, defines a new `framedminipage` environment which is used just like the standard `minipage`. The `framedminipage` starts an `lrbox` environment and then starts a `minipage` environment, after which comes the contents. At the end it closes the two environments and calls `\fbox` with its argument being the contents of the saved box *which have already been typeset*.

```
\newsavebox{\minibox}
\newenvironment{framedminipage}[1]{%
  \begin{lrbox}{\minibox}\begin{minipage}{#1}}%
```

```
{\end{minipage}\end{lrbox}\fbox{\usebox{\minibox}}}
```

**Question 1.** Can you think of any improvements to the definition of the `framedminipage` environment?

**Question 2.** An answer to question 1 is at the end of this chapter. Suggest how it was put there.

### 15.1 Boxes

LaTeX provides some commands to put a box round some text. The class extends the available kinds of boxes.

```
\begin{framed} text \end{framed}
\begin{shaded} text \end{shaded}
\begin{snugshade} text \end{snugshade}
```

The `framed`, `shaded`, and `snugshade` environments, which were created by Donald Arseneau as part of his `framed` package [Ars07], put their contents into boxes that break across pages. The `framed` environment delineates the box by drawing a rectangular frame. If there is a pagebreak in the middle of the box, frames are drawn on both pages.

The `shaded` environment typesets the box with a shaded or colored background. This requires the use of the `color` package [Car05], which is one of the required LaTeX packages, or the `xcolor` package [Ker07]. The shading color is `shadecolor`, which you have to define before using the environment. For example, to have a light gray background:

```
\definecolor{shadecolor}{gray}{0.9}
```

For complete information on this see the documentation for the `color` or `xcolor` packages, or one of the LaTeX books like the *Graphics Companion* [GM<sup>+</sup>07]. In the `snugshaded` environment the box clings more closely to its contents than it does in the `shaded` environment.

#### Recommended alternative

Since the class was originally written, much have happened in the `gfx` generating capabilities in LaTeX, especially the popularity of TikZ has provided many more extensive box and graphics generating packages.

As of 2018 one of the most impressive packages for all sorts of boxes is the `tcolorbox` package by Thomas F. Sturm.

Be aware that the boxes we present in this manual are somewhat delicate; they do not work in all circumstances. For example they will not work with the `multicol` package [Mit18], and any floats or footnotes in the boxes will disappear.

```
\FrameRule \FrameSep \FrameHeightAdjust
```

The `framed` environment puts the text into an ‘`\fbox`’ with the settings:

```
\setlength{\FrameRule}{\fboxrule}
\setlength{\FrameSep}{3\fboxsep}
```



The macro `\FrameHeightAdjust` specifies the height of the top of the frame above the baseline at the top of a page; its initial definition is:

```
\providecommand*\FrameHeightAdjust{0.6em}
```

```
\MakeFramed{<settings>} \endMakeFramed
\FrameCommand \FrameRestore
```

Internally, the environments are specified using the `MakeFramed` environment. The *<setting>* should contain any adjustments to the text width (applied to `\hsize` and using the `\width` of the frame itself) and a ‘restore’ command, which is normally the provided `\FrameRestore` macro. The frame itself is drawn via the `\FrameCommand`, which can be changed to obtain other boxing styles. The default definition equates to an `\fbox` and is:

```
\newcommand*\FrameCommand{%
  \setlength{\fboxrule}{\FrameRule}\setlength{\fboxsep}{\FrameSep}%
  \fbox}
```

For example, the `framed`, `shaded` and `snugshade` environments are defined as

```
\newenvironment{framed}{% % uses default \FrameCommand
  \MakeFramed{\advance\hsize -\width \FrameRestore}}%
  {\endMakeFramed}
\newenvironment{shaded}{% % redefines \FrameCommand as \colorbox
  \def\FrameCommand{\fboxsep=\FrameSep \colorbox{shadecolor}}%
  \MakeFramed{\FrameRestore}}%
  {\endMakeFramed}
\newenvironment{snugshade}{% A tight version of shaded
  \def\FrameCommand{\colorbox{shadecolor}}%
  \MakeFramed{\FrameRestore\@setminipage}}%
  {\par\unskip\endMakeFramed}
```

If you wanted a narrow, centered, framed environment you could do something like this:

```
\newenvironment{narrowframed}{%
  \MakeFramed{\setlength{\hsize}{22pc}\FrameRestore}}%
  {\endMakeFramed}
```

where 22pc will be the width of the new framed environment.

```
\begin{leftbar} text \end{leftbar}
```

The `leftbar` environment draws a thick vertical line at the left of the text. It is defined as

```
\newenvironment{leftbar}{%
  \def\FrameCommand{\vrule width 3pt \hspace{10pt}}%
  \MakeFramed{\advance\hsize -\width \FrameRestore}}%
  {\endMakeFramed}
```

By changing the *<setting>* for `\MakeFramed` and the definition of `\FrameCommand` you can obtain a variety of framing styles. For instance, to have rounded corners to the frame instead of the normal sharp ones, you can use the `fancybox` package [[Zan98](#)] and the following code:

```
\usepackage{fancybox}
\newenvironment{roundedframe}{%
  \def\FrameCommand{%
    \cornersize*{20pt}%
    \setlength{\fboxsep}{5pt}%
    \ovalbox}%
  \MakeFramed{\advance\hsize-\width \FrameRestore}}%
{\endMakeFramed}
```

A framed environment is normally used to distinguish its contents from the surrounding text. A title for the environment may be useful, and if there was a pagebreak in the middle, a title on the continuation could be desirable. Doing this takes a bit more work than I have shown so far. This first part was inspired by a posting to CT<sub>T</sub> by Donald Arseneau.<sup>1</sup>

```
\newcommand{\FrameTitle}[2]{%
  \fboxrule=\FrameRule \fboxsep=\FrameSep
  \fbox{\vbox{\nobreak \vskip -0.7\FrameSep
    \rlap{\strut#1}\nobreak\nointerlineskip% left justified
    \vskip 0.7\FrameSep
    \hbox{#2}}}}
\newenvironment{framewithtitle}[2][\FrameFirst@Lab\ (cont.)]{%
  \def\FrameFirst@Lab{\textbf{#2}}%
  \def\FrameCont@Lab{\textbf{#1}}%
  \def\FrameCommand##1{%
    \FrameTitle{\FrameFirst@Lab}{##1}}%
  \def\FirstFrameCommand##1{%
    \FrameTitle{\FrameFirst@Lab}{##1}}%
  \def\MidFrameCommand##1{%
    \FrameTitle{\FrameCont@Lab}{##1}}%
  \def\LastFrameCommand##1{%
    \FrameTitle{\FrameCont@Lab}{##1}}%
  \MakeFramed{\advance\hsize-\width \FrameRestore}}%
{\endMakeFramed}
```

The `framewithtitle` environment, which is the end goal of this exercise, acts like the `framed` environment except that it puts a left-justified title just after the top of the frame box and before the regular contents.

```
\begin{framewithtitle}[<cont-title>]{<title>} text
\end{framewithtitle}
```

The `<title>` is set in a bold font. If the optional `<cont-title>` argument is given then `<cont-title>` is used as the title on any succeeding pages, otherwise the phrase ‘`<title>` (cont.)’ is used for the continuation title.

If you would like the titles centered, replace the line marked ‘left justified’ in the code for `\FrameTitle` with the line:

---

<sup>1</sup> On 2003/10/24 in the thread `framed.sty w/heading?`. The particulars are no longer applicable as the framing code in question then has since been revised.

```
\rlap{\centerline{\strut#1}}\nobreak\nointerlineskip% centered
```

The code for the `frametitle` environment is not obvious. The difficulty in creating the environment was that the underlying framing code goes through the ‘stuff’ to be framed by first trying to fit it all onto one page (`\FrameCommand`). If it does not fit, then it takes as much as will fit and typesets that using `\FirstFrameCommand`, then tries to typeset the remainder on the next page. If it all fits then it uses `\LastFrameCommand`. If it doesn’t fit, it typesets as much as it can using `\MidFrameCommand`, and then tries to set the remainder on the following page. The process repeats until all has been set.

If you would prefer to have the title at the top outside the frame the above code needs adjusting.

```
\newcommand{\TitleFrame}[2]{%
  \fboxrule=\FrameRule \fboxsep=\FrameSep
  \vbox{\nobreak \vskip -0.7\FrameSep
    \rlap{\strut#1}\nobreak\nointerlineskip% left justified
    \vskip 0.7\FrameSep
    \noindent\fbox{#2}}}%
\newenvironment{titledframe}[2][\FrameFirst@Lab\ (cont.)]{%
  \def\FrameFirst@Lab{\textbf{#2}}}%
  \def\FrameCont@Lab{\textbf{#1}}}%
  \def\FrameCommand##1{%
    \TitleFrame{\FrameFirst@Lab}{##1}}
  \def\FirstFrameCommand##1{%
    \TitleFrame{\FrameFirst@Lab}{##1}}
  \def\MidFrameCommand##1{%
    \TitleFrame{\FrameCont@Lab}{##1}}
  \def\LastFrameCommand##1{%
    \TitleFrame{\FrameCont@Lab}{##1}}
  \MakeFramed{\hsize\textwidth
    \advance\hsize -2\FrameRule
    \advance\hsize -2\FrameSep
    \FrameRestore}}%
{\endMakeFramed}
```

```
\begin{titledframe}[<cont-title>]{<title>} text \end{titledframe}
```

The `titledframe` environment is identical to `framewithtitle` except that the title is placed just before the frame. Again, if you would like a centered title, replace the line marked ‘left justified’ in `\TitleFrame` by

```
\rlap{\centerline{\strut#1}}\nobreak\nointerlineskip% centered
```

You can adjust the code for the `framewithtitle` and `titledframe` environments to suit your own purposes, especially as they are not part of the class so you would have to type them in yourself anyway if you wanted to use them, using whatever names you felt suitable.

The class provides two further environments in addition to those from the `framed` package.

```
\begin{qframe} text \end{qframe}
\begin{qshade} text \end{qshade}
```

When used within, say, a `quotation` environment, the `framed` and `shaded` environments do not closely box the indented text. The `qframe` and `qshade` environments do provide close boxing.<sup>2</sup> The difference can be seen in the following quotation.

This is the start of a quotation environment. It forms the basis showing the difference between the `framed` and `qframe` environments.

This is the second paragraph in the quotation environment and in turn it is within the `qframe` environment.

This is the third paragraph in the quotation environment and in turn it is within the `framed` environment.

This is the fourth and final paragraph within the quotation environment and is not within either a `qframe` or `framed` environment.

If you want to put a frame inside an `adjustwidth` environment then you may well find that `qframe` or `qshade` meet your expectations better than `framed` or `shaded`. Of course, it does depend on what your expectations are.

## 15.2 Long comments

The `%` comment character can be used to comment out (part of) a line of TeX code, but this gets tedious if you need to comment out long chunks of code.

```
\begin{comment} text to be skipped over \end{comment}
```

As an extreme form of font changing, although it doesn't actually work that way, anything in a `comment` environment will not appear in the document; effectively, LaTeX throws it all away. This can be useful to temporarily discard chunks of stuff instead of having to mark each line with the `%` comment character.

```
\newcomment{<name>}  
\commentsoff{<name>}  
\commentson{<name>}
```

The class lets you define your own comment environment via the `\newcomment` command which defines a comment environment called `<name>`. In fact the class itself uses `\newcomment{comment}` to define the `comment` environment. A comment environment `<name>` may be switched off so that its contents are not ignored by using the `\commentsoff` declaration. It may be switched on later by the `\commentson` declaration. In either case `<name>` must have been previously declared as a comment environment via `\newcomment`.

Suppose, for example, that you are preparing a draft document for review by some others and you want to include some notes for the reviewers. Also, you want to include some private comments in the source for yourself. You could use the `comment` environment for your private comments and create another environment for the notes to the reviewers. These notes should not appear in the final document. Your source might then look like:

---

<sup>2</sup> Donald Arseneau has said that he may put something similar in a later version the `framed` package.

```

\newcomment{review}
\ifdraftdoc\else
  \commentsoff{review}
\fi
...
\begin{comment}
Remember to finagle the wingle!
\end{comment}
...
\begin{review}
\textit{REVIEWERS: Please pay particular attention to this section.}
\end{review}
...

```

Comment environments cannot be nested, nor can they overlap. The environments in the code below will not work in the manner that might be expected:

```

\newcomment{acomment} \newcomment{mycomment}
\begin{comment}
  \begin{acomment} %% comments cannot be nested
  ...
  \end{acomment}
  ...
  \begin{mycomment}
  ...
\end{comment}
...
\end{mycomment} %% comments cannot overlap

```

More encompassing comment environments are available if you use Victor Eijkhout's comment package [Eij99].

### 15.3 Verbatims

Standard LaTeX defines the `\verb` and `\verb*` commands for typesetting short pieces of text verbatim, short because they cannot include a linebreak. For longer verbatim texts the `verbatim` or `verbatim*` environments can be used. The star forms indicate spaces in the verbatim text by outputting a `␣` mark for each space. The class extends the standard verbatims in various ways.

If you have to write a lot of `\verb` text, as I have had to do for this book, it gets tedious to keep on typing this sort of thing: `\verb!verbatim text!`. Remember that the character immediately after the `\verb`, or `\verb*`, ends the verbatim processing.

<pre> \MakeShortVerb{\backslash-char} \DeleteShortVerb{\backslash-char} </pre>
--

The `\MakeShortVerb` macro takes a character preceded by a backslash as its argument, say `\!`, and makes that character equivalent to `\verb!`. Using the character a second time will stop the verbatim processing. Doing, for example `\MakeShortVerb{\!}`, lets you then use `!verbatim text!` instead of the longer winded `\verb!verbatim text!`.

You have to pick as the short verb character one that you are unlikely to use; a good choice is often the | bar character as this rarely used in normal text. This choice, though may be unfortunate if you want to have any tabulars with vertical lines, as the bar character is used to specify those. The `\DeleteShortVerb` macro is provided for this contingency; give it the same argument as an earlier `\MakeShortVerb` and it will restore the short verb character to its normal state.

The `\MakeShortVerb` and `\DeleteShortVerb` macros come from the `shortvrb` package which is part of the LaTeX base system, but I have found them so convenient that I added them to the class.

`\setverbatimfont{<font-declaration>}`

The default font for verbatims is the normal sized monospaced font. The declaration `\setverbatimfont` can be used to specify a different font. The class default is

```
\setverbatimfont{\normalfont\ttfamily}
```

To use a smaller version simply say

```
\setverbatimfont{\normalfont\ttfamily\small}
```

A monospaced font is normally chosen as verbatim text is often used to present program code or typewritten text. If you want a more exotic font, try this

```
\setverbatimfont{\fontencoding{T1}\fontfamily{cmss}\selectfont}
```

and your verbatim text will then look like

We are no longer using the boring old typewriter font  
for verbatim text. We used the T1 encoding  
to make sure that characters that are often ligatures  
like “, or ”, or ---, or <, or >, print as expected.  
After this we will switch back to the default verbatim font via  
`\setverbatimfont{\normalfont\ttfamily}`

In the normal way of things with an OT1 fontencoding, typesetting the ligatures mentioned above in the sans font produces: ligatures like “, or ”, or ---, or ¡, or ¿, which is not what happens in the `\verbatim` environment.

`\begin{verbatim} anything \end{verbatim}`  
`\begin{verbatim*} anything \end{verbatim*}`

In the `verbatim` environment<sup>3</sup> you can write anything you want (except `\end{verbatim}`), and it will be typeset exactly as written. The `verbatim*` environment is similar except, like with `\verb*`, spaces will be indicated with a `␣` mark.

`\tabson[<number>]`  
`\tabsoff`

The standard `verbatim` environment ignores any TAB characters; with the class's environment after calling the `\tabson` declaration the environment will handle TAB characters. By default 4 spaces are used to represent a TAB; the optional `<number>` argument to the declaration will set the number of spaces for a TAB to be `<number>`. Some folk like to use 8

---

<sup>3</sup> This version of the `verbatim` environment is heavily based on the `verbatim` package [SRR99] but does provide some extensions.

spaces for a TAB, in which case they would need to declare `\tabson[8]`. Unremarkably, the declaration `\tabsoff` switches off TABs. The class default is `\tabsoff`.

```
\wrappingon
\wrappingoff
\verbatimindent
\verbatimbreakchar{<char>}
```

As noted, whatever is written in a verbatim environment is output just as written, even if lines are too long to fit on the page. The declaration `\wrappingon` lets the environment break lines so that they do not overflow. The declaration `\wrappingoff` restores the normal behaviour.

The following is an example of how a wrapped verbatim line looks. In the source the contents of the verbatim was written as a single line.

```
This is an example of line wrapping in the verbatim environment. It is a %
    single line in the source and the \wrappingon declaration has been %
    used.
```

The wrapped portion of verbatim lines are indented from the left margin by the length `\verbatimindent`. The value can be changed by the usual length changing commands. The end of each line that has been wrapped is marked with the `<char>` character of the `\verbatimbreakchar` macro. The class default is `\verbatimbreakchar{\char'\%}`, so that lines are marked with `%`. To put a `'/'` mark at the end of wrapped lines you can do

```
\setverbatimbreak{\char'\/}
```

or similarly if you would like another character. Another possibility is

```
\setverbatimchar{\char'\char'/*}
```

which will make `'/'` the end marker.

### 15.3.1 Boxed verbatims

Verbatim environments are often used to present program code or, as in this book, LaTeX code. For such applications it can be useful to put the code in a box, or to number the code lines, or perhaps both.

```
\begin{fboxverbatim} anything \end{fboxverbatim}
```

The `fboxverbatim` environment typesets its contents verbatim and puts a tightly fitting frame around the result; in a sense it is similar to the `fbox` command.

```
\begin{boxedverbatim} anything \end{boxedverbatim}
\begin{boxedverbatim*} anything \end{boxedverbatim*}
```

The `boxedverbatim` and `boxedverbatim*` environments are like the `verbatim` and `verbatim*` environments except that a box, allowing page breaks, may be put around the verbatim text and the lines of text may be numbered. The particular format of the output can be controlled as described below.

```
\bvbox \bvtopandtail \bvside \nobvbox
\bvboxsep
```

Four styles of boxes are provided and you can extend these. Following the `\bvbox` declaration, a box is drawn round the verbatim text, breaking at page boundaries if necessary; this is the default style. Conversely, no boxes are drawn after the `\nobvbox` declaration. With the `\bvttopandtail` declaration horizontal lines are drawn at the start and end of the verbatim text, and with the `\bvsides` declarations, vertical lines are drawn at the left and right of the text. The separation between the lines and the text is given by the length `\bvboxsep`.

The following hooks are provided to set your own boxing style.

```
\bvtoprulehook \bvtopmidhook \bvendrulehook
\bvleftsidehook \bvrightsidehook
```

The macros `\bvtoprulehook` and `\bvendrulehook` are called at the start and end of the `boxedverbatim` environment, and before and after page breaks. The macros `\bvleftsidehook` and `\bvrightsidehook` are called at the start and end of each verbatim line. The macro `\bvtopmidhook` is called after `\bvtoprulehook` at the start of the environment. It can be used to add some space if `\bvtoprulehook` is empty.

```
\bvperpagetrue \bvperpagefalse
\bvtopofpage{<text>} \bvendofpage{<text>}
```

The command `\bvperpagetrue` indicates that a box should be visibly broken at a page-break, while there should be no visible break for `\bvperpagefalse`. If the box continues on to another page then it may be advantageous to place some sort of heading before the verbatim continues. Following the declaration `\bvperpagetrue` the `<text>` argument to `\bvtopofpage` will be typeset after any pagebreak. For example you could set:

```
\bvtopofpage{continued}
```

to print ‘continued’ in the normal text font.

By default, the class sets

```
\bvendofpage{\hrule\kern-.4pt}
```

which causes the `\hrule` to be drawn at the end of a page as the visible break (the rule is 0.4pt thick and the kern backs up that amount after the rule, so it effectively takes no vertical space). This is not always suitable. For instance, if there will be a ‘continued’ message at the top of the following page it may seem odd to draw a line at the bottom of the previous page. In this case, setting

```
\bvendofpage{}
```

will eliminate the rule.

As examples of the use of these hooks, here is how some of the boxed verbatim styles are defined.

The default style is `\bvbox`, which puts separate full boxes on each page.

```
\newcommand{\bvbox}{%
  \bvperpagetrue
  \renewcommand{\bvtoprulehook}{\hrule \nobreak \vskip-.1pt}%
  \renewcommand{\bvleftsidehook}{\vrule}%
  \renewcommand{\bvrightsidehook}{\vrule}%
  \renewcommand{\bvendrulehook}{\hrule}%
  \renewcommand{\bvtopmidhook}{\rule{0pt}{2\fbboxsep} \hss}%
}
```



The `\nobvbox` turns off all boxing, and is defined as

```
\newcommand{\nobvbox}{%
  \bvperpagefalse
  \renewcommand{\bvtoprulehook}{}%
  \renewcommand{\bvleftsidehook}{}%
  \renewcommand{\bvrightsidehook}{}%
  \renewcommand{\bvendrulehook}{}%
  \renewcommand{\bvtopmidhook}{\rule{0pt}{2\fbboxsep} \hss}%
}
```

The definitions of the other styles, `\bvtopandtail` and `\bvsides`, are intermediate between `\bvbox` and `\nobvbox` in the obvious manner.

```
\linenumberfrequency{<nth>}
\resetbvlinenumber
\setbvlinenums{<first>}{<startat>}
\linenumberfont{<font declaration>}
```

The command `\linenumberfrequency` controls the numbering of lines in a `boxedverbatim` — every `<nth>` line will be numbered. If `<nth>` is 0 or less, then no lines are numbered, if `<nth>` is 1 then each line is numbered, and if `<nth>` is `n`, where `n` is 2 or more, then only every `n`th line is numbered. Line numbering is continuous from one instance of the `boxedverbatim` environment to the next. Outside the environment the line numbers can be reset at any time by the command `\resetbvlinenumber`.

The `\setbvlinenums` macro can be used to specify that the number of the first line of the following `boxedverbatim` shall be `<first>` and the first printed number shall be `<startat>`.

The `\linenumberfont` declaration sets `<font declaration>` as the font for the line numbers. The default specification for this is:

```
\linenumberfont{\footnotesize\rmfamily}
```

Line numbers are always set at the left of the lines because there is no telling how long a line might be and it might clash with a line number set at the right.

```
\bvnumbersinside
\bvnumbersoutside
```

Line numbers are typeset inside the box after the declaration `\bvnumbersinside` and are typeset outside the box after the declaration `\bvnumbersoutside`. The default is to print the numbers inside the box.

Verbatim tabbing, but not wrapping, applies to the `boxedverbatim` environment.

### Recommended alternative

Again the `tcolorbox` package offers boxes vs verbatim text.

#### 15.3.2 New verbatims

The class implementation of verbatims lets you define your own kind of verbatim environment. Unfortunately this is not quite as simple as saying

```
\newverbatim{myverbatim}{...}{...}
```

as you can for defining normal environments. Instead, the general scheme is

```
\newenvironment{myverbatim}%  
{<non-verbatim stuff> \verbatim <more non-verbatim stuff>}%  
\endverbatim}
```

In particular, you cannot use either the `\begin` or `\end` macros inside the definition of the new verbatim environment. For example, the following code will not work

```
\newenvironment{badverbatim}%  
{\NBG\begin{verbatim}}{\end{verbatim}}
```

and this won't work either

```
\newenvironment{badverbatim}%  
{\begin{env}\verbatim}\endverbatim\end{env}}
```

And, as with the standard `verbatim` environment, you cannot use the new one in the definition of a new command.

For an example of something that does work, this next little piece of typesetting was done in a new verbatim environment I have called `verbexami`, which starts and ends with a horizontal rule, and it shows the definition of `verbexami`.

---

The `verbexami` environment

```
\newenvironment{verbexami}%  
{\par\noindent\hrule The verbexami environment \verbatim}%  
\endverbatim\hrule}
```

---

And this is a variation on the theme, with the environment again being enclosed by horizontal rules.

---

Verbexamii

IS THIS FUN?

```
\newenvironment{verbexamii}%  
{\vspace{0.5\baselineskip}\hrule \vspace{0.2\baselineskip}  
Verbexamii \verbatim \textsc{Is this fun?}}%  
\endverbatim\hrule\vspace{0.3\baselineskip}}
```

---

As no doubt you agree, these are not memorable examples of the typesetter's art but do indicate that you can define your own verbatim environments and may need to take a bit of care to get something that passes muster.

I will give some more useful examples, but mainly based on environments for writing verbatim files as I think that these provide a broader scope.

### 15.3.3 Example: the `lcode` environment

In this manual all the example LaTeX code has been typeset in the `lcode` environment; this is a verbatim environment defined especially for the purpose. Below I describe the code for defining my `lcode` environment, but first here is a simple definition of a verbatim environment, which I will call `smallverbatim`, that uses the `\small` font instead of the `normalsize` font.

```

\newenvironment{smallverbatim}%
  {\setverbatimfont{\normalfont\ttfamily\small}%
   \verbatim}%
  {\endverbatim}

```

The `verbatim` environment is implemented as a kind of `trivlist`, and lists usually have extra vertical space before and after them. For my environment I did not want any extra spacing so I defined the macro `\@zeroseps` to zero the relevant list spacings. I also wanted the code lines to be inset a little, so I defined a new length called `\gparindent` to use as the indentation.

```

\makeatletter
\newcommand{\@zeroseps}{\setlength{\topsep}{\z@}%
                        \setlength{\partopsep}{\z@}%
                        \setlength{\parskip}{\z@}}
\newlength{\gparindent} \setlength{\gparindent}{\parindent}
\setlength{\gparindent}{0.5\parindent}
% Now, the environment itself
\newenvironment{lcode}{\@zeroseps
  \renewcommand{\verbatim@startline}{%
    \verbatim@line{\hskip\gparindent}}
  \small\setlength{\baselineskip}{\onelineskip}\verbatim}%
  {\endverbatim
   \vspace{-\baselineskip}%
  \noindent
}
\makeatother

```

Unless you are intimately familiar with the inner workings of the `verbatim` processing you deserve an explanation of the `lcode` definition.

Extremely roughly, the code for `\verbatim` looks like this:

```

\def\verbatim{%
  \verbatim@font
  % for each line, until \end{verbatim}
  \verbatim@startline
  % collect the characters in \verbatim@line
  \verbatim@processline{\the\verbatim@line\par}
  % repeat for the next line
}

```

The code first calls `\verbatim@font` to set the font to be used. Then, for each line it does the following:

- Calls the macro `\verbatim@startline` to start off the output version of the line.
- Collects all the characters comprising the line as a single token called `\verbatim@line`.
- If the characters are the string `'\end{verbatim}'` it finishes the `verbatim` environment.
- Otherwise it calls the macro `\verbatim@processline` whose argument is the characters in the line, treated as a paragraph. It then starts all over again with the next line.

1 0 1 1 0

2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2808 2809 2810 2811 2812 2813 2814 2815 2816 2817 2818 2819 2820 2821 2822 2823 2824 2825

---

1. *Journal of the American Medical Association*, 1997; 277: 1039-1043.

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840. 84

---

1. *Journal of the American Medical Association*, 2000; 283: 2686-2692.

Figure 1. The effect of the concentration of the solution on the adsorption of the dye. The concentration of the solution was 0.001, 0.002, 0.003, 0.004, 0.005, 0.006, 0.007, 0.008, 0.009, 0.01, 0.012, 0.014, 0.016, 0.018, 0.02, 0.022, 0.024, 0.026, 0.028, 0.03, 0.032, 0.034, 0.036, 0.038, 0.04, 0.042, 0.044, 0.046, 0.048, 0.05, 0.052, 0.054, 0.056, 0.058, 0.06, 0.062, 0.064, 0.066, 0.068, 0.07, 0.072, 0.074, 0.076, 0.078, 0.08, 0.082, 0.084, 0.086, 0.088, 0.09, 0.092, 0.094, 0.096, 0.098, 0.1, 0.12, 0.14, 0.16, 0.18, 0.2, 0.22, 0.24, 0.26, 0.28, 0.3, 0.32, 0.34, 0.36, 0.38, 0.4, 0.42, 0.44, 0.46, 0.48, 0.5, 0.52, 0.54, 0.56, 0.58, 0.6, 0.62, 0.64, 0.66, 0.68, 0.7, 0.72, 0.74, 0.76, 0.78, 0.8, 0.82, 0.84, 0.86, 0.88, 0.9, 0.92, 0.94, 0.96, 0.98, 1.0. The concentration of the solution was 0.001, 0.002, 0.003, 0.004, 0.005, 0.006, 0.007, 0.008, 0.009, 0.01, 0.012, 0.014, 0.016, 0.018, 0.02, 0.022, 0.024, 0.026, 0.028, 0.03, 0.032, 0.034, 0.036, 0.038, 0.04, 0.042, 0.044, 0.046, 0.048, 0.05, 0.052, 0.054, 0.056, 0.058, 0.06, 0.062, 0.064, 0.066, 0.068, 0.07, 0.072, 0.074, 0.076, 0.078, 0.08, 0.082, 0.084, 0.086, 0.088, 0.09, 0.092, 0.094, 0.096, 0.098, 0.1, 0.12, 0.14, 0.16, 0.18, 0.2, 0.22, 0.24, 0.26, 0.28, 0.3, 0.32, 0.34, 0.36, 0.38, 0.4, 0.42, 0.44, 0.46, 0.48, 0.5, 0.52, 0.54, 0.56, 0.58, 0.6, 0.62, 0.64, 0.66, 0.68, 0.7, 0.72, 0.74, 0.76, 0.78, 0.8, 0.82, 0.84, 0.86, 0.88, 0.9, 0.92, 0.94, 0.96, 0.98, 1.0.

You can use `\renewcommand` to change the definitions of these if you wish.

```
\IfStreamOpen{<stream>}{<true-code>}{<false-code>}
```

The macro `\IfStreamOpen` checks whether or not the `<stream>` stream is open. If it is then the `<true-code>` argument is processed, while when it is not open the `<false-code>` argument is processed.

#### 15.4.1 Writing to a file

One stream may be used for writing to several different files, although not simultaneously.

```
\openoutputfile{<filename>}{<stream>}
\closeoutputstream{<stream>}
```

The command `\openoutputfile` opens the file called `<filename>`, either creating it if it does not exist, or emptying it if it already exists. It then attaches the file to the output stream called `<stream>` so that it can be written to, and then finally calls the macro named `\atstreamopen<stream>`.

The command `\closeoutputstream` firstly calls the macro named `\atstreamclose<stream>` then closes the output stream `<stream>`, and finally detaches and closes the associated file.

```
\addtostream{<stream>}{<text>}
```

The `\addtostream` command writes `<text>` to the output stream `<stream>`, and hence to whatever file is currently attached to the stream. The `<stream>` must be open. Any commands within the `<text>` argument will be processed before being written. To prevent command expansion, precede the command in question with `\protect`.

Writing verbatim text to a file is treated specially as it is likely to be the most common usage.

```
\begin{verbatimoutput}{<file>} anything \end{verbatimoutput}
\begin{writeverbatim}{<stream>} anything \end{writeverbatim}
```

The text within a `verbatimoutput` environment is written verbatim to the `<file>` file. Alternatively, the contents of the `writeverbatim` environment are written verbatim to the `<stream>` stream.

Specifically, `verbatimoutput` opens the specified file, writes to it, and then closes the file. This means that if `verbatimoutput` is used more than once to write to a given file, then only the contents of the last of these outputs is captured in the file. On the other hand, you can use `writeverbatim` several times to write to the file attached to the stream and, providing the stream has not been closed in the meantime, all will be captured.

#### 15.4.2 Reading from a file

One stream may be used for reading from several files, although not simultaneously.

```
\openinputfile{<filename>}{<stream>}
\closeinputstream{<stream>}
```

The command `\openinputfile` opens the file called `<filename>` and attaches it to the input stream called `<stream>` so that it can be read from. Finally it calls the macro named `\atstreamopen<stream>`. It is an error if `<filename>` can not be found.

The command `\closeinputstream` calls the macro named `\atstreamclose<stream>`, closes the output stream `<stream>`, and then detaches and closes the associated file.

`\readstream{<stream>}`

The command `\readstream` reads the entire contents of the file currently associated with the input stream `<stream>`. This provides the same functionality as `\input{<filename>}`.

`\readaline{<stream>}`

The `\readaline` reads what TeX considers to be one line from the file that is currently associated with the input stream `<stream>`.

Multiple lines can be read by calling `\readaline` multiple times. A warning is issued if there are no more lines to be read (i.e., the end of the file has been reached).

Just as for writing, reading files verbatim is treated specially.

`\verbatiminput{<file>} \verbatiminput*{<file>}`  
`\boxedverbatiminput{<file>} \boxedverbatiminput*{<file>}`  
`\readverbatim{<stream>} \readverbatim*{<stream>}`  
`\readboxedverbatim{<stream>} \readboxedverbatim*{<stream>}`

The commands `\verbatiminput` and `\boxedverbatiminput`, and their starred versions, act like the `verbatim` and `boxedverbatim` environments, except that they get their text from the `<file>` file. It is an error if `<file>` cannot be found. Similarly, `\readverbatim` and `\readboxedverbatim` get their text from the file currently attached to the `<stream>` input stream. It is an error if `<stream>` is not open for input.

#### 15.4.3 Example: endnotes

*In an earlier version of the manual, this section contained an example as to how one could make endnotes. The example is now irrelevant, since memoir contain something similar to end notes called page notes, see section 12.6 on page 243.*

*Those interested in the code from the old example, can find it in the manual source (it has just been commented out).*

#### 15.4.4 Example: end floats

There are some documents where all figures are required to be grouped in one place, for instance at the end of the document or perhaps at the end of each chapter. Grouping at the end of a document with chapters is harder, so we'll tackle that one.

The basic idea is to write out verbatim each figure environment and then read them all back in at the end. We will use a stream, let's call it `tryout`, and call our file for figures `tryout.fig`.

```
\newoutputstream{tryout}
\openoutputfile{tryout.fig}{tryout}
```

If all were simple, in the document we could then just do

```
\begin{writeverbatim}{tryout}
\begin{figure} ... \end{figure}
\end{writeverbatim}
...
\closeoutputstream{tryout}
\input{tryout.fig}
```

So, what's the problem?

By default figure captions are numbered per chapter, and are preceded by the chapter number; more precisely, the definition of a figure number is

```
\thechapter.\arabic{figure}
```

If we simply lump all the figures at the end, then they will all be numbered as if they were in the final chapter. For the sake of argument assume that the last chapter is number 10. The *n*th figure will then be numbered 10.*n*. One thing that we can do rather simply is to change the definition of the figure by using another counter, let's call it *pseudo*, instead of the chapter.

```
\newcounter{pseudo}
\renewcommand{\thepseudo}{\arabic{pseudo}}
\renewcommand{\thefigure}{\thepseudo.\arabic{figure}}
```

Now, all we should have to do is arrange that the proper value of *pseudo* is available before each figure is typeset at the end. The code around the `figure` environments might then look like this

```
\addtostream{tryout}{\protect\setcounter{pseudo}{\thechapter}}
\begin{writeverbatim}{tryout}
\begin{figure}...
```

and a part of the file might then look like

```
...
\setcounter{pseudo}{4}
\begin{figure}...
```

The `\protect` before the `\setcounter` command will stop it from expanding before it is written to the file, while the `\thechapter` command *will* be expanded to give the actual number of the current chapter. This looks better as now at least the figure will be numbered 4.*n* instead of 10.*n*.

There is one last snag — figure numbers are reset at the start of each chapter — but if we just dump the figures at the end of the document then although the chapter part of the number will alter appropriately because of the *pseudo* process, the second part of the number will just increase continuously. It looks as though we should write out a change to the chapter counter at the start of each chapter. If we do that, then we should be able to get rid of the *pseudo* counter, which sounds good. But, and this is almost the last but, what if there are chapters after we have read in the figure file? To cater for this the chapter number of the last chapter before the file must be saved, and then restored after the figures have been processed.

Finally, wouldn't it be much better for the user if everything was wrapped up in an environment that handled all the messy stuff?

Here is the final code that I am going to produce which, by the way, is displayed in the `boxedverbatim` environment with line numbers and the following settings, just in case there is a page break in the middle of the box.

```
\nobvbox
\bvperpagetrue
\bvtopofpage{\begin{center}\normalfont%
(Continued from previous page)\end{center}}
```

```
\bvendofpage{}
\resetbvlinenumber
\linenumberfrequency{1}
\bvnumbersoutside
\linenumberfont{\footnotesize\rmfamily}
\begin{boxedverbatim}
...

1 \newoutputstream{tryout}
2 \openoutputfile{\jobname.fig}{tryout}
3 \newcounter{pseudo}
4 \renewcommand{\thefigure}{\thepseudo.\arabic{figure}}
5 \newenvironment{writefigure}{%
6   \ifnum\value{chapter}=\value{pseudo}\else
7     \setcounter{pseudo}{\value{chapter}}
8     \addtostream{tryout}{\protect\stepcounter{chapter}}
9     \addtostream{tryout}{\protect\addtocounter{chapter}{-1}}
10    \addtostream{tryout}{%
11      \protect\setcounter{pseudo}{\thechapter}}
12    \fi
13    \addtostream{tryout}{\protect\begin{figure}}
14    \writeverbatim{tryout}{}%
15  {\endwriteverbatim\finishwritefigure}
16 \newcommand{\finishwritefigure}{%
17   \addtostream{tryout}{\protect\end{figure}}}
18 \newcommand{\printfigures}{%
19   \closeoutputstream{tryout}%
20   \input{\jobname.fig}%
21 }
```

The above code should be either put in the preamble or in a separate package file.

The first four lines of the code perform the initial setup described earlier. Lines 1 and 2 set up for outputting to a file `\jobname.fig`, which is where the figures will be collected. Lines 3 and 4 create the new counter we need and change the construction of the figure number. The rest of the code defines a new environment `writefigure` which is to be used instead of the `figure` environment. It writes its content out to the `tryout` stream.

In line 6 a check is made to see if the current values of the `chapter` and `pseudo` counters are the same; nothing is done if they are. If they are different, it means that this is the first figure in the chapter and we have to put appropriate information into the figure file. Line 7 sets the `pseudo` counter to the value of the `chapter` counter (if there is another `writefigure` in the chapter it will then skip over the code in lines 7 to 11). The next lines put (where `N` is the number of the current chapter):

```
\stepcounter{chapter}
\addtocounter{chapter}{-1}
\setcounter{pseudo}{N}
```



into the figure file. Stepping the chapter number (by one) resets the following figure number, and then subtracting one from the stepped number returns the chapter number to its original value. Finally the counter pseudo is set to the number of the current chapter.

Line 13 puts

```
\begin{figure}
```

into the figure file, and line 14 starts the `writeverbatim` environment.

For the end of the `writefigure` environment (line 15), the `writeverbatim` environment is ended and after that the `\finishwritefigure` macro is called. This is defined in lines 16 and 17, and simply writes

```
\end{figure}
```

out to the figure file. The `\endwriteverbatim`, and any other kind of `\end...verbatim`, command is very sensitive to anything that follows it, and in this case did not like to be immediately followed by an `\addtostream{...}`, but did not mind it being wrapped up in the `\finishwritefigure` macro.

The `\printfigures` macro defined in the last three lines of the code simply closes the output stream and then inputs the figures file.

As an example of how this works, if we have the following source code:

```
\chapter{The fifth chapter}
...
\begin{writefigure}
%% illustration and caption
\end{writefigure}
...
\begin{writefigure}
%% another illustration and caption
\end{writefigure}
```

then the figure file will contain the following (shown verbatim in the `fboxverbatim` environment).

```
\stepcounter{chapter}
\addtocounter{chapter}{-1}
\setcounter{pseudo}{5}
\begin{figure}
%% illustration and caption
\end{figure}
\begin{figure}
%% another illustration and caption
\end{figure}
```

#### 15.4.5 Example: questions and answers

Text books often have questions at the end of a chapter. Sometimes answers are also provided at the end of the book, or in a separate teachers guide. During the draft stages of such a book it is useful to keep the questions and answers together in the source and paper drafts, only removing or repositioning the answers towards the end of the writing process.

This example provides an outline for meeting these desires. For pedagogical purposes I use a `\label` and `\ref` technique although there are better methods. The example also

shows that not everything works as expected — it is a reasonably accurate rendition of the process that I actually went through in designing it.

First we need a counter for the questions and we'll use an environment for questions as these may be of any complexity. The environment takes one argument — a unique key to be used in a `\label`.

```
\newcounter{question} \setcounter{question}{0}
\renewcommand{\thequestion}{\arabic{question}}
\newenvironment{question}[1]%
  {\refstepcounter{question}
   \par\noindent\textbf{Question \thequestion:}\label{#1}}%
  {\par}
```

I have used `\refstepcounter` to increment the counter so that the `\label` will refer to it, and not some external counter.

We will use a file, called `\jobname.ans` to collect the answers and this will be written to by a stream. There is also a convenience macro, `\printanswers`, for the user to call to print the answers.

```
\newoutputstream{ansout}
```

A matching environment for answers is required. The argument to the environment is the key of the question.

In draft mode it is simple, just typeset the answer and no need to bother with any file printing (remember that `\ifdraftdoc` is true for a draft mode document).

```
\ifdraftdoc % when in draft mode
\newenvironment{answer}[1]%
  {\par\noindent\textbf{Answer \ref{#1}:}}%
  {\par}
\newcommand{\printanswers}{%
\else % when not in draft mode
```

In final mode the answer environment must write its contents verbatim to the `ans` file for printing by `\printanswers`. Dealing with these in reverse order, this is the definition of `\printanswer` when not in draft mode.

```
\newcommand{\printanswers}{%
  \closeoutputstream{ansout}
  \input{\jobname.ans}}
```

Now for the tricky bit, the answer environment. First define an environment that makes sure our output stream is open, and which then writes the answer title to the stream.

```
\newenvironment{@nswer}[1]{\@bsphack
  \IfStreamOpen{ansout}{}%
    \openoutputfile{\jobname.ans}{ansout}%
  }%
  \addtostream{ansout}{\par\noindent\textbf{Answer \ref{#1}:}}%
  {\@esphack}
```

The macros `\@bsphack` and `\@esphack` are LaTeX kernel macros that will gobble extraneous spaces around the environment. In other words, this environment will take no space in the

typeset result. The `\IfStreamOpen` macro is used to test whether or not the stream is open, and if it isn't then it opens it. The answer title is then written out to the stream. Now we can define the answer environment so that its contents get written out verbatim.

```
\newenvironment{answer}[1]%
  {\@bsphack\@nswer{#1}\writeverbatim{ansout}}%
  {\par\endwriteverbatim\end@nswer\@esphack}
\fi
% end of \ifdraftdoc ... \else ...
```

When I was testing this code I had a surprise as I got nasty error messages from LaTeX the first time around, but it worked fine when I processed the source a second time! The problem lies in the code line

```
\addtostream{ansout}{\par\noindent\textbf{Answer \ref{#1}:}}%
```

The first time around, LaTeX processed the `\ref` command and of course it was undefined. In this case `\ref` gets replaced by the code to print the error message, which involves macros that have `@` in their names, which LaTeX only understands under special circumstances. The second time around `\ref` gets replaced by the question number and all is well. I then remembered that some commands need protecting when they are written out, so I tried (I've wrapped the line to fit)

```
\addtostream{ansout}{\par\noindent
  \protect\makeatletter\textbf{Answer
  \protect\ref{#1}:}\protect\makeatother}%
```

which did work but seemed very clumsy.

I then took another line of attack, and looked at the definition of `\ref` to see if I could come up with something that didn't expand into `@` names. The result of this was

```
\addtostream{ansout}{\par\noindent\textbf{Answer
  \quietref{#1}:}}%
```

In the kernel file `ltxref.dtx` I found the definition of `\ref` and it used a macro `\@setref` (shown below) to do its work. My `\quietref` locally changes the definition of `\@setref` and then calls `\ref`, which will then use the modified `\@setref`.

```
\def\@setref#1#2#3{%
  %% kernel definition
  \ifx#1\relax
    \protect\G@refundefinedtrue
    \nfss@text{\reset@font\bfseries ??}%
    \@latex@warning{Reference '#3' on page \thepage \space
      undefined}%
  \else
    \expandafter#2#1\null
  \fi}

\DeclareRobustCommand{\quietref}[1]{\begingroup
  \def\@setref##1##2##3{%
    \ifx##1\relax ??\else
      \expandafter##2##1\null
    \fi
    \ref{#1}\endgroup}
```

Having gone all round the houses, the simplest solution was actually one that I had skipped over

```
\addtostream{ansout}{\par\noindent\textbf{Answer  
                                \protect\ref{#1}:}}%
```

The advantage of using the `\label` and `\ref` mechanism is that a question and its answer need not be adjacent in the source; I think that you have seen some of the disadvantages. Another disadvantage is that it is difficult to use, although not impossible, if you want the answers in a separate document.

The real answer to all the problems is force an answer to come immediately after the question in the source and to use the question counter directly, as in the endnotes example. In the traditional manner, this is left as an exercise for the reader.

### 15.5 Answers

**Question 1.** As a convenience, the argument to the environment could be made optional, defaulting, say, to the current line width. If the default width is used the frame will be wider than the line width, so we really ought to make the width argument specify the width of the frame instead of the minipage. This means calculating a reduced width for the minipage based on the values of `\fboxsep` and `\fboxrule`.

```
\newsavebox{\minibox}  
\newlength{\minilength}  
\newenvironment{framedminipage}[1][\linewidth]{%  
  \setlength{\minilength}{#1}  
  \addtolength{\minilength}{-2\fboxsep}  
  \addtolength{\minilength}{-2\fboxrule}  
  \begin{lrbox}{\minibox}\begin{minipage}{\minilength}}%  
  {\end{minipage}\end{lrbox}\fbox{\usebox{\minibox}}}
```

**Question 2.** There are at least three reasonable answers. In increasing or decreasing order of probability (your choice) they are:

- I took Sherlock Holmes' advice and followed the methods outlined in the chapter;
- I used a package, such as the answer package which is designed for the purpose;
- I just wrote the answers here.

# Sixteen

---

## Cross referencing

---

A significant aspect of LaTeX is that it provides a variety of cross referencing methods, many of which are automatic. An example of an automatic cross reference is the way in which a `\chapter` command automatically adds its title and page number to the ToC, or where a `\caption` adds itself to a ‘List of...’.

Some cross references have to be specifically specified, such as a reference in the text to a particular chapter number, and for these LaTeX provides a general mechanism that does not require you to remember the particular number and more usefully does not require you to remember to change the reference if the chapter number is later changed.

### 16.1 Labels and references

The general LaTeX cross reference method uses a pair of macros.

```
\label{<labstr>}
\ref{<labstr>} \pageref{<labstr>}
```

You can put a `\label` command where you want to label some numbered element in case you might want to refer to the number from elsewhere in the document. The `<labstr>` argument is a sequence of letters, digits, and punctuation symbols; upper and lower case letters are different. The `\ref` macro prints the number associated with `<labstr>`. The `\pageref` macro prints the number of the page where the `\label` specifying the `<labstr>` was placed.

The `\label` and `\ref` mechanism is simple to use and works well but on occasions you might be surprised at what `\ref` prints.

LaTeX maintains a current *ref* value which is set by the `\refstepcounter` command. This command is used by the sectioning commands, by `\caption`, by numbered environments like `equation`, by `\item` in an `enumerate` environment, and so on. The `\label` command writes an entry in the aux file consisting of the `<labstr>`, the current *ref* value and the current page number. A `\ref` command picks up the *ref* value for `<labstr>` and prints it. Similarly `\pageref` prints the page number for `<labstr>`.

The critical point is that the `\label` command picks up the value set by the *most recent visible*<sup>1</sup> `\refstepcounter`.

- A `\label` after a `\section` picks up the `\section` number, not the `\chapter` number.
- A `\label` after a `\caption` picks up the caption number.
- A `\label` *before* a `\caption` picks up the surrounding sectional number.

---

<sup>1</sup> Remember, a change within a group, such as an environment, is not visible outside the group.

If you are defining your own macro that sets a counter, the counter value will be invisible to any `\label` unless it is set using `\refstepcounter`.

```
\fref{<labstr>} \figurerefname  
\tref{<labstr>} \tablerefname  
\pref{<labstr>} \pagerefname
```

The class provides these more particular named references to a figure, table or page. For example the default definitions of `\fref` and `\pref` are

```
\newcommand{\fref}[1]{\figurerefname~\ref{#1}}  
\newcommand{\pref}[1]{\pagerefname~\pageref{#1}}
```

and can be used as

```
\ldots footnote parameters are shown in~\fref{fig:fn}  
on~\pref{fig:fn}.
```

which in this document prints as:

```
··footnote parameters are shown in Figure 12.1 on page 233.
```

```
\Aref{<labstr>} \appendixrefname  
\Bref{<labstr>} \bookrefname  
\Pref{<labstr>} \partrefname  
\Cref{<labstr>} \chapterrefname  
\Sref{<labstr>} \sectionrefname
```

Similarly, specific commands are supplied for referencing sectional divisions; `\Aref` for Appendix , `\Bref` for Book , `\Pref` for Part , `\Cref` for Chapter , and `\Sref` for divisions below Chapter . For example:

```
This is \Sref{sec:lab&ref} in \Cref{chap:xref}.
```

This is §16.1 in Chapter 16.

## 16.2 Reference by name

In technical works it is common to reference a chapter, say, by its number. In non-technical works such cross references are likely to be rare, and when they are given it is more likely that the chapter title would be used instead of the number, as in:

```
The chapter \textit{\titleref{chap:bringhurst}} describes \ldots
```

The chapter *An example book design* describes ...

There are two packages, `nameref` [Rahtz01] and `titleref` [Ars01a], that let you refer to things by name instead of number.

Name references were added to the class as a consequence of adding a second optional argument to the sectioning commands. I found that this broke the `nameref` package, and hence the `hyperref` package as well, so they had to be fixed. The change also broke Donald Arseneau's `titleref` package, and it turned out that `nameref` also clobbered `titleref`. The class also provides titles, like `\poemtitle`, that are not recognised by either of the packages. From my viewpoint the most efficient thing to do was to enable the class itself to provide name referencing.

```
\titleref{<labstr>}
```

## Typeset example 16.1: Named references should be to titled elements

Labels may be applied to:

1. Chapters, sections, etc.
2. Captions
3. Legends
4. Poem titles
5. Items in numbered lists, etc. ...

Item 1 in section [Reference by name](#) mentions sections while item [Named references should be to titled elements](#), on page 295 in the same section, mentions things like items in enumerated lists that should not be referenced by `\titleref`.

The macro `\titleref` is a class addition to the usual set of cross referencing commands. Instead of printing a number it typesets the title associated with the labelled number. This is really only useful if there *is* a title, such as from a `\caption` or `\section` command. For example, look at this code and its result.

## Source for example 16.1

```
Labels may be applied to:
\begin{enumerate}
\item Chapters, sections, etc.          \label{sec:nxref:1}
...
\item Items in numbered lists, etc. \ldots \label{sec:nxref:5}
\end{enumerate}
Item \ref{sec:nxref:1} in section \textit{\titleref{sec:nxref}}
mentions sections while item \titleref{sec:nxref:5}, on page
\pageref{sec:nxref:5} in the same section, mentions things like
items in enumerated lists that should not be referenced
by \verb?\titleref?.
```

As the above example shows, you have to be a little careful in using `\titleref`. Generally speaking, `\titleref{<key>}` produces the last named thing before the `\label` that defines the `<key>`.

|                                       |
|---------------------------------------|
| <code>\headnameref \tocnameref</code> |
|---------------------------------------|

There can be three possibilities for the name of a sectional division; the full name, the name in the ToC, and the name in the page header. As far as `\titleref` is concerned it does not use the fullname, and so the choice simplifies to the ToC or page header. Following the declaration `\headnameref` it uses the page header name. Following the opposite declaration `\tocnameref`, which is the default, it uses the ToC name.

**NOTE:** Specifically with the memoir class, do not put a `\label` command inside an

## Typeset example 16.2: Current title

---

This sentence in the section titled ‘Current title’ is an example of the use of the command `\currenttitle`.

---

argument to a `\chapter` or `\section` or `\caption`, etc., command. Most likely it will either be ignored or referencing it will produce incorrect values. This restriction does not apply to the standard classes, but in any case I think it is good practice not to embed any `\label` commands.

```
\currenttitle
```

If you just want to refer to the current title you can do so with `\currenttitle`. This acts as though there had been a label associated with the title and then `\titleref` had been used to refer to that label. For example:

## Source for example 16.2

```
This sentence in the section titled ‘\currenttitle’ is an example of the
use of the command \verb?\currenttitle?.
```

```
\theTitleReference{<num>}{<text>}
```

Both `\titleref` and `\currenttitle` use the `\theTitleReference` to typeset the title. This is called with two arguments — the number, `<num>`, and the text, `<text>`, of the title. The default definition is:

```
\newcommand{\theTitleReference}[2]{#2}
```

so that only the `<text>` argument is printed. You could, for example, change the definition to

```
\renewcommand{\theTitleReference}[2]{#1\space \textit{#2}}
```

to print the number followed by the title in italics. If you do this, only use `\titleref` for numbered titles, as a printed number for an unnumbered title (a) makes no sense, and (b) will in any case be incorrect.

The commands `\titleref`, `\theTitleReference` and `\currenttitle` are direct equivalents of those in the `titleref` package [[Ars01a](#)].

```
\namerefon \nameref
```

The capability for referencing by name has one potentially unfortunate side effect — it causes some arguments, such as that for `\legend`, to be moving arguments and hence any fragile command in the argument will need `\protecting`. However, not every document will require the use of `\titleref` and so the declaration `\namerefoff` is provided to switch it off (the argument to `\legend` would then not be moving). The declaration `\namerefon`, which is the default, enables name referencing.



# Seventeen

---

## Back matter

---

The back matter consists of reference and supportive elements for the main matter; things like bibliographies, indexes, glossaries, endnotes, and other material. The class provides additional elements and features of such matter that are not in the standard classes.

### 17.1 Bibliography

Just as a reminder the bibliography is typeset within the `thebibliography` environment.

```
\bibname  
\begin{thebibliography}{\langle exlabel \rangle}  
\bibitem ...  
\end{thebibliography}
```

The environment takes one required argument,  $\langle exlabel \rangle$ , which is a piece of text as wide as the widest label in the bibliography. The value of `\bibname` (default ‘Bibliography’) is used as the title.

```
\bibintoc \nobibintoc
```

The declaration `\bibintoc` will cause the `thebibliography` environment to add the title to the ToC, while the declaration `\nobibintoc` ensures that the title is not added to the ToC. The default is `\bibintoc`.

```
\cite[\langle detail \rangle]{\langle labstr-list \rangle}
```

Within the text you call out a bibliographic reference using the `\cite` command, where  $\langle labstr-list \rangle$  is a comma-separated list of identifiers for the cited works; there must be no spaces in this list. The optional  $\langle detail \rangle$  argument is for any additional information regarding the citation such as a chapter or page number; this is printed after the main reference.

Various aspects of a bibliography can be changed and at this point it may be helpful to look at some of the internals of the `thebibliography` environment, which is defined like this

```
\newenvironment{thebibliography}[1]{%  
  \bibsection  
  \begin{bibitemlist}{#1}}%  
{\end{bibitemlist}\postbibhook}
```

The bibliographic entries are typeset as a list, the `bibitemlist`.

```
\bibsection
```

The macro `\bibsection` defines the heading for the `thebibliography` environment; that is, everything before the actual list of items. It is effectively defined as

```
\newcommand{\bibsection}{%
  \chapter*{\bibname}
  \bibmark
  \ifnobibintoc\else
    \phantomsection
    \addcontentsline{toc}{chapter}{\bibname}
  \fi
  \prebibhook}
```

If you want to change the heading, redefine `\bibsection`. For example, to have the bibliography as a numbered section instead of an unnumbered chapter, redefine it like

```
\renewcommand{\bibsection}{%
  \section{\bibname}
  \prebibhook}
```

If you use the `natbib` [Dal99a] and/or the `chapterbib` [Ars01b] packages with the `sectionbib` option, then they change `\bibsection` appropriately to typeset the heading as a numbered section.

`\bibmark`

`\bibmark` may be used in pagestyles for page headers in a bibliography. Its default definition is:

```
\newcommand*{\bibmark}{}
```

but could be redefined like, say,

```
\renewcommand*{\bibmark}{\markboth{\bibname}{}}
```

`\prebibhook \postbibhook`

The commands `\prebibhook` and `postbibhook` are called after typesetting the title of the bibliography and after typesetting the list of entries, respectively. By default, they are defined to do nothing. You may wish to use one or other of these to provide some general information about the bibliography. For example:

```
\renewcommand{\prebibhook}{%
  CTAN is the Comprehensive \tx\ Archive Network and URLs for the
  several CTAN mirrors can be found at \url{http://www.tug.org}.}
```

`\biblistextra`

Just at the end of setting up the `bibitemlist` the `\biblistextra` command is called. By default this does nothing but you may change it to do something useful. For instance, it can be used to change the list parameters so that the entries are typeset flushleft.

```
\renewcommand*{\biblistextra}{%
  \setlength{\leftmargin}{0pt}%
  \setlength{\itemindent}{\labelwidth}%
  \addtolength{\itemindent}{\labelsep}}
```

```
\setbiblabel{<style>}
```

The style of the labels marking the bibliographic entries can be set via `\setbiblabel`. The default definition is

```
\setbiblabel{[#1]\hfill}
```

where #1 is the citation mark position, which generates flushleft marks enclosed in square brackets. To have marks just followed by a dot

```
\setbiblabel{#1.\hfill}
```

```
\bibitem[<label>]{<labstr>}
\newblock
```

Within the `bibitemlist` environment the entries are introduced by `\bibitem` instead of the more normal `\item` macro. The required `<labstr>` argument is the identifier for the citation and corresponds to a `<labstr>` for `\cite`. The items in the list are normally labelled numerically but this can be overridden by using the optional `<label>` argument. The `\newblock` command can be used at appropriate places in the entry for encouraging a linebreak (this is used by the `openbib` option).

```
\bibitemsep
```

In the listing the vertical space between entries is controlled by the length `\bibitemsep`, which by default is set to the normal `\itemsep` value. The vertical space is `(\bibitemsep + \parsep)`. If you wish to eliminate the space between items do

```
\setlength{\bibitemsep}{-\parsep}
```

### 17.1.1 BibTeX

Often the BibTeX program [Pat88a] is used to generate the bibliography list from database(s) of bibliographic data. For BibTeX a bibliographic data base is a `bib` file containing information necessary to produce entries in a bibliography. BibTeX extracts the raw data from the files for each citation in the text and formats it for typesetting according to a particular style.

```
\bibliography{<bibfile-list>}
```

The bibliography will be printed at the location of the `\bibliography` command. Its argument is a comma-separated list of BibTeX `bib` files which will be searched by BibTeX to generate the bibliography. Only the file name(s) should be supplied, the extension must not be given.

```
\nocite{<labstr>} \nocite{*}
```

The command `\nocite` causes BibTeX to make an entry in the bibliography but no citation will appear in the text. The special case `\nocite{*}` causes *every* entry in the database to be listed in the bibliography.

```
\bibliographystyle{<style>}
```

Many different BibTeX styles are available and the particular one to be used is specified by calling `\bibliographystyle` before the bibliography itself. The ‘standard’ bibliography `<style>s` follow the general schemes for mathematically oriented papers and are:

- plain** The entry format is similar to one suggested by Mary-Claire van Leunen [Leu92], and entries are sorted alphabetically and labelled with numbers.
- unsrt** The format is the same as **plain** but that entries are ordered by the citation order in the text.
- alpha** The same as **plain** but entries are labelled like ‘Wil89’, formed from the author and publication date.
- abbrv** The same as **plain** except that some elements, like month names, are abbreviated.

There are many other styles available, some of which are used in collaboration with a package, one popular one being Patrick Daly’s **natbib** [Dal99a] package for the kinds of author-year citation styles used in the natural sciences. Another package is **jurabib** [Ber02] for citation styles used in legal documents where the references are often given in footnotes rather than listed at the end of the document.

I assume you know how to generate a bibliography using BibTeX, so this is just a quick reminder. You first run LaTeX on your document, having specified the bibliography style, cited your reference material and listed the relevant BibTeX database(s). You then run BibTeX, and after running LaTeX twice more the bibliography should be complete. After a change to your citations you have to run LaTeX once, BibTeX once, and then LaTeX twice more to get an updated set of references.

The format and potential contents of a BibTeX database file (a **bib** file) are specified in detail in Lamport [Lam94] and the first of the *Companions* [MG<sup>+</sup>04]. Alternatively there is the documentation by Oren Patashnik [Pat88a] who wrote the BibTeX program.

A BibTeX style, specified in a **bst** file, is written using an anonymous stack based language created specifically for this purpose. If you can’t find a BibTeX style that provides what you want you can either use the **makebst** [Dal99b] package which leads you through creating your own style via a question and answer session, or you can directly write your own. If you choose the latter approach then Patashnik’s *Designing BibTeX files* [Pat88b] is essential reading. As he says, it is best to take an existing style and modify it rather than starting from scratch.

## 17.2 Index

It is time to take a closer look at indexing. The class allows multiple indexes and an index may be typeset as a single or a double column.

The general process is to put indexing commands into your source text, and LaTeX will write this raw indexing data to an **idx** file. The raw index data is then processed, not by LaTeX but by yourself if you have plenty of spare time on your hands, or more usually by a separate program, to create a sorted list of indexed items in a second file (usually an **ind** file). This can then be input to LaTeX to print the sorted index data.

### 17.2.1 Printing an index

|   |
|---|
| <pre>\makeindex[<i>file</i>]<br/>\printindex[<i>file</i>]</pre> |
|---|

In order to make LaTeX collect indexing information the declaration `\makeindex` must be put in the preamble. By default the raw index data is put into the `jobname.idx` file. If the optional *file* argument is given then index data can be output to `file.idx`. Several `\makeindex` declarations can be used provided they each call for a different file.

The `\printindex` command will print an index where by default the indexed items are assumed to be in a file called `jobname.ind`. If the optional *<file>* argument is given then the indexed items are read from the file called `file.ind`.

```
\begin{theindex} entries \end{theindex}
\onecolindex \twocolindex
\indexname
```

The index entries are typeset within the `theindex` environment. By default it is typeset with two columns but following the `\onecolindex` declaration the environment uses a single column. The default two column behaviour is restored after the `\twocolindex` declaration. The index title is given by the current value of `\indexname` (default 'Index').

```
\indexintoc \noindexintoc
```

The declaration `\indexintoc` will cause the `theindex` environment to add the title to the ToC, while the declaration `\noindexintoc` ensures that the title is not added to the ToC. The default is `\indexintoc`.

```
\indexcolsep
\indexrule
```

The length `\indexcolsep` is the width of the gutter between the two index columns. The length `\indexrule`, default value 0pt, is the thickness of a vertical rule separating the two columns.

```
\preindexhook
```

The macro `\preindexhook` is called after the title is typeset and before the index listing starts. By default it does nothing but can be changed. For example

```
\renewcommand{\preindexhook}{\bold page numbers are used
to indicate the main reference for an entry.}
```

```
\indexmark
```

`\indexmark` may be used in pagestyles for page headers in an index. Its default definition is:

```
\newcommand*{\indexmark}{}
```

but could be redefined like, say,

```
\renewcommand*{\indexmark}{\markboth{\indexname}{\indexname}}
```

```
\ignorenoidxfile
\reportnoidxfile
```

Following the declaration `\ignorenoidxfile`, which is the default, LaTeX will silently pass over attempts to use an `idx` file which has not been declared via `\makeindex`. After the declaration `\reportnoidxfile` LaTeX will whine about any attempts to write to an unopened file.

### 17.2.2 Preparing an index

It is easy for a computer to provide a list of all the words you have used, and where they were used. This is called a concordance. Preparing an index, though, is not merely a gathering of words but is an intellectual process that involves recognising and naming concepts,

constructing a logical hierarchy of these and providing links between related concepts. No computer can do that for you though it can help with some tasks, such as sorting things into alphabetical order, eliminating duplicates, and so forth.

Several iterations may be required before you have an acceptable index. Generally you pick out the important words or phrases used on the first pass. Part of the skill of indexing is finding appropriate words to describe things that may not be obvious from the text. If there are several ways of describing something they may all be included using a ‘see’ reference to the most obvious of the terms, alternatively you could use ‘see also’ references between the items. Entries should be broken down into subcategories so that any particular item will not have a long string of page numbers and your reader is more likely to quickly find the relevant place. After having got the first index you will most probably have to go back and correct all the sins of omission and commission, and start the cycle again.

I found that indexing this manual was the most difficult part of preparing it. It was easy to index the names of all the macros, environments, and so on as I had commands that would simultaneously print and index these. It was the concepts that was difficult. I inserted `\index` commands as I went along at what seemed to be appropriate places but turned out not to be. I would use slightly different words for the same thing, and what was worse the same word for different things. It took a long time to improve it to its present rather pitiful state.

`\index[file]{stuff}`

The `\index` macro specifies that *stuff* is to appear in an index. By default the raw index data — the *stuff* and the page number — will be output to the `jobname.idx` file, but if the optional *file* argument is given then output will be to the `file.idx` file.

This book has two indexes. The main index uses the default indexing commands, while the second index does not. They are set up like this:

```
% in preamble
\makeindex
\makeindex[lines]
% in body
...\index{main} ... \index[lines]{First line} ...
...
% at the end
\clearpage
% main index
\pagestyle{Index}
\renewcommand{\preindexhook}{%
The first page number is usually, but not always,
the primary reference to the indexed topic.\vskip\onelineskip}
\printindex

% second index
\clearpage
\pagestyle{ruled}
\renewcommand{\preindexhook}{}
\renewcommand{\indexname}{Index of first lines}
\onecolindex
```

```
\printindex[lines]
```

```
\specialindex{<file>}{<counter>}{<stuff>}
```

The `\index` command uses the page number as the reference for the indexed item. In contrast the `\specialindex` command uses the `<counter>` as the reference for the indexed `<stuff>`. It writes `<stuff>` to the `file.idx` file, and also writes the page number (in parentheses) and the value of the `<counter>`. This means that indexing can be with respect to something other than page numbers. However, if the `hyperref` package is used the special index links will be to pages even though they will appear to be with respect to the `<counter>`; for example, if figure numbers are used as the index reference the `hyperref` link will be to the page where the figure caption appears and not to the figure itself.

```
\showindexmarks \hideindexmarks
\indexmarkstyle
```

The declaration `\showindexmarks` causes the argument to practically any `\index` and `\specialindex` to be printed in the margin of the page where the indexing command was issued. The argument is printed using the `\indexmarkstyle` which is initially specified as

```
\indexmarkstyle{\normalfont\footnotesize\ttfamily}
```

For reasons I don't fully understand, spaces in the argument are displayed as though it was typeset using the starred version of `\verb`. The `\hideindexmarks`, which is the default, turns off `\showindexmarks`.

The standard classes just provide the plain `\index` command with no optional `<file>` argument. In those classes the contents of the `jobname.idx` file is limited to the index entries actually seen in the document. In particular, if you are using `\include` for some parts of the document and `\includeonly` to exclude one or more files, then any `\index` entries in an excluded file will not appear in the `jobname.idx` file. The new implementation of indexing eliminates that potential problem.

```
\item \subitem \subsubitem
```

The `theindex` environment supports three levels of entries. A `\item` command flags a main entry; a subentry of a main entry is indicated by `\subitem` and a subentry of a subentry is flagged by `\subsubitem`. For example a portion of an index might look like:

|                                   |                 |
|-----------------------------------|-----------------|
| <code>\item</code> bridge, 2,3,7  | bridge, 2, 3, 7 |
| <code>\subitem</code> railway, 24 | railway, 24     |
| <code>\subsubitem</code> Tay, 37  | Tay, 37         |

if the Tay Bridge<sup>1</sup> was mentioned on page 37.

<sup>1</sup> A railway (railroad) bridge in Scotland that collapsed in 1879 killing 90 people. The disaster lives for ever in the poem *The Tay Bridge Disaster* by William McGonagall (1830--?), the first verse of which goes:

Beautiful Railway Bridge of the Silv'ry Tay!  
 Alas! I am very sorry to say  
 That ninety lives have been taken away  
 On the last Sabbath day of 1879,  
 Which will be remember'd for a very long time.

|       |  |  |
|-------|--|--|
| p. v: | <code>\index{Alf}</code>   | <code>\indexentry{Alf}{v}</code>   |
| p. 1: | <code>\index{Alf}</code>   | <code>\indexentry{Alf}{1}</code>   |
| p. 2: | <code>\index{Alf}</code>   | <code>\indexentry{Alf}{2}</code>   |
| p. 3: | <code>\index{Alf}</code>   | <code>\indexentry{Alf}{3}</code>   |
| p. 5: | <code>\index{Alfabet see{Bet}}</code>                                    | <code>\indexentry{Alfabet see{Bet}}{5}</code>  |
| p. 7: | <code>\index{Alf@\textit{Alf}}</code><br><code>\index{Bet textbf}</code> | <code>\indexentry{Alf@\textit{Alf}}{7}</code><br><code>\indexentry{Bet textbf}{7}</code> |
| p. 8: | <code>\index{Alf!Bet!Con}</code>   | <code>\indexentry{Alf!Bet!Con}{8}</code>   |
| p. 9: | <code>\index{Alf!Dan}</code>   | <code>\indexentry{Alf!Dan}{9}</code>   |

Figure 17.1: Raw indexing: (left) index commands in the source text; (right) `idx` file entries

### 17.2.3 MakeIndex

It is possible, but time consuming and error prone, to create your index by hand from the output of the `\index` commands you have scattered throughout the text. Most use the `MakeIndex` program to do this for them; there is also the `xindy` program [Keh98] but this is much less known.

`\xindyindex`

It turns out that `xindy` cannot handle a memoir hyperindex (which can be obtained with the aid of the `hyperref` package), although `MakeIndex` can do so.<sup>2</sup> If you are going to use `xindy` to process the raw index data put `\xindyindex` in the preamble, which will prevent hyperindexing.

`MakeIndex` reads an `idx` file containing the raw index data (which may include some commands to `MakeIndex` itself), sorts the data, and then outputs an `ind` file containing the sorted data, perhaps with some LaTeX commands to control the printing. `MakeIndex` was created as a general purpose index processing program and its operation can be controlled by a ‘makeindex configuration file’ (by default this is an `ist` file). Such a file consists of two parts. The first part specifies `MakeIndex` commands that can be included in the `<stuff>` argument to `\index`. The second part controls how the sorted index data is to be output.

I will only describe the most common elements of what you can put in an `ist` file; consult the `MakeIndex` manual [CH88], or the *Companion* [MG<sup>+</sup>04], for all the details.

You can embed commands, in the form of single characters, in the argument to `\index` that guide `MakeIndex` in converting the raw `idx` file into an `ind` file for final typesetting. The complete set of these is given in Table 17.1. They all have defaults and you can modify these via a `MakeIndex` configuration file.

In the simplest case you just use the name of the index item as the argument to the `\index` command. However, spaces are significant as far as `MakeIndex` is concerned. The following three uses of `\index` will result in three different entries in the final index `\index{entry}` `\index{entry}` `\index{entry}`

The `!` character

The `level` specifier starts a new minor level, or subitem, with a maximum of two sub-levels. The default `level` specifier is the special character `!`. For example:

```
\index{item!sub item!sub sub item}
```

<sup>2</sup> This deficiency in `xindy` was discovered by Frederic Connes, who also provided the `\xindyindex` command.



Table 17.1: MakeIndex configuration file input parameters

| Keyword                          | Default                     | Description  |
|----------------------------------|-----------------------------|--|
| <code>keyword (s)</code>         | <code>"\\indexentry"</code> | The argument to this command is a MakeIndex index entry  |
| <code>arg_open (c)</code>        | <code>'{'</code>            | Argument start delimiter   |
| <code>arg_close (c)</code>       | <code>'}'</code>            | Argument end delimiter   |
| <code>range_open (c)</code>      | <code>'('</code>            | Start of an explicit page range  |
| <code>range_close (c)</code>     | <code>')'</code>            | End of an explicit page range  |
| <code>level (c)</code>           | <code>'!'</code>            | Character denoting a new subitem level   |
| <code>actual (c)</code>          | <code>'@'</code>            | Character denoting that the following text is to appear in the actual index file   |
| <code>encap (c)</code>           | <code>' '</code>            | Character denoting that the rest of the argument is to be used as an encapsulating command for the page number   |
| <code>quote (c)</code>           | <code>'\"'</code>           | Character that escapes the following character   |
| <code>escape (c)</code>          | <code>'\\'</code>           | Symbol with no special meaning unless followed by the <code>quote</code> character, when both characters will be printed. The <code>quote</code> and <code>escape</code> characters must be different. |
| <code>page_compositor (s)</code> | <code>"-"</code>            | Composite number separator   |

(s) of type string, (c) of type character

|  |                  |
|--|------------------|
| <code>\begin{theindex}</code>            |                  |
| <code>\item Alf, v, 1-3</code>           | Alf, v, 1-3      |
| <code>\subitem Bet</code>                | Bet              |
| <code>\subsubitem Con, 8</code>          | Con, 8           |
| <code>\subitem Dan, 9</code>             | Dan, 9           |
| <code>\item \textit{Alf}, 7</code>       | Alf, 7           |
| <code>\item Alfabet, \see{Bet}{5}</code> | Alfabet, see Bet |
| <code>\indexspace</code>                 |                  |
| <code>\item Bet, \textbf{7}</code>       | Bet, 7           |
| <code>\end{theindex}</code>              |                  |

Figure 17.2: Processed index: (left) alphabeticized ind file; (right) typeset index

The @ character

An indexable item may be represented in two portions, separated by the actual specifier, which by default is the @ character. The portion before the @ is used when MakeIndex sorts the raw index data, and the portion after the @ is used as the entry text. For example:

```
\index{MakeIndex@\textit{MakeIndex}}
```

will result in the final index entry of \textit{MakeIndex} in the alphabetic position accorded to MakeIndex. The same treatment can be applied for subitems:

```
\index{program!MakeIndex@\textit{MakeIndex}!commands}
```

The / character

Anything after the encap specifier, which by default is the | character, is treated as applying to the page number. In general

```
\index{...|str}
```

will produce a page number, say n, in the form

```
\str{n}
```

For example, if you wanted the page number of one particular entry to be in a bold font, say to indicate that this is where the entry is defined, you would do

```
\index{entry|textbf}
```

As a special case, if you want an index item to have a page range put the two characters | ( at the end of the argument on the first page, and the character pair | ) at the end of the argument on the last page. For example:

```
... \index{range|(} pages about range \index{range|)}) ...
```

The two arguments must match exactly except for the final ( and ). You can also do

```
\index{...|(str}
```

which will produce a page range of the form

```
\str{n-m}
```

In this case, if the range is only a single page, the result is simply

```
\str{n}
```

|   |
|---|
| <pre>\see{&lt;text&gt;}{&lt;page&gt;} seename<br/>\seealso{&lt;text&gt;}{&lt;page&gt;} alsoname</pre> |
|---|

The macros \see and \seealso are specifically for use in an \index command after the |. The \see command replaces the page number by the phrase ‘see <text>’, while the \seealso command adds ‘see also <text>’ to the entry. For example, in the source for this manual I have

```
\index{chapter!style|see{chapterstyle}}  
\index{figure|seealso{float}}
```

A \see or \seealso should be used once only for a particular entry. The ‘see’ texts for \see and \seealso are stored in \seename and \alsename, whose default definitions are:

```
\newcommand*{\seename}{see}
\newcommand*{\alsoname}{see also}
```

The " and \ characters

If, for some reason, you want to index something that includes one of the !, @, | or " characters there is the difficulty of persuading MakeIndex to ignore the special meaning. This is solved by the quote specifier, which is normally the " character. The character immediately after " is treated as non-special. For example, if you needed to index the @ and ! characters:

```
\index{"@ (commercial at)}
\index{"! (exclamation)}
```

The leading " is stripped off before entries are alphabetized.

The escape specifier is used to strip the special meaning from the quote specifier. This is usually the \ character. So, to index the double quote character itself:

```
\index{\ " (double quote)}
```

Example of using the special characters

Here is a short example of indexing the special characters. Given an input like this in the document

```
\index{exclamation mark (!)}
\index{vicious|see{circle}}
\index{atsign@\texttt{"@} sign|\textbf{
\index{quote!double (")}
\index{circle|see{vicious}}
```

then an index could eventually be produced that looks like:

```
@ sign, 30
circle, see vicious
exclamation mark (!), 21
quote
  double ("), 47
vicious, see circle
```

#### 17.2.4 Controlling MakeIndex output

Table 17.2 lists the parameters that control MakeIndex's output, except for the keywords that control the setting of page numbers. The special characters and strings are not fixed within the MakeIndex program. The program will read an ist file in which you can redefine all of MakeIndex's defaults.

I have used a file called `memman.ist` for configuring MakeIndex for this manual. Here it is:

```
% MakeIndex style file  memman.ist

% @ is a valid character in some entries, use ? instead
actual '?'
```

Table 17.2: MakeIndex configuration file output parameters

| Keyword                          | Default                                 | Description  |
|----------------------------------|---|--|
| <code>preamble (s)</code>        | <code>"\\begin{theindex}\\n"</code>     | Text for the start of the output file  |
| <code>postamble (s)</code>       | <code>"\\n\\n\\end{theindex}\\n"</code> | Text at the end of the output file   |
| <code>group_skip (s)</code>      | <code>"\\n\\n\\indexspace\\n"</code>    | Vertical space before a new letter group   |
| <code>heading_prefix (s)</code>  | <code>" "</code>                        | Prefix for heading for a new letter group  |
| <code>heading_suffix (s)</code>  | <code>" "</code>                        | Suffix for heading for a new letter group  |
| <code>headings_flag (n)</code>   | <code>0</code>                          | A value = 0 inserts nothing between letter groups. A value > 0 includes an uppercase instance of the new symbol, while a value < 0 includes a lowercase instance, all within <code>heading_prefix</code> and <code>heading_suffix</code> |
| <code>item_0 (s)</code>          | <code>"\\n\\item "</code>               | Command inserted in front of a level 0 entry   |
| <code>item_1 (s)</code>          | <code>"\\n \\subitem "</code>           | As above for a level 1 entry   |
| <code>item_2 (s)</code>          | <code>"\\n \\subsubitem "</code>        | As above for a level 2 entry   |
| <code>item_01 (s)</code>         | <code>"\\n \\subitem "</code>           | Command inserted in front of a level 1 entry starting at level 0   |
| <code>item_12 (s)</code>         | <code>"\\n \\subsubitem "</code>        | Command inserted in front of a level 2 entry starting at level 1   |
| <code>item_x1 (s)</code>         | <code>"\\n \\subitem "</code>           | Command inserted in front of a level 1 entry when the parent level has no page numbers   |
| <code>item_x2 (s)</code>         | <code>"\\n \\subitem "</code>           | As above for a level 2 entry   |
| <code>delim_0 (s)</code>         | <code>", "</code>                       | Delimiter between level 0 entry and first page number  |
| <code>delim_1 (s)</code>         | <code>", "</code>                       | As above for level 1 entry   |
| <code>delim_2 (s)</code>         | <code>", "</code>                       | As above for level 2 entry   |
| <code>delim_n (s)</code>         | <code>", "</code>                       | Delimiter between page numbers   |
| <code>delim_r (s)</code>         | <code>"-"</code>                        | Designator for a page range  |
| <code>encap_prefix (s)</code>    | <code>"\\"</code>                       | Prefix in front of a page encapsulator   |
| <code>encap_infix (s)</code>     | <code>"{"</code>                        | Infix for a page encapsulator  |
| <code>encap_suffix (s)</code>    | <code>"}"</code>                        | Suffix for a page encapsulator   |
| <code>page_precedence (s)</code> | <code>"rnaRA"</code>                    | Page number precedence for sorting. <code>r</code> and <code>R</code> are lower- and uppercase roman; <code>a</code> and <code>A</code> are lower- and uppercase alphabetic; <code>n</code> is numeric                                   |
| <code>line_max (n)</code>        | <code>"72"</code>                       | Maximum length of an output line   |
| <code>indent_space (s)</code>    | <code>"\\t\\t"</code>                   | Indentation commands for wrapped lines   |
| <code>indent_length (n)</code>   | <code>"16"</code>                       | Indentation length for wrapped lines   |

(s) of type string, (n) of type number, `"\\n"` and `"\\t"` are newline and tab.

---

```
% output main entry <entry> as: \item \idxmark{<entry>},
item_0 "\n\item \idxmark{"
delim_0 "}, "
% not forgetting the subitem case
item_x1 "} \n \subitem "

% Wrap and uppercase head letters
headings_flag 1
heading_prefix "\\doidxbookmark{"
heading_suffix "}"
```

Many items that I need to index include @ as part of their names, which is one of the special characters. The actual line says that the character ? performs the same function as the default @ (and by implication, @ is not a special character as far as MakeIndex is concerned).

The item\_0 line says that a main entry in the generated index starts

```
\item \idxmark{
```

and the delim\_0 and item\_x1 lines say that the main entry ends

```
}, % or
}

\subitem
```

Thus, main entries will appear in an ind file like

```
\item \idxmark{a main entry}, <list of page numbers>
\item \idxmark{a main entry with no page numbers}
\subitem subitem, <list of page numbers>
```

Read the MakeIndex manual [CH88] for full details on how to get MakeIndex to do what you want.

The \doidxbookmark that is used to wrap around the letter group headers, can be used to not only style the group header, but can also be used to add the headers in the bookmarks list. This can be done using

```
\newcommand{\doidxbookmark}[1]{\def\@tempa{Symbols}\def\@tempb{#1}%
\centering\bfseries \ifx\@tempa\@tempb %
Alphabetic
\phantomsection%
\pdfbookmark[0]{Alphabetic}{Alphabetic-idx}%
% \label{AlphabeticAlphabeticAlphabetic-idx}%
\else
#1%
\phantomsection%
\pdfbookmark[0]{#1}{#1-idx}%
% \label{#1#1#1-idx}%
\fi%
\vskip\onelineskip\par}}
```

The labels are generally not needed but can be used to add a visual representation of the index bookmarks into the index itself.

### 17.2.5 Indexing and the **natbib** package

The **natbib** package [Dal99a] will make an index of citations if `\citeindextrue` is put in the preamble after the **natbib** package is called for.

`\citeindexfile`

The name of the file for the citation index is stored in the macro `\citeindexfile`. This is initially defined as:

```
\newcommand{\citeindexfile}{\jobname}
```

That is, the citation entries will be written to the default `idx` file. This may be not what you want so you can change this, for example to:

```
\renewcommand{\citeindexfile}{names}
```

If you do change `\citeindexfile` then you have to put

```
\makeindex[\citeindexfile]
```

*before*

```
\usepackage[...]{natbib}
```

So, there are effectively two choices, either along the lines of

```
\renewcommand{\citeindexfile}{authors} % write to authors.idx
\makeindex[\citeindexfile]
\usepackage{natbib}
\citeindextrue
...
\renewcommand{\indexname}{Index of citations}
\printindex[\citeindexfile]
```

or along the lines of

```
\usepackage{natbib}
\citeindextrue
\makeindex
...
\printindex
```

## 17.3 Glossaries

Unlike indexes, LaTeX provides less than minimal support for glossaries. It provides a `\makeglossary` command for initiating a glossary and a `\glossary` command which puts its argument, plus the page number, into a `glo` file, and that's it. `memoir`, combined with the `MakeIndex` program [CH88], enables you to generate and print a glossary in your document. The commands for creating a glossary are similar to those for indexes.

`\makeglossary[\langle file \rangle]`

You have to put `\makeglossary` in your preamble if you want a glossary. This opens a file called by default `\jobname.glo`. If you use the optional `\langle file \rangle` argument the file `file.glo` will be opened. A glossary `glo` file is analogous to an index `idx` file.

```
\printglossary[⟨file⟩]
```

To print a glossary call `\printglossary` which will print the glossary from file `\jobname.gls`, or from `file.gls` if the optional argument is used. A glossary `gls` file is analogous to an index `ind` file.

```
\glossary[⟨file⟩](⟨key⟩){⟨term⟩}{⟨desc⟩}
```

Use the `\glossary` command to add a `⟨term⟩` and its description, `⟨desc⟩`, to a glossary file. By default this will be `\jobname.glo` but if the optional `⟨file⟩` argument is given then the information will be written to `file.glo`. The `(⟨key⟩)` argument is optional. If present then `⟨key⟩` will be added to the file to act as a sort key for the `⟨term⟩`, otherwise `⟨term⟩` will be used as the sort key.

By using the optional `⟨file⟩` arguments you can have several glossaries, subject to TeX's limitations on the number of files that can be open at any one time.

A simple glossary entry might be:

```
\glossary{glossary}{A list of terms and their descriptions.}
```

The glossary facilities are designed so that the `MakelIndex` program can be used to convert the raw glossary data in a `glo` file into the printable glossary in a `gls` file.

```
\begin{theglossary} entry list \end{theglossary}
```

Glossary entries are typeset in a `theglossary` environment. It is assumed that a `gls` file will contain a complete `theglossary` environment, from `\begin{theglossary}` all the way through to `\end{theglossary}`.

```
\glossitem{⟨term⟩}{⟨desc⟩}{⟨ref⟩}{⟨num⟩}
```

A `\glossitem` is a glossary entry within a `theglossary` environment for a `⟨term⟩` with `⟨description⟩`. The `⟨num⟩` argument is the page or section where the corresponding `\glossary` was issued. The `⟨ref⟩` argument, if not empty, might be the section or page number corresponding to the `⟨num⟩` page or section number. The default definition is

```
\newcommand{\glossitem}[4]{#1 #2 #3 #4}
```

which is not very exciting. You may well prefer to use your own definition.

### 17.3.1 Controlling the glossary

Setting up `makeindex`

If you just run `MakelIndex` on a `glo` file you will get lots of errors; `MakelIndex` has to be configured to read a `glo` file and generate a useful `gls` file as by default it expects to read an index `idx` file and produce an index `ind` file. A configuration file like an index `ist` file will be needed. There is no recommended extension for such a file but I have come to favour `gst`. The command line for `MakelIndex` to create a sorted glossary from the raw data in a `glo` file, say `fred.glo`, using a configuration file called, say `basic.gst`, is

```
makeindex -s basic.gst -o fred.gls fred.glo
```

For other jobs just change the file names appropriately.

So, what is in a `gst` file? The potential contents were described earlier, but at a minimum you need this:

```
%%% basic.gst basic makindex glossary style file
%%% Output style parameters
preamble "\\begin{theglossary}"
postamble "\\end{theglossary}\\n"
item_0     "\\n\\glossitem"
delim_0    "{"\\memglonum{"
encap_suffix "}}"
headings_flag 1
heading_prefix "\\doglobbookmark{"
heading_suffix "}"
%%% Input style parameters
keyword "\\glossaryentry"
```

The keyword line says that each entry in an input (glo) file will be of the form:

```
\\glossaryentry{entry text}{number}
```

and by a miracle of coding, this is what memoir will put in a glo file for each `\\glossary` command.

The preamble and postamble lines tell the program to start and end its output file with `\\begin{theglossary}` and `\\end{theglossary}`, respectively. The `item_0` tells the program to start each output entry with `\\glossitem`. The `delim_0` says that `{\\memglonum{` should be put between the end of the entry text and the (page) number. Finally `encap_suffix` requests `}}` to be put after any ‘encapsulated’ (page) number.

A complete listing of the possible entries in a configuration file, also called a style file, for MakeIndex is in Table 17.1 and 17.2 with the exception of the output file page number setting keywords.

The `\\doglobbookmark` macro can be used to add bookmarks for the letter groups. In the case of this manual we do not write anything, just add the letters to the glossary entry in the bookmark list. In memsty `\\doglobbookmark` is defined as

```
\\newcommand\\doglobbookmark[1]{%
  \\def\\@tempa{Symbols}\\def\\@tempb{#1}%
  \\ifx\\@tempa\\@tempb %
    \\phantomsection\\pdfbookmark[0]{Alphabetic}{Alphabetic-glo}%
  \\else%
    \\phantomsection\\pdfbookmark[0]{#1}{#1-glo}%
  \\fi%
}
```

MakeIndex uses the word ‘Symbols’ to specify the group that does not start with a letter.

Raw input data

`\\@@wrglom@{<file>}{<key>}{<term>}{<desc>}{<ref>}{<num>}`

The `\\glossary` macro writes its arguments to the aux file in the form of arguments to the `\\@@wrglom@` internal macro. In turn this calls a series of other macros that eventually write the data to the `<file>` glo file in the format (where @ is the actual flag):

```
\\glossaryentry{key@{\\memgloterm{term}} {\\memglodesc{desc}}{\\memgloref{ref}}
|\\memglonumf}{num}
```



which MakeIndex then effectively converts into

```
\glossitem{\memgloterm{term}}{\memglodesc{desc}}{\memgloref{ref}}
          {\memglonum{\memglonumf{num}}}
```

```
\memgloterm{<term>}
\memglodesc{<desc>}
\memgloref{<ref>}
\memglonum{<num>}
```

These macros can be redefined to format the various parts of a glossary entry. Their default definitions are simply

```
\newcommand{\memgloterm}[1]{#1}
\newcommand{\memglodesc}[1]{#1}
\newcommand{\memgloref}[1]{#1}
\newcommand{\memglonum}[1]{#1}
```

For example, if you wanted the term in bold, the description in italics, and no numbers:

```
\renewcommand{\memgloterm}[1]{\textbf{#1}}
\renewcommand{\memglodesc}[1]{\textit{#1}}
\renewcommand{\memglonum}[1]{}
```

There are several macros that effect a glossary entry but which must not be directly modified (the `\memglonumf` shown above as part of the `\glossaryentry` is one of these). Each of the following `\changeGLOSS...` macros takes an optional *<file>* argument. The changes to the underlying macro apply only to the glossary of that particular *<file>* (or the `\jobname` file if the argument is not present).

```
\changeGLOSSactual[<file>]{<char>}
\changeGLOSSref[<file>]{<thecounter>}
\changeGLOSSnum[<file>]{<thecounter>}
\changeGLOSSnumformat[<file>]{<format>}
```

`\changeGLOSSactual` sets *<char>* as the actual character for the *<file>* glossary. It is initially `@`. This must match with the `actual` specified for the `gst` file that will be applied.

`\changeGLOSSref` specifies that *<thecounter>* should be used to generate the *<ref>* for the *<file>* glossary. It is initially nothing.

`\changeGLOSSnum` specifies that *<thecounter>* should be used to generate the *<num>* for the *<file>* glossary. It is initially `\thepage`.

`\changeGLOSSnumformat` specifies that *<format>* should be used to format the *<num>* for the *<file>* glossary. The format of *<format>* is `|form`, where `|` is the `encap` character specified in the `gst` file, and `form` is a formatting command, taking one argument (the number), without any backslash. For example

```
\changeGLOSSnumformat{|textbf}
```

to get bold numbers. It is initially set as `|memjustarg`, where this is defined as:

```
\newcommand{\memjustarg}[1]{#1}
```

There must be a format defined for the *<num>* otherwise the arguments to `\glossitem` will not be set correctly.

The `\makeglossary` command uses the `\change...` commands to define the initial versions, so only use the `\change...` macros *after* `\makeglossary`. In this document an early version of the glossary was set up by

```
\makeglossary
\changeGLOSSACTUAL{?}
\makeatletter
\changeGLOSSNUM{\@currentlabel}
\makeatother
\changeGLOSSNUM{\thepage}
```

The first call of `\changeGLOSSNUM` makes the number the current numbered chapter, or numbered section, or numbered ... I didn't like that when I tried it, so the second call resets the number to the page number.

The listing

The final glossary data in the `gls` file is typeset in the `theglossary` environment, which is much like the `theindex` and `thebibliography` environments.

The environment starts off with a chapter-style unnumbered title. There are several macros for specifying what happens after that.

```
\glossaryname
\glossarymark
\glossaryintoc \noglossaryintoc
```

The title for the glossary is `\glossaryname` whose initial definition is

```
\newcommand*{\glossaryname}{Glossary}
```

`\glossarymark`, which by default does nothing, can be redefined to set marks for headers. The glossary title will be added to the ToC if the `\glossaryintoc` declaration is in force, but will not be added to the ToC following the `\noglossaryintoc`.

```
\preglossaryhook
```

The macro `\preglossaryhook` is called after the glossary title has been typeset. By default it does nothing, but you could redefine it to, for example, add some explanatory material before the entries start.

```
\onecolglossary \twocolglossary
\glossarycolsep \glossaryrule
```

The glossary can be typeset in two columns (`\twocolglossary`) but by default (`\onecolglossary`) it is set in one column. When two columns are used, the length `\glossarycolsep` is the distance between the columns and the length `\glossaryrule` is the width (default 0) of a vertical rule between the columns.

```
\begintheglossaryhook
\atendtheglossaryhook
```

The last thing that `\begin{theglossary}` does is call `\begintheglossaryhook`. Similarly, the first thing that is done at the end of the environment is to call `\atendtheglossaryhook`. By default these macros do nothing but you can redefine them.

For example, if you wanted the glossary in the form of a description list, the following will do that.

```

\renewcommand*{\begintheglossaryhook}{\begin{description}}
\renewcommand*{\atendtheglossaryhook}{\end{description}}
\renewcommand{\glossitem}[4]{\item[#1:] #2 #3 #4}

```

The glossary for this document

The following is the code I have used to produce the glossary in this document.

This is the code in the sty file that I used.

```

\makeglossary
\changeGlossActual{?}
\changeGlossNum{\thepage}
\changeGlossNumFormat{|\hyperpage}%% for hyperlinks
\renewcommand*{\glossaryname}{Command summary}
\renewcommand*{\glossarymark}{\markboth{\glossaryname}{\glossaryname}}
\renewcommand{\glossitem}[4]{%
  \sbox\@tempboxa{#1 \space #2 #3 \makebox[2em]{#4}}%
  \par\hangindent 2em
  \ifdim\wd\@tempboxa<0.8\linewidth
    #1 \space #2 #3 \dotfill \makebox[2em][r]{#4}\relax
  \else
    #1 \dotfill \makebox[2em][r]{#4}\\
    #2 #3
  \fi}

```

The redefinition of `\glossitem` works as follows (it is similar to code used in the setting of a `\caption`):

1. Put the whole entry into a temporary box.
2. Set up a hanging paragraph with 2em indentation after the first line.
3. Check if the length of the entry is less than 80% of the linewidth.
4. For a short entry set the name, description, and any reference then fill the remainder of the line with dots with the number at the right margin.
5. For a longer entry, set the title and number on a line, separated by a line of dots, then set the description (and reference) on the following lines.

The `gst` file I have used for this document has a few more items than the basic one.

```

%% memman.gst makindex glossary style file for memman and friends
%% Output style parameters
preamble "\\begin{theglossary}"
postamble "\\n\\end{theglossary}\\n"
group_skip "\\n\\glossaryspace\\n"
item_0 "\\n\\glossitem"
delim_0 "{\\memglonum{"
encap_suffix "}}}"
indent_space "\t"
indent_length 2
%% Input style parameters
keyword "\\glossaryentry"

```

```
actual '?'  
page_compositor "."
```

The `group_skip` line asks that `\glossaryspace` be put between the last entry for one letter and the first for the next letter. The `indent_space` and `indent_length` give a smaller indent for continuation lines in the output than the default.

The `actual` entry says that the input file will use `?` instead of the default `@` as the flag for separating a key from the start of the real entry. The `page_compositor` indicates that any compound numbers will be like 1.2.3 instead of the default 1-2-3.

In the document the raw data is collected by the `\glossary` commands in the body of the text. For instance, although I have not actually used the first two:

```
\glossary(cs)%  
  {\cs{cs}\marg{name}}%  
  {\Typesets \texttt{name} as a macro name with preceding backslash,  
   e.g., \cs{name}.}%  
\glossary(gmarg)%  
  {\cs{gmarg}\marg{arg}}%  
  {\Typesets \texttt{arg} as a required argument, e.g., \marg{arg}.}  
\glossary(glossaryname)%  
  {\cs{glossaryname}}%  
  {Name for a glossary}%  
\glossary(memgloterm)%  
  {\cs{memgloterm}\marg{term}}%  
  {Wrapper round a glossary term.}%
```

Any change to the glossary entries will be reflected in the `glo` produced from that LaTeX run. `MakeIndex` has to be run the `glo` file using the appropriate `gst` configuration file, and then LaTeX run again to get the corrected, sorted and formatted result printed by `\printglossary`.

In particular, for this document, which also includes an index so that can be processed when the glossary is processed.

```
pdflatex memman  
makeindex -s memman.gst -o memman.gls memman.glo  
makeindex -s memman.ist memman      %%% for the index  
makeindex lines                     %%% for the index of first lines  
pdflatex memman
```

# Eighteen

---

## Miscellaneous

---

In which we talk of many things, but not shoes or ships or sealing wax, nor cabbages and kings.

This chapter started with the `\chapterprecis` command to add the above text, which is also added to the ToC.

The class provides a miscellany of minor facilities, which are described here.

### 18.1 Draft documents

The `draft` option marks any overfull lines with black rectangles, otherwise the appearance is the same as for a final document.

`\ifdraftdoc`

The `\ifdraftdoc` macro is provided so that you can add extra things that you might want to happen when processing a draft; for example you might want to have each page header (or footer) include the word ‘DRAFT’. The code to do this can be put into a construct like the following:

```
\ifdraftdoc
  % special things for a draft document
\else
  % perhaps special things for a non-draft document
\fi
```

### 18.2 Change marks

When preparing a manuscript it normally goes through several iterations. The macros described in this section can be used to identify changes made to a document throughout its lifecycle.

The commands below implement a simplified version of the change marking in the `iso` class [Wil00b].

`\changemarks \nochangemarks`

The change marking macros only work properly when the `draft` class option is used. Additionally, the marks are only printed when the `\changemarks` declaration is in effect. Using `\nochangemarks` switches off any marking.

```
\added{<change-id>}
\deleted{<change-id>}
\changed{<change-id>}
```

Each of these macros puts a symbol and  $\langle change-id \rangle$  into the margin near where the command is given. The `\added` macro indicates that something has been added to the manuscript and uses  $\oplus$  as its symbol. The `\deleted` macro is for indicating that something has been deleted and uses the  $\neq$  symbol. The macro `\changed` uses the  $\Leftrightarrow$  symbol to indicate that something has been changed.

These marking commands should be attached to some word or punctuation mark in the text otherwise extraneous spaces may creep into the typeset document.

### 18.3 Trim marks

When the class `showtrims` option is used, trim marks can be placed on each page, usually to indicate where the stock should be trimmed to obtain the planned page size.

```
\showtrimsoff \showtrimson
```

If the `showtrims` class option has been used then the `\showtrimsoff` declaration switches off the trim marks; the `\showtrimson` declaration, which is the default, switches on the trim marks. These declarations do nothing if the `showtrims` option has not been used.

***Caveat.** Most modern  $\text{\LaTeX}$  editors make use of the `synctex` features in, say,  $\text{\pdf\LaTeX}$  to enable reverse search from the PDF previewer back to the source code in the editor. That is, click in a certain manner in the PDF previewer and you will be taken to the corresponding (or there about) line in the source code.*

*Apparently the `synctex` feature does not like the trimmarks the class provide, or the `showlocs` page style. The code line one is referred back to may be off by tens of lines.*

*Currently, there is no known workarounds for this deficiency.*

Trim marks can be placed at each corner of the (trimmed) page, and also at the middle of each side of the page.

```
\trimXmarks
\trimLmarks
\trimFrame
\trimNone
\trimmarkscolor
```

Some predefined trimming styles are provided. After the declaration `\trimXmarks` marks in the shape of a cross are placed at the four corners of the page. The declaration `\trimLmarks` calls for corner marks in the shape of an 'L', in various orientations depending on the particular corner. After `\trimFrame` a frame will be drawn around each page, coinciding with the page boundaries. The declaration `\trimNone` disables all kinds of trim marking. All three plus `\quarkmarks` (described below) is visibly shown on Figure 18.1.

The macro `\trimmarkscolor` is despite its name a normal (empty) macro. By redefining it one can change the color of the trimmarks, handy for example if the document has a dark background color. To make them blue use

```
\newcommand*{\trimmarkscolor}{\color{blue}}
```

```
\trimmarks
\tmarktl \marktr \markbr \markbl
\tmarktm \markmr \markbm \markml
```

The `\trimmarks` macro is responsible for displaying up to 8 marks. The marks are defined as zero-sized pictures which are placed strategically around the borders of the page.

The command `\trimmarks` places the pictures `\tmarktl`, `\tmarktr`, `\tmarkbl`, and `\tmarkbr` at the top left, top right, bottom right and bottom left corners of the page. The pictures `\tmarktm`, `\tmarkmr`, `\tmarkbm`, and `\tmarkml` are placed at the top middle, middle right, bottom middle and middle left of the edges of the page. All these `\tmark..` macros should expand to zero-sized pictures.

`\trimmark`

The declaration `\trimXmarks` uses `\trimmark` for the corner crosses. This is defined as

```
\newcommand{\trimmark}{%
  \begin{picture}(0,0)
    \setlength{\unitlength}{1cm}\thicklines
    \put(-2,0){\line(1,0){4}}
    \put(0,-2){\line(0,1){4}}
  \end{picture}}
```

which produces a zero-sized picture of a 4cm cross. Then `\trimXmarks` is defined as:

```
\newcommand*{\trimXmarks}{%
  \let\tmarktl\trimmark
  \let\tmarktr\trimmark
  \let\tmarkbr\trimmark
  \let\tmarkbl\trimmark}
```

As an example, to draw short lines marking the half-height of the page, try this:

```
\renewcommand*{\tmarkml}{%
  \begin{picture}(0,0)%
    \unitlength 1mm
    \thinlines
    \put(-2,0){\line(-1,0){10}}
  \end{picture}}
\renewcommand*{\tmarkmr}{%
  \begin{picture}(0,0)%
    \unitlength 1mm
    \thinlines
    \put(2,0){\line(1,0){10}}
  \end{picture}}
```

Thin horizontal lines of length 10mm will be drawn at the middle left and middle right of the page, starting 2mm outside the page boundary. This is what we do (now) by default for all four middle parts.

`\quarkmarks`  
`\registrationColour{<mark>}`

Following the declaration `\quarkmarks` and trim marks will be in the style of Quark Xpress registration marks.<sup>1</sup> The marks will be typeset using `\registrationColour`. The default definition is simply

<sup>1</sup> The code for this was donated by William Adams.

```
\newcommand*{\RegistrationColour}[1]{#1}
```

but you can change that to, say, print the marks in particular color. See Figure 18.1.

```
examples only inserted in pdf-mode, now we can write and work in DVI-mode,  
/daleif
```

Figure 18.1: The four trimmark types

#### 18.4 Sheet numbering

One purpose of trim marks is to show a printer where the stock should be trimmed. In this application it can be useful to also note the sheet number on each page, where the sheet number is 1 for the first page and increases by 1 for each page thereafter. The sheet number is independent of the page number.

```
sheetsequence  
\thesheetsequence
```

The macro `\thesheetsequence` typesets the current sheet sequence number and is analogous to the `\thepage` macro.

```
lastsheet  
lastpage
```

The counter `lastsheet` holds the number of sheets processed during the *previous* run of LaTeX. Similarly, the counter `lastpage` holds the number of the last page processed during the previous run. Note that the last page number is not necessarily the same as the last sheet number. For example:

*In this document this is sheet 344 of 551 sheets, and page 320 of 527.*

The previous sentence was the result of processing the following code

```
\textit{In this document this is  
sheet \thesheetsequence\ of \thelastsheet\ sheets,  
and page \thepage\ of \thelastpage.}
```

You may wish to use the sheet and/or page numbers as part of some trim marks. The following will note the sheet numbers above the page.

```
\newcommand*{\trimseqpage}{%  
  \begin{picture}(0,0)  
    \unitlength 1mm  
    \put(0,2){\makebox(0,0)[b]{Sheet: \thesheetsequence\ of \thelastsheet}}  
  \end{picture}}  
\let\marktm\trimseqpage
```

#### 18.5 Gatherings or signatures

Sometimes publishers request that they be supplied with a total number of pages that meet their planned *gatherings*.<sup>2</sup> For instance a gathering may consist of 8 leaves, and as there are

---

<sup>2</sup> There was a thread on ctt, `pagenumber mod 4?` about this in 2008.



two pages to a leaf this is equivalent to 16 pages. To meet this particular requirement there must be a total of  $8N$  leaves, or equivalently  $16N$  pages, where  $N$  will be the number of gatherings.

```
\leavespergathering{⟨num⟩}
```

The command `\leavespergathering` ensures that there will be exactly the right number of pages output to make a complete set of gatherings of  $\langle num \rangle$  leaves ( $2\langle num \rangle$  pages) each — if necessary blank pages will be output at the end to make up the correct tally. If  $\langle num \rangle$  is less than two (the default) then no additional pages will be output.

## 18.6 Time

```
\printtime \printtime*
\hmpunct \amname \pmname
```

The `\printtime` command<sup>3</sup> prints the time of day when the document is processed using the 24 hour clock while `\printtime*` uses a 12 hour clock. For example, the effect of the next piece of code is shown below.

```
This document was processed on: \today\ at \printtime\ (\printtime*).
```

This document was processed on: September 7, 2019 at 10:28 (10:28 am).

The punctuation between the hours and minutes is `\hmpunct` which defaults to a colon (:). The macros `\amname` and `\pmname` hold the abbreviations for *ante meridiem* and *post meridiem*, respectively; the defaults are ‘am’ and ‘pm’.

According to the *Chicago Manual of Style* [Chi93] there should be no punctuation between the hours and minutes in the 24 hour system. For the 12 hour system it recommends that small caps be used for the divisions of the day (e.g., A.M. and P.M.) and also that the American practice is to use a colon as the separator between hours and minutes whereas the English practice is to use a period (known to the English as a ‘full stop’). I don’t know what the traditions are in other orthographies.

The `\quarkmarks` declaration uses `\printtime`, so be careful if you change it.

Nicola Talbot’s `datetime` package [Tal06] provides a much more comprehensive collection of styles for printing the time; also for dates.

## 18.7 Page breaks before lists

A sentence or two may be used to introduce a list (e.g., `itemize`) and it can be annoying if there is a page break between the introductory words and the first item.

```
\noprelistbreak
```

Putting `\noprelistbreak` immediately before the `\begin{itemize}` should prevent a page break. Ideally, there should be no blank lines between the end of the introduction and the start of the list.

<sup>3</sup> I based the code on a similar macro in TeX for the Impatient [AHK90].

## 18.8 Changing counters

This is effectively a bundling of the `chngcntr` package [Wil01e].

```
\newcounter{<ctr>}[<within>]  
\thectr
```

In LaTeX a new counter called, say `ctr`, is created by the `\newcounter` command as `\newcounter{ctr}`. If the optional `<within>` argument is given, the counter `ctr` is reset to zero each time the counter called `within` is changed; the `within` counter must exist before it is used as the optional argument. The command `\thectr` typesets the value of the counter `ctr`. This is automatically defined for you by the `\newcounter` command to typeset arabic numerals.

```
\counterwithin{<ctr>}{<within>}  
\counterwithin*{<ctr>}{<within>}
```

The `\counterwithin` macro makes a `<ctr>` that has been initially defined by `\newcounter{ctr}` act as though it had been defined by `\newcounter{ctr}[within]`. It also redefines the `\thectr` command to be `\thewithin.\arabic{ctr}`. The starred version of the command does nothing to the original definition of `\thectr`.

```
\counterwithout{<ctr>}{<within>}  
\counterwithout*{<ctr>}{<within>}
```

The `\counterwithout` macro makes the `ctr` counter that has been initially defined by `\newcounter{ctr}[within]` act as though it had been defined by `\newcounter{ctr}`. It also redefines the `\thectr` command to be `\arabic{ctr}`. The starred version of the command does nothing to the original definition of `\thectr`.

Any number of `\counterwithin{ctr}{...}` and `\counterwithout{ctr}{...}` commands can be issued for a given counter `ctr` if you wish to toggle between the two styles. The current value of `ctr` is unaffected by these commands. If you want to change the value use `\setcounter`, and to change the typesetting style use `\renewcommand` on `\thectr`.

**Caveat.** As of 2018 `\counterwithout` and `\counterwithin` will be provided by the  $\text{\LaTeX}$ -kernel, thus we only provide it if it does not already exist.

```
\letcountercounter{<counterA>}{<counterB>}  
\unletcounter{<counterA>}
```

At times it is handy to ‘let’ one counter act as if it was a different counter. Say you have two constructions, each with their own counter `A` and `B`, now you want them to cooperate, counting in unison. This can be done using the `\letcountercounter`.

`\letcountercounter{<counterA>}{<counterB>}` \lets (make the same) `<counterA>` to `<counterB>`. The original of `<counterA>` is kept, such that you can `\unlet` it later.

`\unletcounter{<counterA>}` restores `<counterA>` to its `\unlet` condition.

This feature can be quite handy. Say for instance you want figures and tables to counter within the same counter (say `table`), then we need each change to the `figure` counter to actually act on the `table` counter. `\letcountercounter{figure}{table}` solves the problem.

## 18.9 New new and provide commands

```
\newloglike{<cmd>}{<string>}
\newloglike*{<cmd>}{<string>}
```

The class provides means of creating new math log-like functions. For example you might want to do

```
\newloglike{\Ei}{Ei}
```

if you are using the exponential integral function in your work. The starred version of the command creates a function that takes limits (like the `\max` function).

The LaTeX kernel defines the `\providecommand` macro that acts like `\newcommand` if the designated macro has not been defined previously, otherwise it does nothing. The class adds to that limited repertoire.

```
\provideenvironment{<name>}[<numargs>][<optarg>]{<begindef>}{<enddef>}
\providelength{<cmd>}
\providecounter{<ctr>}[<within>]
\provideloglike{<cmd>}{<string>}
\provideloglike*{<cmd>}{<string>}
```

The macros `\provideenvironment`, `\providelength` and `\providecounter` take the same arguments as their `\new...` counterparts. If the environment, length or counter has not been defined then it is defined accordingly, otherwise the macros do nothing except produce a warning message for information purposes.

The `\provideloglike` commands are for math log-like functions, but they do not produce any warning messages.

## 18.10 Changing macros

Commands are provided for extending simple macro definitions.

```
\addtodef{<macro>}{<prepend>}{<append>}
\addtoiargdef{<macro>}{<prepend>}{<append>}
```

The macro `\addtodef` inserts `<prepend>` at the start of the current definition of `<macro>` and puts `<append>` at the end, where `<macro>` is the name of a macro (including the backslash) which takes no arguments. The `\addtoiargdef` macro is similar except that `<macro>` is the name of a macro that takes one argument.

For example the following are two equivalent definitions of `\mymacro`:

```
\newcommand{\mymacro}[1]{#1 is a violinist in spite of being tone deaf}
```

and

```
\newcommand{\mymacro}[1]{#1 is a violinist}
\addtoiargdef{\mymacro}{}{ in spite of being tone deaf}
```

The `\addtoiargdef` (and `\addtodef`) commands can be applied several times to the same `<macro>`. Revising the previous example we could have

```
\newcommand{\mymacro}[1]{#1 is a violinist}
\addtoiargdef{\mymacro}{Although somewhat elderly, }%
{ in spite of being tone deaf}
```

```
\addtoargdef{\mymacro}{}{ and a bagpiper}
```

which is equivalent to

```
\newcommand{\mymacro}[1]{%
  Although somewhat elderly, #1 is a violinist
  in spite of being tone deaf and a bagpiper}
```

The `<prepend>` and `<append>` arguments may include LaTeX code, as shown in this extract from the class code:

```
\addtoargdef{\date}{}{%
  \begingroup
    \renewcommand{\thanks}[1]{}
    \renewcommand{\thanksmark}[1]{}
    \renewcommand{\thanksgap}[1]{}
    \protected@xdef\thedata{#1}
  \endgroup}
```

Note that in the case of `\addtoargdef` an argument can also refer to the original argument of the `<macro>`.

```
\addtodef*{\<macro>}{\<prepend>}{\<append>}
\addtoargdef*{\<macro>}{\<prepend>}{\<append>}
```

These starred versions are for use when the original `<macro>` was defined via `\newcommand*`. Using the starred versions is like using `\renewcommand*` and the unstarred versions are like having used `\renewcommand`. It is the version (starred or unstarred) of a sequence of `\addto...` commands that counts when determining whether the equivalent `\renew...` is treated as starred or unstarred.

The `\addto...` macros cannot be used to delete any code from `<macro>` nor to add anything except at the start and end. Also, in general, they cannot be used to change the definition of a macro that takes an optional argument, or a starred macro.

```
\patchcommand{\<macro>}{\<start-code>}{\<end-code>}
```

The `\patchcommand` is from the late Michael Downes' `patchcmd` package [Dow00]. It inserts the `<start-code>` at the start of the current definition of the macro `<macro>`, and inserts `<end-code>` at the end of its current definition. The `<macro>` can have zero to nine parameters. If `<macro>` uses `\futurelet` (e.g., it is a starred command or takes an optional argument) only `<start-code>` is useful — `<end-code>` must be empty otherwise things get messed up. If `<macro>` has any delimited arguments then `\patchcommand` cannot be used.

### 18.11 String arguments

In the code for the class I have sometimes used macro arguments that consist of a 'string', like the `*` arguments in the page layout macros (e.g., `\settypeblocksize`), or the `flushleft`, `center` and `flushright` strings for the `\makeheadposition` macro.

```
\nametest{\<str1>}{\<str2>}
\ifsamename
```

The macro `\nametest` takes two strings as the arguments `<str1>` and `<str2>`. It sets `\ifsamename` true if `<str1>` is the same as `<str2>`, otherwise it sets `\ifsamename` false. For

the purposes of `\nametest`, a string is a sequence of characters which may include spaces and may include the `\` backslash character; strings are equal if and only if their character sequences are identical.

Typically, I have used it within macros for checking on argument values. For example:

```
\newcommand{\amacro}[1]{%
  \nametest{#1}{green}
  \ifsamename
%    code for green
  \fi
  \nametest{#1}{red}
  \ifsamename
%    code for red
  \fi
  ...
}
```

## 18.12 Odd/even page checking

It is difficult to check robustly if the current page is odd or even but the class does provide a robust method based on writing out a label and then checking the page reference for the label. This requires at least two LaTeX runs to stabilise. This has been extracted from the original `chngpage` package (which is no longer available). (The class code and `chngpage` code is similar but not identical. There is a later package, `changepage` [Wil08a] which contains code that is identical to the class.)

```
\checkoddpag
\ifoddpag
\strictpagecheck \easypagecheck
```

The macro `\checkoddpag` sets `\ifoddpag` to true if the current page number is odd, otherwise it sets it to false (the page number is even). The robust checking method involves writing and reading labels, which is what is done after the command `\strictpagecheck` is issued; it may take more than one run before everything settles down. The simple method is just to check the current page number which, because of TeX's asynchronous page breaking algorithm, may not correspond to the actual page number where the `\checkoddpag` command was issued. The simple, but faster, page checking method is used after the `\easypagecheck` command is issued.

```
\cplabel
```

When strict page checking is used the labels consist of a number preceded by the value of `\cplabel`, whose default definition is `^_` (e.g., a label may consist of the characters `^_21`). If this might clash with any of your labels, change `\cplabel` with `\renewcommand`, but the definition of `\cplabel` must be constant for any given document.

## 18.13 Moving to another page

Standard LaTeX provides the `\newpage`, `\clearpage` and `\cleardoublepage` commands for discontinuing the current page and starting a new one. The following is a bundling of the `nextpage` package [Wil00c].

```
\needspace{<length>}
```

This macro decides if there is *<length>* space at the bottom of the current page. If there is, it does nothing, otherwise it starts a new page. This is useful if *<length>* amount of material is to be kept together on one page. The `\needspace` macro depends on penalties for deciding what to do which means that the reserved space is an approximation. However, except for the odd occasion, the macro gives adequate results.

```
\Needspace{<length>}  
\Needspace*{<length>}
```

Like `\needspace`, the `\Needspace` macro checks if there is *<length>* space at the bottom of the current page and if there is not it starts a new page. The command should only be used between paragraphs; indeed, the first thing it does is to call `\par`. The `\Needspace` command checks for the actual space left on the page and is more exacting than `\needspace`.

If either `\needspace` or `\Needspace` produce a short page it will be ragged bottom even if `\flushbottom` is in effect. With the starred `\Needspace*` version, short pages will be flush bottom if `\flushbottom` is in effect and will be ragged bottom when `\raggedbottom` is in effect.

Generally speaking, use `\needspace` in preference to `\Needspace` unless it gives a bad break or the pages must be flush bottom.

```
\movetoevenpage[<text>]  
\cleartoevenpage[<text>]
```

The `\movetoevenpage` stops the current page and starts typesetting on the next even numbered page. The `\clear...` version flushes out all floats before going to the next even page. The optional *<text>* is put on the skipped page (if there is one).

```
\movetooddpage[<text>]  
\cleartooddpage[<text>]
```

These macros are similar to the `\...evenpage` ones except that they jump to the next odd numbered page.

A likely example for the optional *<text>* argument is

```
\cleartooddpage[\vspace*{\fill}THIS PAGE LEFT BLANK\vspace*{\fill}]
```

which will put ‘THIS PAGE LEFT BLANK’ in the centre of any potential skipped (empty) even numbered page.

```
\cleartorecto \cleartoverso
```

These are slightly simpler forms<sup>4</sup> of `\cleartooddpage` and `\cleartoevenpage`. For example, if you wanted the ToC to start on a verso page, like in *The TeXbook* [Knu84], then do this:

---

4 Perhaps more robust.

```
\cleartoverso
\tableofcontents
```

## 18.14 Number formatting

Several methods are provided for formatting numbers. Two classes of number representations are catered for. A ‘numeric number’ is typeset using arabic digits and a ‘named number’ is typeset using words.

The argument to the number formatting macros is a ‘number’, essentially something that resolves to a series of arabic digits. Typical arguments might be:

- Some digits, e.g., `\ordinal{123}` → 123rd
- A macro expanding to digits, e.g., `\def\temp{3}\ordinal{\temp}` → 3rd
- The value of a counter, e.g., `\ordinal{\value{page}}` → 327th
- The arabic representation of a counter, e.g., `\ordinal{\thepage}` → 327th

However, if the representation of a counter is not completely in arabic digits, such as `\thesection` which here prints as 18.14, it will produce odd errors or peculiar results if it is used as the argument. For instance:

```
\ordinal{\thesection} → .1418th
```

### 18.14.1 Numeric numbers

```
\cardinal{<number>}
\fcardinal{<number>}
\fnumbersep
```

The macro `\fcardinal` prints its `<number>` argument formatted using `\fnumbersep` between each triple of digits. The default definition of `\fnumbersep` is:

```
\newcommand{\fnumbersep}{,}
```

Here are some examples:

```
\fcardinal{12} → 12
\fcardinal{1234} → 1,234
\fcardinal{1234567} → 1,234,567
\renewcommand*{\fnumbersep}{\:}\fcardinal{12345678} → 12 345 678
\renewcommand*{\fnumbersep}{, \:}
```

The `\cardinal` macro is like `\fcardinal` except that there is no separation between any of the digits.

```
\ordinal{<number>}
\fordinal{<number>}
\ordscript{<chars>}
```

The `\fordinal` macro typesets its `<number>` argument as a formatted ordinal, using `\fnumbersep` as the separator. The macro `\ordinal` is similar except that there is no separation between any of the digits.

Some examples are:

```
\fordinal{3} → 3rd
\fordinal{12341} → 12,341st
```

## Typeset example 18.1: TeX's minimum number in words (English style)

The minimum number in TeX is minus two billion, one hundred and forty-seven million, four hundred and eighty-three thousand, six hundred and forty-seven (i.e., -2, 147, 483, 647)

```
\renewcommand{\ordscript}[1]{\textsuperscript{#1}}
```

```
\fordinal{1234567} -> 1,234,567th
```

```
\ordinal{1234567} -> 1234567th
```

This is the `\ordinal{\value{chapter}}` chapter. -> This is the 18<sup>th</sup> chapter.

The characters denoting the ordinal (ordination?) are typeset as the argument of `\ordscript`, whose default definition is:

```
\newcommand{\ordscript}[1]{#1}
```

As the above examples show, this can be changed to give a different appearance.

```
\nthstring \iststring \iindstring \iiirdstring
```

The ordinal characters are the values of the macros `\nthstring` (default: th) for most ordinals, `\iststring` (default: st) for ordinals ending in 1 like 21<sup>st</sup>, `\iindstring` (default: nd) for ordinals like 22<sup>nd</sup>, and `\iiirdstring` (default: rd) for ordinals like 23<sup>rd</sup>.

## 18.14.2 Named numbers

```
\numtoname{<number>}
```

```
\numtoName{<number>}
```

```
\NumToName{<number>}
```

The macro `\numtoname` typesets its `<number>` argument using lowercase words. The other two macros are similar, except that `\numtoName` uses uppercase for the initial letter of the first word and `\NumToName` uses uppercase for the initial letters of all the words.

As examples:

```
\numtoname{12345} -> twelve thousand, three hundred and forty-five
```

```
\numtoName{12345} -> Twelve thousand, three hundred and forty-five
```

```
\NumToName{12345} -> Twelve Thousand, Three Hundred and Forty-Five
```

## Source for example 18.1

```
The minimum number in TeX is \numtoname{-2147483647}
(i.e., \fcardinal{-2147483647})
```

```
\ordinaltoname{<number>}
```

```
\ordinaltoName{<number>}
```

```
\OrdinalToName{<number>}
```



## Typeset example 18.2: TeX's maximum number in words (American style)

The maximum number in TeX is two billion one hundred forty-seven million four hundred eighty-three thousand six hundred forty-seven (i.e., 2147483647).

These three macros are similar to `\numtoname`, etc., except that they typeset the argument as a wordy ordinal.

For example:

This is the `\ordinaltoname{\value{chapter}}` chapter. -> This is the eighteenth chapter.

```
\namenumberand \namenumbercomma \tensunitsep
```

By default some punctuation and conjunctions are used in the representation of named numbers. According to both American and English practice, a hyphen should be inserted between a 'tens' name (e.g., fifty) and a following unit name (e.g., two). This is represented by the value of `\tensunitsep`. English practice, but not American, is to include commas (the value of `\namenumbercomma`) and conjunctions (the value of `\namenumberand`) in strategic positions in the typesetting. These macros are initially defined as:

```
\newcommand*\namenumberand{ and }
\newcommand*\namenumbercomma{, }
\newcommand*\tensunitsep{-}
```

The next example shows how to achieve American typesetting.

## Source for example 18.2

```
\renewcommand*\namenumberand{ }
\renewcommand*\namenumbercomma{ }
The maximum number in TeX is \numtoname{2147483647}
(i.e., \cardinal{2147483647}).
```

```
\minusname \lcminusname \ucminusname
```

When a named number is negative, `\minusname` is put before the spelled out number. The definitions of the above three commands are:

```
\newcommand*\lcminusname{minus }
\newcommand*\ucminusname{Minus }
\let\minusname\lcminusname
```

which means that 'minus' is normally all lowercase. To get 'minus' typeset with an initial uppercase letter simply:

```
\let\minusname\ucminusname
```

## Typeset example 18.3: Varieties of fractions in text

In summary, fractions can be typeset like  $3/4$  or  $\frac{3}{4}$  or  $\frac{3}{4}$  or  $\frac{3}{4}$  because several choices are provided.

Only one version of `\namenum` is supplied as I consider that it is unlikely that ‘and’ would ever be typeset as ‘And’. If the initial uppercase is required, renew the macro when appropriate.

There is a group of macros that hold the names for the numbers. To typeset named numbers in a language other than English these will have to be changed as appropriate. You can find them in the class and patch code. The actual picking and ordering of the names is done by an internal macro called `\n@me@number`. If the ordering is not appropriate for a particular language, that is the macro to peruse and modify. Be prepared, though, for the default definitions to be changed in a later release in case there is a more efficient way of implementing their functions.

If you want to express numbers that fall outside TeX’s range, Edward Reingold has produced a set of macros that can write out in words any number within the range  $-10^{66}$  to  $10^{66}$ , that is, up to a thousand vigintillion [Rei07].

## 18.14.3 Fractions

When typesetting a simple fraction in text there is usually a choice of two styles, like  $3/4$  or  $\frac{3}{4}$ , which do not necessarily look as though they fit in with their surroundings. These fractions were typeset via:

... like  $3/4$  or  `$\frac{3}{4}$`  ...

```
\slashfrac{<top>}{<bottom>}
\slashfracstyle{<num>}
```

The class provides the `\slashfrac` command which typesets its arguments like  $3/4$ . Unlike the `\frac` command which can only be used in math mode, the `\slashfrac` command can be used in text and math modes.

The `\slashfrac` macro calls the `\slashfracstyle` command to reduce the size of the numbers in the fraction. You can also use `\slashfracstyle` by itself.

## Source for example 18.3

In summary, fractions can be typeset like  $3/4$  or  `$\frac{3}{4}$`  or  `\slashfrac{3}{4}`  or  `\slashfracstyle{3/4}`  because several choices are provided.

```
\textsuperscript{<super>}
\textsubscript{<sub>}
```

## Typeset example 18.4: Super- and subscripts in text

In normal text you can typeset superscripts like  $H^+$  and subscripts like  $H_2O$  without going into math mode.

While on the subject of moving numbers up and down, the kernel provides the `\textsuperscript` macro for typesetting its argument as though it is a superscript. The class also provides the `\textsubscript` macro for typesetting its argument like a subscript.

## Source for example 18.4

In normal text you can typeset superscripts like `H\textsuperscript{+}` and subscripts like `H\textsubscript{2}O` without going into math mode.

## 18.15 An array data structure

The class includes some macros for supporting the `patverse` environment which may be more generally useful.

```
\newarray{<arrayname>}{<low>}{<high>}
```

`\newarray` defines the `<arrayname>` array, where `<arrayname>` is a name like `MyArray`. The lowest and highest array indices are set to `<low>` and `<high>` respectively, where both are integer numbers.

```
\setarrayelement{<arrayname>}{<index>}{<text>}
\getarrayelement{<arrayname>}{<index>}{<result>}
```

The `\setarrayelement` macro sets the `<index>` location in the `<arrayname>` array to be `<text>`. Conversely, `\getarrayelement` sets the parameterless macro `<result>` to the contents of the `<index>` location in the `<arrayname>` array. For example:

```
\setarrayelement{MyArray}{23}{\$2^{23}\$}
\getarrayelement{MyArray}{23}{\result}
```

will result in `\result` being defined as `\def\result{\$2^{23}\$}`.

```
\checkarrayindex{<arrayname>}{<index>}
\ifbounderror
```

`\checkarrayindex` checks if `<arrayname>` is an array and if `<index>` is a valid index for the array. If both conditions hold then `\ifbounderror` is set false, but if either `<arrayname>` is not an array or, if it is, `<index>` is out of range then `\ifbounderror` is set true.

```
\stringtoarray{<arrayname>}{<string>}
\arraytostring{<arrayname>}{<result>}
```

The macro `\stringtoarray` puts each character from `<string>` sequentially into the `<arrayname>` array, starting at index 1. The macro `\arraytostring` assumes that `<arrayname>`

is an array of characters, and defines the macro  $\langle result \rangle$  to be that sequence of characters. For example:

```
\stringtoarray{MyArray}{Chars}  
\arraytostring{MyArray}{\MyString}
```

is equivalent to

```
\def\MyString{Chars}
```

```
\checkifinteger{<num>}  
\ifinteger
```

The command `\checkifinteger` checks if  $\langle num \rangle$  is an integer (not less than zero). If it is then `\ifinteger` is set true, otherwise it is set false.

**Note.** Please note that `\checkifinteger` may only work on simple input.

## 18.16 Checking the processor

### 18.16.1 Checking for pdfLaTeX

Both LaTeX and pdfLaTeX can be run on the same document. LaTeX produces a `.dvi` file as output, while pdfLaTeX can produce either a `.dvi` or a `.pdf` file. On modern systems pdfLaTeX produces a pdf file by default.

If you want a dvi file output use LaTeX and if you want a pdf file use pdfLaTeX.

```
\ifpdf ... \fi
```

The class provides `\ifpdf` (by autoloading the `ifpdf` package) which is true when the document is being processed by pdfLaTeX and false otherwise. You can use it like this:

```
\ifpdf  
  code for pdfLaTeX only  
\else  
  code for LaTeX only  
\fi
```

If there is no LaTeX specific code then don't write the `\else` part.

### 18.16.2 Checking for etex

Modern LaTeX distributions use `etex`, which is an extended version of TeX, as the underlying engine. `etex` provides some more primitives than TeX, which may be useful, but not everybody has `etex` available (Though, as of 2018, this is *very* rare).

```
\ifetex
```

`\ifetex` can be used to determine if `etex` is being used as the underlying engine; it is analogous to `\ifpdf` which tests for pdfLaTeX (provided by autoloading the `ifetex` package). For example:

```
\ifetex  
  %%% code only processible by etex  
\else
```

```
\typeout{etex is not available}
\fi
```

### 18.16.3 Checking for XeTeX

You have been able to use `\ifpdf` to check if pdfLaTeX is being used to process the document.

```
\ifxetex
```

In a similar manner you can use `\ifxetex` to check if the document is being processed by XeTeX (provided by autoloading the `ifxetex` package).

```
\RequireXeTeX
```

The `ifxetex` package also provides `\RequireXeTeX`, which generates an error if XeTeX is not being used to process the document. This can be useful if you make your own class building upon memoir.

### 18.16.4 Checking for LuaTeX

Similarly you can use

```
\ifluatex
```

to check if the doc is being process by LuaTeX.

## 18.17 Leading

LaTeX automatically uses different leading for different font sizes.

```
\baselineskip \onelineskip
```

At any point in a document the standard LaTeX `\baselineskip` length contains the current value of the leading<sup>5</sup>. The class provides the length `\onelineskip` which contains the initial leading for the normal font. This value is useful if you are wanting to specify length values in terms of numbers of lines of text.

### 18.18 Minor space adjustment

The kernel provides the `\,` macro for inserting a thin space in both text and math mode. There are other space adjustment commands, such as `\!` for negative thin space, and `\:` and `\;` for medium and thick spaces, which can only be used in math mode.

```
\thinspace \medspace \: \!
```

On occasions I have found it useful to be able to tweak spaces in text by some fixed amount, just as in math mode. The kernel macro `\thinspace` specifies a thin space, which is 3/18 em. The class `\medspace` specifies a medium space of 4/18 em. As mentioned, the kernel macro `\:` inserts a medium space in math mode. The class version can be used in both math and text mode to insert a medium space. Similarly, the class version of `\!` can be used to insert a negative thin space in both text and math mode.

The math thick space is 5/18 em. To specify this amount of space in text mode you can combine spacing commands as:

<sup>5</sup> This statement ignores any attempts to stretch the baseline.

`\:\:\!`

which will result in an overall space of 5/18 em (from  $(4 + 4 - 3)/18$ ).

### 18.19 Adding a period

Much earlier, when showing the code for the sectional division styles for this document, I used the macro `\addperiod`.

```
\addperiod{<text>}
```

This puts a period (a full stop) at the end of `<text>`. I used it to add a period at the end of the `\paragraph` and `\subparagraph` titles. When sectional titles, like `\paragraph` are run-in, it is customary to end them with a period (or occasionally a colon).

### 18.20 Words and phrases

The class provides several macros that expand into English words or phrases. To typeset in another language these need to be changed, or an author or publisher may want some changes made to the English versions. Table 18.1 lists the macros, their default values, and where they used.

Most, if not all, of the tabulated definitions are simple — for example

```
\newcommand*{\partname}{Part}  
\newcommand*{\partrefname}{Part~}
```

and so can be also changed simply.

The definitions of the macros for the names of numbers are more complex — for example for the number 11 (eleven)

```
\newcommand*{\nNamexi}{\iflowertonumname e\else E\fi eleven}
```

That is, each definition includes both a lowercase and an uppercase initial letter, so a bit more care has to be taken when changing these. For specifics read the documentation of the class code.

### 18.21 Symbols

LaTeX lets you typeset an enormous variety of symbols. The class adds nothing to the standard LaTeX capabilities in this respect. If you want to see what symbols are available then get a copy of Scott Pakin's *The Comprehensive LaTeX Symbol List* [Pak01]. You may have to do a little experimentation to get what you want, though.

For example, the `\texttrademark` command produces the trademark symbol™, but the `\textregistered` command produces®. When I wanted to use the registered trademark symbol it needed to be typeset like a superscript instead of on the baseline. The `\textsuperscript` macro typesets its argument like a superscript, so using

```
\textsuperscript{\textregistered}
```

gave the required result®.

Table 18.1: Defined words and phrases

| Macro                          | Default    | Usage                                       |
|--------------------------------|------------|---|
| <code>\abstractname</code>     | Abstract   | title for <code>abstract</code> environment |
| <code>\alsoname</code>         | see also   | used by <code>\seealso</code>               |
| <code>\amname</code>           | am         | used in printing time of day                |
| <code>\appendixname</code>     | Appendix   | name for an appendix heading                |
| <code>\appendixpagename</code> | Appendices | name for an <code>\appendixpage</code>      |
| <code>\appendixtocname</code>  | Appendices | ToC entry announcing appendices             |
| <code>\bibname</code>          | 문헌목록       | title for <code>\thebibliography</code>     |
| <code>\bookname</code>         | Book       | name for <code>\book</code> heading         |
| <code>\bookrefname</code>      | Book       | used by <code>\Bref</code>                  |
| <code>\chaptername</code>      | Chapter    | name for <code>\chapter</code> heading      |
| <code>\chapterrefname</code>   | Chapter    | used by <code>\Cref</code>                  |
| <code>\contentsname</code>     | 목차         | title for <code>\tableofcontents</code>     |
| <code>\figurename</code>       | Figure     | name for figure <code>\caption</code>       |
| <code>\figurerefname</code>    | Figure     | used by <code>\fref</code>                  |
| <code>\glossaryname</code>     | Glossary   | title for <code>\theglossary</code>         |
| <code>\indexname</code>        | 색인         | title for <code>\theindex</code>            |
| <code>\lcmminusname</code>     | minus      | used in named number formatting             |
| <code>\listfigurename</code>   | 圖 목차       | title for <code>\listoffigures</code>       |
| <code>\listtablename</code>    | 表 목차       | title for <code>\listoftables</code>        |
| <code>\minusname</code>        | minus      | used in named number formatting             |
| <code>\namenumberand</code>    | and        | used in named number formatting             |
| <code>\namenumbercomma</code>  | ,          | used in named number formatting             |
| <code>\notesname</code>        | Notes      | title of <code>\notedivision</code>         |
| <code>\pagename</code>         | page       | for your use                                |
| <code>\pagerefname</code>      | page       | used by <code>\pref</code>                  |
| <code>\partname</code>         | Part       | name for <code>\part</code> heading         |
| <code>\partrefname</code>      | Part       | used by <code>\Pref</code>                  |
| <code>\pmname</code>           | pm         | used in printing time of day                |
| <code>\sectionrefname</code>   | §          | used by <code>\Sref</code>                  |
| <code>\seename</code>          | see        | used by <code>\see</code>                   |
| <code>\tablename</code>        | Table      | name for table <code>\caption</code>        |
| <code>\tablerefname</code>     | Table      | used by <code>\tref</code>                  |
| <code>\ucminusname</code>      | Minus      | used in named number formatting             |

## 18.22 Two simple macros

There are two trivial macros that can be generally useful.

```
\memjustarg{<text>}  
\mengobble{<text>}
```

The `\memjustarg` macro just uses its argument and is defined as:

```
\newcommand*{\memjustarg}[1]{#1}
```

The `\mengobble` macro gobbles down and swallows its argument. Its definition is:

```
\newcommand{\mengobble}[1]{} 
```

Do *not* redefine either `\memjustarg` or `\mengobble`; if you do various pieces of code will behave in unexpected ways that you will not like.

## 18.23 Vertical centering

Earlier there was a description of a method for centering text vertically. The `vplace` environment provides a simpler and more general way.

```
\begin{vplace}[<num>] text \end{vplace}
```

The contents of the `vplace` environment are vertically centered. The optional `<num>` argument can be used to specify the ratio of the upper space to the lower space. You can put other text on the page above or below the centered text. The environment may be useful for title pages.

## 18.24 For package writers

The facilities described in this section are for anyone to use but I suspect that they may be most useful to package developers.

## 18.24.1 Emulating packages

```
\EmulatedPackage{<package>}[<date>]  
\EmulatedPackageWithOptions{<optionlist>}{<package>}[<date>]
```

These commands are for package writers; they are based on a conversation with Donald Arseneau on `CTT`. They fool LaTeX into thinking that the `<package>` has already been loaded so it won't try loading it again. These are probably only useful if your package includes the actual code for `<package>`.

`memoir` does include code from several packages and uses a similar internal command to ensure that the packages are not loaded following some later `\usepackage` command. The names of the emulated packages are written to the `log` file. At the time of writing the emulated packages are: `abstract`, `appendix`, `array`, `booktabs`, `ccaption`, `chngcntr`, `crop`, `dcolumn`, `delarray`, `enumerate`, `epigraph`, `ifmtarg`, `ifpdf`, `index`, `makeidx`, `moreverb`, `needspace`, `newfile`, `nextpage`, `pagenote`, `patchcmd`, `parskip`, `setspace`, `shortvrb`, `showidx`, `tabularx`, `titleref`, `tocbibind`, `tocloft`, `verbatim`, and `verse`. As well as the emulated packages `memoir` provides functions equivalent to those in the following packages, although the class does not prevent you from using them: `fancyhdr`, `framed`, `geometry`, `sidecap`, `subfigure`, and `titlesec`.

```
\DisemulatePackage{<package>}
```



This command undoes any prior `\EmulatedPackage` or `\EmulatedPackageWithOptions` for the *⟨package⟩* package. For example, if you wish to use the index package instead of memoir's emulation then put

```
\DisemulatePackage{index}
\usepackage{index}
```

in your preamble.

#### 18.24.2 Inserting code before and after a file, package or class

The kernel provides two commands, `\AtBeginDocument` and `\AtEndDocument` which can only be used in the preamble, for inserting code at the start and end of the document environment.

The kernel also provides the macros `\AtEndOfPackage{⟨code⟩}` and `\AtEndOfClass{⟨code⟩}` for inserting code at the end of the current package or class. More precisely, these macros call the *⟨code⟩* after the package or class file has been input via `\InputIfFileExists`.

The class provides a more comprehensive set of macros for code insertions, which should be used before the relevant file is called for.

```
\AtBeginFile{⟨file⟩}{⟨code⟩}
\AtEndFile{⟨file⟩}{⟨code⟩}
```

The `\AtBeginFile` macro inserts *⟨code⟩* just before the *⟨file⟩* file is `\input` (or `\included`, etc.). Similarly `\AtEndFile` inserts the *⟨code⟩* immediately after the *⟨file⟩*. The *⟨file⟩* argument must be the same as used in the corresponding `\input` command. If *⟨file⟩* includes an extension, for example `fred.def`, then that is taken as the complete name, otherwise if there is no extension, for instance `fred`, then the `.tex` extension is automatically appended making the full name `fred.tex`.

The `\At...File` commands must be issued *before* the corresponding *⟨file⟩* is input otherwise nothing will happen.

```
\AtBeginPackage{⟨pack⟩}{⟨code⟩}
\AtEndPackage{⟨pack⟩}{⟨code⟩}
\RequireAtEndPackage{⟨pack⟩}{⟨code⟩}
```

The `\AtBeginPackage` command will insert *⟨code⟩* just before the *⟨pack⟩* package is used. Similarly `\AtEndPackage` will insert the *⟨code⟩* immediately after the *⟨pack⟩*. The *⟨pack⟩* argument must be the same as used in the corresponding `\usepackage` command, that is, without any extension. The `\At...Package` commands must be issued *before* the corresponding *⟨pack⟩* is used otherwise nothing will happen.

The `\RequireAtEndPackage` command will, like `\AtEndPackage`, insert *⟨code⟩* at the end of the *⟨pack⟩* package if it has not yet been used. If the package has already been used then the *⟨code⟩* is called immediately.

```
\AtBeginClass{⟨class⟩}{⟨code⟩}
\AtEndClass{⟨class⟩}{⟨code⟩}
\RequireAtEndClass{⟨class⟩}{⟨code⟩}
```

The `\AtBeginClass` command will insert *⟨code⟩* just before the *⟨class⟩* class is used. Similarly `\AtEndClass` will insert the *⟨code⟩* immediately after the *⟨class⟩*. The *⟨class⟩* argument must be the same as used in the corresponding `\LoadClass` command, that is, without any

extension. The `\At...Class` commands must be issued *before* the corresponding `<class>` is used otherwise nothing will happen.

The `\RequireAtEndClass` command will, like `\AtEndClass`, insert `<code>` at the end of the `<class>` class if it has not yet been used. If the class has already been used then the `<code>` is called immediately.

There is an unfortunate interaction between the kernel's `\AtEndOfPackage` and the class's `\AtEndPackage`, and similarly for the `\AtEndOfClass` and `\AtEndClass`. I discovered this when I tried to automate using the `memhfixc` package if `hyperref` was being used by putting the following into the memoir code

```
\AtEndPackage{hyperref}{\usepackage{memhfixc}}
```

which caused all sorts of problems.

The kernel scheme looks like this:

```
\newcommand{\usepackage}[1]{%  
  ...  
  \InputIfFileExists{#1}  
<AtEndOfPackage code>}
```

The basic mechanism for implementing the class macros is by modifying the kernel's `\InputIfFileExists` macro, which internally uses a form of `\input` to read in the file, so that the inserted `<code>` comes immediately before and after the `\input`, somewhat like:

```
\renewcommand{\InputIfFileExists}[1]{%  
  ...  
  <before code> \input{#1} <after code>}
```

If `\AtEndPackage` is applied to a package that has an internal `\AtEndOfPackage` then the result can be sketched as:

```
\newcommand{\usepackage}[1]{%  
  ...  
  <before code>  
  \input{#1}  
  <after code>  
  <AtEndOfPackage code>  
}
```

In other words the body of the package is read in, the `\AtEndPackage` code is called, and then *after* that the `\AtEndOfPackage` code is called.

The `hyperref` package internally uses `\AtEndOfPackage` to read some files and `memhfixc` had to be input after these. A way to automate `memhfixc` after `hyperref` is:

```
\AtEndPackage{hyperref}{%  
  \AtBeginDocument{\usepackage{memhfixc}}}
```

but this seems more trouble than it's worth especially since Heiko Oberdiek has kindly updated `hyperref` so that versions after 2006/11/15 will automatically load the `memhfixc` package.

#### 18.25 Heading hooks

On 2nd September 2005 I posted two messages to the `comp.text.tex` newsgroup saying that I was creating a new version of memoir and that I would consider inserting hooks into

the class code that package writers might find useful. I got no requests for any hooks or anything else from package writers. I therefore assume that no package author sees any problems if a memoir class document author uses the package.

However, I have provided macros that may be useful for those who want to do things with the contents of section headings, captions, and the like. The macros are called within the relevant heading or caption code, and by default are defined to do nothing.

Hooks for the `\book` and `\book*` commands.

```
\membookinfo{thebook}{fortoc}{title}
\membookstarinfo{title}
```

Hooks for the `\part` and `\part*` commands.

```
\mempartinfo{thepart}{fortoc}{title}
\mempartstarinfo{title}
```

In many cases a `\mem...info` macro includes an argument related to the heading's number (*thepart* for `\mempartinfo`). In certain circumstances, such as a `\chapter` in the `\frontmatter`, there might not be a number even though the normal unstarred version of the command is used. In these cases the number argument (*thechapter* in the case of `\memchapinfo`) is left empty.

Hooks for the `\chapter` and `\chapter*` commands. Note that regular chapters and those as appendices are treated differently.

```
\memchapinfo{thechapter}{fortoc}{forhead}{title}
\memchapstarinfo{fortoc}{title}
\memappchapinfo{thechapter}{fortoc}{forhead}{title}
\memappchapstarinfo{fortoc}{title}
```

Hooks for `\section`, `\subsection`, etc., and their starred versions. *name* is the type of section (e.g., `section`, or `subsection`, or `subsubsection` or ...

```
\memsecinfo{name}{thename}{fortoc}{forhead}{title}
\memsecstarinfo{name}{title}
```

Hooks for appendix-like page headings.

```
\memapppageinfo{title}
\memapppagestarinfo{title}
\memleadpageinfo{pstyle}{cmdname}{title}
\memleadpagestarinfo{pstyle}{cmdname}{title}
```

Hooks for `\poemtitle`, `\PoemTitle`, and their starred versions.

```
\mempoeminfo{title}
\mempoemstarinfo{title}
\memPoemTitleinfo{thepoem}{fortoc}{forhead}{title}
\memPoemTitlestarinfo{fortoc}{title}
```

Hooks for the several kinds of `\caption` and `\legend` commands.

```

\memcaptioninfo{<type>}{<thetype>}{<fortoc>}{<title>}
\memlegendinfo{<title>}
\memnamedlegendinfo{<fortoc>}{<title>}
\membitwonumcaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}
    {<name2>}{<fortoc2>}{<title2>}
\membionenumcaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}
    {<name2>}{<fortoc2>}{<title2>}
\membicaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}{<name2>}{<title2>}

```

As an example of how one of these macros might be used, just before the start of this section I put

```

\renewcommand{\memsecinfo}[5]{\edef\Margi{#1}\edef\Margii{#2}%
    \edef\Margiii{#3}\edef\Margiv{#4}%
    \edef\Margv{#5}}

```

and now I'm putting

```

The arguments are: (1) '\Margi', (2) '\Margii', (3) '\Margiii',
                  (4) '\Margiv', (5) '\Margv'.

```

The arguments are: (1) 'section', (2) '18.25', (3) 'Heading hooks', (4) 'Heading hooks', (5) 'Heading hooks'.

**Warning:** Be very careful with the fifth argument of this macro when using hyperref, this argument will then contain a hyper link anchor, which may cause problems when used out of context.

#### 18.26 Documenting LaTeX commands

The class provides a few macros to help you if you want to describe LaTeX commands.

```

\bs \cs{<name>} \cmdprint{<cmd>} \cmd{<cmd>}

```

The macro `\bs` simply prints the `'\'` backslash.

The macro `\cs` prints its argument, putting a backslash in front of it. For example `\cs{<name>}` prints `\name`.

The argument to `\cmdprint` should be the name of a macro, including the backslash. It is then printed as is. For instance `\cmdprint{\amacro}` prints `\amacro`.

The argument to `\cmd` should be the name of a macro, including the backslash. It is then printed, using `\cmdprint`, and also added to the index file with the assumption that `?` will be used as the 'actual' character (the default is `@` which is not of much use if you are trying to index macro names that have `@` as part of their names).

```

\meta{<arg>} \marg{<arg>} \oarg{<arg>} \parg{<arg>}

```

The macro `\meta{<arg>}` prints `<arg>` for an argument to a macro.

The macro `\marg{<arg>}` prints `{<arg>}` for a required argument.

The macro `\oarg{<arg>}` prints `[<arg>]` for an optional argument.

The macro `\parg{<arg>}` prints `(<arg>)` for a parenthesized argument.

# Nineteen

---

## For package users

---

Many packages work just as well with memoir as with any of the standard classes. In some instances, though, there may be a problem. In other instances the class and package have been designed to work together but you have to be careful about any code that you might write.

### 19.1 Class/package name clash

A typical indication of a problem is an error message saying that a command has already been defined (see page [454](#)).

When the class and a package both use the same name for a macro that they define something has to give. For the sake of an example, assume that memoir has defined a macro called `\foo` and a package pack that is used in the document also defines `\foo`. There are several options that you can choose which might resolve the difficulty.

1. Just keep the class definition:

```
\documentclass{...}
\let\classfoo\foo    % save the class' definition
\let\foo\relax        % 'undefine' \foo
\usepackage{pack}     % defines \foo
\let\foo\classfoo     % restore \foo to the class definition
...
\foo...               % the class \foo
```

2. Just keep the package definition:

```
\documentclass{...}
\let\foo\relax        % 'undefine' \foo
\usepackage{pack}     % defines \foo
...
\foo...               % the package \foo
```

3. Keep the class definition and rename the package definition:

```
\documentclass{...}
\let\classfoo\foo    % save the class' definition
\let\foo\relax        % 'undefine' \foo
\usepackage{pack}     % defines \foo
\let\packfoo\foo      % rename pack's \foo
```

```
\let\foo\classfoo % restore \foo to the class definition
...
\foo...           % the class \foo
\packfoo          % the package \foo
```

4. Keep the package definition and rename the class definition:

```
\documentclass{...}
\let\classfoo\foo % save the class' definition
\let\foo\relax    % 'undefine' \foo
\usepackage{pack} % defines \foo
...
\foo...           % the package \foo
\classfoo...      % the class \foo
```

A potential problem with these options can occur after the package is loaded and there are class or package commands that you use that, knowingly or not, call `\foo` expecting to get the class or the package definition, one of which is now not available (except under a different name).

The memoir class has been available since 2001. It seems likely that if older packages clash with memoir then, as eight years have gone by, the authors are unlikely to do anything about it. If a newer package clashes then contact the author of the package.

If all else fails, ask for help on the `CTT` newsgroup.

## 19.2 Support for bidirectional typesetting

The bidi system [Kha10] provides means of bidirectional typesetting. The class has built in support for bidi but this means that if you are defining your own macros there are some things you need to be aware of.

When dealing with bidirectional texts the left-to-right (LTR) direction is the familiar one and LaTeX is set up for this. When typesetting right-to-left (RTL) bidi interchanges left and right. The support in memoir consists of replacing many, but not all, of the right- and left-specific constructs. The replacement macros are:

```
\memRTLleftskip \memRTLrightskip
\memRTLvleftskip \memRTLvrighskip
\memRTLraggedright \memRTLraggedleft
```

In certain places, but not everywhere:

```
\memRTLleftskip is used instead of \leftskip
\memRTLrightskip is used instead of \rightskip
\memRTLvleftskip is used instead of \vleftskip
\memRTLvrighskip is used instead of \vrighskip
\memRTLraggedleft is used instead of \raggedleft
\memRTLraggedright is used instead of \raggedright
```

So, if you are defining any macros that use the `\...skip` or `\ragged...` macros you may have to use the `\memRTL...` version instead. The memoir definitions of these macros are simply:

```
\newcommand*\memRTLleftskip{\leftskip}
\newcommand*\memRTLrightskip{\rightskip}
...
\newcommand*\memRTLraggedleft{\raggedleft}
```

The bidi system redefines them to suit its purposes. If your work will only be set LTR there is no need to use the `\memRTL...` macros in any of your code. If you might ever be producing a bidirectional document then you may have to use the `\memRTL...` versions of the standard commands in your code. To determine where you might have to use them you will have to consult the bidi documentation as not every use of the standard commands needs to be replaced.





## 20.1 introduction

In this chapter I will work through a reasonably complete design exercise. Rather than trying to invent something myself I am taking the design of Bringhurst's *The Elements of Typographic Style* [Bri99] as the basis of the exercise. This is sufficiently different from the normal LaTeX appearance to demonstrate most of the class capabilities, and also it is a design by a leading proponent of good typography.

As much as possible, this chapter is typeset according to the results of the exercise to provide both a coding and a graphic example.

## 20.2 design requirements

The *Elements of Typographic Style* is typeset using Minion as the text font and Syntax (a sans font) for the captions.

The trimmed page size is 23 by 13.3cm. The fore-edge is 3.1cm and the top margin is 1.9cm.

As already noted, the font for the main text is Minion, with 12pt leading on a 21pc measure with 42 lines per page. For the purposes of this exercise I will assume that Minion can be replaced by the font used for this manual. The captions to figures and tables are unnamed and unnumbered and typeset in Syntax. The captions give the appearance of being in a smaller font size than the main text, which is often the case. I'll assume that the `\small\sffseries` font will reasonably do for the captions.

The footer is the same width as the typeblock and the folio is placed in the footer at the fore-edge. There are two blank lines between the bottom of the typeblock and the folio.

There is no header in the usually accepted sense of the term but the chapter title is put on recto pages and section titles are on verso pages. The running titles are placed in the fore-edge margin level with the seventh line of the text in the typeblock. The recto headers are typeset raggedright and the verso ones raggedleft.

Bringhurst also uses many marginal notes, their maximum width being about 51pt, and typeset raggedright in a smaller version of the textfont.

Chapter titles are in small caps, lowercase, in a larger font than for the main text, and a rule is placed between the title and the typeblock. The total vertical space used by a chapter title is three text lines. Chapters are not numbered in the text but are in the ToC.

Section titles are again in small caps, lowercase, in the same size as the text font. The titles are numbered, with both the chapter and section number.

A subsection title, which is the lowest subdivision in the book, is in the italic form of the textfont and is typeset as a numbered non-indented paragraph. These are usually multiline as Bringhurst sometimes uses them like an enumerated list, so on occasion there is a subsection title with no following text.

Only chapter titles are put into the ToC, and these are set raggedright with the page numbers immediately after the titles. There is no LoF or LoT.

Note that unlike the normal LaTeX use of fonts, essentially only three sizes of fonts are used — the textfont size, one a bit larger for the chapter titles, and one a bit smaller for marginal notes and captions. Also, bold fonts are not used except on special occasions, such

as when he is comparing font families and uses large bold versions to make the differences easier to see.

### 20.3 specifying the page and typeblock

The first and second things to do are to specify the sizes of the page after trimming and the typeblock. The trimmed size is easy as we have the dimensions.

Specifying  
the page  
and  
typeblock

```
\settrimmedsize{23cm}{13.3cm}{*}
```

We want 42 lines of text, so that's what we set as the height of the typeblock; however, we have to remember to ask for lines as the optional *algorithm* argument when we finally call `\checkandfixthelayout`.

```
\settypeblocksize{42\onelineskip}{21pc}{*}
```

To make life easier, we'll do no trimming of the top of the stock

```
\setlength{\trimtop}{0pt}
```

but will trim the fore-edge. The next set of calculations first sets the value of the `\trimedge` to be the `\stockwidth`; subtracting the trimmed `\paperwidth` then results in `\trimedge` being the amount to trim off the fore-edge.

```
\setlength{\trimedge}{\stockwidth}
\addtolength{\trimedge}{-\paperwidth}
```

The sizes of the trimmed page and the typeblock have now been specified. The typeblock is now positioned on the page. The sideways positioning is easy as we know the fore-edge margin to be 3.1cm.

```
\setlrmargins{*}{3.1cm}{*}
```

The top margin is specified as 1.9cm, which is very close to four and a half lines of text. Just in case someone might want to use a different font size, I'll specify the top margin so that it is dependent on the font size. The `\footskip` can be specified now as well (it doesn't particularly matter what we do about the header-related lengths as there isn't anything above the typeblock).

```
\setulmargins{4.5\onelineskip}{*}{*}
\setheadfoot{\onelineskip}{3\onelineskip}
\setheaderspaces{\onelineskip}{*}{*}
```

Lastly define the dimensions for any marginal notes.

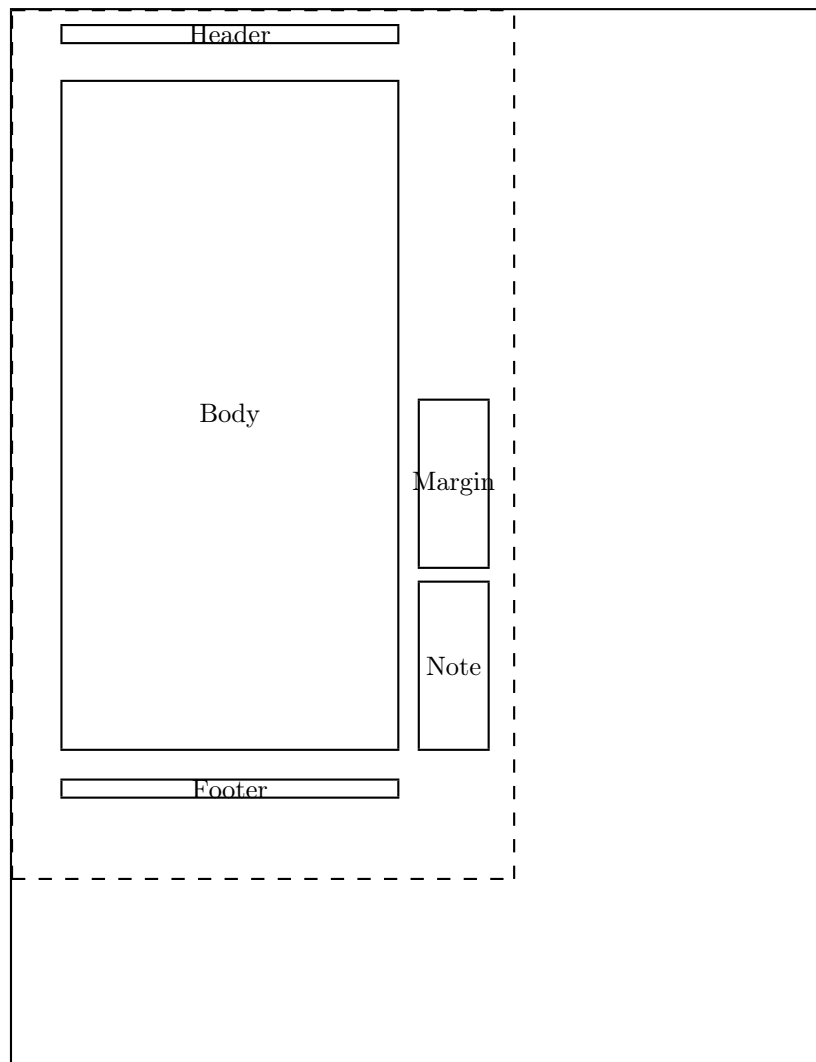
```
\setmarginnotes{17pt}{51pt}{\onelineskip}
```

If this was for real, the page layout would have to be checked and implemented.

```
\checkandfixthelayout[lines]
```

It is possible to implement this layout just for this chapter but I'm not going to tell you either how to do it, or demonstrate it. Except under exceptional circumstances it is not good to make such drastic changes to the page layout in the middle of a document. However, the picture on page 347 illustrates how this layout would look on US letterpaper stock. Looking at the illustration suggests that the layout would look rather odd unless the stock was trimmed down to the page size — another reason for not switching the layout here.

Dashed lines represent the actual page size after trimming the stock.



An  
example  
book  
design

Lengths are to the nearest pt.

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| <code>\stockheight = 795pt</code>   | <code>\stockwidth = 614pt</code>  |
| <code>\pageheight = 654pt</code>    | <code>\pagewidth = 378pt</code>   |
| <code>\textheight = 502pt</code>    | <code>\textwidth = 252pt</code>   |
| <code>\trimtop = 0pt</code>         | <code>\trimedge = 236pt</code>    |
| <code>\uppermargin = 54pt</code>    | <code>\spinemargin = 38pt</code>  |
| <code>\headheight = 12pt</code>     | <code>\headsep = 30pt</code>      |
| <code>\footskip = 36pt</code>       | <code>\marginparsep = 17pt</code> |
| <code>\marginparpush = 12pt</code>  | <code>\columnsep = 10pt</code>    |
| <code>\columnseprule = 0.0pt</code> |                                   |

An illustration of Bringhurst's page layout style when printed on US letter paper stock. Also shown are the values used for the page layout parameters for this design.

## 20.4 specifying the sectional titling styles

### 20.4.1 The chapter style

Recapping, chapter titles are in small caps, lowercase, in a larger font than for the main text, and a rule is placed between the title and the typeblock. The total vertical space used by a chapter title is three text lines. Chapters are not numbered in the text but are in the ToC. Titles in the ToC are in mixed case.

Specifying  
the  
sectional  
titling  
styles

The definition of the chapterstyle is remarkably simple, as shown below.

```
%% Bringhurst chapter style
\makechapterstyle{bringhurst}{%
  \renewcommand{\chapterheadstart}{}
  \renewcommand{\printchaptername}{}
  \renewcommand{\chapternamenum}{}
  \renewcommand{\printchapternum}{}
  \renewcommand{\afterchapternum}{}
  \renewcommand{\printchaptertitle}[1]{%
    \raggedright\Large\scshape\MakeLowercase{##1}}
  \renewcommand{\afterchaptertitle}{}
  \vskip\onelineskip \hrule\vskip\onelineskip
}
```

Most of the specification consists of nulling the majority of the normal LaTeX specification, and modifying just two elements.

The chapter title (via `\printchaptertitle`) is typeset raggedright using the `\Large` smallcaps fonts. The `\MakeLowercase` macro is used to ensure that the entire title is lowercase before typesetting it. Titles are input in mixed case.

After the title is typeset the `\afterchaptertitle` macro specifies that one line is skipped, a horizontal rule is drawn and then another line is skipped.

### 20.4.2 Lower level divisions

Section titles are in small caps, lowercase, in the same size as the text font. The titles are numbered, with both the chapter and section number.

The specification is:

```
\setseheadstyle{\raggedright\scshape\MakeLowercase}
\setbeforesecskip{-\onelineskip}
\setaftersecskip{\onelineskip}
```

The macro `\setseheadstyle` lowercases the title and typesets it small caps.

The default skips before and after titles are rubber lengths but this does not bode well if we are trying to line something up with a particular line of text — the presence of section titles may make slight vertical adjustments to the text lines because of the flexible spacing. So, we have to try and have fixed spacings. A single blank line is used before (`\setbeforesecskip`) and after (`\setaftersecskip`) the title text.

A subsection title, which is the lowest subdivision in the book, is in the italic form of the textfont and is typeset as a numbered non-indented paragraph. The code for this is below.

```

\setsubsecheadstyle{\sethangfrom{\noindent ##1}\raggedright\itshape}
\setbeforesubsecskip{-\onelineskip}
\setaftersubsecskip{\onelineskip}

```

As in the redefinition of the `\section` style, there are fixed spaces before and after the title text. The title is typeset (`\setsubsecheadstyle`) raggedright in a normal sized italic font. The macro `\sethangfrom` is used to to redefine the internal `\@hangfrom` macro so that the title and number are typeset as a block paragraph instead of the default hanging paragraph style. Note the use of the double `##` mark for denoting the position of the argument to `\@hangfrom`.

An  
example  
book  
design

## 20.5 specifying the pagestyle

The pagestyle is perhaps the most interesting aspect of the exercise. Instead of the chapter and section titles being put at the top of the pages they are put in the margin starting about seven lines below the top of the typeblock. The folios are put at the bottom of the page aligned with the outside of the typeblock.

As the folios are easy, we'll deal with those first.

```

%% Bringhurst page style
\makepagestyle{bringhurst}
\makeevenfoot{bringhurst}{\thepage}{}{}
\makeoddfoot{bringhurst}{}{}{\thepage}

```

Putting text at a fixed point on a page is typically done by first putting the text into a zero width picture (which as far as LaTeX is concerned takes up zero space) and then placing the picture at the required point on the page. This can be done by hanging it from the header.

We might as well treat the titles so that they will align with any marginal notes, which are `\marginparsep` (17pt) into the margin and `\marginparwidth` (51pt) wide. Earlier in the manual I defined two lengths called `\pwlai` and `\pwlaii` which are no longer used. I will use these as scratch lengths in performing some of the necessary calculations.

For the recto page headers the picture will be the *right* part of the header and for the verso pages the picture will be the *left* part of the header, all other parts being empty.

For the picture on the *right* the text must be 17pt to the right of the origin, and some distance below the origin. From some experiments, this distance turns out to be the `\headsep` plus the `\topskip` plus 7.3 lines, which is calculated as follows:

```

\setlength{\pwlai}{\headsep}
\addtolength{\pwlai}{\topskip}
\addtolength{\pwlai}{7.3\onelineskip}

```

There is a nifty internal LaTeX macro called `\strip@pt` which you probably haven't heard about, and I have only recently come across. What it does is strip the 'pt' from a following length, reducing it to a plain real number. Remembering that the default `\unitlength` is 1pt we can do the following, while making sure that the current `\unitlength` is 1pt:

```

\makeatletter
\newcommand{\bringpicr}[1]{%
  \setlength{\unitlength}{1pt}

```

```

\begin{picture}(0,0)
  \put(\strip@pt\marginparsep, -\strip@pt\pwayi){%
    \begin{minipage}[t]{\marginparwidth}
      \raggedright\itshape #1
    \end{minipage}}
\end{picture}
}
\makeatother

```

Specifying the pagestyle

The new macro `\bringpicr{<text>}` puts *<text>* into a minipage of width `\marginparwidth`, typeset `raggedright` in an italic font, and puts the top left of the minipage at the position `(\marginparsep, -\pwayi)` in a zero width picture.

We need a different picture for the *<left>* as the text needs to be typeset `raggedleft` with the right of the text 17pt from the left of the typeblock. I will use the length `\pwayii` to calculate the sum of `\marginparsep` and `\marginparwidth`. Hence:

```

\makeatletter
\setlength{\pwayii}{\marginparsep}
\addtolength{\pwayii}{\marginparwidth}
\newcommand{\bringpicl}[1]{%
  \setlength{\unitlength}{1pt}
  \begin{picture}(0,0)
    \put(-\strip@pt\pwayii, -\strip@pt\pwayi){%
      \begin{minipage}[t]{\marginparwidth}
        \raggedleft\itshape #1
      \end{minipage}}
    \end{picture}
  }
\makeatother

```

The new macro `\bringpicl{<text>}` puts *<text>* into a minipage of width `\marginparwidth`, typeset `raggedleft` in an italic font, and puts the top left of the minipage at the position `(-\marginparsep + \marginparwidth, -\pwayi)` in a zero width picture.

Now we can proceed with the remainder of the pagestyle specification. The next bit puts the chapter and section titles into the `\...mark` macros.

```

\makeatletter
\makepsmarks{bringhurst}{%
  \def\chaptermark##1{\markboth{##1}{##1}}
  \def\sectionmark##1{\markright{##1}}
}
\makeatother

```

Finally, specify the evenhead using `\bringpicl` with the section title as its argument, and the oddhead using `\bringpicr` with the chapter title as its argument.

```

\makeevenhead{bringhurst}{\bringpicl{\rightmark}}{}{}
\makeoddhead{bringhurst}{}{\bringpicr{\leftmark}}

```

## 20.6 captions and the toc

The captions to figures and tables are set in a small sans font and are neither named nor numbered, and there is no LoF or LoT. Setting the caption titles in the desired font is simple:

```
\captiontitlefont{\small\sffamily}
```

There are two options regarding table and figure captioning: either use the `\legend` command (which produces an anonymous unnumbered title) instead of the `\caption` command, or use the `\caption` command with a modified definition. Just in case the design might change at a later date to required numbered captions, it's probably best to use a modified version of `\caption`. In this case this is simple, just give the `\caption` command the same definition as the `\legend` command.

An  
example  
book  
design

```
\let\caption\legend
```

An aside: I initially used the default caption style (block paragraph) for the diagram on page 347, but this looked unbalanced so now it has the last line centered. As a float environment, like any other environment, forms a group, you can make local changes within the float. I actually did it like this:

```
\begin{figure}  
  \captiontitlefont{\small\sffamily}  
  \captionstyle{\centerlastline}  
  ...  
  \legend{...} \label{...}  
\end{figure}
```

For fine typesetting you may wish to change the style of particular captions. The default style for a single line caption works well, but for a caption with two or three lines either the centering or `centerlastline` style might look better. A very long caption is again probably best done in a block paragraph style.

Only chapter titles are included in the ToC. To specify this we use the `\settocdepth` command.

```
\settocdepth{chapter}
```

The ToC is typeset raggedright with no leaders and the page numbers coming immediately after the chapter title. This is specified via:

```
\renewcommand{\cftchapterfont}{\normalfont}  
\renewcommand{\cftchapterpagefont}{\normalfont}  
\renewcommand{\cftchapterpresnum}{\bfseries}  
\renewcommand{\cftchapterleader}{}  
\renewcommand{\cftchapterafterpnum}{\cftparfillskip}
```

## 20.7 preamble or package?

When making changes to the document style, or just defining a new macro or two, there is the question of where to put the changes — in the preamble of the particular document or into a separate package?

If the same changes/macros are likely to be used in more than one document then I suggest that they be put into a package. If just for the single document then the choice remains open.

Preamble  
or  
package?

I have presented the code in this chapter as though it would be put into the preamble, hence the use of `\makeatletter` and `\makeatother` to surround macros that include the `@` character (see §E.4). The code could just as easily be put into a package called, say, `bringhurst`. That is, by putting all the code, except for the `\makeatletter` and `\makeatother` commands, into a file called `bringhurst.sty`. It is a good idea also to end the code in the file with `\endinput`; LaTeX stops reading the file at that point and will ignore any possible garbage after `\endinput`.

You then use the `bringhurst` package just like any other by putting

```
\usepackage{bringhurst}
```

in your document's preamble.



# Twenty-one

---

## An example thesis design

---

Many universities in the United States have strict regulations about the typography of theses. The title and administrative pages are inherently specific to a particular university, but often the design for the body of the thesis clashes with normally accepted typographic practice. This chapter presents fairly typical guidelines for some US universities and code intended to meet them. Let's call the university in question the *Archibald Smythe University*, or ASU for short.

The requirements that are listed below are not from any single university but I have, over the years, seen each one of them. In reality there are likely to be many more nit-picking rules than I have shown.

It amuses me that I have never seen a printed set of requirements that followed the rules laid down therein.

Universities outside the US tend to be more relaxed with the result that theses from these establishments are very often more attractive (certainly less bulky) and more readable. The ASU requirements lead to an exceptionally dull and unattractive appearance.

### 21.1 Example US thesis typographic requirements

#### 21.1.1 General

**Paper size** The thesis shall be printed on 8.5 by 11 inch plain white paper.

**Single-sided** The thesis shall be printed single-sided; that is, one side of each sheet of paper will be blank.

**Margins** Every page of the document shall meet the requirements of a 1.5 inch margin on the left and a 1 inch margin at the top, right, and bottom of the page. Nothing shall appear in any margin.

**Fonts** The thesis may be set in 10, 11 or 12pt Arial, Century, Garamond, Lucida Bright (10pt only), Tahoma, Times, or Verdana. The same font and size shall be used throughout the thesis.

There shall be no bold type.

Italic type (or underlining) is limited to the names of species, genera, book titles, musical compositions, or foreign words.

**Line Spacing** All text shall be double-spaced, except material in tables and the optional biographical sketch (which must be single-spaced). You shall single-space individual footnotes and endnotes with a double space between each entry.

## 21. An example thesis design

---

### 21.1.2 Preliminary matter

The preliminary matter consists of the following pages in this order:

1. Title page
2. Approval page
3. Abstract
4. Dedication (optional)
5. Acknowledgements (optional)
6. Table of contents
7. List of tables (if there are any tables)
8. List of figures (if there are any figures)
9. Other lists (e.g., nomenclature, definitions, glossary of terms, etc.)
10. Preface (optional but must be less than ten pages)
11. Under special circumstances further sections may be allowed

The heading for each preliminary page (except the Dedication which shall not have a heading) is centered between the margins, in all capital letters, double-spaced and begin on the first line below the top margin.

The title and approval page are counted as pages one and two, but no page numbers shall appear on them. All subsequent preliminary pages are paginated with lowercase Roman numerals. Starting with 'iii' on the abstract page, place all page numbers at the bottom of the page, centered between the left and right margins and upon the 1 inch bottom margin. Continue numbering consecutively on the subsequent pages up to the first page of the main text.

#### Title page

1. All text shall be centered between the side margins.
2. Set the title in all capital letters, double-spaced, starting at the top of the page (but below the top margin).
3. On a new line (double-spaced) type 'by' in lowercase letters.
4. On a new line (double-spaced) type your full legal name.
5. At the center of the page type the appropriate description for your degree with the exact wording and line breaks as shown, and single-spaced:

A \_\_\_\_\_ Presented in Partial Fulfillment  
of the Requirements for the Degree

---

Replace the blanks with the appropriate wording: Thesis and Master of Arts or Dissertation and Doctor of Philosophy.

6. At the bottom of the page type 'ARCHIBALD SMYTHE UNIVERSITY' in all capitals.
7. Type the month and year of the date you will graduate, with the month in title case and no comma between the month and year.
8. The space between your name and the degree description should equal the space between the degree description and the name of the University.

Approval page

1. All text shall be centered between the side margins.
2. Set the title in all capital letters, double-spaced, starting at the top of the page (but below the top margin).
3. On a new line (double-spaced) type 'by' in lowercase letters.
4. On a new line (double-spaced) type your full legal name in title-cased letters.
5. Add two double-spaced lines (four single-spaced lines) and type 'has been aproved' in lowercase
6. Add a double-space.
7. Type the month and year of your oral defense, with the month in title case and no comma between the month and year.
8. At about the center of the page type 'Graduate Supervisory Committee:'
9. A blank (double-spaced) line
10. Type the members' names, without titles, one per line, single-spaced, as follows:
  - a) If you have one chair, type: the chair's name, comma, space 'Chair'
  - b) If two chairs, type: comma, space, 'Co-Chair' after the first two names
  - c) Follow with the other members' names.
11. At the bottom of the page, type 'ACCEPTED BY THE GRADUATE COLLEGE'
12. The space between the date and 'Graduate Supervisory Committe' lines should equal the space between the last member's name and the 'ACCEPTED···' line.

Abstract page

Center the title 'ABSTRACT' at the top of the page. Number the page at the bottom, centered with the Roman numeral 'iii'. If there is a second page, number it similarly with 'iv'.

Dedication and Acknowledgements (optional)

- The dedication and acknowledgements together must not exceed three pages.
- The dedication page is not titled and the text should be centered both vertically and horizontally.
- The heading for the acknowledgements page is 'ACKNOWLEDGEMENTS', centered and at the top of the page.
- Continue the page numbering in lowercase Roman, at the bottom and centered.

21.1.3 Table of contents

1. Type 'TABLE OF CONTENTS' centered at the top of the page.
2. On the next line type the word 'Page' right justified
3. Begin listing any preliminary pages that follow the table of contents (e.g., lists) in ALL CAPS. The title is left justified, the page number is right justified and a dotted line fills the gap between.
4. Double space between entries.

## 21. An example thesis design

---

5. Chapter headings and subheadings to three levels shall be listed, with a lower level being indented with respect to a higher level.
6. The wording of headings shall correspond exactly to those in the main body.
7. The page number is centered at the bottom of the page.
8. If the listing continues for more than one page, subsequent pages shall be headed with one line consisting of 'Chapter' left justified and 'Page' right justified.

### 21.1.4 Lists

For a given kind of list (often figures or tables) called, say, 'things':

1. Type 'LIST OF THINGS' centered at the top of the page.
2. On the next line type 'Thing' left justified and 'Page' right justified.
3. List, double-spaced, the caption or title of the thing left justified and the page number right justified, with a dotted line between them.
4. Use Roman lowercase to number the page(s) at the bottom, centered.
5. If the listing continues for more than one page, subsequent pages shall be headed with one line consisting of 'Thing' left justified and 'Page' right justified.

### 21.1.5 Main text

Nothing shall appear in the margins.

The top line on a page is the line immediately below the top margin. The top text line is the one following that (i.e. the second line below the margin).

#### Page numbering

All pages are counted, but the first page of each chapter is not numbered (paginated); other pages are paginated. The first page of the main text is counted as number 1. Numbered pages have the number right justified on the top line.

#### Headings

Chapter headings shall be centered. On the top line type 'Chapter' followed by the number. On the top text line type the heading in all uppercase. Type the text on the subsequent lines.

Subheadings, consisting of the number and title (not in all caps), shall be centered, with one blank line before and after.

#### Captions

Table captions, which are left justified, shall be put before the table itself. The first line consists of 'Table' followed by the number; the caption wording commences on the next line.

Captions for figures are similar, except that they shall be put below the figure and 'Table' replaced by 'Figure'.

Tables and figures shall be single-spaced.

#### Notes

Notes may be placed at the bottom of the page (i.e., footnotes), or grouped in the backmatter (i.e., endnotes) before the reference list.

All notes shall be introduced by a superior number in the text, with the same number used for the text of the note. Notes should be single spaced, with double spacing between them.

### 21.1.6 Backmatter

The backmatter consists of the following pages, in order (all of which are optional).

1. Notes (if you are using endnotes and grouping them at the end)
2. References (AKA ‘Bibliography’ or ‘Works Cited’)
3. Appendices
4. Biographical sketch (optional)

Pagination continues from the main text; but as with chapters, the first pages of any notes, references, or appendices are not numbered. A biographical sketch, if it is included, is the last page and is neither counted nor paginated.

Headings for the backmatter sections shall be in uppercase, centered, and on the top line.

#### Notes

The section for endnotes should begin on a new, unnumbered page. Subsequent pages should be numbered.

Use ‘NOTES’, centered and at the top, as the heading for the notes section.

#### References

Use the reference heading appropriate for your discipline, in uppercase, centered and at the top of the page. Individual references should be single-spaced with the second and later lines of a multiline reference indented with respect to the first line. There should be double-spacing between references.

#### Appendices

The heading for an appendix consists of the word ‘APPENDIX’ followed by the uppercase letter signifying its position in the sequence of appendices (e.g., A or B or C or ...). This shall be centered on the top line. The title of the appendix, in uppercase, is centered on the following line. This page is not numbered. Subsequent pages are numbered and the text commences on the top text line of the following page.

#### Biography

The title for the optional biographical page is ‘BIOGRAPHICAL SKETCH’, in the usual position. The text shall not exceed the one page.

## 21.2 Code

Given the above set of requirements we can produce code that, hopefully, will generate documents that will not fall foul of the inspectorate. For simplicity I’ll do the code in the form of a package called `pwasu.sty`. I will be using some LaTeX kernel commands that you won’t normally come across. Some of the macros include @ as part of their name but this is safe as they are in a package, otherwise they would have to be within a `\makeatletter ... \makeatother` grouping (see §E.4).

## 21. An example thesis design

---

### 21.2.1 Initialisation

First, identify the package and its basic requirements.

```
%%% file pwasu.sty
\NeedsTeXFormat{LaTeX2e}
\ProvidesPackage{pwasu}[2009/04/18 v0.3 ASU thesis]
```

This is only going to work with memoir, so check if the class is being used, and if not then give an error message and stop reading the package code.

```
% Only works with the memoir class!!!!!!!!!!!!!!
\@ifclassloaded{memoir}{\let\endpwasu\relax}{\let\endpwasu\endinput
\PackageError{pwasu}{The pwasu package only works with the memoir class}%
{\@ehd}}
\endpwasu
```

ASU is very strict about only using a single font in a single size. It is probable that at least one reference will be made to a location on the web. With LaTeX such references are set using the url package, which defaults to using a monospaced font for urls. For ASU we have to make sure that they will be made using the body font (and the same applies to any verbatim text, such as computer code listings, for which we can use the `\setverbatimfont` command).

```
\usepackage{url}
\urlstyle{same}
\setverbatimfont{\normalfont\rmfamily}% make verbatims use the body font
```

Ensuring that footnotes use the body font is a simple matter of redefining `\foottextfont`.

```
\renewcommand*{\foottextfont}{\normalfont\normalsize}
```

Noticing that the requirements can involve switching between double and single spacing, some of which will be done internally in the package, give the user a chance to change the default double spacing. The argument to `\setasuspending` can be either `\OnehalfSpacing` or `\DoubleSpacing`. The result sets `\AsuSpacing` to be one of these commands.

```
% To enable spacing to be changed if necessary by the user
\newcommand*{\setasuspending}[1]{%
\let\AsuSpacing#1
\AsuSpacing}
\setasuspending{\DoubleSpacing}
```

### 21.2.2 Page layout

As this is for an American University on letterpaper sized paper we'll assume letterpaper stock, so no cropping will be needed. Setting the side margins is easy:

```
% left, right margins and textwidth
\setlrmarginsandblock{1.5in}{1in}{*}
```

Setting the top and bottom margins requires more thought. LaTeX provides the header and footer areas for page numbers. However, the requirements state that page numbers must be either on the top or bottom line (of the textblock) with the text extending down to the bottom line or up to the top line (of the textblock). I'll organise it according to the layout for the main body. Here, the top of the header is 1 inch below the top of the paper and the bottom of the text is 1 inch above the bottom of the paper (with the footer below that).

```
%% for main body, bottom of text at 1in, footer below
%% top of header at 1in, first text line double spaced
%% below base of header
\newlength{\linespace}
\setlength{\linespace}{\baselineskip} % current equivalent of \onelineskip
\setlength{\headheight}{\onelineskip}
\setlength{\headsep}{\linespace}
\addtolength{\headsep}{-\topskip}
\setlength{\uppermargin}{1in}
\addtolength{\uppermargin}{\headheight}
\addtolength{\uppermargin}{\headsep}
```

And for the bottom margin:

```
%% and for the bottom
\setlength{\lowermargin}{1in}
\setlength{\textheight}{\paperheight}
\addtolength{\textheight}{-\uppermargin}
\addtolength{\textheight}{-\lowermargin}
```

And finally for footnotes:

```
%% footnote settings
\setlength{\footskip}{\onelineskip}
\setlength{\footnotesep}{\onelineskip}
```

The layout on the preliminary pages is different, so I'll need some handy lengths in order to change the layout as appropriate. The user can also make adjustments with these if necessary.

```
%% the fiddle lengths (..ta.. for title/approval page, others for prelims)
\newlength{\toptafiddle} \setlength{\toptafiddle}{2\linespace}
\newlength{\bottafiddle} \setlength{\bottafiddle}{0pt}
\newlength{\topfiddle}   \setlength{\topfiddle}{\toptafiddle}
\newlength{\botfiddle}   \setlength{\botfiddle}{\onelineskip}
```

That's it for the general layout, except for increasing the paragraph indentation as the line spacing is larger than normal.

```
\setlength{\parindent}{2em}
\checkandfixthelayout[nearest]
```

As the layout is set up, the bottom of the text is one inch above the bottom of the paper. This is fine for the main text and the Title and Approval pages but the text height must be decreased, temporarily, for the other pages in the prelims. Changes to the page layout may be accomplished by the following sneaky procedure. First change from one- to two-column (or vice-versa), which starts a new page, make the changes, then change from two- to one-column (or vice-versa) which starts the same new page again but with the layout changes implemented. The following code implements this for the `\textheight` in a one column document, which is what we are dealing with here.

```
\newcommand*{\addtotextheight}[1]{%
  \twocolumn
  \addtolength{\textheight}{#1}%
  \onecolumn}
```

### 21.2.3 Page styles

Next I'll tackle the page styles. The style for the main body is simple, with the page number top right, and the *empty* style is the one for chapter pages. The page number for the preliminary pages is centered at the bottom, and the *plain* page style provides that. For the main text define the *asu* page style.

```
%%% pagestyles
%% the main text
\makepagestyle{asu}
\makeevenhead{asu}{\thepage}{}{}
\makeoddhead{asu}{}{}{\thepage}
```

Any 'continuation' pages for the ToC, etc., have a header that consists of a name at the left and the word 'Page' at the right. We need a header for each kind of listing.

```
%% for continuation pages of the ToC, LoF, LoT
\makepagestyle{toc}
\makeevenfoot{toc}{}{\thepage}{}
\makeoddfoot{toc}{}{\thepage}{}
\makeevenhead{toc}{Chapter}{}{Page}
\makeoddhead{toc}{Chapter}{}{Page}
\makepagestyle{lof}
\makeevenfoot{lof}{}{\thepage}{}
\makeoddfoot{lof}{}{\thepage}{}
\makeevenhead{lof}{Figure}{}{Page}
\makeoddhead{lof}{Figure}{}{Page}
\makepagestyle{lot}
\makeevenfoot{lot}{}{\thepage}{}
\makeoddfoot{lot}{}{\thepage}{}
\makeevenhead{lot}{Table}{}{Page}
\makeoddhead{lot}{Table}{}{Page}
```

### 21.2.4 The ToC and friends

While we're at it, do the code for the LoF and LoT, which is simpler than that needed for the ToC. We have to specify our new pagestyles which can be done by extending the `\listof...` macros. The `\addtodef` macro makes this rather easy.



```

%%% The LoF
\renewcommand{\listfigurename}{LIST OF FIGURES}
\addtocontents{\listoffigures}{\clearpage\pagestyle{lof}}{}

```

For the titles, these have to be moved up into the header area, so that they come just below the top margin, and set the initial pagestyle as *plain*. After the title we can insert the relevant column headers.

```

\renewcommand*{\lofheadstart}{\vspace*{-\topfiddle}}
\renewcommand*{\afterloftitle}{\thispagestyle{plain}%
\par\nobreak {\normalfont Figure \hfill Page}\par\nobreak}

```

And the same for the LoT.

```

%%% The LoT
\renewcommand{\listtablename}{LIST OF TABLES}
\addtocontents{\listoftables}{\clearpage\pagestyle{lot}}{}
\renewcommand*{\lotheadstart}{\vspace*{-\topfiddle}}
\renewcommand*{\afterlottitle}{\thispagestyle{plain}%
\par\nobreak {\normalfont Table \hfill Page}\par\nobreak}

```

The ToC is similar but we also have to deal with the entries themselves.

```

%%% Do the ToC
\renewcommand{\contentsname}{TABLE OF CONTENTS}
\addtocontents{\tableofcontents}{\clearpage\pagestyle{toc}}{}
\renewcommand*{\tocheadstart}{\vspace*{-\topfiddle}}
\renewcommand*{\aftertoctitle}{\thispagestyle{plain}%
\par\nobreak \mbox{}\hfill{\normalfont Page}\par\nobreak}

```

And the changes to the entries, all of which are set in the normal font and with dotted leaders, with no extra space between any of the entries.

```

\renewcommand*{\cftchapterfont}{\normalfont}
\renewcommand*{\cftchapterpagefont}{\normalfont}
\renewcommand*{\cftchapterleader}{%
\cftchapterfont\cftdotfill{\cftchapterdotsep}}
\renewcommand*{\cftchapterdotsep}{\cftdotsep}

```

Unlike the typical LaTeX ToC there must be no additional space before chapter entries; also, there should be no additional space inserted by the chapters in the LoF or LoT which just requires a simple redefinition of `\insertchapterspace..`

```

%%% no extra space before the entry, or in the LoF/LoT
\setlength{\cftbeforechapterskip}{0pt plus 0pt}
\renewcommand*{\insertchapterspace}{}

```

### 21.2.5 Chapter styling

Moving on to styling the chapter titles, the first line must be moved up into the header area, and other spacings set to give blank lines. The fonts are just the regular body font. Call the chapterstyle *asu* and make sure that the *empty* pagestyle is used for it.

```
% chapter style
\makechapterstyle{asu}{%
  \setlength{\beforechapskip}{-\topfiddle}
  \setlength{\midchapskip}{1.0\onelineskip}
  \setlength{\afterchapskip}{1.0\onelineskip}
  \renewcommand*{\chapnamefont}{\normalfont}
  \renewcommand*{\chapnumfont}{\chapnamefont}
  \renewcommand*{\printchapternum}{\centering\chapnumfont \thechapter}
  \renewcommand*{\chaptitelfont}{\normalfont\centering}
  \renewcommand*{\printchapternonum}{\}
\aliaspagestyle{chapter}{empty}
```

The chapterstyle for any appendices is slightly different as the title, all in uppercase, is on one page by itself and the text starts on the following page. Call this the *asuappendix* chapterstyle.

```
% chapter style for appendices, text comes on following page
\makechapterstyle{asuappendix}{%
  \setlength{\beforechapskip}{-\topfiddle}
  \setlength{\midchapskip}{1.0\onelineskip}
  \setlength{\afterchapskip}{1.0\onelineskip}
  \renewcommand*{\chapnamefont}{\normalfont}
  \renewcommand*{\chapnumfont}{\chapnamefont}
  \renewcommand*{\printchaptername}{%
    \chapnamefont\MakeUppercase{\@chapapp}}
  \renewcommand*{\printchapternum}{\centering\chapnumfont \thechapter}
  \renewcommand*{\chaptitelfont}{\normalfont\centering}
  \renewcommand*{\printchapternonum}{\}
  \renewcommand*{\afterchaptertitle}{\clearpage}}
```

We have to extend the `\appendix` command to use the new chapter style, and also to ensure that double spacing will be used (certain elements that come before the appendices are single spaced).

```
%% different chapter style for appendices, (and double spaced)
\addtodef{\appendix}{\chapterstyle{asuappendix}\AsuSpacing}
```

### 21.2.6 Section, etc., styling

Set up the section headings so that they are centered, use the normal font, and have a blank line before and after.

```
%% (subsub)section styles
\setseheadstyle{\centering\normalfont}
\setbeforesecskip{-1\onelineskip plus -1ex minus -.2ex}
\setaftersecskip{1\onelineskip plus .2ex}
\setsubseheadstyle{\centering\normalfont}
\setbeforesubsecskip{-1\onelineskip plus -1ex minus -.2ex}
\setaftersubsecskip{1\onelineskip plus .2ex}
```

### 21.2.7 Captions

The captions are set flushleft and raggedright with the name and number on one line and the title on the following line. Fortunately floats are automatically set single spaced, which is what the requirements specify.

```
%% Captions
\captiontitlefont{\normalfont}% title font
\precaption{\raggedright}% for Caption N
\captiondelim{\newline}% newline
\captionstyle{\raggedright}% for title
\setlength{\belowcaptionskip}{\onelineskip}
```

### 21.2.8 The bibliography

The requirements imply that the title is likely to be ‘REFERENCES’. The bibliography is set single spaced but with a blank line between the entries.

```
%% for REFERENCE section
\renewcommand*{\bibname}{REFERENCES}
\setlength{\bibitemsep}{\onelineskip}
```

The second and later lines of any entry are to be indented. We use the `\biblistextra` hook for setting this up.

```
\renewcommand*{\biblistextra}{%
  \setlength{\itemsep}{\bibitemsep}
  \setlength{\labelwidth}{0pt}
  \setlength{\leftmargin}{3em}% hanging indent
  \setlength{\itemindent}{-\leftmargin}}
```

The title for the bibliography is set via the `\bibsection` macro. The heading is unnumbered but is added to the ToC. To get the spacing right the heading, set as a `\chapter*`, which must be called double spaced, and then single spacing is called for after that.

```
\renewcommand*{\bibsection}{%
  \AsuSpacing
  \chapter*{\bibname}\addcontentsline{toc}{chapter}{\bibname}
  \SingleSpacing}
```

### 21.2.9 End notes

The heading for the Notes section is similar to the bibliography heading.

```
%% endnotes
\renewcommand*{\notesname}{NOTES}
\renewcommand*{\notedivision}{%
  \AsuSpacing
  \chapter*{\notesname}
  \addcontentsline{toc}{chapter}{\notesname}
  \SingleSpacing}
```

The rest of the code for endnotes ensures that they are numbered continuously throughout the text, the number is set as a superscript, that there is a blank line between each entry, and that there are no subdivisions within the listing.

```
\continuousnotenums
\renewcommand*{\notenuminnotes}[1]{\textsuperscript{#1}\space}
\renewcommand{\noteinnotes}[1]{#1\\}
\renewcommand*{\pagenotesubhead}[3]{}% no subheads
```

#### 21.2.10 Preliminary headings

There can be any number of sections in the prelims. The titles for these are located in the LaTeX header area. Here's a general macro for setting these.

```
%%% general macro for Abstract, etc., headings
\newcommand*{\pretocitle}[1]{\clearpage\centering
\hspace*{-\topfiddle}#1\par}}
%%% Start the ACKNOWLEDGEMENTS
\newcommand{\asuacknowledgements}{\pretocitle{ACKNOWLEDGEMENTS}}
```

The Abstract is the first section after the title and approval pages. At this point we must reduce the textheight in order to raise the footer area.

```
%%% Start the ABSTRACT
\newcommand{\asuabstract}{%
\addtotextheight{-\botfiddle}%
\pretocitle{ABSTRACT}}
```

While we are at this, the textheight must be reset to its default value just before the first chapter in the main matter. A simple addition to \mainmatter handles this.

```
\addtodef{\mainmatter}{\addtotextheight{\botfiddle}{}}
```

The dedication, if any, does not have a heading and the text is centered horizontally and vertically.

```
%% make it easy to center any dedication
\newcommand{\asudedication}[1]{%
{\clearpage\mbox{}}\vfill\centering #1 \par\vfill\clearpage}}
```

There may be sections in the prelims that come after the ToC, and the titles of these are added to the ToC.

```
%% for any headings after the tocleft and before the main body
\newcommand{\prelimtitle}[1]{%
\pretocitle{#1}\addcontentsline{toc}{chapter}{#1}}
```

#### 21.2.11 Components of the title and approval pages

There are several items that are set on the title and approval pages. In order to separate the information from the particular layout, I've defined a macro for defining each item.

```

%% for the title page and approval page.
% your title
\newcommand{\settitle}[1]{\def\asutitle{#1}}
% you
\newcommand{\setauthor}[1]{\def\asuaauthor{#1}}
% document type (e.g., thesis)
\newcommand{\setdoctype}[1]{\def\asudoctype{#1}}
% possible degree
\newcommand{\masters}{\def\asudegree{Master of Arts}}
\newcommand{\doctors}{\def\asudegree{Doctor of Philosophy}}
% defence date
\newcommand{\setdefdate}[1]{\def\asudefdate{#1}}
% graduation date
\newcommand{\setgraddate}[1]{\def\asugraddate{#1}}
% committee chair
\newcommand{\setchair}[1]{\def\asuchair{#1, Chair}}
% committee co-chairs
\newcommand{\setchairs}[2]{%
  \def\asuchair{#1, Co-chair \\\ #2, Co-chair}}
% other members (separated by \s)
\newcommand{\setmembers}[1]{\def\asumembers{#1\par}}

```

Just for fun, create some default settings for these. The successful user will have changed them all!

```

%% Use them like this, and if you don't change them you will
%% get unacceptable title and/or approval pages
\settitle{AN INCREDIBLE PIECE OF WORK OVER WHICH I HAVE STRUGGLED
DAY AND NIGHT FOR FAR TOO LONG AND NOW IT IS OVER}
\setauthor{A. N. Author}
\setdoctype{Polemic}
\masters % going for a Masters degree
%% \doctors % going for a PhD
\setdefdate{April 2018}
\setgraddate{May 2021}
% \setchair{A. Jones} % this one
\setchairs{A. Jones}{B. Doe} % or this one
\setmembers{C. Smith \\\ D. Somebody \\\ Some One Else \\\ Yet Another}

```

### 21.2.12 The title and approval pages

An example of a title page is shown in Figure 21.1 and an example of the corresponding approval page is in Figure 21.2.

Now we can set up the layouts for the title and approval pages. The information typeset on these pages is obtained from the previous set of commands. Note that the last line on each of these pages has to be set upon the bottom margin. The ASU inspectorate is likely to be very keen on this, perhaps using a ruler to measure the actual distance from the bottom of the page to ensure that it is the magic 1 inch. I have included an `\enlargethispage` by the

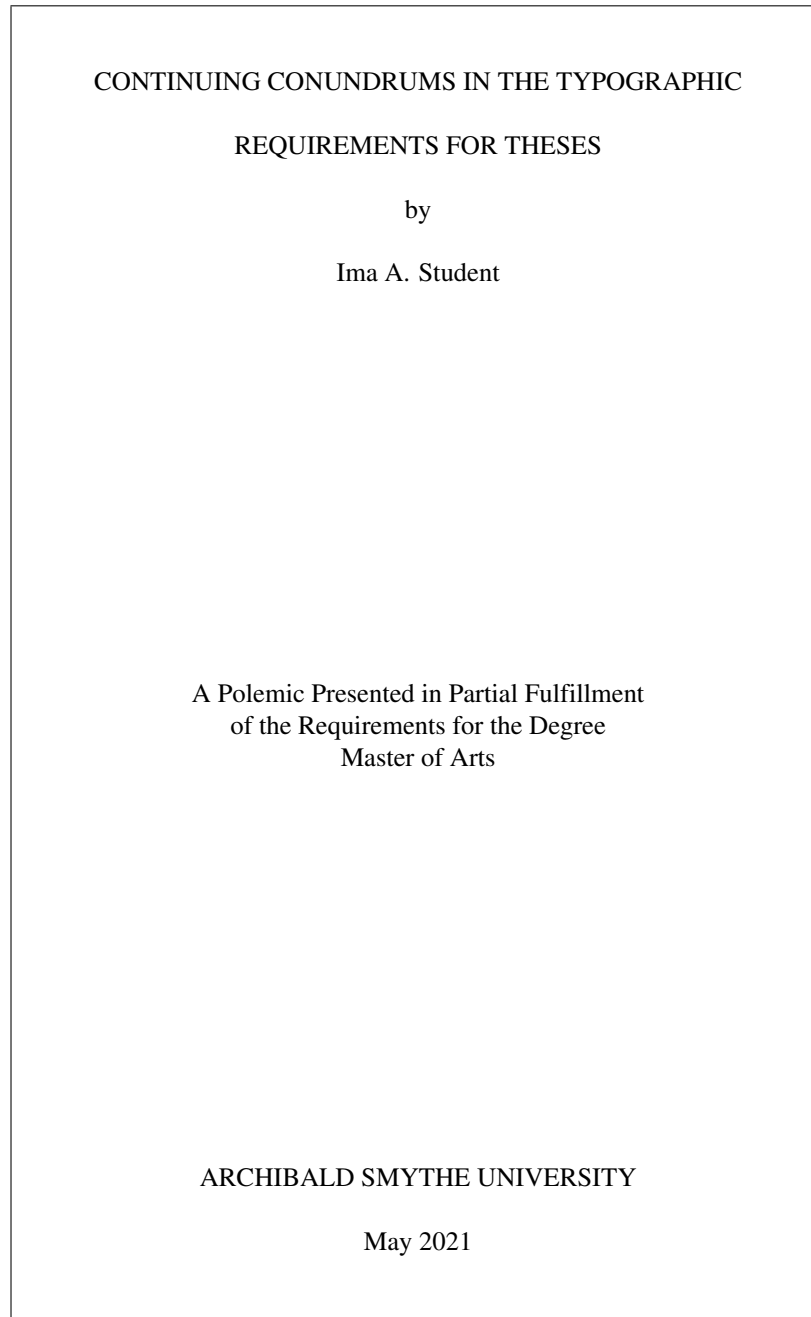


Figure 21.1: Example Archibald Smythe University title page

CONTINUING CONUNDRUMS IN THE TYPOGRAPHIC  
REQUIREMENTS FOR THESES

by

Ima A. Student

has been approved

April 2018

Graduate Supervisory Committee:

S. Holmes, Co-Chair  
J. Moriarty, Co-Chair  
G. E. Challenger  
A. Quartermain  
J. H. Watson

ACCEPTED BY THE GRADUATE COLLEGE

Figure 21.2: Example Archibald Smythe University approval page

amount `\bottafiddle` so the user can make any fine adjustment that might be requested. Similarly, the length `\toptafiddle` may be altered to fine tune the position of the title. Hopefully, neither of these tweaks will be needed, but if so, then use `\addtolength` instead of `\setlength` to make an adjustment.

```
%%% typesets the TITLE page
\newcommand{\thetitlepage}{%
  \clearpage
  \thispagestyle{empty}
  \centering
  \vspace*{-\toptafiddle}
  \asutitle \\\ by \\\ \asuaauthor
  \vfill

  {\SingleSpace
  A \asuctotype\ Presented in Partial Fulfillment \\\
  of the Requirements for the Degree \\\
  \asudegree\par}

  \vfill
  ARCHIBALD SMYTHE UNIVERSITY \\\
  \asugraddate
  \par
  \enlargethispage{\bottafiddle}
  \clearpage}}
```

And similiary for the approval page.

```
%%% typesets the APPROVAL page
\newcommand{\approvalpage}{%
  \thispagestyle{empty}
  \centering
  \vspace*{-\toptafiddle}
  \asutitle \\\ by \\\ \asuaauthor \\\[3\onelineskip]
  has been approved \\\
  \asudefdate

  \vfill

  Graduate Supervisory Committee: \\\[-0.5\onelineskip]
  {\SingleSpacing
  \asuchair \\\
  \asumembers}

  \vfill
  ACCEPTED BY THE GRADUATE COLLEGE
  \par
  \enlargethispage{\bottafiddle}}
```



```
\clearpage}}
```

### 21.2.13 The last bits

The biographical sketch has a title (which is not added to the ToC), the text is single spaced and there is no page number. It is easiest to provide this as an environment.

```
%%% put your biographical text in this environment
%% \begin{biosketch} I'm a person who has accomplished .... \end{biosketch}
\newenvironment{biosketch}{%
  \pretocitle{BIOGRAPHICAL SKETCH}\thispagestyle{empty}\SingleSpacing}%
{}
```

Make sure that the requisite initial page style and appropriate chapter style is used.

```
%% use the asu chapterstyle and plain pagestyle
\chapterstyle{asu}
\pagestyle{plain}

%%%%%%%%%%%% end of *.sty file
\endinput
%%%%%%%%%%%%
```

## 21.3 Usage

This is a sketch of how an ASU thesis could be written.

With the wide textblock, 12pt is too small for reading ease, so best not to use 11pt or 10pt.

Times Roman comes with LaTeX, but you are effectively writing a book, not a newspaper column. If you have Garamond or Lucida Bright then seriously consider using one or other of them.<sup>1</sup> Lucida Bright is probably more appropriate if your thesis includes mathematics while Garamond is perhaps more in keeping if your thesis topic falls into the humanities area. If the requirements did not limit your choices then there are other fonts that might better express your work. In any case I suggest that you do not use a sans font (e.g., Arial, Tahoma or Verdana from the ASU list).

```
\documentclass[oneside,12pt]{memoir}
\usepackage{mathptmx} % Times New Roman
\usepackage{pwasu} % the package
```

The general sequence in your document, after you have set the data for the TITLE and APPROVAL pages and any other specifics and packages in the preamble, is:

```
% if you can get away without the default \DoubleSpacing, then
%\setasuspacing{\OnehalfSpacing}
%% if you use endnotes, then
```

<sup>1</sup> Garamond is a commercial font and, for example, is available along with many other fonts from FontSite (<http://www.fontsite.com>) with LaTeX support from <http://contrapunctus.net/fs500tex>. Lucida Bright, another commercial font, is available from TUG at <http://tug.org/store/lucida> and is supported by several LaTeX packages.

```
\makepagenote
\begin{document}
\maxtocdepth{subsection} % put 3 levels into the ToC
\frontmatter
\thetitlepage
\approvalpage
\asuabstract
  abstract text
%% if you have any acknowledgements, then
  \asuacknowledgements
    acknowledgements text
% \asudedication{ text } % if you want a dedication
\tableofcontents
% \listoffigures % if you have any figures
% \listoftables % if you have any tables
%%% if you have more prelim sections, then
%%% \clearpage
%%% \pagestyle{plain}
%%% \prelimtitle{title} text % for each section before main text
\mainmatter
\pagestyle{asu}
\chapter{...} % start of your main text
... report on lots of incredible work, now you are on your
own until...

%% if endnotes then
  \printpagenotes
%% if a bibliography then
  \begin{thebibliography}...\end{thebibliography}
%% if appendices, then
  \appendix
  \chapter{...}
  ...
%% if Biographical sketch then
  \begin{biosketch} ... \end{biosketch}
\end{document}
```

If you actually try any of the above code and it does not work, then I may have made a typo or two, or maybe you have, or perhaps we both have. In any event, the code is more of a sketch of what might be needed than a prescription of how it must be done.

## 21.4 Comments

Having read through the requirements you will have realised that whatever committees set them had not advanced beyond the 19th century technology of the typewriter.<sup>2</sup> When I wrote my thesis some forty years ago it was, of necessity, single sided so that carbon copies could be made by the typist (who would have objected strongly to having to type the hundred and fifty or so pages six times). I must admit, though, that the sixth copy was almost too faint and blurry to be read comfortably even though the typist had used thin paper and kept replacing the carbon paper. In this day of double sided printers and double sided copiers I see no reason except inertia to keep a single sided requirement. Many students, and faculty members, have beaten their heads against the diehards and very rarely have they managed to prevail.

In contrast to the ASU style I have a copy of a doctoral thesis [Sne04] for Vrije Universiteit, Amsterdam. This is a professionally printed 100 page, double sided, glossy paperbound book with an attractive coloured photograph of a sunset on the front and rear covers. The page size is 40.5pc by 57pc with spine and top margins of 5pc and foreedge and bottom margins of 7pc.<sup>3</sup> The textblock, then, is 28.5 by 45pc set with 45 lines of a 10pt Lucida Bright seriffed font. Chapter and section heads are in a sans font, with the chapter heads larger than the section heads. Caption names are a bold sans with the caption text in an italic. Headers on the verso pages are the chapter title with the section title as the recto header. The page numbers are in the footers by the foreedge margin. Altogether, a much more appealing production than Archibald Smythe University will permit.

---

2 Remington sold their first commercial typewriter in 1873 which even then had the QWERTY keyboard layout. By 1910 typewriter designs were pretty well standardised.

3 Professional printers use points and picas for their measurements.



## Appendices



# A

---

## Packages and macros

---

The memoir class does not provide for everything that you have seen in the manual. I have used some packages that you are very likely to have in your LaTeX distribution, and have supplemented these with some additional macros, some of which I will show you.

### A.1 Packages

The packages that I have used that you are likely to have, and if you do not have them please consider getting them, are:

- `etex` lets you take advantage of eTeX's extended support for counters and such.  
Note that from 2015 and onwards, the allocation of extra registers have now been build into the LaTeX kernel. Thus in most cases the `etex` package is no longer necessary. There are how ever extra very special features left in `etex` that *some* users may need. In that case please remember to load `etex` by placing `\RequirePackage{etex}` *before* `\documentclass`!
- `url` [Ars99] is for typesetting URL's without worrying about special characters or line breaking.
- `fixltx2e` [MC00] eliminates some infelicities of the original LaTeX kernel. In particular it maintains the order of floats on a twocolumn page and ensures the correct marking on a twocolumn page.  
Note that as of 2015, the functionality of this package has been merged into the L<sup>A</sup>T<sub>E</sub>X kernel. Loading this package does nothing.
- `alltt` [Bra97] is a basic package which provides a verbatim-like environment but `\`, `{`, and `}` have their usual meanings (i.e., LaTeX commands are not disabled).
- `graphicx` [CR99] is a required package for performing various kinds of graphical functions.
- `color` [Car05] is a required package for using color, or `xcolor` [Ker07] is an enhanced version of color.
- `latexsym` gives access to some extra symbols.
- `amsmath` for when you are doing anything except the simplest kind of maths typesetting.
- `fontenc` for using fonts with anything other than the original OT1 encoding (i.e., for practically any font).
- `pifont` for typesetting Pifonts (i.e., Symbol and Zapf Dingbats)

Apart from the packages that are supplied as part of the memoir distribution, the packages that I used and you most likely do not have are:

- layouts [Wil03a]. I used it for all the layout diagrams. For example, Figure 6.2 and Figure 6.3 were drawn simply by:

```
\begin{figure}
\centering
\setlayoutscale{1}
\drawparameterstrue
\drawheading{}
\caption{Displayed sectional headings} \label{fig:displaysehead}
\end{figure}

\begin{figure}
\centering
\setlayoutscale{1}
\drawparameterstrue
\runinheadtrue
\drawheading{}
\caption{Run-in sectional headings} \label{fig:runsehead}
\end{figure}
```

The package also lets you try experimenting with different layout parameters and draw diagrams showing what the results would be in a document.

The version of layouts used for this manual is v2.4 dated 2001/04/30. Earlier versions will fail when attempting to draw some figures ( e.g., to draw Figure 2.3).

- fonttable [Wil09a]. I used this for the font tables (e.g., Table 3.2). You must have at least version 1.3 dated April 2009 for processing the manual (earlier versions are likely to produce errors in the number formatting area with minor, but odd looking, effect on the printed result).

## A.2 Macros

Originally the preamble of the manual contained many macro definitions, probably more than most documents would because:

- I am having to typeset many LaTeX commands, which require some sort of special processing;
- I have tried to minimize the number of external packages needed to LaTeX this manual satisfactorily, and so have copied various macros from elsewhere;
- I wanted to do some automatic indexing;
- I wanted to set off the syntax specifications and the code examples from the main text.

I have since put the majority of these into a package file called `memsty.sty`. To get the whole glory you will have to read the preamble, and the `memsty` package file but I show a few of the macros below as they may be of more general interest.

`\Ppstyle{<pagestyle>} \pstyle{<pagestyle>}`



The command `\Ppstyle` prints its argument in the font used to indicate pagestyles and the command `\pstyle` prints its pagestyle argument and also makes a pagestyle entry in the index. Its definition is

```
\newcommand*\Ppstyle}[1]{\Ppstyle{#1}%
  \index{#1 pages?\Ppstyle{#1} (pagestyle)}}%
  \index{pagestyle!#1?\Ppstyle{#1}}}
```

The first part prints the argument in the text and the second adds two entries to the `idx` file. The fragment `#1 pages` is what the `MakeIndex` program will use for sorting entries, and the fragment following the `?` character is what will be put into the index.

```
\Pcstyle{<chapterstyle>} \cstyle{<chapterstyle>}
```

The command `\Pcstyle` prints its argument in the font used to indicate chapterstyles and `\cstyle` prints its chapterstyle argument and also makes a chapterstyle entry in the index. Its definition is

```
\newcommand*\Cstyle}[1]{\Pcstyle{#1}%
  \index{#1 chaps?\Pcstyle{#1} (chapterstyle)}}%
  \index{chapterstyle!#1?\Pcstyle{#1}}}
```

which is almost identical to `\pstyle`.

There is both a *companion* chapterstyle and a *companion* pagestyle. The strings used for sorting the index entries for these are `companion chaps` and `companion pages` respectively, so the chapterstyle will come before the pagestyle in the index. The reason for distinguishing between the string used for sorting and the actual entry is partly to distinguish between different kinds of entries for a single name and partly to avoid any formatting commands messing up the sorted order.

```
\begin{syntax} syntax \end{syntax}
```

The `syntax` environment is for specifying command and environment syntax. Its definition is

```
\newcommand*\tightcenter{%
  \topsep=0.25\onelineskip\trivlist \centering\item\relax}
\def\endtightcenter{\endtrivlist}
\newenvironment{syntax}{\begin{tightcenter}
  \begin{tabular}{|p{0.9\linewidth}|} \hline}%
  {\hline
  \end{tabular}
  \end{tightcenter}}
```

It is implemented in terms of the `tabular` environment, centered within the `typeblock`, which forms a box that will not be broken across a pagebreak. The box frame is just the normal horizontal and vertical lines that you can use with a `tabular`. The width is fixed at 90% of the text width. As it is a `tabular` environment, each line of `syntax` must be ended with `\\`. Note that normal LaTeX processing occurs within the `syntax` environment, so you can effectively put what you like inside it. The `center` environment is defined in terms of a `trivlist` and `\centering`. I wanted to be able to control the space before and after the `\centering` so I defined the `tightcenter` environment which enabled me to do this.

```
\begin{lcode} LaTeX code \end{lcode}
```

I use the `lcode` environment for showing examples of LaTeX code. It is a special kind of `verbatim` environment where the font size is `\small` but the normal `\baselineskip` is used, and each line is indented.

At the bottom the environment is defined in terms of a `list`, although that is not obvious from the code; for details see the class code [Wil09b]. I wanted the environment to be a tight list and started off by defining two helper items.

```
% \@zroseps sets list before/after skips to minimum values
\newcommand*{\@zroseps}{\setlength{\topsep}{\z@}
                        \setlength{\partopsep}{\z@}
                        \setlength{\parskip}{\z@}}
% \gparindent is relative to the \parindent for the body text
\newlength{\gparindent} \setlength{\gparindent}{0.5\parindent}
```

The macro `\@zroseps` sets the before, after and middle skips in a list to 0pt (`\z@` is shorthand for 0pt). The length `\gparindent` will be the line indentation in the environment.

```
% Now we can do the new lcode verbatim environment.
% This has no extra before/after spacing.
\newenvironment{lcode}{\@zroseps
  \renewcommand{\verbatim@startline}%
    {\verbatim@line{\hspace{\gparindent}}}
  \small\setlength{\baselineskip}{\onelineskip}\verbatim}%
{\endverbatim
  \vspace{-\baselineskip}\noindent}
```

The fragment `{\hspace{\gparindent}}` puts `\gparindent` space at the start of each line.

The fragment `\small\setlength{\baselineskip}{\onelineskip}` sets the font size to be `\small`, which has a smaller `\baselineskip` than the normal font, but this is corrected for by changing the local `\baselineskip` to the normal skip, `\onelineskip`. At the end of the environment there is a negative space of one line to compensate for a one line space that LaTeX inserts.

# B

---

## Showcases

---

The memoir memoir class has several features that involve a *style* and it provide several of these styles. This chapter is used to showcase these styles.

### B.1 Chapter styles

For more about defining chapter styles, see section [6.5](#), page [83](#).

## Chapter 1

# Demonstration of the default chapter style

The above is a demonstration of the default chapterstyle. It is one of several styles that come as part of the memoir class.

---

Figure B.1: The default chapterstyle

## 2 Demonstration of the section chapter style

The above is a demonstration of the section chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.2: The section chapterstyle

## 3 Demonstration of the hangnum chapter style

The above is a demonstration of the hangnum chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.3: The hangnum chapterstyle

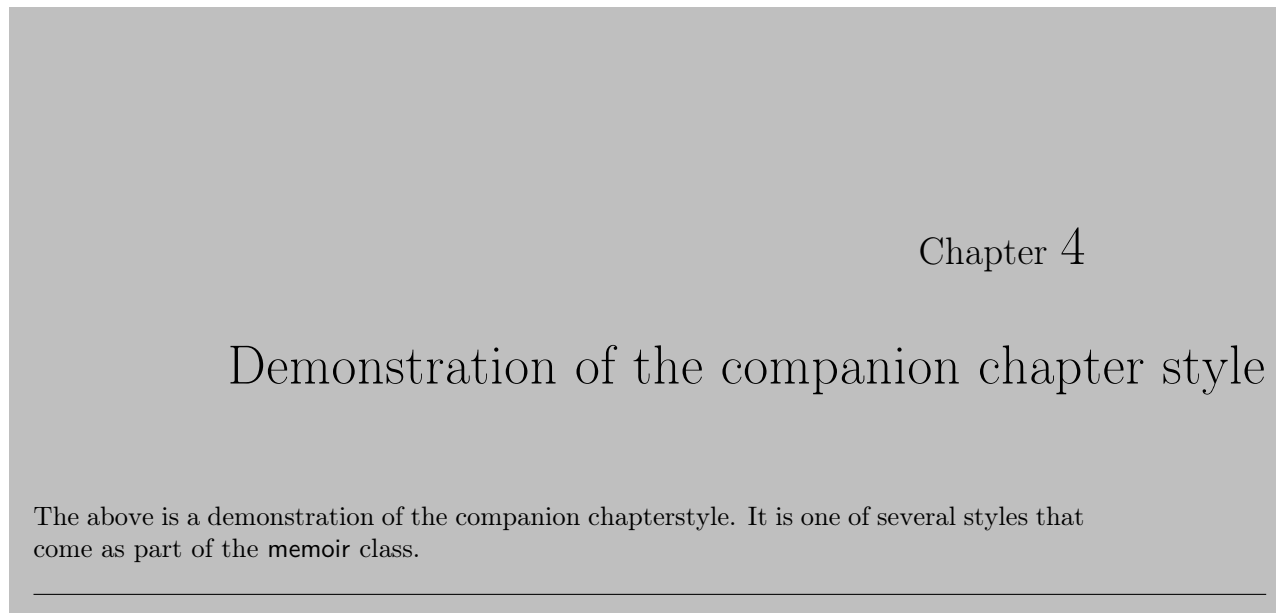


Figure B.4: The companion chapterstyle

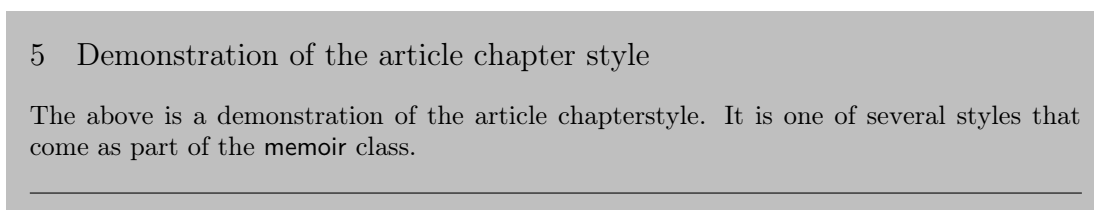


Figure B.5: The article chapterstyle

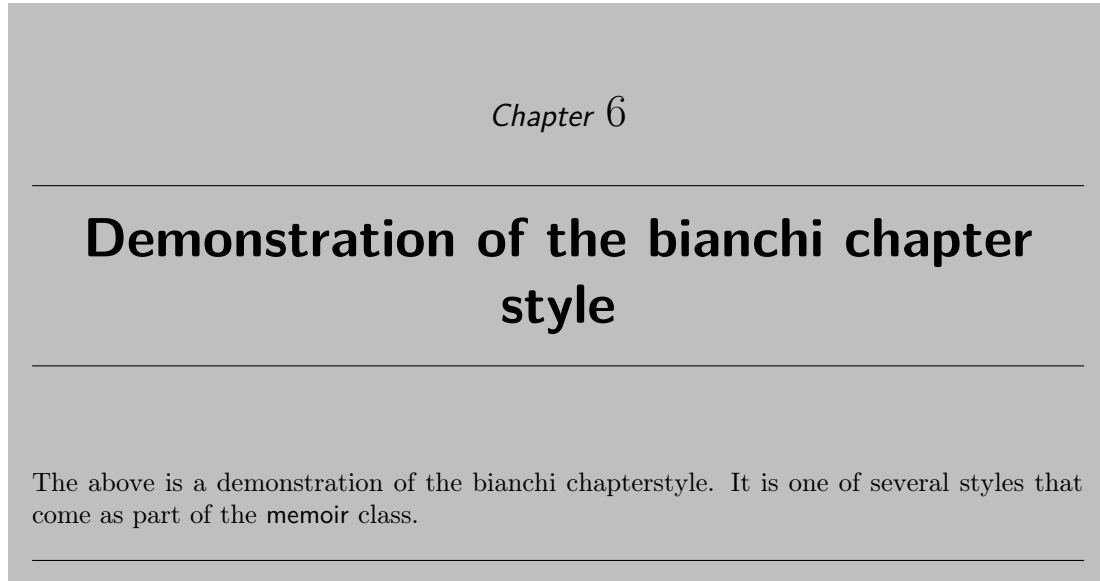


Figure B.6: The bianchi chapterstyle

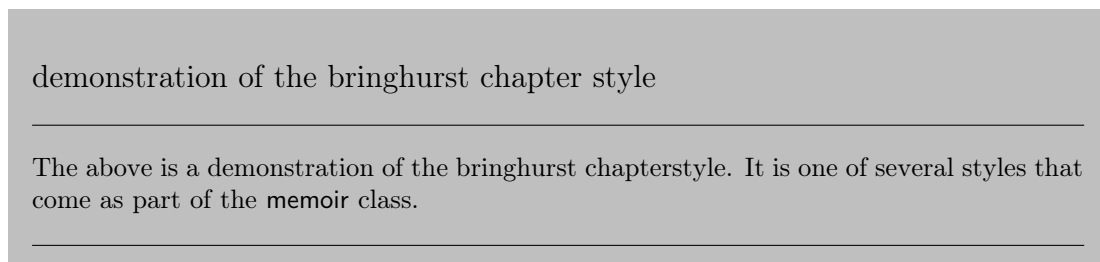


Figure B.7: The bringhurst chapterstyle

## Chapter 8

# Demonstration of the brotherton chapter style

The above is a demonstration of the brotherton chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.8: The brotherton chapterstyle

## Chapter 9

---

# Demonstration of the chappell chapter style

The above is a demonstration of the chappell chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.9: The chappell chapterstyle

## 10 Demonstration of the crosshead chapter style

The above is a demonstration of the crosshead chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.10: The crosshead chapterstyle

## I Demonstration of the culver chapter style

The above is a demonstration of the culver chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.11: The culver chapterstyle

— 2 —

## Demonstration of the dash chapter style

The above is a demonstration of the dash chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.12: The dash chapterstyle



3

---

## Demonstration of the demo2 chapter style

---

The above is a demonstration of the demo2 chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.13: The demo2 chapterstyle

Chapter 4

## Demonstration of the dowding chapter style

The above is a demonstration of the dowding chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.14: The dowding chapterstyle

---

## Demonstration of the ell chapter style

The above is a demonstration of the ell chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.15: The ell chapterstyle

---

## Chapter 6

## Demonstration of the ger chapter style

---

The above is a demonstration of the ger chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.16: The ger chapterstyle

## 7 Demonstration of the komalike chapter style

The above is a demonstration of the komalike chapterstyle. It is one of several styles that come as part of the memoir class.

---

Figure B.17: The komalike chapterstyle

Chapter **8**

---

## Demonstration of the lyhne chapter style

---

The above is a demonstration of the lyhne chapterstyle. It is one of several styles that come as part of the memoir class.

---

Figure B.18: The lyhne chapterstyle. This style requires the `graphicx` package

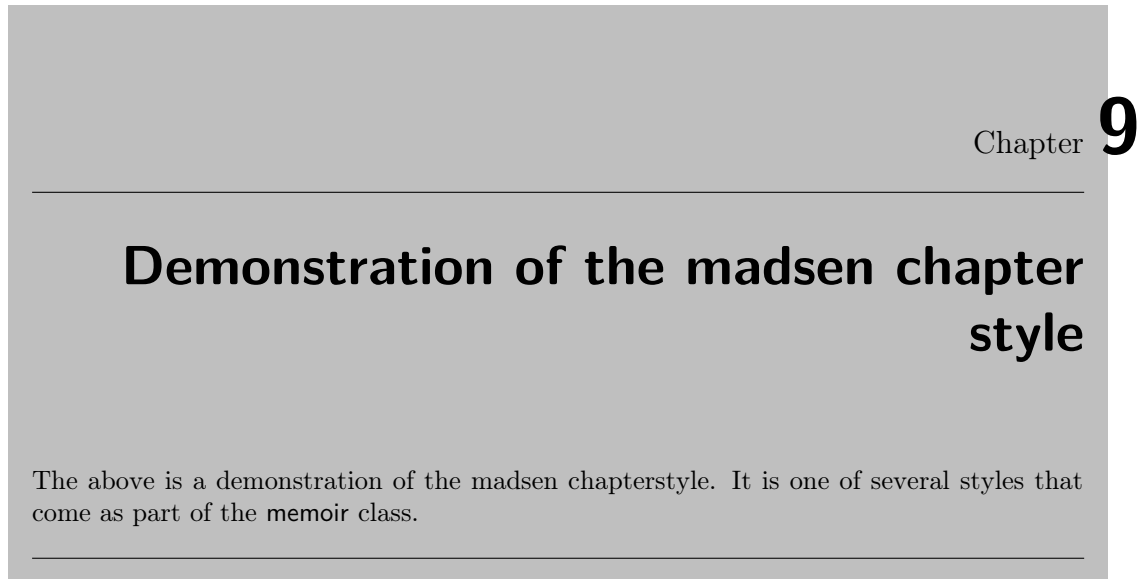


Figure B.19: The madsen chapterstyle. This style requires the `graphicx` package

## Chapter 10

### Demonstration of the ntglke chapter style

The above is a demonstration of the ntglke chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.20: The ntglke chapterstyle

## 1 Demonstration of the southall chapter style

---

The above is a demonstration of the southall chapterstyle. It is one of several styles that come as part of the `memoir` class.

---

Figure B.21: The southall chapterstyle

## 2 Demonstration of the tandh chapter style

The above is a demonstration of the tandh chapterstyle. It is one of several styles that come as part of the memoir class.

---

Figure B.22: The tandh chapterstyle

### chapter 3

---

## DEMONSTRATION OF THE THATCHER CHAPTER STYLE

The above is a demonstration of the thatcher chapterstyle. It is one of several styles that come as part of the memoir class.

---

Figure B.23: The thatcher chapterstyle

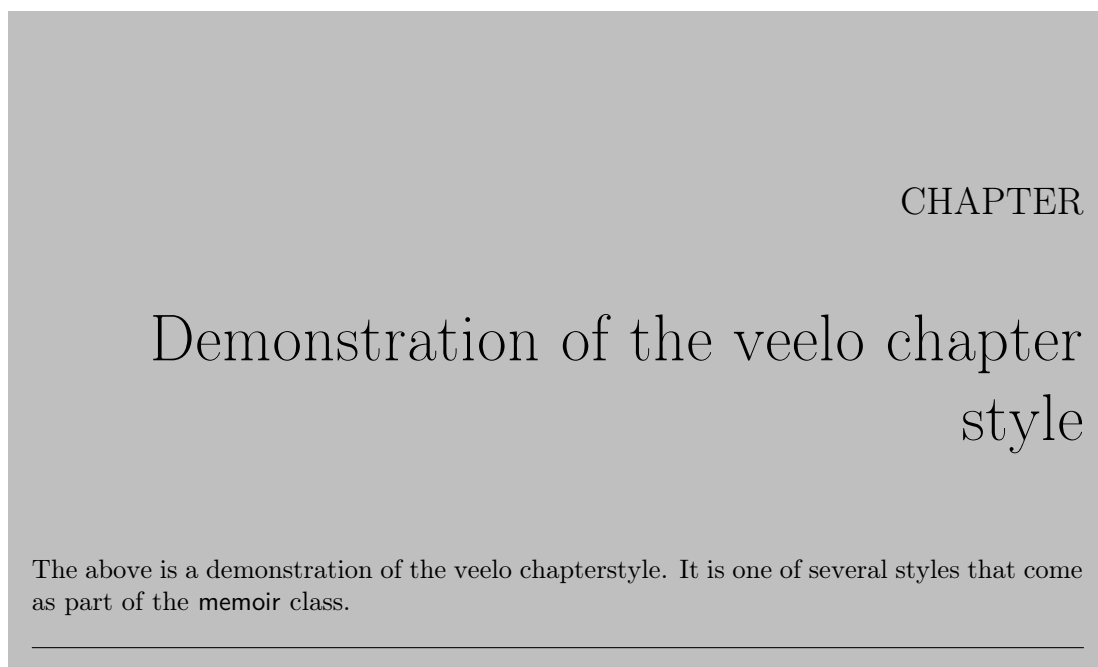


Figure B.24: The veelo chapterstyle. This style requires the `graphicx` package

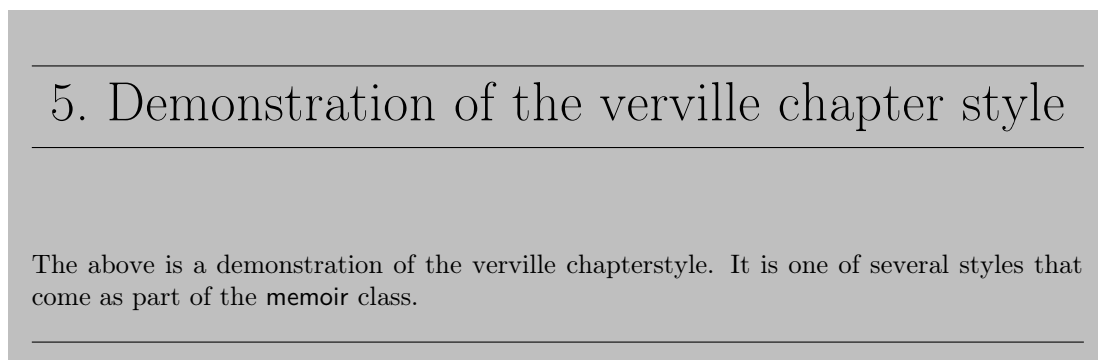


Figure B.25: The verville chapterstyle

## 6 Demonstration of the wilsondob chapter style

The above is a demonstration of the wilsondob chapterstyle. It is one of several styles that come as part of the memoir class.

---

Figure B.26: The wilsondob chapterstyle

The code for some of these styles is given in below. For details of how the other chapter styles are defined, look at the documented class code. This should give you ideas if you want to define your own style.

Note that it is not necessary to define a new chapterstyle if you want to change the chapter headings — you can just change the individual macros without putting them into a style.

### B.1.1 Chappell

A style that includes rules is one that I based on the chapter heads in [CB99] and which I have called *chappell* after the first author. The style, which is shown in Figure B.9, can easily form the basis for general heads in non-technical books.

```
\makechapterstyle{chappell}{%
  \setlength{\beforechapskip}{0pt}
  \renewcommand*{\chapnamefont}{\large\centering}
  \renewcommand*{\chapnumfont}{\large}
  \renewcommand*{\printchapternonum}{%
    \vphantom{\printchaptername}%
    \vphantom{\chapnumfont 1}%
    \afterchapternum
    \vskip -\onelineskip}
  \renewcommand*{\chapttitlefont}{\Large\itshape}
  \renewcommand*{\printchaptertitle}[1]{%
    \hrule\vskip\onelineskip \centering\chapttitlefont ##1}}
```

The style centers the chapter number, draws a rule across the page under it, and below that comes the title, again centered. All the fiddling in the `\printchapternonum` macro is to try and ensure that the rule above the title is at the same height whether or not the chapter is numbered (the ToC being an example of an unnumbered heading).



## B.1.2 Demo, Demo2 and demo3

I created a *demo* chapterstyle quite a time ago and used it on occasions in earlier editions of this Manual. Here is the original code.

```
\makechapterstyle{demo}{%
  \renewcommand*{\printchaptername}{\centering}
  \renewcommand*{\printchapternum}{\chapnumfont \numtoName{\c@chapter}}
  \renewcommand*{\chapttitlefont}{\normalfont\Huge\sffamily}
  \renewcommand*{\printchaptertitle}[1]{%
    \hrule\vskip\onelineskip \raggedleft \chapttitlefont ##1}
  \renewcommand*{\afterchaptertitle}{%
    {\vskip\onelineskip \hrule\vskip \afterchapskip}
}% end demo
```

This has one serious failing and what I now believe is a poor design decision. The failing is that if you have any appendices that use the *demo* chapterstyle then they are numbered instead of being lettered. The poor design is that the position of the title with respect to the top of the page is not the same for numbered and unnumbered chapters. The *demo2* chapterstyle below fixes both of these at the expense of simplicity (at least for me).

```
\makechapterstyle{demo2}{%
  \renewcommand*{\printchaptername}{\centering}
  \renewcommand*{\printchapternum}{\chapnumfont
    \ifanappendix \thechapter \else \numtoName{\c@chapter}\fi}
  \renewcommand*{\chapttitlefont}{\normalfont\Huge\sffamily}
  \renewcommand*{\printchaptertitle}[1]{%
    \hrule\vskip\onelineskip \raggedleft \chapttitlefont ##1}
  \renewcommand*{\afterchaptertitle}{%
    \vskip\onelineskip \hrule\vskip \afterchapskip}
  \setlength{\beforechapskip}{3\baselineskip}
  \renewcommand*{\printchapternonum}{%
    \vphantom{\chapnumfont One}
    \afterchapternum%
    \vskip\topskip}
  \setlength{\beforechapskip}{2\onelineskip}
}% end{demo2}
```

You may find it instructive to compare the code for the *demo* and *demo2* chapterstyles.

The *demo* chapterstyle is still available in the class for backward compatibility reasons, but I strongly advise against anyone using it.

By chance I inadvertently typed a chapterstyle that was a mixture of the *pedersen* and *demo2* styles. As a result there is now a *demo3* chapterstyle as well. The only difference between the two styles is in the definition of `\chapnumfont` which in *demo3* is:

```
\renewcommand*{\chapnumfont}{\normalfont\HUGE\itshape}
```

## B.1.3 Pedersen

I have modified Troels Pedersen's original code to make it a little more efficient and flexible.

```
\newcommand*{\colorchapnum}{}
```

```
\newcommand*{\colorchaptitle}{}
\makechapterstyle{pedersen}{%
  \setlength{\beforechapskip}{-20pt}
  \setlength{\afterchapskip}{10pt}
  \renewcommand*{\chapnamefont}{\normalfont\LARGE\itshape}
  \renewcommand*{\chapnumfont}{\normalfont\HUGE\itshape\colorchapnum}
  \renewcommand*{\chaptitlefont}{\normalfont\huge\itshape\colorchaptitle}
  \renewcommand*{\afterchapternum}{}
  \renewcommand*{\printchaptername}{}
  \setlength{\midchapskip}{20mm}
  \renewcommand*{\chapternamenum}{}
  \renewcommand*{\printchapternum}{%
    \sidebar{\raisebox{0pt}[0pt][0pt]{\makebox[0pt][l]{%
      \resizebox{!}{\midchapskip}{\chapnumfont\thechapter}}}}}
  \renewcommand*{\printchaptertitle}[1]{\chaptitlefont #1}
}
```

The chapter number is scaled up from its normal size and set in a sidebar.

`\colorchapnum \colorchaptitle`

The title is set with `colorchaptitle` and the number with `colorchapnum`, both of which default to doing nothing. Lars Madsen has suggested an attractive red color for these:

```
\usepackage{color}
\definecolor{ared}{rgb}{.647,.129,.149}
\renewcommand{\colorchapnum}{\color{ared}}
\renewcommand{\colorchaptitle}{\color{ared}}
\chapterstyle{pedersen}
```

The uncolored version is used for the `chapterstyle` for this chapter; because of setting the number in a sidebar it does not display well anywhere other than as a real chapter head.

#### B.1.4 Southall

On 2006/01/08 Thomas Dye posted his *southall* chapterstyle on [comp.text.tex](#) and kindly gave me permission to include it here. It is based on the headings in a Cambridge Press book<sup>1</sup> by Aidan Southall. It produces a simple numbered heading with the title set as a block paragraph, and with a horizontal rule underneath. His original code called for lining figures for the number but I have commented out that bit. I also changed the code to eliminate the need for the two new lengths that Thomas used.

```
\makechapterstyle{southall}{%
  \setlength{\afterchapskip}{5\baselineskip}
  \setlength{\beforechapskip}{36pt}
  \setlength{\midchapskip}{\textwidth}
  \addtolength{\midchapskip}{-\beforechapskip}
  \renewcommand*{\chapterheadstart}{\vspace*{2\baselineskip}}
  \renewcommand*{\chaptitlefont}{\huge\rmfamily\raggedright}
  \renewcommand*{\chapnumfont}{\chaptitlefont}
```

---

<sup>1</sup> Which I haven't seen

---

```

\renewcommand*{\printchaptername}{%
\renewcommand*{\chapternamenum}{%
\renewcommand*{\afterchapternum}{%
\renewcommand*{\printchapternum}{%
\begin{minipage}[t][\baselineskip][b]{\beforechapskip}
{\vspace{0pt}\chapnumfont%%\figureversion{lining}
\thechapter}
\end{minipage}}
\renewcommand*{\printchaptertitle}[1]{%
\hfill\begin{minipage}[t]{\midchapskip}
{\vspace{0pt}\chaptitelfont ##1\par}\end{minipage}}
\renewcommand*{\afterchaptertitle}{%
\par\vspace{\baselineskip}%
\hrulefill \par\nobreak\noindent \vskip\afterchapskip}}

```

The resulting style is shown in Figure B.21.

#### B.1.5 Veelo

Bastiaan Veelo posted the code for a new chapter style to CTAN on 2003/07/22 under the title [memoir] [contrib] *New chapter style*. His code, which I have slightly modified and changed the name to *veelo*, is below. I have also exercised editorial privilege on his comments.

I thought I'd share a new chapter style to be used with the memoir class. The style is tailored for documents that are to be trimmed to a smaller width. When the bound document is bent, black tabs will appear on the fore side at the places where new chapters start as a navigational aid. We are scaling the chapter number, which most DVI viewers will not display accurately.

Bastiaan.

In the style as I modified it, `\beforechapskip` is used as the height of the number and `\midchapskip` is used as the length of the black bar.

```

\newlength{\numberheight}
\newlength{\barlength}
\makechapterstyle{veelo}{%
\setlength{\afterchapskip}{40pt}
\renewcommand*{\chapterheadstart}{\vspace*{40pt}}
\renewcommand*{\afterchapternum}{\par\nobreak\vskip 25pt}
\renewcommand*{\chapnamefont}{\normalfont\LARGE\flushright}
\renewcommand*{\chapnumfont}{\normalfont\HUGE}
\renewcommand*{\chaptitelfont}{\normalfont\HUGE\bfseries\flushright}
\renewcommand*{\printchaptername}{%
\chapnamefont\MakeUppercase{\@chapapp}}
\renewcommand*{\chapternamenum}{%
\setlength{\beforechapskip}{18mm}
\setlength{\midchapskip}{\paperwidth}
\addtolength{\midchapskip}{-\textwidth}
\addtolength{\midchapskip}{-\spinewidth}
\renewcommand*{\printchapternum}{%

```

## B. Showcases

---

```
\makebox[0pt][l]{\hspace{.8em}%  
  \resizebox{!}{\numberheight}{\chapnumfont \thechapter}%  
  \hspace{.8em}%  
  \rule{\midchapskip}{\beforechapskip}%  
  }%  
\makeoddfoot{plain}{}{\thechapter}
```

If you use this style you will also need to use the `graphicx` package [CR99] because of the `\resizebox` macro. The *veelo* style works best for chapters that start on recto pages.

# C

---

## Snippets

---

This chapter is (over time) meant to hold various pieces of code for memoir that we have gathered over the years or others have contributed, and which we think might be useful for others. In some cases they will have been moved from the text to this place, in order to make the manual less cluttered.

If you have some memoir related code you would like to share, feel free to send it to `daleif@math.au.dk`.

Snippet overview

|   |     |
|---|-----|
| Snippet C.1 (Mirroring the output) . . . . .                    | 397 |
| Snippet C.2 (Remove pagenumber if only one page) . . . . .      | 398 |
| Snippet C.3 (A kind of draft note) . . . . .                    | 398 |
| Snippet C.4 (Adding indentation to footnotes) . . . . .         | 399 |
| Snippet C.5 (Background image and trimmarks) . . . . .          | 399 |
| Snippet C.6 (Autoadjusted number widths in the ToC) . . . . .   | 399 |
| Snippet C.7 (Using class tools to make a chapter ToC) . . . . . | 401 |
| Snippet C.8 (An appendix ToC) . . . . .                         | 403 |

Snippet C.1 (Mirroring the output)

The memoir class is not quite compatible with the crop package. This is usually not a problem as we provide our own crop marks. But crop provide one feature that we do not: mirroring of the output. The following snippet was posted on `CTR` by Heiko Oberdiek (2009/12/05, thread *Memoir and mirrored pdf output* )

```
\usepackage{atbegshi}
\usepackage{graphicx}
\AtBeginShipout{%
  \sbox\AtBeginShipoutBox{%
    \kern-1in\relax
    \reflectbox{%
      \rlap{\kern1in\copy\AtBeginShipoutBox}%
    \kern\stockwidth
    }%
  }%
}
```

### Snippet C.2 (Remove pagenumber if only one page)

Memoir counts all the pages used. You can use this information in various ways. For example, say you are preparing a setup to write small assignments in, these may or may not be just one page. How do we remove the footer automatically if there is only one page?

Easy, place the following in the preamble (compile at least twice):

```
\AtEndDocument{\ifnum\value{lastsheet}=1\thispagestyle{empty}\fi}
```

### Snippet C.3 (A kind of draft note)

Bastiaan Veelo has kindly provided example code for another form of a side note, as follows.

```
%% A new command that allows you to note down ideas or annotations in
%% the margin of the draft. If you are printing on a stock that is wider
%% than the final page width, we will go to some length to utilise the
%% paper that would otherwise be trimmed away, assuming you will not be
%% trimming the draft. These notes will not be printed when we are not
%% in draft mode.
\makeatletter
\ifdraftdoc
\newlength{\draftnotewidth}
\newlength{\draftnotesignwidth}
\newcommand{\draftnote}[1]{\@bsphack%
  {%% do not interfere with settings for other marginal notes
    \strictpagecheck%
    \checkoddpage%
    \setlength{\draftnotewidth}{\foremargin}%
    \addtolength{\draftnotewidth}{\trimedge}%
    \addtolength{\draftnotewidth}{-3\marginparsep}%
    \ifoddpage
      \setlength{\marginparwidth}{\draftnotewidth}%
      \marginpar{\flushleft\textbf{\textit{\HUGE\ !\ }}\small #1}%
    \else
      \settowidth{\draftnotesignwidth}{\textbf{\textit{\HUGE\ !\ }}}%
      \addtolength{\draftnotewidth}{-\draftnotesignwidth}%
      \marginpar{\raggedleft\makebox[0pt][r]{%% hack around
        \parbox[t]{\draftnotewidth}{%%%%%% funny behaviour
          \raggedleft\small\hspace{0pt}\#1%
        }}\textbf{\textit{\HUGE\ !\ }}}%
      }%
    \fi
  }\@esphack}
\else
\newcommand{\draftnote}[1]{\@bsphack\@esphack}
\fi
```

`\makeatother`

Bastiaan also noted that it provided an example of using the `\foremargin` length. If you want to try it out, either put the code in your preamble, or put it into a package (i.e., `.sty` file) without the `\makeat...` commands.

#### Snippet C.4 (Adding indentation to footnotes)

At times a document design calls for a footnote configuration equal to the default but everything indented more to the right. This can be achieved via

```
\newlength\myextrafootnoteindent
\setlength\myextrafootnoteindent{\parindent}
\renewcommand\makefootmarkhook{%
  \addtolength{\leftskip}{\myextrafootnoteindent}}
```

In this example we indent the footnotes to match the overall paragraph indentation. We need to save the current value of `\parindent` since it is reset in the footnotes.

#### Snippet C.5 (Background image and trimmarks)

This snippet comes from another problem described in `CTT`. If one use the `eso-pic` package to add a background image, this image ends up on top of the trim marks. To get it *under* the trim marks Rolf Niepraschk suggested the following trick

```
\RequirePackage{atbegshi}\AtBeginShipoutInit
\documentclass[... ,showtrims]{memoir}
...
\usepackage{eso-pic}
...
```

#### Snippet C.6 (Autoadjusted number widths in the ToC)

When the ToC is typeset the chapter, section etc. number is typeset within a box of a certain fixed width (one width for each sectional type). If this width is too small for the current document, the user have to manually adjust this width.

In this snippet we present a method where we automatically record the widest.

It a later memoir version, we may add similar code to the core.

There are two ways to record the widest entries of the various types, either preprocess the entire ToC or measure it as a part of the ToC typesetting, store it in the `.aux` and reuse it on the next run. We will use the later approach. There is one caveat: The `.aux` file is read at `\begin{document}`, so we need to postpone our adjustments via `\AtBeginDocument`.

The following solution use some ToC related hooks within the class, plus the `etoolbox` and `calc` packages.

First we create some macros to store information within the `.aux` file, and retrieve it again.

```

\makeatletter
\newcommand\mem@auxrestore[2]{\csgdef{stored@value@#1}{#2}}
\newcommand\memstorevalue[2]{%
  \@bspack%
  \immediate\write\@mainaux{\string\mem@auxrestore{#1}{#2}}%
  \@espack}
\newcommand\RetrieveStoredLength[1]{%
  \ifcsdef{stored@value@#1}{\csuse{stored@value@#1}{0pt}}%
\makeatletter

```

Here `\RetrieveStoredLength` can be used in most `\setlength` cases, at least when the `calc` package is loaded. The argument will be the name of the variable one asked to be stored. If no corresponding value has been found for a given name, 0 pt is returned.

Next we need to prepare the hooks. In this case we will show how to take care of `\chapter`, `\section` and `\subsection`. `\chapter` is relatively easy:<sup>1</sup>

```

\newlength\tmplen          % scratch length
\newlength\widestchapter % guess, they are zero by default
\renewcommand\chapternumberlinehook[1]{%
  \settowidth\tmplen{\hbox{\cftchapterfont#1}}%
  \ifdimgreater\tmplen\widestchapter{%
    \global\widestchapter=\tmplen}{}}

```

We use an alternative syntax to make the `\widestchapter` global.

Handling `\section` and `\subsection` is slightly more tricky, as they both use `numberline`. Instead we rely on the local value of the magic macro `\cftwhatismyname`.

```

\newlength\widestsection
\newlength\widestsubsection
\renewcommand\numberlinehook[1]{%
  % use a loop handler to loop over a list of possible
  % types. \forcsvlist comes from etoolbox
  \forcsvlist{\ToHookListHandler{#1}}{section,subsection,subsubsection,%
    paragraph,subparagraph,figure,table}}
% the actual handler.
\newcommand\ToHookListHandler[2]{%
  \edef\tmpstr{#2}%
  \ifdefstrequal{\cftwhatismyname}{\tmpstr}{%
    \settowidth\tmplen{\hbox{\csuse{cft\cftwhatismyname font}#1}}%
    \ifcslength{widest#2}{% is this length defined?
      \ifdimgreater\tmplen{\csuse{widest#2}}{%
        \global\csuse{widest#2}=\tmplen}{}}{}}

```

Even though the list mention more macros, we only use those we have added corresponding lengths for.

Next we need to store the values at the end of the document

---

<sup>1</sup> In some cases you may want to use `{\@chapapp@head\@cftbnum #1\@cftasnum}`



```
\AtBeginDocument{\AtEndDocument{
  \memstorevalue{widestchapter}{\the\widestchapter}
  \memstorevalue{widestsection}{\the\widestsection}
  \memstorevalue{widestsubsection}{\the\widestsubsection}
}}
```

Here is how to get the standard class setup for a three level TOC. We also add a little extra padding to the boxes. Remember that it may take a few compilations before the ToC settles down.

```
\newlength\cftnumpad      % padding
\setlength\cftnumpad{0.5em}
\AtBeginDocument{
  \cftsetindents{chapter}{0pt}{%
    \RetrieveStoredLength{widestchapter}+\cftnumpad}
  \cftsetindents{section}{%
    \cftchapterindent+\cftchapternumwidth}{%
    \RetrieveStoredLength{widestsection}+\cftnumpad}
  \cftsetindents{subsection}{%
    \cftsectionindent+\cftsectionnumwidth}{%
    \RetrieveStoredLength{widestsubsection}+\cftnumpad}
}
```

Snippet C.7 (Using class tools to make a chapter ToC)

By using a few hooks, we will be able to create a simple chapter toc. First a few notes:

- (a) In this class, the TOC data can be reused, thus we can load the TOC data as many times as we would like.
- (b) Data in the TOC is stored as arguments the `\contentsline` macro, say (see also Figure 9.1 on page 141)

```
\contentsline{chapter}{\chapternumberline {1}Test}{3}
```

where the first argument determines which macro is used to process the data. Each of these macros look at the value of the `tocdepth` counter to know whether to typeset or not.

- (c) Using some hooks we can insert local changes to `tocdepth` in order to only typeset the sections from the current chapter.

The idea is to be able to add hooks at key points in the ToC data, and then use these hooks to enable and disable typesetting.

We will need to add hooks just after a chapter line (like the one above), and we will need to be able to insert hooks just before items that mark the end of a chapter, that is the next `\chapter`, `\part`, `\book`, plus a macro like `\appendixpage` which also write to the ToC.

First we define hooks that add hooks into the TOC. We use a counter to make each start and end hook unique. We add *end markers* above the ToC entries for `\chapter`, `\part` and `\book`.

```
\newcounter{tocmarker}
\renewcommand\mempreaddchaptertotochook{\cftinserthook{toc}{end-\thetocmarker}}
\renewcommand\mempreaddparttotochook  {\cftinserthook{toc}{end-\thetocmarker}}
\renewcommand\mempreaddbooktotochook  {\cftinserthook{toc}{end-\thetocmarker}}
\renewcommand\mempreaddappagetotochook{\cftinserthook{toc}{end-\thetocmarker}}
% start marker
\renewcommand\mempostaddchaptertotochook{%
  \stepcounter{tocmarker}\cftinserthook{toc}{start-\thetocmarker}}
\let\normalchangetocdepth\changetocdepth % for later
```

The hooks inserted into the TOC file, does nothing by default. You will notice that the line above will now look like:

```
\cftinsert {end-0}
\contentsline{chapter}{\chapternumberline {1}Test}{3}
\cftinsert {start-1}
...
\cftinsert {end-1}
\contentsline{chapter}{\chapternumberline {2}Test}{5}
```

Thus to get a chapter toc command we need to make sure that (1) all entries are disabled, (2) at start-1 we reenale TOC entries, and (3) at end-1 disable TOC entries again. Here is the rest of the code, explained via comments.

```
\makeatletter
\newcommand\chaptertoc{
  % make changes local, remember counters a global
  \begingroup
  % store current value, to be restored later
  \setcounter{@memmarkcntra}{\value{tocdepth}}
  % when ever \settocdepth is used, it adds the new value to the
  % ToC data. This cause problems when we want to disable all
  % entries. Luckily the data is added via a special macro, we we
  % redefine it, remember we stored the original value earlier.
  \let\changetocdepth@gobble
  % disable all entries (using our copy from above)
  \normalchangetocdepth{-10}
  % enable toc data within our block, we go as far as subsubsection
  \cftinsertcode{start-\thetocmarker}{\normalchangetocdepth{3}}
  % when the block is done, disable the remaining
  \cftinsertcode{end-\thetocmarker}{\normalchangetocdepth{-10}}
  % remove the spacing above the toc title
  \let\toheadstart\relax
  % remove the toc title itself
```

---

```

\let\printtoctitle\@gobble
% remove space below title
\let\aftertoctitle\relax
% reformat TOC entries:
\setlength{\cftsectionindent}{0pt}
\setlength{\cftsubsectionindent}{\cftsectionnumwidth}
\setlength{\cftsubsubsectionindent}{\cftsubsectionindent}
\addtolength{\cftsubsubsectionindent}{\cftsubsectionnumwidth}
\renewcommand\cftsectionfont{\small}
\renewcommand\cftsectionpagefont{\small}
\renewcommand\cftsubsectionfont{\small}
\renewcommand\cftsubsectionpagefont{\small}
\renewcommand\cftsubsubsectionfont{\small}
\renewcommand\cftsubsubsectionpagefont{\small}
% include the actual ToC data
\tableofcontents*
\endgroup
% restore tocdepth
\setcounter{tocdepth}{\value{@memmarkcntra}}
% to indent or not after the chapter toc
\m@mindentafterchapter
% space between chapter toc and text
\par\bigskip
% handles indentation after the macro
\@afterheading}
\makeatother

```

Note that if the `\chapterprecistoc` or `\chapterprecis` has been used then that data is also added to the ToC data, and we will need to locally disable it in the chapter ToC. This can be done by adding

```
\let\precistoc\@gobble
```

to the `\chaptertoc` definition above, just make sure it is added before calling before `\tableofcontents*`.

Snippet C.8 (An appendix ToC)

Here we assume a structure like

```

\tableofcontents*
\chapter
\chapter
\chapter
\appendix
\appendixpage
\appendixtableofcontents
\chapter

```

```
\chapter
\chapter
```

where the first ToC should just show until (and including) `\appendixpage`, and `\appendixtableofcontents` should only list the appendices.

We also assume that no `\settocdepth`'s have been issued after `\appendixpage`.

We only need a single hook after `\appendixpage`.

```
\renewcommand\mempostaddappagetotochook{\cftinserthook{toc}{BREAK}}
\cftinsertcode{BREAK}{\changetocdepth{-10}}
\let\normalchangetocdepth\changetocdepth % needed for later
```

Then the definition of the actual appendix ToC:

```
\makeatletter
\newcommand\appendixtableofcontents{
  \begingroup
  \let\changetocdepth\@gobble
  \normalchangetocdepth{-10}
  \cftinsertcode{BREAK}{\normalchangetocdepth{3}}
  \renewcommand\contentsname{Appendices overview}
  \tableofcontents*
  \endgroup
}
\makeatother
```

# D

---

## Pictures

---

There are many freely available LaTeX introductions on CTAN and other places. One thing that these apparently are not covering is the traditional picture environment. It can be very handy in many applications, though for more complex drawings the reader might be better off with TikZ/pgf or PSTricks. For the benefit of the general reader we here provide a lesson in the standard picture environment.

*Writers comment:* There are many extensions to the stock picture environment provided by the LaTeX kernel. We have chosen not to deal with them in this chapter but instead concentrate on what you get as is from the kernel. But there are a few handy packages that the reader might want to explore: `picture` (by Heiko Oberdiek) which extends the `\put` syntax to include arbitrary lengths, like 50mm; `pict2e` which is mentioned in [GM<sup>+</sup>07] but just recently was released; `eepic`. All packages are available from CTAN.

This chapter describes how to draw diagrams and pictures using LaTeX. Pictures are drawn in the `picture` environment. You can draw straight lines, arrows and circles; you can also put text into your pictures.

Most often pictures are drawn within a `figure` environment, but they may also be drawn as part of the normal text.

### D.1 Basic principles

The positions of picture elements are specified in terms of a two-dimensional cartesian coordinate system. A *coordinate* is a number, such as 7, -21 or 1.78. In the cartesian coordinate system, a pair of coordinates (i.e., a pair of numbers) specifies a position relative to the position designated as (0,0). This special position is called the *origin*. The first of the coordinate pair gives the value of the horizontal distance from the origin to the position. A positive coordinate is an offset to the right and a negative number is an offset to the left. The first value of a coordinate pair is called the *x coordinate*. The second value of a coordinate pair is called the *y coordinate* and gives the vertical offset from the origin (positive upwards and negative downwards).

`\unitlength`

To draw a picture we also need to specify the units of measurement. By default, LaTeX takes the printer's point (there are 72.27 points to an inch) as the measurement of length. The value of the unit of length measurement within a `picture` environment is actually given by the value of the `\unitlength` length declaration. This can be changed to any length that you like via the `\setlength` command. For example,

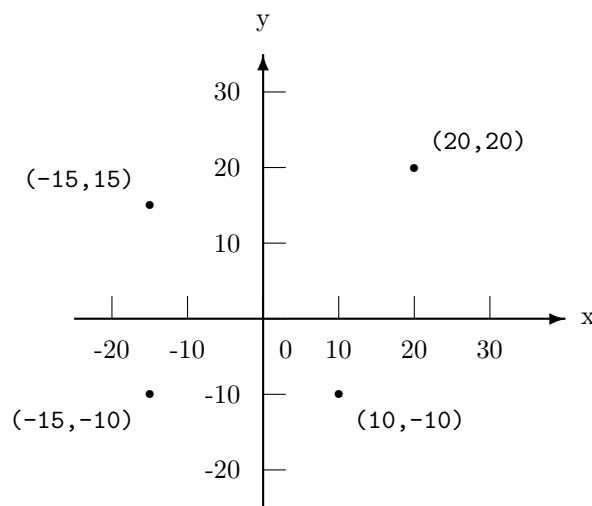


Figure D.1: Some points in the cartesian coordinate system

```
\setlength{\unitlength}{2mm}
```

will make the value of `\unitlength` to be two millimeters.

Figure D.1 shows the positions of some points and their coordinate values. Coordinate pairs are typed as a pair of numbers, separated by a comma, and enclosed in parentheses.

```
\thinlines
\thicklines
\linethickness{<len>}
```

In general, LaTeX can draw lines of only two thicknesses, thin and thick. The required thickness is specified via either a `\thicklines` or a `\thinlines` declaration, with the latter being the default.

There is another declaration, `\linethickness`, which can be used to change the thickness of horizontal and vertical lines only. It sets the thickness of these lines to `<len>`, but has no effect on any sloping lines.

A `picture` environment has a required size pair argument that specifies the width and height of the picture, in terms of the value of `\unitlength`.

```
\begin{picture}(<width, height>)<contents>\end{picture}
\begin{picture}(<width, height>)(<llx, lly>)<contents>\end{picture}
```

The environment creates a box of size `<width>` by `<height>`, which will not be split across pages. The default position of the origin in this environment is at the lower left hand corner of the box. For example,

```
\begin{picture}(80,160)
```

creates a picture box of width 80 and height 160 whose lower left hand corner is at  $(0,0)$ . There is also an optional coordinate pair argument (which comes after the required argu-

ment) that specifies the coordinates of the lower left hand corner of the box if you do not want the default origin.

```
\begin{picture}(80,160)(10,20)
```

specifies a picture box of width 80 and height 160, as before, but with the bottom left hand corner having coordinates of (10,20). Thus, the top right hand corner will have coordinates (90,180). Note that the optional argument is enclosed in parentheses not square brackets as is ordinarily the case. Typically, the optional argument is used when you want to shift everything in the picture. LaTeX uses the required argument to determine the space required for typesetting the result.

You are not limited to drawing within the box, but if you do draw outside the box the result might run into other text on the page, or even run off the page altogether. LaTeX only reserves the space you specify for the picture and does not know if anything protrudes. In particular

```
\begin{picture}(0,0)
```

creates a zero-sized picture which takes no space at all. This can be very useful if you need to position things on the page.

Within the picture environment, LaTeX is in a special *picture* mode (which is a restricted form of LR mode). The only commands that can appear in picture mode are `\put`, `\multiput` and `\qbezier` commands, and a few declarations such as the type style and the thickness declarations. By the way, you should only change the value of `\unitlength` outside picture mode otherwise LaTeX will get confused about its measurements.

## D.2 Picture objects

In a picture everything is placed and drawn by the `\put` (or its `\multiput` variant) command.

```
\put(<x,y>){<object>}
```

`\put` places *<object>* in the picture with the object's *reference point* at position *<(x,y)>*.

The following sections describe the various picture objects.

### D.2.1 Text

Text is the simplest kind of picture object. This is typeset in LR mode and the reference point is at the lower left hand corner of the text.

#### Source for example [D.1](#)

```
\setlength{\unitlength}{1mm} % measurements in millimeters
\begin{picture}(30,10)       % define size of picture
\put(0,0){\framebox(30,10){}} % draw frame around picture
\put(10,5){Some text}       % place text
\thicklines
\put(10,5){\vector(1,1){0}} % mark reference point
\end{picture}
\setlength{\unitlength}{1pt} % reset measurements to default
```

Typeset example D.1: Picture: text

---



In the diagram, and those following, the reference point is indicated by an arrow. Also, a box is drawn round the diagram at the same size as the `picture` environment.

#### D.2.2 Boxes

A box picture object is made with one of the box commands. When used in picture mode, the box commands have a slightly different form than when in normal text. The first argument of a box command is a size pair that specifies the width and height of the box. The last argument is the text to be placed in the box. The reference point of a box is the lower left hand corner.

```
\framebox(<width, height>)[<pos>]{<text>}
\makebox(<width, height>)[<pos>]{<text>}
```

The `\framebox` command draws a framed box of the specified (*<width, height>*) dimensions around the text.

Source for example [D.2](#)

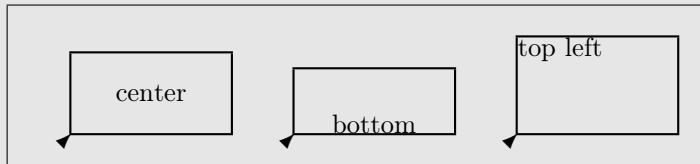
```
\setlength{\unitlength}{1pc}
\begin{picture}(22,5)
\put(0,0){\framebox(22,5){}}           % empty box
\thicklines
\put(2,1){\framebox(5,2.5){center}}    % centered text
\put(2,1){\vector(1,1){0}}             % ref point
\put(9,1){\framebox(5,2)[b]{bottom}}   % bottomed text
\put(9,1){\vector(1,1){0}}             % ref point
\put(16,1){\framebox(5,3)[tl]{top left}} % cornered text
\put(16,1){\vector(1,1){0}}            % ref point
\end{picture}
\setlength{\unitlength}{1pt}
```

The default position of the *text* is centered in the box. However, this can be changed via an optional argument (which is enclosed in square brackets), placed between the coordinate pair and the text argument. This argument consists of either one or two of the following letters.

- | (left) Places the contents at the left of the box.



Typeset example D.2: Picture: text in boxes



- r (right) Places the contents at the right of the box.
- t (top) Places the contents at the top of the box.
- b (bottom) Places the contents at the bottom of the box.

These place the text in the corresponding position in the box. In a two-letter argument the order of the letters is immaterial. For example, [tr] and [rt] will both result in the text being placed at the top right hand corner of the box. Unlike the normal `\framebox` command, a `\framebox` in a picture environment does not add any extra space around the text.

Corresponding to the `\framebox` there is a `\makebox` command which does not draw a frame around its contents. The `\makebox` command takes the same arguments as the `\framebox`. Particularly interesting is when you specify a zero sized `\makebox`. A `\makebox(0,0){text}` command will make the reference point the center of text. Similarly, the other positioning arguments which will adjust the reference point with respect to the box contents. This can be used for fine-tuning the position of text in a picture.

Source for example D.3

```
\setlength{\unitlength}{1pc}
\begin{picture}(16,2)
\put(0,0){\framebox(16,2){}}
\thicklines
\put(3.5,1){\makebox(0,0){center}}      % ref at text center
\put(3.5,1){\vector(0,-1){0}}
\put(7,1){\makebox(0,0)[b]{bottom}}      % ref at text bottom
\put(7,1){\vector(0,1){0}}
\put(11,1){\makebox(0,0)[tl]{top left}} % ref at text top left
\put(11,1){\vector(1,-1){0}}
\end{picture}
\setlength{\unitlength}{1pt}
```


You can draw a dashed box with the `\dashbox` command.

## D. Pictures

Typeset example D.3: Picture: positioning text



Typeset example D.4: Picture: dashed box



`\dashbox{<len>}<(<width, height>)<[<pos>]<{<text>}>`

The first argument of this command specifies the length of each dash. The following arguments are the same as for the other box commands.

Source for example [D.4](#)

```
\setlength{\unitlength}{4mm}
\begin{picture}(7,4)
\put(0,0){\framebox(7,4){}}
\thicklines
\put(1,1){\dashbox{0.5}(5,2)[tr]{top right}}
\put(1,1){\vector(1,1){0}}
\end{picture}
\setlength{\unitlength}{1pt}
```


The appearance of the box is best when the width and height of the box are integer multiples of the dash length. In the example the dash length has been set to 0.5 with the width and height set as (5,2); thus the width and height are respectively ten and four times the dash length.

The `\frame` command draws a frame around the contents of the box that exactly fits the contents.

`\frame{<contents>}`

It takes a single required argument which is the contents.

Typeset example D.5: Picture: framing



Source for example D.5

```
\setlength{\unitlength}{1pc}
\begin{picture}(10,3)
\put(0,0){\framebox(10,3){}}
\thicklines
\put(0.5,2){\frame{$\mathcal{FRAME}$ text}}
\put(0.5,2){\vector(1,1){0}}
\end{picture}
\setlength{\unitlength}{1pt}
```

The `\shortstack` command enables you to stack text vertically. It produces a box with a single column of text. As with the other boxes, the reference point is at the lower left hand corner, although no frame is drawn around the stack. The `\shortstack` command is an ordinary box making command, but it is not often used outside picture mode.

Each line of  $\langle text \rangle$ , except for the last, is ended by a `\\` command. The default is to center each text line within the column. However, there is an optional positioning argument. A value of `l` for  $\langle pos \rangle$  will left align the text and a value of `r` will right align the text.

Source for example D.6

```
\setlength{\unitlength}{1mm}
\begin{picture}(75,25)
\put(0,0){\framebox(75,25){}}
\put(3,3){\shortstack{Default \\ short \\ Stack}}
\put(3,3){\vector(1,1){0}}
\put(23,3){\shortstack[l]{Left\\aligned\\short\\Stack}}
\put(23,3){\vector(1,1){0}}
\put(43,3){\shortstack[r]{Right\\aligned\\short\\Stack}}
\put(43,3){\vector(1,1){0}}
```

Typeset example D.6: Picture: stacking

|         |         |         |         |
|---------|---------|---------|---------|
|         |         |         | Extra   |
| Default | Left    | Right   |         |
| short   | aligned | aligned | spaced  |
| Stack   | short   | short   |         |
| ✓ Stack | ✓ Stack | ✓ Stack | ✓ Stack |

```
\put(63,3){\shortstack{Extra \\[4ex] spaced \[2ex] Stack}}
\put(63,3){\vector(1,1){0}}
\end{picture}
\setlength{\unitlength}{1pt}
```

The rows in a stack are not evenly spaced. The spacing between two rows can be changed in one of two ways.

1. Add a strut to a row. A strut is a vertical rule with no width.
2. Use the optional argument to the `\[` command. This optional argument is a length value.

```
\[ $\langle len \rangle$ ]
```

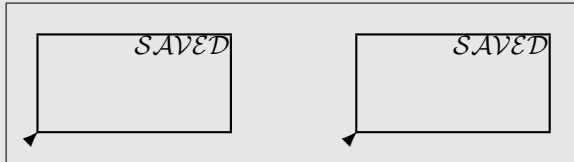
It has the effect of adding additional  $\langle len \rangle$  vertical space between the two lines that the `\[` separates.

```
\newsavebox{ $\langle box \rangle$ }
\savebox{ $\langle box \rangle$ }{ $\langle width, height \rangle$  [ $\langle pos \rangle$ ] { $\langle text \rangle$ }}
\sbox{ $\langle box \rangle$ }{ $\langle text \rangle$ }
\usebox{ $\langle box \rangle$ }
```

Just as in normal text you can save and reuse boxes. The `\savebox` macro in picture mode is a variant of the normal text version, but the other three commands are the same in both picture and paragraph modes, and are described in Chapter 15. In picture mode you have to specify the size of the storage box when saving it, via the  $\langle \langle width, height \rangle \rangle$  argument to `\savebox`.

A `\savebox` command can be used within a picture to store a picture object. The first argument of `\savebox` is the name of the storage bin to be used. The following arguments are the same as the `\makebox` command. The result is stored, not drawn. When you have saved something it can be drawn in either the same or other pictures via the `\usebox` command. This command takes one argument, which is the name of the storage bin.

Typeset example D.7: Picture: saved boxes

Source for example [D.7](#)

```

\setlength{\unitlength}{1pc}
\begin{picture}(18,5)
\put(0,0){\framebox(18,5){}}
\newsavebox{\Mybox}
\savebox{\Mybox}(6,3)[tr]{\mathcal{SAVED}}
\thicklines
\put(1,1){\frame{\usebox{\Mybox}}}
\put(11,1){\frame{\usebox{\Mybox}}}
\put(1,1){\vector(1,1){0}}
\put(11,1){\vector(1,1){0}}
\end{picture}
\setlength{\unitlength}{1pt}

```

It can take LaTeX a long time to draw something. When a box is saved it actually contains the typeset contents, which then just get printed out when the box is used. It can save processing time if something which appears several times is saved and then used as and where required. On the other hand, a saved box can use up a significant amount of LaTeX's internal storage space. The `\sbox` command with an empty text argument can be used to delete the contents of a bin. For example,

```
\sbox{\Mybox}{}
```

will empty the `\Mybox` box. Note that this does not delete the storage box itself.

### D.2.3 Lines

LaTeX can draw straight lines, but the range of slopes for lines is somewhat restricted. Further, very short lines cannot be drawn.

```
\line(<i,j>){<distance>}
```

The pair  $\langle i, j \rangle$  specifies the *slope* of the line, and  $\langle distance \rangle$  is a value that controls the length of the line. The line starts at its reference point (i.e., the place where it is `\put`). The

slope of the line is such that if a point on the line is slid along the line, then for every  $i$  units the point moves in the horizontal direction it will also have moved  $j$  units in the vertical direction. Negative values for  $i$  or  $j$  have the expected meaning. A move of -3 units in  $i$  means a move of 3 units to the left, and similarly a move of -4 units in  $j$  means a move of 4 units downwards. So, a line sloping up to the right will have positive values for  $i$  and  $j$ , while a line sloping up to the left will have a negative value for  $i$  and a positive value for  $j$ .

The  $\langle distance \rangle$  argument specifies the length of the line in the  $x$  (horizontal) direction. One problem with this may have occurred to you: what if the line is vertical (i.e.,  $i = 0$ )? In this case only,  $\langle distance \rangle$  specifies the vertical length of the line. The  $\langle distance \rangle$  argument must be a non-negative value. For horizontal and vertical lines only, the actual length of the line is  $\langle distance \rangle$ . Figure D.2, which is produced from the code below, diagrams the line specification arguments.

```
\begin{figure}
\centering
\setlength{\unitlength}{1mm}
\begin{picture}(70,60)
\thicklines    % draw line and ref point
  \put(10,20){\line(2,1){40}}
  \put(10,20){\vector(1,-1){0}}
\thinlines     % draw axes
  \put(0,0){\vector(1,0){60}} \put(63,0){x}
  \put(0,0){\vector(0,1){50}} \put(0,53){y}
  % draw i and j vectors
  \put(20,25){\vector(1,0){20}}
  \put(30,22){\makebox(0,0)[t]{\mathit{i}}}
  \put(40,25){\vector(0,1){10}}
  \put(42,30){\makebox(0,0)[l]{\mathit{j}}}
  % draw distance vector
  \put(30,10){\vector(-1,0){20}}
  \put(30,10){\vector(1,0){20}}
  \put(30,8){\makebox(0,0)[t]{\textit{distance}}}
\end{picture}
\setlength{\unitlength}{1pt}
\caption{Specification of a line or arrow}
\label{flpic:spec}
\end{figure}
```

Only a fixed number of slopes are available. This is because LaTeX uses a special font for drawing lines — a line actually consists of little bits of angled rules joined together. Thus, there is only a limited number of values for  $i$  and  $j$ . They must both be integers and in the range  $-6 \leq i, j \leq 6$ . Also, they must have no common divisor other than 1. In other words, the ratio between  $i$  and  $j$  must be in its simplest form. You cannot, for example, have (3, 6); instead it would have to be (1, 2). The shortest line that LaTeX can draw is about ten points ( $1/7$  inch approximately) in overall length. You can, though, draw lines that are too long to fit on the page.

Figure D.3 shows the lines and arrows slanting upwards and to the right that can be drawn in LaTeX. The slope  $(i, j)$  pair are shown to the right of the first set of lines and

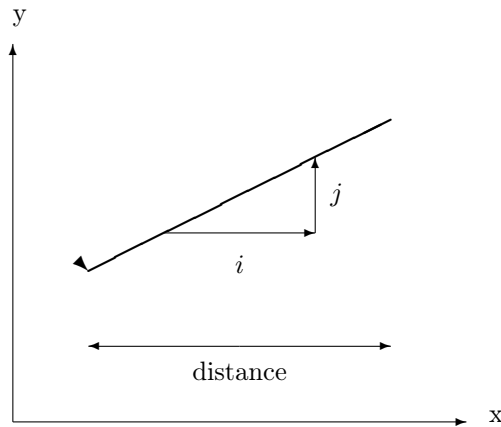


Figure D.2: Specification of a line or arrow

arrows, together with the  $j/i$  ratio which gives the slope of the line as a decimal number.

#### D.2.4 Arrows

As shown in Figure D.3 you can also draw a line with an arrowhead on it. These are specified by the `\vector` command.

```
\vector(<i,j>){<distance>}
```

This works exactly like the `\line` command and the arrowhead is put on the line at the end away from the reference point. That is, the arrow points away from the reference point. If the `<distance>` argument is too small (zero, for instance) the arrowhead only is drawn, with its point at the position where it is `\put`.

LaTeX is even more restrictive in the number of slopes that it can draw with arrows than it is with lines. The  $(i, j)$  slope specification pair must lie in the range  $-4 \leq i, j \leq 4$ . Also, as with the `\line` command, they must have no common divisor.

#### D.2.5 Circles

LaTeX can draw two kinds of circles. One is an open circle where only the perimeter is drawn, and the other is a solidly filled disk.

```
\circle{<diameter>}
\circle*{<diameter>}
```

The reference point for the open circle, drawn by the `\circle` command, and the disk, which is drawn by the `\circle*` command, is at the center of the circle. The argument to the commands is the `<diameter>` of the circle.

Source for example D.8

```
\setlength{\unitlength}{1pt}
```

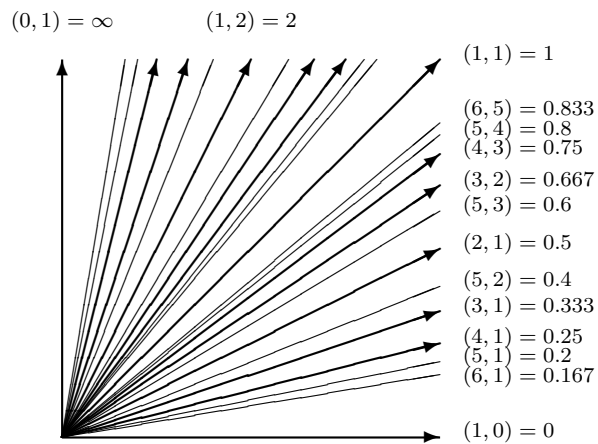
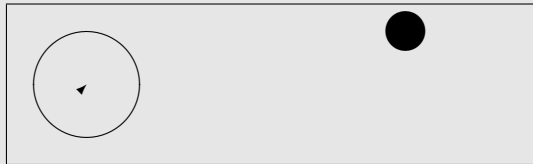


Figure D.3: Sloping lines and arrows

---

Typeset example D.8: Picture: circles

---

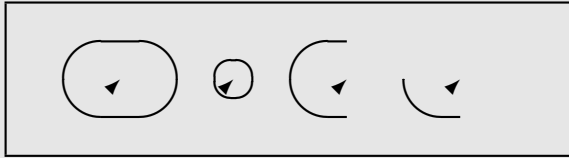


```
\begin{picture}(200,60)
\put(0,0){\framebox(200,60){}}
\put(30,30){\circle{40}}
\put(30,30){\vector(1,1){0}}
\put(150,50){\circle*{20}}
\end{picture}
\setlength{\unitlength}{1pt}
```

Just as with the `\line` and `\vector` commands, there is only a limited range of circles that can be drawn. Typically, the maximum diameter of a `\circle` is about 40 points, while for a `\circle*` the maximum diameter is less, being about 15 points. LaTeX will choose the nearest sized circle to the one that you specify. Either consult your local guru to find what



Typeset example D.9: Picture: ovals



sized circles you can draw on your system, or try some experiments by drawing a range of circles to see what happens.

Quarter circles and boxes

In LaTeX an `\oval` is a rectangular box with rounded corners.

```
\oval(<width, height>)[<portion>]
```

The `\oval` command has one required argument which specifies the width and height of the box. The normally sharp corners of the box are replaced by quarter circles of the maximum possible radius (which LaTeX figures out for itself). Unlike the boxes discussed earlier, the reference point is at the ‘center’ of the oval.


Source for example D.9

```
\setlength{\unitlength}{1mm}
\begin{picture}(75,20)
\thicklines
\put(0,0){\framebox(75,20){}}
\put(15,10){\oval(15,10)}      % complete oval
\put(15,10){\vector(1,1){0}}
\put(30,10){\oval(5,5)}       % small oval
\put(30,10){\vector(1,1){0}}
\put(45,10){\oval(15,10)[l]}  % left half
\put(45,10){\vector(1,1){0}}
\put(60,10){\oval(15,10)[bl]} % bottom left quarter
\put(60,10){\vector(1,1){0}}
\end{picture}
\setlength{\unitlength}{1pt}
```

The `\oval` command also has one optional argument, *<portion>*, which comes after the required argument. Use of the optional argument enables either half or a quarter of the complete rounded box to be drawn. The argument is a one or two letter code drawn from the following.

Typeset example D.10: Picture: text in oval

---



- l (left) Draw the left of the oval.
- r (right) Draw the right of the oval.
- t (top) Draw the top of the oval.
- b (bottom) Draw the bottom of the oval.

These are similar to the optional positioning argument in the box commands. A one letter code will draw the designated half of the oval, while a two letter code results in the designated quarter of the oval being drawn. In all cases the reference point is at the center of the ‘complete’ oval.

Source for example [D.10](#)

```
\setlength{\unitlength}{1mm}
\begin{picture}(30,10)
\thicklines
\put(15,5){\oval(30,10)}
\put(15,5){\makebox(0,0){Text in oval}}
\end{picture}
\setlength{\unitlength}{1pt}
```

Unlike the boxes described in §D.2.2 there is no  $\langle text \rangle$  argument for an `\oval`. If you want the rounded box to contain text, then you have to place the text inside the box yourself. The code in example [D.10](#) shows one way of doing this; a zero-sized box is used to center the text at the center of the oval.

### D.3 Repetitions

The `\multiput` command is a convenient way to place regularly spaced copies of an object in a picture.

`\multiput(\langle x, y \rangle)(\langle dx, dy \rangle)\{\langle num \rangle\}\{\langle object \rangle\}`

As you can see, this is similar to the syntax for the `\put` command, except that there are two more required arguments, namely  $(\langle dx, dy \rangle)$  and  $num$ .

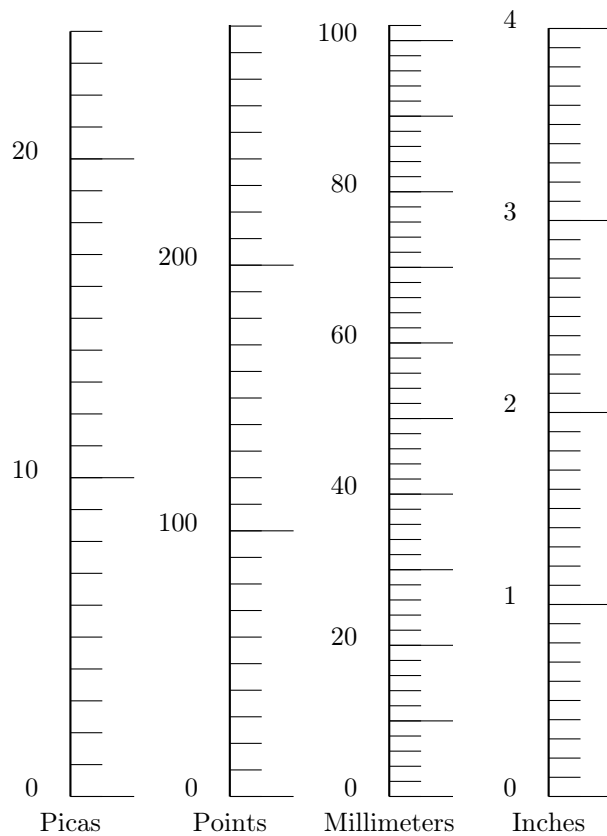


Figure D.4: Some measuring scales

The  $(\langle dx, dy \rangle)$  argument is a pair of (decimal) numbers that specify the amount that the  $\langle object \rangle$  shall be moved at each repetition. The first of this pair specifies the horizontal movement and the second the vertical movement. Positive values shift to the right or up, and negative numbers shift to the left or down. The  $\langle num \rangle$  argument specifies how many times the  $\langle object \rangle$  is to be drawn.

The code below produces Figure D.4. This example also shows that a picture can be placed inside another picture. Often it is useful to break a complex diagram up into pieces, with each piece being a separate picture. The pieces can then be individually positioned within the overall diagram.

```
\begin{figure}
\setlength{\unitlength}{1pc}
\centering
\begin{picture}(21,26)
% Draw Pica scale
\put(2,2){\begin{picture}(5,24)
\put(0,-.5){\makebox(0,0)[t]{\textbf{Picas}}}
\thicklines \put(0,0){\line(0,1){24.0}}
```

## D. Pictures

---


```

\thinlines \multiput(0,0)(0,1){25}{\line(1,0){1}}
\multiput(0,0)(0,10){3}{\line(1,0){2}}
\put(-1,0){\makebox(0,0)[br]{0}}
\put(-1,10){\makebox(0,0)[br]{10}}
\put(-1,20){\makebox(0,0)[br]{20}}
\end{picture}}
% Draw Points scale
\put(7,2){\begin{picture}(5,24)
\put(0,-0.5){\makebox(0,0)[t]{\textbf{Points}}}
\thicklines \put(0,0){\line(0,1){24.2}}
\thinlines \multiput(0,0)(0,0.8333){30}{\line(1,0){1}}
\multiput(0,0)(0,8.333){3}{\line(1,0){2}}
\put(-1,0){\makebox(0,0)[br]{0}}
\put(-1,8.333){\makebox(0,0)[br]{100}}
\put(-1,16.667){\makebox(0,0)[br]{200}}
\end{picture}}
% Draw Millimeter scale
\put(12,2){\begin{picture}(5,24)
\put(0,-0.5){\makebox(0,0)[t]{\textbf{Millimeters}}}
\thicklines \put(0,0){\line(0,1){24.2}}
\thinlines \multiput(0,0)(0,0.4742){15}{\line(1,0){1}}
\multiput(0,0)(0,2.3711){11}{\line(1,0){2}}
\put(-1,0){\makebox(0,0)[br]{0}}
\put(-1,4.742){\makebox(0,0)[br]{20}}
\put(-1,9.484){\makebox(0,0)[br]{40}}
\put(-1,14.226){\makebox(0,0)[br]{60}}
\put(-1,18.968){\makebox(0,0)[br]{80}}
\put(-1,23.71){\makebox(0,0)[br]{100}}
\end{picture}}
% Draw Inch scale
\put(17,2){\begin{picture}(5,24)
\put(0,-0.5){\makebox(0,0)[t]{\textbf{Inches}}}
\thicklines \put(0,0){\line(0,1){24.1}}
\thinlines \multiput(0,0)(0,0.60225){41}{\line(1,0){1}}
\multiput(0,0)(0,6.0225){5}{\line(1,0){2}}
\put(-1,0){\makebox(0,0)[br]{0}}
\put(-1,6.0225){\makebox(0,0)[br]{1}}
\put(-1,12.045){\makebox(0,0)[br]{2}}
\put(-1,18.0675){\makebox(0,0)[br]{3}}
\put(-1,24.09){\makebox(0,0)[br]{4}}
\end{picture}}

\end{picture}
\setlength{\unitlength}{1pt}
\caption{Some measuring scales} \label{flpic:scales}
\end{figure}

```

Typeset example D.11: Picture: repetitions



You can also make regular two-dimensional patterns by using a `\multiput` pattern inside another `\multiput`. As LaTeX will process each `\multiput` every time it is repeated it is often more convenient to store the results of the first `\multiput` in a bin and then use this as the argument to the second `\multiput`.

Source for example [D.11](#)

```
\setlength{\unitlength}{1mm}
\begin{picture}(32,14)
\put(0,0){\framebox(32,14){}}
\savebox{\Mybox}(8,8){\multiput(0,0)(4,4){3}{\circle*{1}}}
\multiput(4,4)(6,0){4}{\usebox{\Mybox}}
\sbox{\Mybox}{}
\end{picture}
\setlength{\unitlength}{1pt}
```

Remember that a storage bin must have been declared via a `\newsavebox` command before it can be used. I originally declared and used the `\Mybox` bin in §D.2.2. As the above example shows, you can change the contents of a storage bin by utilising it in another `\savebox`. Storage bins can use up a lot of LaTeX's memory. After you have finished with a storage bin empty it via the `\sbox` command with an empty last argument, as shown in the example.

#### D.4 Bezier curves

Standard LaTeX provides one further drawing command — the `\qbezier` command. This can be used for drawing fairly arbitrary curves.

`\qbezier[⟨num⟩](⟨Xs,Ys⟩)(⟨Xm,Ym⟩)(⟨Xe,Ye⟩)`

The command will draw what geometers call a *quadratic Bezier curve* from the point  $(\langle Xs, Ys \rangle)$  to the point  $(\langle Xe, Ye \rangle)$ . The curve will pass somewhere near to the point  $(\langle Xm, Ym \rangle)$ .

Bezier curves are named after Pierre Bezier who first used them in 1962. They are widely used in Computer Aided Design (CAD) programs and other graphics and font design systems. Descriptions, with varying degrees of mathematical complexity, can be found in many places: when I was a practicing geometer these included [FP80], [Mor85]

and [Far90]; no doubt there are more recent sources available and there is a brief review in [Wil04a].

Figure D.5 shows two of these curves. The figure was produced by the code below.

```
\begin{figure}
\setlength{\unitlength}{1mm}
\centering
\begin{picture}(100,100)

\thicklines % first curve
\qbezier(10,50)(50,90)(50,50)
\thinlines % draw lines joining control points
\put(10,50){\line(1,1){40}}
\put(50,90){\line(0,-1){40}}
% label control points
\put(10,45){\makebox(0,0)[t]{\texttt{(10,50)}}}
\put(50,95){\makebox(0,0)[b]{\texttt{(50,90)}}}
\put(55,50){\makebox(0,0)[l]{\texttt{(50,50)}}}

\thicklines % second curve
\qbezier[25](50,50)(50,10)(90,50)
\thinlines % draw lines joining control points
% \put(50,50){\line(0,-1){40}}
% \put(50,10){\line(1,1){40}}
% label control points
\put(50,5){\makebox(0,0)[t]{\texttt{(50,10)}}}
\put(90,55){\makebox(0,0)[b]{\texttt{(90,50)}}}

\end{picture}
\setlength{\unitlength}{1pt}
\caption{Two Bezier curves}
\label{lpicf:bez}
\end{figure}
```

The three points used to specify the position and shape of the Bezier curve are called *control points*. The curve starts at the first control point and is tangent to the line joining the first and second control points. The curve stops at the last control point and is tangent to the line joining the last two control points.

In Figure D.5 the lines joining the control points for the first curve have been drawn in. The locations of all the control points for the two curves are labeled.

The second Bezier curve is the same shape as the first one, but rotated 180 degrees. The first control point of this curve is the same as the last control point of the first curve. This means that the two curves are joined at this point. The line, although it is not drawn, connecting the first two control points of the second curve is in the same direction as the line joining the last two control points of the first curve. This means that the two curves are also tangent at the point where they join. By stringing together several Bezier curves you can draw quite complex curved shapes.

|                          |
|--------------------------|
| <code>\qbeziermax</code> |
|--------------------------|

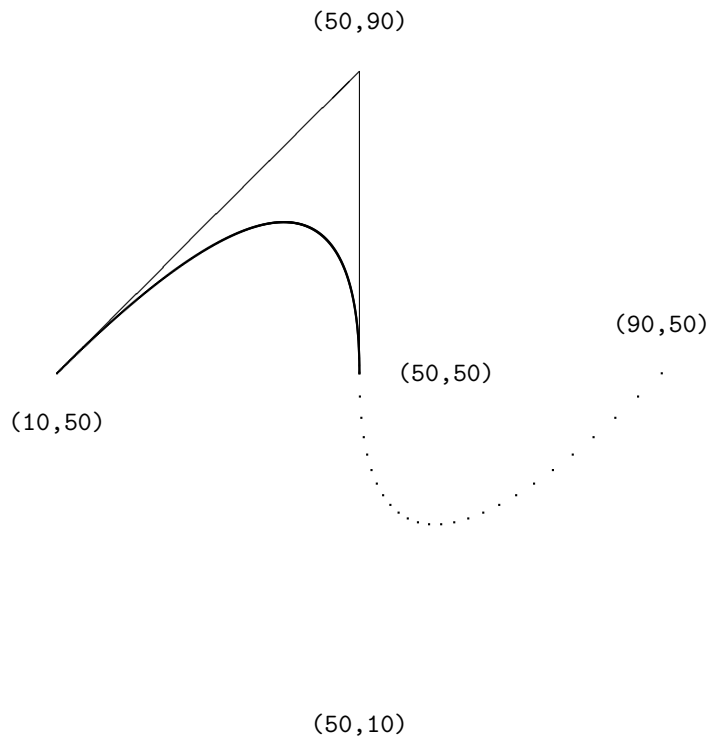


Figure D.5: Two Bezier curves

The Bezier curves are actually drawn as a linearized form using a series of rectangular blobs of ink. Left to itself, LaTeX will attempt to pick the number of blobs to give the smoothest looking curve, up to a maximum number. (Each blob takes up space in LaTeX's internal memory, and it may run out of space if too many are used in one picture.) The maximum number of blobs per Bezier curve is set by the `\qbeziermax` command. This can be adjusted with the `\renewcommand` command. For example:

```
\renewcommand{\qbeziermax}{250}
```

will set the maximum number of blobs to be 250.

Another method of controlling the number of blobs is by the optional *num* argument to the `\qbezier` command. If used, it must be a positive integer number which tells LaTeX exactly how many blobs to use for the curve.





# E

---

## LaTeX and TeX

---

Strictly speaking, LaTeX is a set of macros built on top of the TeX program originally developed by Donald Knuth [[Knu86](#), [Knu84](#)] in the early 1980's. TeX is undoubtedly one of the most robust computer programs to date.

Leslie Lamport says that most TeX commands can be used with LaTeX and lists those that cannot be used [[Lam94](#), Appendix E]. Apart from this he says nothing about any TeX commands. I have used some TeX macros in the code examples and so I need to talk a little bit about these.

I like to think of the commands and macros as falling into one of several groups.

- TeX primitives. These are the basic constructs of the TeX language.
- TeX commands or macros. These are part of the plain TeX system and are constructed from the TeX primitives.
- LaTeX kernel commands or macros. These are defined in the LaTeX kernel and are based on plain TeX primitives or commands. In turn, some higher level kernel macros are constructed from more basic aspects of the kernel. The kernel does redefine some of the plain TeX commands.
- Class command. These are mainly built up on the kernel commands but may use some basic TeX.
- Package commands. These are similar to the class commands but are less likely to directly use TeX macros.
- User commands. Typically these are limited to the commands provided by the class and any packages that might be called for, but more experienced users will employ some kernel commands, like `\newcommand`, to make their authoring more efficient.

Although TeX is designed as a language for typesetting it is also a 'Turing complete' language which means that it can perform any function that can be programmed in any familiar programming language. For example, an interpreter for the BASIC language has been written in TeX, but writing this kind of program using TeX is something that only an expert<sup>1</sup> might consider.

Nevertheless, you may have to, or wish to, write a typesetting function of your own. This chapter presents a few of the programming aspects that you may need for this, such

---

1 Probably also a masochist with plenty of time.

as performing some simple arithmetic or comparing two lengths. For anything else you will have to read one or more of the TeX books or tutorials.

In England witnesses at a trial have to swear to ‘Tell the truth, the whole truth, and nothing but the truth’. I will try and tell the truth about TeX but, to misquote Hamlet

There are more things in heaven and TeX, Horatio,  
Than are dreamt of in your philosophy.

### E.1 The TeX process

As we are delving deeper than normal and because at the bottom it is the TeX language that does all the work, it is useful to have an idea of how TeX processes a source file to produce a dvi file. It is all explained in detail by Knuth [Knu84] and also perhaps more accessibly by Eijkhout [Eij92]; the following is a simplified description. Basically there are four processes involved and the output from one process is the input to the following one.

**Input** The input process, which Knuth terms the ‘eyes’, reads the source file and converts what it sees into *tokens*. There are essentially two kinds of token. A token is either a single character such as a letter or a digit or a punctuation mark, or a token is a control sequence. A *control sequence* consists of a backslash and either all the alphabetic characters immediately following it, or the single non-alphabetic following it. Control sequence is the general term for what I have been calling a macro or a command.

**Expansion** The expansion processor is what Knuth calls ‘TeX’s mouth’. In this process some of the tokens from the input processor are expanded. Expansion replaces a token by other tokens or sometimes by no token. The expandible tokens include macros, conditionals, and a number of TeX primitives.

**Execution** The execution process is TeX’s ‘stomach’. This handles all the tokens output by the expansion processor. Control sequences that are not expandible are termed *executable*, and the execution processor executes the executable tokens. Character tokens are neither expandible nor executable. It handles any macro definitions and also builds horizontal, vertical and mathematical lists.

**Layout** The layout processor (TeX’s ‘bowels’) breaks horizontal lists into paragraphs, mathematical lists into formulae, and vertical lists into pages. The final output is the dvi file.

In spite of the sequential nature implied by this description the overall process includes some feedback from a later process to an earlier one which may affect what that does.

It is probably the expansion processor that needs to be best understood. Its input is a sequence of tokens from the input processor and its output is a sequence of different tokens.

In outline, the expansion processor takes each input token in turn and sees if it is expandible; if it is not it simply passes it on to the output. If the token is expandible then it is replaced by its expansion. The most common expandible tokens are control sequences that have been defined as macros. If the macro takes no arguments then the macro’s name is replaced by its definition. If the macro takes arguments, sufficient tokens are collected to get

the values of the arguments, and then the macro name is replaced by the definition. The expansion processor then looks at the first token in the replacement, and if that is expandable it expands that, and so on.

Nominally, the eventual output from the expansion processor is a stream of non-expandable tokens. There are ways, however of controlling whether or not the expansion processor will actually expand an expandable token, and to control the order in which things get expanded, but that is where things get rapidly complicated.

The layout processor works something like this. Ignoring maths, TeX stores what you type in two kinds of lists, vertical and horizontal. As it reads your words it puts them one after another in a horizontal list. At the end of a paragraph it stops the horizontal list and adds it to the vertical list. At the beginning of the next paragraph it starts a new horizontal list and adds the paragraph's words to it. And so on. This results in a vertical list of horizontal lists of words, where each horizontal list contains the words of a paragraph.

It then goes through each horizontal list in turn, breaking it up into shorter horizontal lists, one for each line in the paragraph. These are put into another vertical list, so conceptually there is a vertical list of paragraphs, and each paragraph is a vertical list of lines, and each line is a horizontal list of words, or alternatively one vertical list of lines. Lastly it chops up the vertical list of lines into page sized chunks and outputs them a page at a time.

TeX is designed to handle arbitrary sized inserts, like those for maths, tables, sectional divisions and so forth, in an elegant manner. It does this by allowing vertical spaces on a page to stretch and shrink a little so that the actual height of the typeblock is constant. If a page consists only of text with no widow or orphan then the vertical spacing is regular, otherwise it is likely to vary to some extent. Generally speaking, TeX is not designed to typeset on a fixed grid, but against this other systems are not designed to produce high quality typeset mathematics. Attempts have been made to tweak LaTeX to typeset on a fixed grid but as far as I know nobody has been completely successful.

TeX works somewhat more efficiently than I have described. Instead of reading the whole document before breaking paragraphs into lines, it does the line breaking at the end of each paragraph. After each paragraph it checks to see if it has enough material for a page, and outputs a page whenever it is full. However, TeX is also a bit lazy. Once it has broken a paragraph into lines it never looks at the paragraph again, except perhaps to split it at a page break. If you want to change, say, the width of the typeblock on a particular page, any paragraph that spills over from a previous page will not be reset to match the new measure. This asynchronous page breaking also has an unfortunate effect if you are trying to put a note in say, the outside margin, as the outside is unknown until after the paragraph has been set, and so the note may end up in the wrong margin.

## E.2 LaTeX files

The aux file is the way LaTeX transfers information from one run to the next and the process works roughly like this.

- The aux file is read at the start of the document environment. If `\nofiles` has not been specified a new empty aux file is then created which has the side effect of destroying the original aux file.

- Within the document environment there may be macros that write information to the aux file, such as the sectioning or captioning commands. However, these macros will not write their information if `\nofiles` has been specified.
- At the end of the document environment the contents of the aux file are read.

Under normal circumstances new output files are produced each time LaTeX is run, but when `\nofiles` is specified only the `dvi` and `log` files will be new — any other files are unchanged.

In the case of the sectioning commands these write macros into the aux file that in turn write information into a `toc` file, and the `\tableofcontents` command reads the `toc` file which contains the information for the Table of Contents. To make this a bit more concrete, as LaTeX processes a new document through the first two runs, the following events occur.

1. Initially there is neither an aux nor a `toc` file. At the start of the document environment a new empty aux file is created.
2. During the first run the `\tableofcontents` typesets the Contents heading and creates a new empty `toc` file.

During the run sectional commands write information into the new aux file. At the end of the document environment the aux file is read. Contents information in the aux file is written to the `toc` file. Lastly all the output files are closed.

3. For the second run the aux file from the previous run is read at the start of the document environment; no information can be written to a `toc` file because the `toc` file is only made available by the `\tableofcontents` command. The aux file from the previous run is closed and the new one for this run is created.

This time the `\tableofcontents` reads `toc` file that was created during the previous run which contains the typesetting instructions for the contents, and then starts a new `toc` file.

And so the process repeats itself.

The aux file mechanism means that, except for the simplest of documents, LaTeX has to be run at least twice in order to have all the information to hand for typesetting. If sections are added or deleted, two runs are necessary afterwards to ensure that everything is up to date. Sometimes three, or even more, runs are necessary to guarantee that things are settled.

### E.3 Syntax

The LaTeX syntax that you normally see is pretty regular. Mandatory arguments are enclosed in curly braces and optional arguments are enclosed in square brackets. One exception to this rule is in the `picture` environment where coordinate and direction pairs are enclosed in parentheses.

The TeX syntax is not regular in the above sense. For example, if in LaTeX you said

```
\newcommand*{\cmd}[2]{#1 is no. #2 of}
\cmd{M}{13} the alphabet. % prints: M is no. 13 of the alphabet
```

Then in TeX you would say

```
\def\cmd#1#2{#1 is no. #2 of}
```

and you could then use either of the following calls:

```
\cmd M{13} the alphabet. % prints: M is no. 13 of the alphabet
\cmd{M}{13} the alphabet. % prints: M is no. 13 of the alphabet
```

A simplistic explanation of the first TeX call of `\cmd` is as follows. A control sequence starts with a backslash, followed by either a single character, or one or more of what TeX thinks of as letters (normally the 52 lower- and upper-case alphabetic characters); a space or any non-letter, therefore, ends a multiletter control sequence. TeX and LaTeX discard any spaces after a macro name. If the macro takes any arguments, and `\cmd` takes two, TeX will then start looking for the first argument. An argument is either something enclosed in braces or a single token. In the example the first token is the character ‘M’, so that is the value of the first argument. TeX then looks for the second argument, which is the ‘13’ enclosed in the braces. In the second example, both arguments are enclosed in braces.

Here are some TeX variations.

```
\cmd B{2} the alphabet. % prints: B is no. 2 of the alphabet.
\cmd B2 the alphabet.   % prints: B is no. 2 of the alphabet.
\cmd N14 the alphabet.  % prints: N is no. 1 of4 the alphabet.
```

The result of `\cmd B{2}` is as expected. The results of `\cmd B2` and `\cmd N14` should also be expected, and if not take a moment to ponder why. The ‘B’ and ‘N’ are the first arguments to `\cmd` in the two cases because a single character is a token. Having found the first argument TeX looks for the second one, which again will be a token as there are no braces. It will find ‘2’ and ‘1’ as the second arguments and will then expand the `\cmd` macro. In the case of `\cmd B2` this gives a reasonable result. In the case of `\cmd N14`, TeX expands `\cmd N1` to produce ‘N is in position 1 of’, then continues printing the rest of the text, which is ‘4 the alphabet’, hence the odd looking result.

#### E.4 (La)TeX commands

I have used some TeX commands in the example code and it is now time to describe these. Only enough explanation is given to cover my use of them. Full explanations would require a doubling in the size of the book and a concomitant increase in the price, so for full details consult the *TeXbook* which is the definitive source, or one of the TeX manuals listed in the Bibliography. I find *TeX by Topic* particularly helpful.

I have also used LaTeX commands that are not mentioned by Lamport. LaTeX uses a convention for command names; any name that includes the `@` character is an ‘internal’ command and may be subject to change, or even deletion. Normal commands are meant to be stable — the code implementing them may change but their effect will remain unaltered. In the LaTeX kernel, and in class and package files the character `@` is automatically treated as a letter so it may be used as part of a command name. Anywhere else you have to use `\makeatletter` to make `@` be treated as a letter and `\makeatother` to make `@` revert to its other meaning. So, if you are defining or modifying or directly using any command that includes an `@` sign then this must be done in either a `.sty` file or if in the document itself it must be surrounded by `\makeatletter` and `\makeatother`.

The implication is ‘don’t use internal commands as they may be dangerous’. Climbing rocks is also dangerous but there are rock climbers; the live ones though don’t try climbing Half Dome in Yosemite or the North Face of the Eiger without having first gained experience on friendlier rocks.

The LaTeX kernel is full of internal commands and a few are mentioned in Lamport. There is no place where you can go to get explanations of all the LaTeX commands, but if you run LaTeX on the `source2e.tex` file which is in the standard LaTeX distribution you will get the commented kernel code. The index of the commands runs to about 40 double column pages. Each class and package introduce new commands over and above those in the kernel.

LaTeX includes `\newcommand`, `\providecommand` and `\renewcommand` as means of (re-)defining a command, but TeX provides only one method.

`\def<cmd><arg-spec>{<text>}`

`\def` specifies that within the local group the command `\cmd` is defined as `<text>`, and any previous definitions of `<cmd>` within the group are overwritten. Neither the `<text>` nor any arguments can include an end-of-paragraph. The LaTeX equivalent to `\def` is the pair of commands `\providecommand*` followed by `\renewcommand*`.

The `<arg-spec>` is a list of the argument numbers (e.g., `#1#2`) in sequential order, the list ending at the ‘{’ starting the `<text>`. Any spaces or other characters in the argument list are significant. These must appear in the actual argument list when the macro is used.

`\long \global  
\gdef<cmd><arg-spec>{<text>  
\edef<cmd><arg-spec>{<text>  
\xdef<cmd><arg-spec>{<text>`

If you use the `\long` qualifier before `\def` (as `\long\def . . .`) then the `<text>` and arguments may include paragraphs. The LaTeX version of this is the unstarred `\providecommand` followed by `\renewcommand`.

To make a command global instead of local to the current group, the `\global` qualifier can be used with `\def` (as `\global\def . . .`) when defining it; `\gdef` is provided as a shorthand for this common case.

Normally any macros within the replacement `<text>` of a command defined by `\def` are expanded when the command is called. The macro `\edef` also defines a command but in this case any macros in the replacement `<text>` are expanded when the command is defined. Both `\long` and `\global` may be used to qualify `\edef`, and like `\gdef` being shorthand for `\global\def`, `\xdef` is short for `\global\edef`.

There is much more to the `\def` family of commands than I have given; consult elsewhere for all the gory details.

`\let<cmba>=<cmb>`

The `\let` macro gives `<cmba>` the same definition as `<cmb>` *at the time the `\let` is called*. The `=` sign is optional. `\let` is often used when you want to save the definition of a command.

Here is a short example of how some of `\def` and `\let` work.

```
\def\name{Alf}  
\let\fred = \name  
  \name, \fred.           % prints Alf, Alf.
```

```

\def\name{Fred}
\name, \fred.      % prints Fred, Alf.
\def\name{\fred red}
\name, \fred.      % prints Alfred, Alf.

```

```
\csname <string>\endcsname
```

If you have ever tried to define commands like `\cmd1`, `\cmd2` you will have found that it does not work. TeX command names consists of either a single character or a name composed solely of what TeX thinks of as alphabetic characters. However, the `\csname` `\endcsname` pair turn the enclosed `<string>` into the control sequence `\string`, which means that you can create `\cmd1` by

```
\csname cmd1\endcsname
```

Note that the resulting `\cmd1` is not defined (as a macro).

```

\@namedef{<string>}
\@nameuse{<string>}

```

The kernel `\@namedef` macro expands to `\def\<string>`, where `<string>` can contain any characters. You can use this to define commands that include non-alphabetic characters. There is the matching `\@nameuse` macro which expands to `\<string>` which then lets you use command names that include non-alphabetic characters. For example:

```

\@namedef{fred2}{Frederick-II}
...
\makeatletter\@nameuse{fred2}\makeatother reigned from ...

```

At any point in its processing TeX is in one of six *modes* which can be categorized into three groups:

1. horizontal and restricted horizontal;
2. vertical and internal vertical;
3. math and display math.

More simply, TeX is in either horizontal, or vertical, or math mode. In horizontal mode TeX is typically building lines of text while in vertical mode it is typically stacking things on top of each other, like the lines making up a paragraph. Math gets complicated, and who can do with more complications at this stage of the game?

```

\hbox to <dimen>{\text} \hb@xt@<dimen>{\text}
\vbox to <dimen>{\text}

```

With `\hbox`, `<text>` is put into a horizontal box, and similarly `\vbox` puts `<text>` into a vertical box. The sizes of the boxes depend on the size of the `<text>`. The optional `to <dimen>` phrase sets the size of the box to the fixed `<dimen>` value. If the `<text>` does not fit neatly inside a fixed size box then TeX will report `overfull` or `underfull` warnings. LaTeX supplies the `\hb@xt@` command as a shorthand for `\hbox to`.

Inside a horizontal box TeX is in restricted horizontal mode which means that everything in the box is aligned horizontally. Inside a vertical box TeX is in internal vertical mode and the contents are stacked up and aligned vertically.

```
\dp<box> \ht<box> \wd<box>
```

The depth, height and width of a box are returned by the macros `\dp`, `\ht` and `\wd` respectively.

```
\leavevmode
```

TeX may be in either vertical or horizontal mode and there are things that can be done in one mode while TeX reports an error if they are attempted in the other mode. When typesetting a paragraph TeX is in horizontal mode. If TeX is in vertical mode, `\leavevmode` makes it switch to horizontal mode, but does nothing if TeX is already in horizontal mode. It is often used to make sure that TeX is in horizontal mode when it is unclear what state it might be in.

### E.5 Calculation

LaTeX provides some methods for manipulating numbers and these, of course, are composed from TeX's more basic methods. Sometimes it is useful to know what TeX itself provides. We have met most, if not all, of LaTeX's macros earlier but I'll collect them all here for ease of reference.

#### E.5.1 Numbers

In LaTeX a counter is used for storing an integer number.

```
\newcounter{<counter>}  
\setcounter{<counter>}{<number>}  
\stepcounter{<counter>} \refstepcounter{<counter>}
```

A new counter called `<counter>`, without a backslash, is created using `\newcounter`. Its value can be set to a `<number>` by the `\setcounter` command and `\stepcounter` increases its value by one. If the counter is to be used as the basis for a `\label`, its value must be set using `\refstepcounter`, neither `\stepcounter` nor `\setcounter` will work as expected in this case.

Internally, a LaTeX *counter* is represented by a TeX *count* — the `\newcounter` macro creates a TeX count named `\c@<counter>`, and the other `\. . . counter` macros similarly operate on the `\c@<counter>` count.

```
\newcount<count>
```

The TeX `\newcount` command creates a new count, `<count>`, which *does* include an initial backslash. For example

```
\newcount\mycount
```

TeX's method of assigning a number to a count uses nothing like `\setcounter`.

```
<count> [= ] <number>
```

The `[` and `]` enclosing the `=` sign are there only to indicate that the `=` sign is optional. For example:

```
\mycount = -24\relax    % \mycount has the value -24  
\mycount 36\relax      % now \mycount has the value 36
```



Table E.1: Some internal macros for numbers

|                       |       |                     |       |                       |       |
|-----------------------|-------|---------------------|-------|-----------------------|-------|
| <code>\m@ne</code>    | -1    | <code>\z@</code>    | 0     | <code>\@ne</code>     | 1     |
| <code>\tw@</code>     | 2     | <code>\thr@@</code> | 3     | <code>\sixt@@n</code> | 16    |
| <code>\@xxxiii</code> | 32    | <code>\@cclv</code> | 255   | <code>\@cclvi</code>  | 256   |
| <code>\@m</code>      | 1000  | <code>\@Mi</code>   | 10001 | <code>\@Mii</code>    | 10002 |
| <code>\@Miii</code>   | 10003 | <code>\@Miv</code>  | 10004 | <code>\@MM</code>     | 20000 |

I have added `\relax` after the digits forming the number for safety and efficiency. When TeX is reading a number it keeps on looking until it comes across something that is not part of a number. There are things that TeX will treat as part of a number which you might not think of, but `\relax` is definitely not part of a number. See, for example, [Eij92, chapter 7] for all the intricate details if you need them.

There are some numbers that are used many times in the LaTeX kernel and class codes. To save having to use `\relax` after such numbers, and for other reasons of efficiency, there are commands that can be used instead of typing the digits. These are listed in Table E.1. The command `\z@` can be used both for the number zero and for a length of 0pt. Do not use the commands to print a number.

TeX has a limited vocabulary for arithmetic. It can add to a count, and can multiply and divide a count, but only by integers. The result is always an integer. This may be disconcerting after a division where any remainder is discarded. The syntax for these operations is:

```
\advance<count> [ by ] <number>
\multiply<count> [ by ] <number>
\divide<count> [ by ] <number>
```

The `by` is a TeX keyword and the brackets are just there to indicate that it can be missed out. Some examples:

```
\advance\mycount by -\mycount % \mycount is now 0
\mycount = 15\relax          % \mycount is now 15
\divide\mycount by 4\relax   % \mycount is now 3
\multiply\mycount 4\relax     % \mycount is now 12
\advance\mycount by \yourcount % \mycount is now \yourcount + 12
```

The value of a count can be typeset by prepending the count by the `\the` command, e.g., `\the\mycount`.

### E.5.2 Lengths

Every length has an associated unit. For convenience I'll use '*dimension*' as shorthand for a number and a length unit.

```
dimension: <number><length-unit>
```

For example, a *dimension* may be 10pt, or 23mm, or 1.3pc.

Unlike LaTeX, TeX distinguishes two kinds of lengths. A TeX `\dimen` is a length that is fixed; in LaTeX's terms it is a *rigid* length. On the other hand a TeX `\skip` is a length that may stretch or shrink a little; it is what LaTeX calls a *rubber* length.

```
\newdimen<dimen> \newskip<skip>
```

The TeX macros `\newdimen` and `\newskip` are used for creating a new  $\langle dimen \rangle$  or a new  $\langle skip \rangle$ . For instance:

```
\newdimen\mydimen
\newskip\myskip
```

The value of a `\dimen` is a *dimension* and the value of a `\skip` is what TeX calls *glue*. It so happens that LaTeX's `\newlength` always creates a new skip — all LaTeX lengths are created as rubber lengths. Glue has at least one and possibly as many as three parts.

glue: *dimension* [ *plus dimension* ] [ *minus dimension* ]

The optional plus part is the amount that the glue can stretch from its normal size and the optional minus part is the amount the glue can shrink below its normal size. Both plus and minus are TeX keywords. Glue can never shrink more than the *minus dimension* and it normally does not stretch more than the *plus dimension*.

`\@plus \@minus`

LaTeX supplies `\@plus` and `\@minus` which expand to `plus` and `minus` respectively. Writing `\@plus` instead of `plus` uses one instead of four tokens, saving three tokens, and `\@minus` in place of `minus` saves four tokens — remember that a TeX token is either a control sequence (e.g. `\@minus`) or a single character (e.g., `m`). TeX's memory is not infinite — it can only hold so many tokens — and it makes sense for kernel and class or package writers to use fewer rather than more to leave sufficient space for any that authors might want to create.

In TeX, assigning a value to a length (`\dimen` or `\skip`) is rather different from the way it would be done in LaTeX.

$\langle dimen \rangle$  [ = ]  $\langle dimension \rangle$   
 $\langle skip \rangle$  [ = ]  $\langle glue \rangle$

The [ and ] enclosing the = sign are there only to indicate that the = sign is optional. For example:

```
\newdimen\mydimen
\mydimen = 3pt      % \mydimen has the value 3pt
\mydimen -13pt     % now \mydimen has the value -13pt
\myskip = 10pt plus 3pt minus 2pt % \myskip can vary between
                                % 8pt and 13pt (or more)
\myskip = 10pt plus 3pt          % \myskip can vary between
                                % 10pt and 13pt (or more)
\myskip = 10pt minus 2pt        % \myskip can vary between
                                % 8pt and 10pt
\myskip = 10pt                 % \myskip is fixed at 10pt
```

Like counts, the value of a length can be typeset by prepending the length by the `\the` command, e.g., `\the\myskip`.

TeX's lengths can be manipulated in the same way as a count, using the `\advance`, `\multiply` and `\divide` macros. Ignoring some details, lengths can be added together but may only be multiplied or divided by an integer number.

```

▷ \Wdimen = 10pt ⇒
                                Wdimen = 10.0pt
▷ \Wskip = 15pt plus 5pt minus 3pt ⇒
                                Wskip = 15.0pt plus 5.0pt minus 3.0pt
▷ \advance\Wskip by \Wskip ⇒
                                Wskip = 30.0pt plus 10.0pt minus 6.0pt
▷ \multiply\Wskip by 3 ⇒
                                Wskip = 90.0pt plus 30.0pt minus 18.0pt
▷ \divide\Wskip by 17 ⇒
                                Wskip = 5.29411pt plus 1.7647pt minus 1.05882pt
▷ \advance\Wskip by \Wdimen ⇒
                                Wskip = 15.29411pt plus 1.7647pt minus 1.05882pt
▷ \advance\Wdimen by \Wskip ⇒
                                Wdimen = 25.29411pt

```

A length can be multiplied by a fractional number by prepending the length with the number. For example:

```

▷ \Wdimen = 0.5\Wdimen ⇒
                                Wdimen = 12.64705pt
▷ \Wskip = 0.5\Wskip ⇒
                                Wskip = 7.64705pt

```

When `\multiply` or `\divide` is applied to a `\skip` all its parts are modified, both the fixed part and any elastic components. However, if a `\skip` is multiplied by a fractional number then it loses any elasticity it might have had. In the same vein, if a `\skip` is added to a `\dimen` any elasticity is lost. A `\skip` can be coerced into behaving like a `\dimen` but a `\dimen` is always rigid. For example, typing `'\Wdimen = 10pt plus 2pt minus 1pt'` results in: `'plus 2pt minus 1pt'`.

`\newlength{<len>}`

LaTeX's `\newlength` macro creates a new rubber length (internally it uses `\newskip`); there is no LaTeX specific macro to create a rigid length (i.e., a `\dimen`).

LaTeX has a variety of macros for setting or changing its length values.

`\setlength{<len>}{<glue>}`

The LaTeX `\setlength` macro assigns the value `<glue>` to the rubber length `<len>`. Some examples of this are:

```

▷ \setlength{\Wlen}{10pt} ⇒
                                Wlen = 10.0pt
▷ \setlength{\Wlen}{10pt plus 2pt} ⇒
                                Wlen = 10.0pt plus 2.0pt
▷ \setlength{\Wlen}{10pt minus 1pt} ⇒
                                Wlen = 10.0pt minus 1.0pt
▷ \setlength{\Wlen}{10mm plus 2pt minus 1pt} ⇒
                                Wlen = 28.45274pt plus 2.0pt minus 1.0pt

```

As shown in the last example above where both mm and pt are used as a length unit, the `\the` applied to a length always prints the value in pt units.

```
\settowidth{<len>}{<text>}
\settoheight{<len>}{<text>}
\settodepth{<len>}{<text>}
```

These put the `<text>` into a box and then set the `<len>` to the width, height and depth respectively of the box.

```
\addtolength{<len>}{<glue>}
```

LaTeX's `\addtolength` macro is the equivalent of TeX's `\advance` command. There are no equivalents to TeX's `\multiply` or `\divide` but in any case a length can still be multiplied by prepending it with a fractional number.

```
\z@
fil fill filll
```

`\z@` is a very useful LaTeX command when specifying lengths. Depending on the context it either stands for the number 0 (zero) or 0pt (zero length). TeX has three kinds of infinitely stretchy length units that can be used in the plus or minus parts of a skip. `fil` is infinitely more flexible than any fixed amount, but `fill` is infinitely more flexible than `fil` and `filll` is infinitely more flexible than anything else at all. These infinite glues can be used to push things around.

```
\hskip<skip>
\vskip<skip>
```

The TeX command `\hskip` inserts `<skip>` horizontal space and likewise `\vskip` inserts `<skip>` vertical space.

```
\hfil \hfill \hfilneg \hss
```

These commands are all TeX primitives and are equivalent to horizontal skips with some kind of infinite glue, as indicated below (note the use of `fil` as a length unit, it being preceded by a number):

```
\hfil    -> \hskip Opt plus 1fil
\hfill   -> \hskip Opt plus 1fill
\hfilneg -> \hskip Opt          minus 1fil
\hss     -> \hskip Opt plus 1fil minus 1fil
```

```
\vfil \vfill \vfilneg \vss
```

These commands are all TeX primitives and are equivalent to vertical skips with some kind of infinite glue, as indicated below:

```
\vfil    -> \vskip Opt plus 1fil
\vfill   -> \vskip Opt plus 1fill
\vfilneg -> \vskip Opt          minus 1fil
\vss     -> \vskip Opt plus 1fil minus 1fil
```

## E.6 Programming

One of the commonest programming operations is to possibly do one thing if something is true and to possibly do another thing if it is not true. Generally speaking, this is called an ‘if-then-else’ or *conditional* statement.

```
\if... <test> <true-text> [ \else <false-text> ] \fi
```

TeX has several kinds of ‘if-then-else’ statements which have the general form shown above. The statement starts with an `\if...` and is finished by a matching `\fi`. As usual, the brackets enclose optional elements, so there need be no `\else` portion. The `<true-text>`, if it exists, is processed if the `<test>` is true otherwise the `<false-text>`, if both the `\else` clause and `<false-text>` are present, is processed.

The simplest kind of `\if...` is defined by the `\newif` macro.

```
\newif\if<name>
```

`\newif` creates three new commands, the `\ifname` and the two declarations, `\nametrue` and `\namefalse`, for setting the value of `\ifname` to true or false respectively. In this case the `<test>` is embedded in the `\if...`. For example:

```
\newif\ifpeter
...
\ifpeter
  My name is Peter.
\else
  Call me Ishmael.
\fi
```

or a more likely scenario is

```
\newif\ifmine
\minetrue % or \minefalse
\newcommand{\whose}{%
  \ifmine It's mine. \else I don't know whose it is. \fi}
```

Here are some of the other more commonly used kinds of ifs.

```
\ifdim <dimen1> <rel> <dimen2>
\ifnum <number1> <rel> <number2>
\ifodd <number>
```

The `<rel>` in `\ifnum` and `\ifdim` is one of the three characters: `<` (less than), `=` (equals), or `>` (greater than). `\ifdim` results in true if the two lengths are in the stated relationship otherwise it results in false. Similarly `\ifnum` is for the comparison of two integers. The `\ifodd` test is true if the integer `<number>` is an odd number, otherwise it results in false.

Among other things, the LaTeX class code that organizes the page layout checks if the length values are sensible. The following code is a snippet from the layout algorithm. It checks that the sum of the margins and the width of the typeblock is the same as the width of the page after trimming. `\@tempdima` and `\@tempdimb` are two ‘scratch’ lengths used in many calculations.

```
\@tempdimb= -1pt          % allow a difference of 1pt
\@tempdima=\paperwidth    % paperwidth
```

```
\advance\@tempdima by -\foremargin % minus the foremargin
\advance\@tempdima -\textwidth      % minus the textwidth
\advance\@tempdima -\spinemargin    % minus the spinemargin
\ifdim\@tempdima < \@tempdimb      % should be close to zero
  %% error                          % otherwise a problem
\fi
```

Changing the subject, on the offchance that you might want to see how the Fibonacci sequence progresses, the first thirty numbers in the sequence are: 1, 1, 2, 3, 5, 8, 13, 21, 34, 55, 89, 144, 233, 377, 610, 987, 1597, 2584, 4181, 6765, 10946, 17711, 28657, 46368, 75025, 121393, 196418, 317811, 514229 and 832040. I got LaTeX to calculate those numbers for me, and it could have calculated many more. They were produced by just saying `\fibseries{30}`. The French mathematician Édouard Lucas (1842–1891) studied sequences like this and was the one to give it the name Fibonacci. Lucas also invented the game called the Tower of Hanoi with Henri de Parville (1838–1909), supplying the accompanying fable [dP84, RBC74]:

In the great temple at Benares beneath the dome that marks the center of the world, rests a brass plate in which are fixed three diamond needles, each a cubit high and as thick as the body of a bee. On one of these needles, at the creation, God placed sixty-four discs of pure gold, the largest disc resting on the brass plate, and the others getting smaller and smaller up to the top one. This is the tower of Bramah. Day and night unceasingly the priests transfer the discs from one diamond needle to another according to the fixed and immutable laws of Bramah, which require that the priest on duty must not move more than one disc at a time and that he must place this disc on a needle so that there is no smaller disc below. When the sixty-four discs shall have been thus transferred from the needle which at creation God placed them, to one of the other needles, tower, temple, and Brahmins alike will crumble into dust and with a thunderclap the world will vanish.

The number of separate transfers of single discs is  $2^{64} - 1$  or just under eighteen and a half million million moves, give or take a few, to move the pile. At the rate of one disc per second, with no mistakes, it would take more than 58 million million years before we would have to start being concerned.

In his turn, Lucas has a number sequence named after him. There are many relationships between the Fibonacci numbers  $F_n$  and the Lucas numbers  $L_n$ , the simplest, perhaps, being

$$L_n = F_{n-1} + F_{n+1} \tag{E.1}$$

$$5F_n = L_{n-1} + L_{n+1} \tag{E.2}$$

The first 15 numbers in the Lucas sequence are: 2, 1, 3, 4, 7, 11, 18, 29, 47, 76, 123, 199, 322, 521 and 843. These were produced by saying `\gfibseries{2}{1}{15}`. The Lucas numbers are produced in the same manner as the Fibonacci numbers, it's just the starting pairs that differ.

However, it is the definition of the `\fibseries` and `\gfibseries` macros that might be more interesting in this context.

First, create four new counts. `\fibtogo` is the number of terms to be calculated, `\fib` is the current term, and `\fibprev` and `\fibprevprev` are the two prior terms.

```
\newcount\fib
\newcount\fibprev
\newcount\fibprevprev
\newcount\fibtogo
```

The argument to `\fibseries` is the number of terms. The counts `\fibprevprev` and `\fibprev` are set to the starting pair in the sequence. Provided the number of terms requested is one or more the macro `\@fibseries` is called to do the work.

```
\newcommand*\fibseries}[1]{%
  \fibprevprev=1\relax
  \fibprev=1\relax
  \ifnum #1>0\relax
    \@fibseries{#1}%
  \fi}
```

The macro `\@fibseries` calculates and prints the terms.

```
\newcommand*\@fibseries}[1]{%
  \fibtogo=#1\relax
```

It's simple if no more than two terms have been asked for — just print them out.

```
\ifnum \fibtogo=\@ne
  \the\fibprevprev
\else
  \ifnum \fibtogo=\tw@
    \the\fibprevprev{} and \the\fibprev
  \else
```

Three or more terms have to be calculated. We reduce the number to be calculated by 2, and print the first two terms.

```
    \advance\fibtogo by -\tw@
    \the\fibprevprev, \the\fibprev
```

We now have to calculate the rest of the terms, where each term is the sum of the two previous terms. The macro `\@fibnext` calculates the next term, prints it out and reduces the number of terms left to be calculated (`\fibtogo`) by one. If there are terms left to be done then the process is repeated until they have all been printed.

```
    \loop
      \@fibnext
      \ifnum \fibtogo>\z@
        \repeat
    \fi
\fi}
```

The `\@fibnext` macro calculates a term in the series, uses `\printfibterm` to print it, and decrements the `\fibtogo` count.

```
\newcommand*\@fibnext){%
```

```
\fib=\fibprev
\advance\fib by \fibprevprev
\fibprevprev=\fibprev
\fibprev=\fib
\printfibterm
\advance\fibtogo \m@ne}
```

The last of the macros, `\printfibterm`, typesets a term in the sequence. If the term is the last one print an ‘and’ otherwise print a ‘,’ then a space and the term.

```
\newcommand*{\printfibterm}{%
  \ifnum \fibtogo=\@ne \space and \else , \fi
  \the\fib}
```

You have met all of the macros used in this code except for TeX’s `\loop` construct. I find the syntax for this a little unusual.

```
\loop <text1> \if... <text2> \repeat
```

The construct starts with `\loop` and is ended by `\repeat`; the `\if...` is any conditional test, but without the closing `\fi`. TeX processes `<text1>`, then if the `\if...` is true it processes `<text2>` and repeats the sequence again starting with `<text1>`. On the other hand, as soon as the result of the `\if...` is false the loop stops (i.e., TeX jumps over `<text2>` and goes on to do whatever is after the `\repeat`).

The `\gfibseries` macro that I used for the Lucas numbers is a generalisation of `\fibseries`, where the first two arguments are the starting pair for the sequence and the third argument is the number of terms; so `\gfibseries{1}{1}{...}` is equivalent to `\fibseries{...}`.

```
\newcommand*{\gfibseries}[3]{%
  \fibprevprev=#1\relax
  \fibprev=#2\relax
  \ifnum #3>0\relax
    \@fibseries{#3}%
  \fi}
```

The calculation of the terms in the Fibonacci and in the generalised sequences is the same so `\@fibseries` can be used again.

I used the TeX `\loop` construct in the `\@fibseries` macro but LaTeX has a similar construct.

```
\@whilenum <ifnum test> \do {<body>}
\@whiledim <ifdim test> \do {<body>}
```

As long as the appropriate `<test>` is true the `<body>` is processed.

In `\@fibseries` I used `\ifnum` to check for 3 possible values. There is another `\if...` form that can be used for this type of work.

```
\ifcase <number> <text for 0> \or <text for 1> \or <text for 2>
...
\or <text for N> [ \else <text for anything else> ] \fi
```

If the `<number>` is 0 then `<text for 0>` is processed, but if `<number>` is 1 then `<text for 1>` is processed, but if `<number>` is ... Each `<text for ...>` is separated by an `\or`. If `<number>` is anything



other than the specified cases (i.e., less than zero or greater than N) then if the `\else` is present (*text for anything else*) is processed.

Here's another version of the `\@fibseries` macro using `\ifcase` and `\@whilenum`.

```
\renewcommand*{\@fibseries}[1]{%
  \fibtogo=#1\relax
  \ifcase \fibtogo % ignore 0
  \or % \fibtogo=1
    \the\fibprevprev
  \or % \fibtogo=2
    \the\fibprevprev{} and \the\fibprev
  \else % fibtogo > 2
    \advance\fibtogo by -\tw@
    \the\fibprevprev, \the\fibprev
    \@whilenum \fibtogo > \z@ \do {% must kill space after the {
      \@fibnext}%
    }
  \fi}
```

TeX has more programming constructs than I have shown here and these will be explained in any good TeX book. LaTeX also has more than I have shown but in this case the best place to look for further information is in the LaTeX kernel code, for example in `ltxcntrl.dtx`.



# F

---

## The terrors of errors

---

No matter how conscientious you are a mistake or two will occasionally creep into your document source. The good news is that whatever happens TeX will not destroy your files — it may produce some odd looking output, or even no output at all, but your work is safe. The bad news is that you have to correct any errors that TeX finds. To assist you in this TeX stops whenever it comes across what it thinks is an error and tells you about it. If you're not sure what to do it will also provide some possibly helpful advice.

TeX underlies LaTeX which underlies classes and packages. You may get messages that originate from TeX, or from LaTeX, or from the class and any packages you may be using. I'll describe the TeX, LaTeX, and class messages below.

In general, you will see a message on your terminal and LaTeX will stop and wait for you to respond. It prints a question mark and is expecting you to type one of the following:

- `<return>` (or `<enter>` or what is the equivalent on your keyboard): LaTeX will continue processing the document.
- `H` (help): the help message is output and LaTeX waits for you to respond again.
- `S` (scroll): Continue processing, outputting any further error messages, but not stopping.
- `Q` (quiet): Continue processing without stopping and with no further messages.
- `R` (run): Like the `Q` option but not even stopping if your document requires some user input.
- `I` (insert): To insert some material for TeX to read but no changes are made to the source file.
- `E` (edit): This may return you to an editor so you can change the file. What actually happens is system dependent.
- `X` (exit): Stop this LaTeX run.

On the system I am used to the case of the characters does not matter. I must admit that the only ones I have used are `<return>`, `q`, `h` and `x`, in approximately that order of frequency.

All messages are output to the `log` file so you can study them later if you need to.

### F.1 TeX messages

The following is an alphabetical list of some of TeX's messages, abbreviated in some cases, together with their corresponding remarks. As an example of how these appear on your terminal, if you had a line in your source that read:

resulting in  $x^3^4$ .

then TeX would output this:

```
! Double superscript
1.102 resulting in  $x^3^
4^$.
?$ 
```

If you typed h in response to this you would then see:

```
I treat 'x^1^2' essentially like 'x^{1}^2'.
```

TeX's messages start with ! followed by the particular message text. The second line starts 1. and a number, which is the number of the line in your file where the error is. This is followed by the text of the line itself up to the point where the error was detected, and the next line in the report shows the rest of the erroneous line. The last line of the report is a ? and TeX awaits your response.

In the listing I have used this font for the error message and *this font for the comment message*.

! A box was supposed to be here.

*I was expecting to see \hbox or \vbox or \copy or \box or something like that. So you might find something missing in your output. But keep trying; you can fix this later.*

! Argument of ... has an extra }.

*I've run across a '}' that doesn't seem to match anything. For example, '\def\#1{...}' and '\a}' would produce this error. If you simply proceed now, the \par that I've just inserted will cause me to report a runaway argument that might be the root of the problem. But if your '}' was spurious, just type '2' and it will go away.*

In LaTeX terms, the example can be translated into '\newcommand{\a}[1]{...}' and '\a}'.

If you can't find the extra } it might be that you have used a fragile command in a moving argument. Footnotes or math in division titles or captions are a fruitful source for this kind of error. You shouldn't be putting footnotes into titles that will get listed in the ToC. For maths, put \protect before each fragile command.

! Arithmetic overflow.

*I can't carry out that multiplication or division, since the result is out of range.*

The maximum number that TeX can deal with is 2,147,483,647 and it balks at dividing by zero.

! Dimension too large.

*I can't work with sizes bigger than about 19 feet. Continue and I'll use the largest value I can.*

! Display math should end with \$\$.

*The '\$' that I just saw supposedly matches a previous '\$\$'. So I shall assume that you typed '\$\$' both times.*

Although \$\$ is one of TeX's methods for starting and ending display math, do *not* use it in LaTeX.

! Double subscript.

*I treat 'x\_1\_2' essentially like 'x\_1{}\_2'.*

This would produce  $x_{12}$ . If you were after say,  $x_{2_3}$  instead, type `x_{2_{3}}`.

! Double superscript.

*I treat 'x^1^2' essentially like 'x^1{}^2'.*

This would produce  $x^{12}$ . If you were after say,  $x^{2^3}$  instead, type `x^{2^3}`.

! (\end occurred inside a group at level ...).

This message is output at the end of a run. It means that you have not ended all the groups that you started; a group can be started by a simple open brace (`{}`), but there are other starting mechanisms as well, such as `\begin{...}`. If the problem is a missing `\end{...}`, LaTeX is kind enough to tell you what the mismatch is.

! (\end occurred when ... was incomplete).

! Extra \fi. or Extra \else. or Extra \or.

*I'm ignoring this; it doesn't match any \if.*

! Extra \endcsname.

*I'm ignoring this, since I wasn't doing a \csname.*

! Extra \right.

*I'm ignoring a \right that had no matching \left.*

! Extra }, or forgotten \endgroup, \$, or \right.

*I've deleted a group closing symbol because it seems to be spurious, as in '\$x}\$'. But perhaps the } is legitimate and you forgot something else, as in '\hbox{\$x}' . In such cases the way to recover is to insert both the forgotten and the deleted material, e.g., by typing 'I\$'.*

The braces or math mode delimiters didn't match. You might have forgotten a `{`, `\[`, `\(` or `$`.

! Extra ...

*Things are pretty mixed up, but I think the worst is over.*

! Extra alignment tab has been changed to \cr.

*You have given more \span or & marks than there were in the preamble to the \halign or \valign now in progress. So I'll assume that you meant to type \cr instead.*

Internally, LaTeX uses `\halign` for its array and tabular environments. The message means that you have too many column entries in a row (i.e., too many `&` before the end of the row). Perhaps you have forgotten to put `\\` at the end of the preceding row.

! File ended while scanning ... or Forbidden control sequence found while scanning ...

*I suspect you have forgotten a '}', causing me to read past where you wanted me to stop. I'll try to recover; but if the error is serious you'd better type 'E' or 'X' now and fix your file.*

! Font ...not loadable: Metric (TFM) file not found.

! Font ...not loadable: Bad metric (TFM) file.

*I wasn't able to read the size data for this font, so I will ignore the font specification. [Wizards can fix TFM files using TFtoPL/PLtoTF.] You might try inserting a different font spec; e.g., type 'I\font<same font id>=<substitute font name>'.*

LaTeX can't find a font you have asked for.

! Huge page cannot be shipped out.

*The page just created is more than 18 feet tall or more than 18 feet wide, so I suspect something went wrong.*

! I can't find file `...', please type another.

TeX couldn't find the file you asked it to read. You can also get this message with LaTeX if you have missed the braces around the argument to `\input`.

! I can't go on meeting you like this.

*One of your faux pas seems to have wounded me deeply... in fact, I'm barely conscious. Please fix it and try again.*

! I can't write on file `...', please type another.

TeX couldn't write on a file, you might have misspelled the name or not have permission to use it.

! Illegal parameter number in definition of ...

*You meant to type ## instead of #, right? Or maybe a } was forgotten somewhere earlier, and things are all screwed up? I'm going to assume that you meant ##.*

This is probably due to a command defining command like `\newcommand` or `\renewcommand` or `\providecommand`, or an environment defining command like `\newenvironment` or `\renewenvironment`, where a # has been used incorrectly. Apart from the command `\#`, a # can only be used to indicate an argument parameter, like #3 which denotes the third argument. You cannot use an argument parameter, like the #3 in the last argument of either the `\newenvironment` or the `\renewenvironment` commands.

You get the same error if you try to include any of the above defining commands inside another one.

! Illegal unit of measure (replaced by filll).

*I dddon't go any higher than filll.*

You have tried to use a `filll` with more than 3 'l's.

**! Illegal unit of measure (mu inserted).**

*The unit of measurement in math glue must be mu. To recover gracefully from this error it's best to delete the erroneous units; e.g., type '2' to delete two letters. (See Chapter 27 of The TeXbook.)*

TeX was in math mode and expecting a length, which must be in mu units.

**! Illegal unit of measure (pt inserted).**

*Dimensions can be in units of em, ex, in, pt, pc, cm, mm, dd, cc, bp, or sp; but yours is a new one! I'll assume you meant to say pt, for printers' points. To recover gracefully from this error it's best to delete the erroneous units; e.g., type '2' to delete two letters. (See Chapter 27 of The TeXbook.)*

TeX was expecting a length but it found just a number without a known length unit. For example you wrote 2ib instead of 2in.

**! Improper \hyphenation will be flushed.**

*Hyphenation exceptions must contain only letters and hyphens. But continue; I'll forgive and forget.*

**! Incomplete ...all text was ignored after line ...**

*A forbidden control sequence occurred in skipped text. This kind of error happens when you say '\if...' and forget the matching '\fi'. I've inserted a '\fi'; this might work.*

**! Infinite glue shrinkage found in a paragraph.**

*The paragraph just ended includes some glue that has infinite shrinkability, e.g., '\hskip 0pt minus 1fil'. Such glue doesn't belong there—it allows a paragraph of any length to fit on one line. But it's safe to proceed, since the offensive shrinkability has been made finite.*

**! Limit controls must follow a math operator.**

*I'm ignoring this misplaced \limits or \nolimits command.*

**! Misplaced &. or Misplaced \cr. or Misplaced \span.**

*I can't figure out why you would want to use a tab mark or \cr or \span here. If you just want an ampersand the remedy is simple: Just type 'I\&' now. But if some right brace up above has ended a previous alignment prematurely, you're probably due for more error messages, and you might try typing 'S' now just to see what is salvageable.*

In LaTeX the most likely of these messages is the Misplaced &. You can only use a naked & in environments like array and tabular as column separators. Anywhere else you have to use \&.

**! Misplaced \noalign.**

*I expect to see \noalign only after the \cr of an alignment. Proceed, and I'll ignore this case.*

**! Misplaced \omit.**

*I expect to see \omit only after the tab marks or the \cr of an alignment. Proceed, and I'll ignore this case.*

**! Missing \cr inserted.**

*I'm guessing that you meant to end an alignment here.*

You might have missed a \\ at the end of the last row of a tabular or array.

**! Missing = inserted for ...**

*I was expecting to see '<', '=', or '>'. Didn't.*

**! Missing # inserted in alignment preamble.**

*There should be exactly one # between &'s, when an \halign or \valign is being set up. In this case you had none, so I've put one in; maybe that will work.*

If you get this in LaTeX then there are problems with the argument to an array or tabular.

**! Missing \$ inserted. or Missing \endgroup inserted. or Missing \right inserted. or Missing } inserted.**

*I've inserted something that you may have forgotten. (See the <inserted text> above.) With luck, this will get me unwedged, But if you really didn't forget anything, try typing '2' now; then my insertion and my current dilemma will both disappear.*

This is a general response to the above messages. There is also a more specific response for each of the messages, as listed below.

**! Missing \$ inserted.**

*I've inserted a begin-math/end-math symbol since I think you left one out. Proceed with fingers crossed.*

Certain commands can only be executed in math mode and there are others that cannot be used in math mode. TeX has come across a command that cannot be used in the current mode, so it switches into, or out of, math mode on the assumption that that was what you had forgotten to do.

**! Missing \endcsname inserted.**

*The control sequence marked <to be read again> should not appear between \csname and \endcsname.*

**! Missing { inserted.**

*A left brace was mandatory here, so I've put one in. You might want to delete and/or insert some corrections so that I will find a matching right brace soon. If you're confused by all this, try typing 'I}' now.*

**! Missing { inserted.**

*Where was the left brace? You said something like \def\{a}', which I'm going to interpret as \def\{a{}'.*

In LaTeX terms, the example wrongdoing would be `\newcommand{\a}{'`

**! Missing { inserted.**

*I've put in what seems necessary to fix the current column of the current alignment. Try to go on, since this might almost work.*

It seems that a { might have been missing in a tabular or array entry.

**! Missing control sequence inserted.**

*Please don't say '\def cs{...}', say '\def\cs{...}'. I've inserted an inaccessible control sequence so that your definition will be completed without mixing me up too badly. You can recover graciously from this error, if you're careful; see exercise 27.2 in The TeXbook.*



**! Missing delimiter(. inserted).**

*I was expecting to see something like ‘(’ or ‘\{’ or ‘\}’ here. If you typed, e.g., ‘{’ instead of ‘\{’ you should probably delete the ‘{’ by typing ‘1’ now, so that braces don’t get unbalanced. Otherwise just proceed. Acceptable delimiters are characters whose \delcode is nonnegative, or you can use ‘\delimiter <delimiter code>’.*

**! Missing number, treated as zero.**

*A number should have been here; I inserted ‘0’. (If you can’t figure out why I needed to see a number, look up ‘weird error’ in the index to The TeXbook.)*

In LaTeX this is often caused by a command expecting a number or a length argument but not finding it. You might have forgotten the argument or an opening square bracket in the text might have been taken as the start of an optional argument. For example, the `\` (newline) command takes an optional length argument, so the following will produce this error:

```
... next line\
[Horatio:] ...
```

**! Not a letter.**

*Letters in \hyphenation words must have \lccode>0.*

One or more characters in the argument to the `\hyphenation` command should not be there.

**! Number too big.**

*I can only go up to  $2147483647 = '17777777777 = "7FFFFFFF$ , so I’m using that number instead of yours.*

These all represent the same value, firstly in decimal, secondly in octal, and lastly in hexadecimal notations.

**! Output loop--- ...consecutive dead cycles.**

*I’ve concluded that your \output is awry; it never does a \shipout, so I’m shipping \box255 out myself. Next time increase \maxdeadcycles if you want me to be more patient!*

TeX appears to be spinning its wheels, doing nothing.

**! Overfull \hbox (…pt too wide).**

This is a warning that TeX couldn’t cram some text into the allotted horizontal space.

**! Overfull \vbox (…pt too high).**

This is a warning that TeX couldn’t find a good place for a pagebreak, so it has put too much onto the current page.

**! Paragraph ended before ...was complete.**

*I suspect you’ve forgotten a ‘}’, causing me to apply this control sequence to too much text. How can we recover? My plan is to forget the whole thing and hope for the best.*

Either a blank line or a `\par` command appeared in the argument to a macro that cannot handle paragraphs (e.g., a macro that was defined using `\newcommand*`).

! Please type a command or say ``\end'`.

This is the message that causes me the most trouble. My computer always ignores whatever I say to it and even typing `\end` has no effect. What I usually do, after having tried a few variations like `\end{document}`, is to kill the program by whatever means the operating system provides. Some other possible responses include:

- Type `\stop`
- Type `\csname @@end\endcsname` (LaTeX stores TeX's version of `\end` as `\@@end`)
- Type some macro that you think is unknown, perhaps `\qwertyuiod`, then respond to the error message: `Undefined control sequence`.
- Sometimes nothing works except killing the program. If you are sure you know how to kill a program, try the following highly contrived code:

```
\documentclass{article}
\newif\ifland
\newif\ifprint
\newcommand{\Xor}[2]{\ifx #1 #2}
\begin{document}
% \Xor{\ifland}{\ifprint}% try uncommenting this
\iffalse
\end{document}
```

! Runaway argument. or Runaway definition. or Runaway preamble. or Runaway text.

! Sorry, but I'm not programmed to handle this case.

*I'll just pretend that you didn't ask for it. If you're in the wrong mode, you might be able to return to the right one by typing `'I'` or `'I$'` or `'I\par'`.*

! TeX capacity exceeded, sorry [...].

*If you absolutely need more capacity, you can ask a wizard to enlarge me.*

This is dealt with in more detail below.

! Text line contains an invalid character.

*A funny symbol that I can't read has just been input. Continue, and I'll forget that it ever happened.*

The input file contains a nonprinting (control) character; only printing characters should be in the file. Some programs, like word processors, insert invisible characters into their output file. If you have used one of these to prepare your input file, make sure you save it as a plain text file (also known as an ASCII file).

! That makes 100 errors; please try again.

! This can't happen (...).

*I'm broken. Please show this to someone who can fix can fix*

This is the message you should never see!

! Too many }'s.

*You've closed more groups than you opened. Such booboos are generally harmless, so keep going.*

There are more closing braces (}) than there are opening braces ({).

! Unbalanced output routine.

*Your sneaky output routine has fewer real { 's than } 's. I can't handle that very well; good luck.*

A package or class has done nasty things to one of LaTeX's most delicate parts — the output routine.

! Unbalanced write command.

*On this page there's a \write with fewer real { 's than } 's. I can't handle that very well; good luck.*

! Undefined control sequence.

*The control sequence at the end of the top line of your error message was never \def'ed. If you have misspelled it (e.g., '\hobx'), type 'I' and the correct spelling (e.g., 'I\hbox'). Otherwise just continue, and I'll forget whatever was undefined.*

TeX has come across a macro name that it does not know about. Perhaps you misspelled it, or it is defined in a package you did not include. Another possibility is that you used a macro name that included the @ character without enclosing it between \makeatletter and \makeatother (see §E.4). In this case TeX would think that the name was just the portion up to the @.

! Underfull \hbox (badness ...).

This is a warning. There might be some extra horizontal space. It could be caused by trying to use two \newline or \ commands in succession with nothing intervening, or by using a \linebreak command or typesetting with the \sloppy declaration.

! Underfull \vbox (badness ...).

This is a warning that TeX couldn't find a good place for a pagebreak, so it produced a page with too much whitespace on it.

! Use of ...doesn't match its definition.

*If you say, e.g., '\def\al{...}', then you must always put 'I' after '\a', since the control sequence names are made up of letters only. The macro here has not been followed by the required stuff, so I'm ignoring it.*

! You can't use `...' in `... '.

This often manifests itself in the form

You can't use '\spacefactor' in vertical mode

the cause is usually trying to use a macro with @ in its name, typically in the preamble (see §E.4). The solution is to enclose the macro within \makeatletter and \makeatother.

Another version is

You can't use 'macro parameter character #' in ... mode.

In this case you have used a naked # in ordinary text; it can only be used in the definition of a macro. In ordinary text you have to use \#.

#### F.1.1 TeX capacity exceeded

TeX has run out of computer space before it finished processing your document. The most likely cause is an error in the input file rather than there really not being enough space — I have processed documents consisting of more than 1400 pages without any capacity problems.

You can very easily make TeX run out of space. Try inputting this:

```
\documentclass{article}
\newcommand*{\fred}{Fred}          % should print 'Fred'
% try to make it print 'Frederick' instead
\renewcommand{\fred}{\fred erick}
\begin{document}
  His name is \fred.
\end{document}
```

and TeX will tell you that it has run out of stack space:

```
! TeX capacity exceeded, sorry [input stack size=15000].
\fred ->\fred
      erick
1.5 His name is \fred
.
```

No pages of output.

Transcript written on errors.log.

The offending code above tries to define \fred in terms of itself, and TeX just keeps chasing round and round trying to pin down \fred until it is exhausted.

At the end of the log file for a run, TeX prints the memory space it has used. For example:

```
Here is how much of TeX's memory you used:
2432 strings out of 60985
29447 string characters out of 4940048
106416 words of memory out of 8000001
5453 multiletter control sequences out of 10000+65535
8933 words of font info for 31 fonts out of 1000000 for 1000
276 hyphenation exceptions out of 1000
26i,11n,21p,210b,380s stack positions out of
      15000i,4000n,6000p,200000b,40000s
```

The error message says what kind of space it exhausted (input stack size in the example above). The most common are:

**buffer size** Can be caused by too long a section or caption title appearing in the ToC, LoF, etc. Use the optional argument to produce a shorter entry.

**exception dictionary** There are too many words listed in \hyphenation commands. Remove any that are not actually used and if that doesn't work, remove the less common ones and insert \- in the words in the text.

**hash size** The document defines too many command names and/or uses too many cross-referencing `\labels`.

**input stack size** Typically caused by a self-referencing macro definition.

**main memory size** There are three main things that cause TeX to run out of main memory:

- Defining a lot of very long complicated macros.
- Having too many `\index` or `\glossary` commands on a page.
- Creating such a complicated page that TeX cannot hold all it needs to process it.

The solution to the first two problems is to simplify and eliminate. The third is more problematic.

Large tabulars, arrays and pictures (the `\qbezier` command is a memory hog) can gobble up memory. A queue of floats also demands memory space. Try putting a `\clearpage` just before the place where the error occurs and if it still runs out of room then there may be an error in your file, otherwise you did exceed the capacity.

If you have a long paragraph or a long verbatim environment try breaking it up, as TeX keeps these in memory until it is ready to typeset them. If you have a queue of floats make sure that you have done your best to help LaTeX find a way to output them (see §10.4) and try adding `\clearpage` at appropriate places to flush the queue.

**pool size** Typically caused by having too many characters in command names and label names.

It can also be caused by omitting the right brace that ends the argument of a counter command (`\setcounter` or `\addtocounter`) or of a `\newenvironment` or `\newtheorem` command.

**save stack size** This happens if commands or environments are nested too deeply. For instance a picture that contains a picture that includes a `\multipt` that includes a picture that includes a ...

## F.2 LaTeX errors

LaTeX errors introduce themselves differently from those that TeX finds. For example, if you ever happened to use the `\caption` command outside a float, like:

```
\caption{Naked}
```

you would get the message:

```
! LaTeX Error: \caption outside float.
```

```
See the LaTeX manual or LaTeX Companion for explanation.
```

```
Type H <return> for immediate help.
```

```
...
```

```
1.624 \caption
      {Naked}
```

?

If you then typed H in response you would get the following helpful message:

```
You're in trouble here. Try typing <return> to proceed.
If that doesn't work, type X <return> to quit.
?
```

The majority of LaTeX's help messages follow this formula, so I have not noted them in the alphabetical listing below.

`\< in mid line`

A `\<` appears in the middle of a line in a tabbing environment; it should only come at the start of a line.

`... allowed only in math mode`

You have tried to use a math command in a non-math mode.

`Bad \line or \vector argument`

A `\line` or `\vector` has a negative length argument or the slope is not within the allowed range.

`Bad math environment delimiter`

If in math mode there is a start math mode command like `\(` or `\[` or if in LR or paragraph mode there is an end math mode command like `\)` or `\]`. The basic problem is unmatched math mode delimiters or unbalanced braces.

`\begin{...} ended by \end{...}`

The name of the `\begin` argument is not the same as the name of the `\end` argument. This could be caused by a typo or a missing `\end`.

`Can only be used in the preamble`

Some commands can only be used in the preamble, such as `\usepackage`, but there was one of these after the `\begin{document}`.

`\caption outside float`

You have used the `\caption` command outside a float, such as a figure or table environment.

`Command \... already defined or name \end... illegal`

This is normally because you have used one of the `\new...` commands to define a command or environment or counter name that has already been used; remember also that defining an environment `foo` automatically defines the macro `\foo`. Either choose a new name or use the appropriate `\renew...`; also, see §19.1. In the unlikely event that you have tried to define something beginning with `\end...`, choose another name.

`Command ... invalid in math mode`

You have used a non-math command in math mode.

Command ... not provided in base LaTeX2e

You have tried to use a symbol that is not part of basic LaTeX. Try loading the `latexsym` or `amsfonts` package which might define the symbol.

Counter too large

You are using a non-numeric counter representation, such as letters or footnote symbols, and the counter has exceeded the allowed number (for example there are only 26 alphabetic characters).

Environment ... undefined

LaTeX does not know the name of the argument of a `\begin`. You have probably misspelled it.

File not found. Type X to quit or <RETURN> to proceed or enter new name  
(Default extension: ...)

LaTeX cannot find the file you requested. The extension `tex` results from a problematic `\input` or `\include`; the extension `sty` from a `\usepackage` and an extension `cls` from a `\documentclass`.

Float(s) lost

Usually caused by having too many `\marginpars` on a page.

Illegal character in array argument

There is an illegal character in the argument of an array or tabular environment, or in the second argument of a `\multicolumn` command.

`\include` cannot be nested

A file that is `\included` cannot `\include` any other files.

`\LoadClass` in package file

This is an error in a package file you are using (you can only use `\LoadClass` in a class file). Complain to the author.

Lonely `\item` --- perhaps a missing list environment

An `\item` command appears to be outside any list environment.

Missing `\begin{document}`

If you haven't forgotten `\begin{document}` then there is something wrong in the preamble as LaTeX is trying to typeset something before the document starts. This is often caused by missing the backslash from a command, misplaced braces round an argument, a stray character, or suchlike.

Missing @-exp in array argument

The `@` character is not followed by an @-expression in the argument of an array or tabular environment, or in the second argument of a `\multicolumn` command.

Missing p-arg in array argument

There is a p not followed by braces in the argument of an array or tabular environment, or in the second argument of a `\multicolumn` command.

No counter ... defined

The argument to a `\setcounter` or `\addtocounter` command, or in the optional argument to `\newcounter` or `\newtheorem` is not the name of a counter. Perhaps you misspelled the name. However, if the error occurred while an aux file was being read then you might well have used a `\newcounter` in an `\included` file.

No room for a new ...

TeX is limited in the numbers of different things it can handle. You might not recognize the thing that the message mentions as some of them are hidden in LaTeX. The LaTeX counter uses a TeX `\count` for example, and a length is a TeX `\skip`. Most things are limited to a maximum of 256 but there can be no more than 16 files open for reading and 16 for writing.

No `\title` given

You did not put a `\title` command before using `\maketitle`.

Not in outer par mode

There is a float (e.g., a figure or a `\marginpar`) in math mode or in a parbox (e.g., in another float).

Option clash for ...

The same package was used twice but with different options. It is possible for one package to use another package which might be the cause if you can't see anything obvious.

Page height already too large

You are trying to use `\enlargethispage` when the page is already too large.

`\pushtabs` and `\poptabs` don't match

There are unmatched `\pushtabs` and `\poptabs` in a tabbing environment.

`\RequirePackage` or `\LoadClass` in Options Section

This is a problem in a class or package file. Complain to the author.

Something's wrong --- perhaps a missing `\item`

This can be caused by not starting a list environment, such as `itemize` with a `\item` command, or by omitting the argument to the `thebibliography` environment. There are many other non-obvious causes, such as calling some macro that ends up using `\addvspace` or `\addpenalty` when not in `vmode`.

Suggested extra height (...) dangerously large

LaTeX is concerned that you are trying to increase the page size too much with the `\enlargethispage` command.



**Tab overflow**

In the tabbing environment a `\=` has exceeded LaTeX's maximum number of tab stops.

**The file needs format ... but this is ...**

The document uses a document class or package that is not compatible with the version of LaTeX you are using. If you are using only standard files then there is a problem with your LaTeX installation.

**There's no line to end here**

A `\newline` or `\\` appears in vertical mode, for example between paragraphs. Or perhaps you have tried to put `\\` immediately after an `\item` to start the text on a new line. If this is the case, then try this:

```
\item \mbox{} \\
...
```

**This may be a LaTeX bug**

This is a message you don't want to see as it is produced by the output routine — perhaps the most obscure part of LaTeX. It is probably due to an earlier error. If it is the first error, though, and you can't see anything wrong, ask for somebody's help.

**Too deeply nested**

There are too many list environments nested within each other. At least four levels are usually available but some list environments are not obvious (for example the quotation environment is actually a list).

**Too many columns in eqnarray environment**

An `eqnarray` environment has three `&` column separators with no `\\` between.

**Too many unprocessed floats**

There may be too many `\marginpars` to fit on a page, but it's more likely that LaTeX hasn't been able to find locations for printing all the figures or tables. If one float cannot be placed, all later ones are saved until LaTeX runs out of storage space. See [§10.4](#) for details on how LaTeX decides to place a float.

**Two \documentclass commands**

Your document has two `\documentclass` commands; only one is permitted.

**Two \LoadClass commands**

This is an error in the class file. Complain to the author.

**Undefined tab position**

A `\>`, `\+`, `\-`, or `\<` tabbing command is trying to move to a tab position that has not been defined by a `\=` command.

Unknown option ... for class/package ...

You have asked for an option that the class or package does not know about. Perhaps you have misspelled something, or omitted a comma.

`\usepackage` before `\documentclass`

In general, the `\usepackage` command can only be used in the preamble.

`\verb` ended by end of line

The argument of a `\verb` command runs past the end of the line. Perhaps you forgot to put in the correct ending character.

`\verb` illegal in command argument

A `\verb` cannot be part of the argument to another command.

### F.3 LaTeX warnings

Most warnings are given at the point in the document where a potential problem is discovered, while others are output after the document has been processed.

For example, the following code

```
... \ref{joe}... \cite{FRED96} ...
```

may produce warnings like

```
Latex Warning: Reference 'joe' on page 12 undefined
                on input line 881.
```

```
Latex Warning: Citation 'FRED96' on page 12 undefined
                at lines 890--897.
```

during the document processing, and then at the end there will also be the warning:

```
LaTeX Warning: There were undefined references.
```

Some warning messages pinpoint where a problem might lie, as in the citation warning above, while others make no attempt to do so. In the alphabetical listing that follows I have not included such information, even if it is supplied.

```
Citation ... on page ... undefined
```

The key in a `\cite` command was not defined by any `\bibitem`.

```
Citation ... undefined
```

The key in a `\cite` command was not defined by any `\bibitem`.

```
Command ... invalid in math mode
```

The command is not permitted in math mode but was used there anyway. Remember that font size commands and `\boldmath` or `\unboldmath` cannot be used in math mode.

Float too large for page by ...

A float (table or figure) is too tall to fit properly on a page by the given amount. It is put on a page by itself.

Font shape ... in size ... not available size ... substituted

You asked for a font size that was not available. The message also says what font is being used instead.

Font shape ... undefined using ... instead

You asked for a font shape that was not available. The message also says what font is being used instead.

h float specifier changed to ht or !h float specifier changed to !ht

A float has an optional h or !h argument but as it wouldn't fit on the current page it has been moved to the top of the next page.

Label ... multiply defined

Two `\label` or `\bibitem` commands have the same argument (at least during the previous LaTeX run).

Label(s) may have changed. Rerun to get cross-references right

This is only output at the end of the run.

One of the numbers printed by `\cite`, `\ref` or `\pageref` commands might be incorrect because the correct values have changed since the preceding LaTeX run.

Marginpar on page ... moved

A `\marginpar` was moved down the page to avoid overwriting an earlier one. The result will not be aligned with the `\marginpar` call.

No `\author` given

There is no `\author` command before calling `\maketitle`.

No positions in optional float specifier. Default added (so using ``tbp'`)

You have used an empty optional argument to a float, for example:

```
\begin{figure}[]
```

so it has used

```
\begin{figure}[tbp]
```

instead.

Optional argument of `\twocolumn` too tall on page ...

The contents of the optional argument to `\twocolumn` was too long to fit on the page.

`\oval`, `\circle`, or `\line` size unavailable

You have asked for too large (or too small) an oval or circle, or too short a line, in a picture.

Reference ... on page ... undefined

The argument of a `\ref` or `\pageref` has not been defined on the preceding run by a `\label` command.

Size substitutions with differences up to ... have occurred. Please check the transcript file carefully and redo the format generation if necessary!

This is only output at the end of the run.

Some fonts have had to be used as substitutes for requested ones and they are a different size.

Some shapes were not available, defaults substituted

This is only output at the end of the run.

At least one font had to be substituted.

Text page ... contains only floats

The page should have included some textual material but there was no room for it.

There were multiply defined labels

This is only output at the end of the run.

Two or more `\label` or `\cite` commands had the same argument.

There were undefined references

This is only output at the end of the run.

There was at least one `\ref` or `\pageref` or `\cite` whose argument had not been defined on the preceding run by a `\label` or `\biblabel` command.

Unused global option(s) [...]

The listed options were not known to the document class or any packages you used.

You have requested release ... of LaTeX but only release ... is available

You are using a class or package that requires a later release of LaTeX than the one you are using. You should get the latest release.

You have requested version ... of class/package ... but only version ... is available

You (or the class or one of the packages you are using) needs a later release of a class or package than the one you are using. You should get the latest release.

## F.4 Class errors

The class errors introduce themselves differently from those that LaTeX finds. Instead of starting with

! LaTeX Error:

the class errors start with

! Class memoir Error:

After that, it is indistinguishable from a LaTeX error. For example, if you ever happened to input the next line as line 954 in your document you would get the error message that follows

```
\sidecapmargin{either}
```

```
! Class memoir Error: Unrecognized argument for \sidecapmargin.
```

See the memoir class documentation for explanation.

Type H <return> for immediate help.

...

```
l.954 \sidecapmargin{either}
```

```
?
```

If you then typed H (or h) in response you would get the following helpful message:

```
Try typing <return> to proceed.
```

```
If that doesn't work, type X <return> to quit.
```

```
?
```

The majority of the help messages follow this formula, so I have not noted them in the alphabetical listing below.

```
... is negative
```

```
The value is negative. It should be at least zero.
```

```
... is not a counter
```

```
An argument that should be the name of a counter is not.
```

```
... is zero or negative
```

```
The value must be greater than zero.
```

```
>{...} at wrong position: token ignored
```

```
A >{...} in the argument to an array or tabular is incorrectly placed and is being ignored.
```

```
<{...} at wrong position: changed to !{...}
```

```
A <{...} in the argument to an array or tabular is incorrectly placed. It has been changed to !{...} instead.
```

```
A pattern has not been specified
```

```
You are trying to use the patverse or patverse* environment without having first defined a pattern.
```

Argument to `\setsidecappos` is not t or c or b

The argument will be assumed to be c.

Argument to `\overridesidecapmargin` neither left nor right

The argument to `\overridesidecapmargin` must be either left or right. The attempted override will be ignored.

Cannot change a macro that has delimited arguments

You are using `\patchcmd` on a macro that has delimited arguments.

Empty preamble: ``l'` used

The argument to an array or tabular is empty. The specification `{l}` is being used instead.

Font command ... is not supported

You have tried to use a deprecated font command. Either replace it with the current font command or declaration or use the `oldfontcommands` class option.

`\footskip` is too large for `\lowermargin` by ...

The `\footskip` is too large for the `\lowermargin`. Either increase the `\lowermargin` or decrease the `\footskip`.

`\headheight` and/or `\headsep` are too large for `\uppermargin` by ...

The sum of the `\headheight` and the `\headsep` is larger than the `\uppermargin`. Either increase the `\uppermargin` or reduce the others.

Illegal pream-token (...): ``c'` used

An illegal character is used in the argument to an array or tabular. The `'c'` specifier is being used instead (which centers the column).

Index ... outside limits for array ...

Trying to access an index for the array data structure that is not between the low and high indices.

Limits for array ... are in reverse order

The low index is not less than the high index in `\newarray`.

Missing arg: token ignored

The argument to a column specifier for a array or tabular is missing.

No array called ...

You have tried to access an unknown array data structure.

Not defined: ...

You are using `\patchcmd` on a macro that is not defined.

Not redefinable: ...

You are using `\patchcmd` on a macro that it is unable to modify.

Only one column-spec. allowed

There can only be one column specifier in a `\multicolumn`.

Optional argument is not one of: classic, fixed, lines, or nearest. I will assume the default.

You have provided an unknown name for the optional argument to `\checkthelayout`. The default classic will be used instead.

`\paperheight` and/or `\trimtop` are too large for `\stockheight` by ...

The sum of the `\paperheight` and the `\trimtop` is larger than the `\stockheight`. Either increase the `\stockheight` or reduce the others.

`\paperwidth` and/or `\trimedge` are too large for `\stockwidth` by ...

The sum of the `\paperwidth` and the `\trimedge` is larger than the `\stockwidth`. Either increase the `\stockwidth` or reduce the others.

`\spinewidth` and/or `\textwidth` and/or `\foremargin` are too large for `\paperwidth` by ...

The sum of the `\spinewidth` and the `\textwidth` and the `\foremargin` is larger than the `\paperwidth`. Either increase the `\paperwidth` or reduce the others.

The combination of argument values is ambiguous. The lengths will be set to zero

The combination of values in the arguments to one of the commands for page layout does not make sense.

The `'extrafontsizes'` option is required to use the `'...pt'` option

If you want to use a `'...pt'` class option greater than 25pt you also have to use the `extrafontsizes` option. The class will use the 17pt option.

Unknown document division name (...)

You have used an unknown division name in the argument to `\settocdepth` or `\setsecnumdepth` and friends. If you haven't mistyped it you will have to use `\setcounter` instead.

Unknown mark setting type `'...'` for ...mark

In `\createmark` or `\createplainmark` the mark setting type should have been left or both or right. The class will use both.

Unknown numbering type ... for ...mark

In `\createmark` the class expected either `shownumber` or `nonumber` for displaying the number. It will use `shownumber`.

Unrecognized argument for `\sidecapmargin`

The argument to `\sidecaption` should be left or right or inner or outer.

`\uppermargin` and/or `\textheight` and/or `\lowermargin` are too large for `\paperheight` by ...

The sum of the `\uppermargin` and the `\textheight` and the `\lowermargin` is larger than the `\paperheight`. Either increase the `\paperheight` or reduce the others.

You have used the ``*pt'` option but file ... can't be found

You have used the `*pt` option but the corresponding `clo` file can't be found. Check your definitions of `\anyptfilebase` and `\anyptsize`. The `mem10.clo` file will be used instead.

XeTeX is required to process this document

The document needs to be processed via XeTeX. Try using `xelatex` instead of `(pdf)latex`, or try removing any XeTeX packages from the document.

#### F.5 Class warnings

These are introduced by Class memoir Warning:

For example `\addtodef{alf}{\joe}{fred}` will produce a message along the lines of:

Class memoir Warning: 'alf' is not a macro on input line 91.

while `\addtodef{\joe}{alf}{fred}` might produce:

Class memoir Warning: '\joe' is not a macro on input line 97.

The following is an alphabeticised list of the class warnings.

... at index ... in pattern ... is not a digit

The character at the given position in the verse pattern is not a digit.

... is not a macro

Using `\addtodef` or `\addtoiargdef` you have tried to extend the definition of an unknown macro.

... is not an input stream

You are trying to access a non-existent input stream.

... is not an output stream

You are trying to access a non-existent output stream.

Bad `\sidebarmargin` argument

The argument to `\sidebarmargin` is not recognized. The class will use right.



Characters dropped after `\end{...}`

At the end of a verbatim environment there should be no characters after the `\end{...}` on the same line.

Column ... is already defined

The column type has been defined by a previous `\newcolumntype`.

Counter ... already defined

For information only, the counter in `\providecounter` is already defined.

Do not use `\footnote` in `\maketitle`. Use `\thanks` instead

You cannot use `\footnote` in any of the `\maketitle` elements (i.e., `\title` or `\author` or `\date`) but you can use `\thanks`.

Empty `'thebibliography'` environment

There are no `\bibitems` in the `thebibliography` environment.

Environment ... already defined

For information only, the environment in `\provideenvironment` is already defined.

Index ... for pattern ... is out of bounds

The index for the verse pattern is either too low or too high.

Input stream ... is already defined

You are trying to use `\newinputstream` to create an already existing input stream.

Input stream ... is not open

You are trying to access or close an input stream that is closed.

Input stream ... is open

You are trying to open an input stream that is already open.

Length ... already defined

For information only, the length in `\providelength` is already defined.

Marginpar on page ... moved by ...

A marginal note has been lowered by the given amount to avoid overwriting a previous note; the moved note will not be aligned with its `\marginpar`. (This is a more informative message than the normal LaTeX one.)

No more to read from stream ...

There is nothing left in the stream to be read.

Optional argument of `\twocolumn` too tall on page ...

The contents of the optional argument to `\twocolumn` was too long to fit on the page.

Output stream ... is already defined

You are trying to use `\newoutputstream` to create an already existing output stream.

Output stream ... is not open

You are trying to access or close an output stream that is closed.

Output stream ... is open

You are trying to open an output stream that already open.

Redefining primitive column ...

The argument to `\newcolumntype` is one of the basic column types.

Stream ... is not open

You are trying to access a stream, either input or output, that is closed.

The ... font command is deprecated. Use ... or ... instead

You are using a deprecated font command. Consider using one of the alternatives.

The counter will not be printed. The label is: ...

The optional *(style)* argument to the `enumerate` environment does not include one of the special characters.

Undefined index file ...

You are trying to add an index entry to an unknown `idx` file.

Unknown `toclevel` for ...

The division name you have used for `\settocdepth` is not recognized.

`\verb` may be unreliable inside `tabularx`

A `\verb` in a `tabularx` may work, but may not.

X columns too narrow (table too wide)

The width of the X columns in a `tabularx` had to be made too narrow.

# G

---

## Comments

---

### G.1 Algorithms

Over time we may use this section to explain, or list some of the algorithms for some of the macros in the class. The information may be useful to some.

#### G.1.1 Autoadjusting `\marginparwidth`

This algorithm is used within `\fixthelayout` unless the user have used `\setmarginnotes`.

```
if twocolumn then
  marginparwidth = min{inner margin,outer margin}
else
  if twoside then
    if marginpar always left or always right then
      marginparwidth = min{inner margin,outer margin}
    else if marginpar in outer margin then
      marginparwidth = outer margin
    else if marginpar in inner margin then
      marginparmargin = inner margin
    end if
  else
    if marginpar in left margin then
      marginparwidth = inner margin
    else
      marginparwidth = outer margin
    end if
  end if
end if
marginparwidth = marginparwidth - 2marginparsep
if marginparwidth < 1pt then
  marginparwidth = 1pt
end if
```



---

## Notes

---

### Chapter 3 텍스트와 글꼴

[‘work in progress’] (page 35) XeTeX enables you to use Opentype fonts with LaTeX, and supports both left-to-right and right-to-left typesetting. It has become very popular with those involved in linguistics and non-Latin scripts.

[using the appropriate package] (page 35) I have found Christopher League’s *TeX support for the FontSite 500 CD*, obtainable from <http://contrapunctus.net/fs500tex>, extremely useful in providing packages for a wide range of PostScript fonts for me to use. You do have to buy a CD containing the sources of the fonts from FontSite (<http://www.fontsite.com>); it cost me a total of \$37.12, including taxes and shipping, in 2002 for 512 PostScript and TrueType professional quality fonts that are legal and very reasonably priced.

Many of the fonts fall into the Decorative/Display category but the book fonts include: 많은 글꼴이 장식 (Decorative) / 디스플레이 (Display) 범주에 속하지만 책 글꼴에는 다음이 포함됩니다.

Blackletter Alte Schwabacher, Engravers Old English, Fette Fraktur, Fette Gotisch, and Olde English.

Uncial/Mediaeval American UncialXXAmerican Uncial, Linden, and Rosslaire.

Geralde/Venetian Bergamo (also known as Bembo), Caslon, Garamond, Goudy Old Style, Jenson Recut (also known as Centaur), URW Palladio (also known as Palatino), Savoy (also known as Sabon), Schnittger, University Old Style, and Vendome.

Transitional URW Antiqua, Baskerville, Century Old Style, ATF Clearface, English Serif, Jessica (also known as Joanna), Lanston Bell, New Baskerville, and Nicholas Cochlin.

Modern/Didone Basel (also known as Basilia), Bodoni, Modern, and Walbaum.

Free Form Barbedour, Bernhard Modern, Della Robbia, Engravers Litho, Flanders, and Lydian.

Sans Serif There are over 20 in this category but some of the ones I am most familiar with are: Chantilly (also known as Gill Sans), Franklin Gothic, Function (also known as Futura), Lanston Koch, News Gothic, Opus (also known as Optima), Struktör (also known as Syntax), and Unitus (also known as Unifers).

Slab Serif Cheltenham, Clarendon, Egyptian, Glytus (also known as Glypha), URW Latino (also known as Melior), Litho Antique, Serific (also known as Serifa).

Script There are some sixteen Script fonts.

Decorative There are over fifty Decorative fonts.

Symbol There are a dozen miscellaneous symbol fonts which include, among others, arrows, borders, fleurons and various icons.

#### Chapter 12 Page notes

[Put no mark ...finally printed] ([page 243](#)) This manual uses both footnotes and endnotes. For identifying the endnotes I have used the 'words' method for identifying the parent location of an endnote, so as not to start confusing the reader with two sets of note marks in the body of the text. Typically either footnotes or endnotes are used, not both, so the question of distinguishing them does not normally arise.

## 명령 조건표

|  |   |     |
|--|---|-----|
| *pt  | 저자 설정 본문 폰트 클래스 옵션  | 3   |
| \:   | A medium space (4/18 em).   | 333 |
| \@docsep{<num>}                                | Distance, as <num> math units, bewteen dots in the dotted lines in the ToC etc.   | 140 |
| \@dottedtocline{<level>}{<indent>}{<numwidth>} | For a ToC, (LoF, LoT) entry at <level> specifies the <indent> and <numwidth> and draws a dotted line between the title and page number. | 142 |
| \@fnsymbol{<num>}                              | Converts <num> to the footnote marker representation.   | 235 |
| \@makefnmark                                   | Typesets the footnote marker where \footnote is called.   | 232 |
| \@pnumwidth{<length>}                          | Space for a page number in the ToC etc.   | 140 |
| \@thefnmark                                    | Value of the footnote marker.   | 232 |
| \@tocrmarg{<length>}                           | Right hand margin for titles in the ToC etc.  | 140 |
| \[<length>]                                    | Ends a verse line, and adds <length> vertical space.  | 258 |
| \[*<length>]                                   | Ends a line while preventing a pagebreak, and adds <length> vertical space.   | 258 |
| \[>[<length>]                                  | Shorthand for \verselinebreak.  | 259 |
| 10pt   | 본문 폰트 10pt 클래스 옵션   | 2   |
| 11pt   | 본문 폰트 11pt 클래스 옵션   | 2   |
| 12pt   | 본문 폰트 12pt 클래스 옵션   | 2   |
| 14pt   | 본문 폰트 14pt 클래스 옵션   | 2   |
| 17pt   | 본문 폰트 17pt 클래스 옵션   | 2   |
| 20pt   | 본문 폰트 20pt 클래스 옵션   | 2   |
| 25pt   | 본문 폰트 25pt 클래스 옵션   | 2   |
| 30pt   | 본문 폰트 30pt 클래스 옵션   | 3   |
| 36pt   | 본문 폰트 36pt 클래스 옵션   | 3   |
| 48pt   | 본문 폰트 48pt 클래스 옵션   | 3   |
| 60pt   | 본문 폰트 60pt 클래스 옵션   | 3   |
| 9pt  | 본문 폰트 9pt 클래스 옵션  | 2   |
| a3paper  | A3 용지 크기 클래스 옵션   | 1   |
| a4paper  | A4 용지 크기 클래스 옵션   | 1   |
| a5paper  | A5 용지 크기 클래스 옵션   | 1   |
| a6paper  | A6 용지 크기 클래스 옵션   | 1   |
| \abnormalparskip{<length>}                     | Sets the inter-paragraph spacing to <length>.   | 49  |
| \abovecaptionskip                              | Vertical space above a caption.   | 201 |
| \aboverulesep                                  | Space above a tabular rule.   | 216 |
| \abslabeldelim{<text>}                         | (text)는 문단 첫머리 헤딩에서 \abstractname 직후에 식자되는 텍스트이다.   | 72  |

|  |     |
|--|-----|
| <code>\absleftindent</code> abstract 텍스트의 왼쪽에 인덴트를 둔다.   | 72  |
| <code>\absnamepos</code> abstract 표제가 문단 첫머리가 아닐 적에 그 정렬 위치를 지정한다. 즉 <code>flushleft</code> , <code>center</code> , <code>flushright</code> 가운데 하나이다.  | 72  |
| <code>\absparindent</code> abstract 본문의 문단 들여쓰기를 행한다.  | 72  |
| <code>\absparsep</code> abstract 환경의 문단 사이에 간격을 준다.  | 72  |
| <code>\absrightindent</code> abstract 텍스트의 오른쪽에 인덴트를 둔다.   | 72  |
| <code>\abstitlekip</code> abstract 표제의 상하좌우 간격   | 72  |
| <code>\begin{abstract}</code> 요약문 (abstract) 을 조판하는 환경   | 71  |
| <code>\abstractcol</code> twocolumn 문서에서 번호붙지 않는 chapter와 같은 모양으로 조판하도록 선언한다.  | 71  |
| <code>\abstractintoc</code> abstract의 표제를 ToC에 추가한다.   | 71  |
| <code>\abstractname</code> abstract의 표제  | 72  |
| <code>\abstractnamefont</code> abstract 표제를 식자할 폰트   | 72  |
| <code>\abstractnum</code> abstract가 번호붙는 chapter와 같은 모양으로 식자되도록 한다.  | 71  |
| <code>\abstractrunin</code> abstract 표제가 문단 첫머리에 표시되도록 한다.   | 71  |
| <code>\abstracttextfont</code> abstract의 본문 텍스트를 식자할 폰트  | 72  |
| <code>\addappheadtotoc</code> Adds ToC entry with the title <code>\appendixtocname</code> .  | 78  |
| <code>\addcontentsline{&lt;file&gt;}{&lt;kind&gt;}{&lt;text&gt;}</code> Writes heading/caption data to the <code>&lt;file&gt;</code> in the form of the <code>\contentsline</code> macro.  | 140 |
| <code>\added{&lt;change-id&gt;}</code> Change mark for something added; <code>&lt;change-id&gt;</code> is put in the margin.   | 318 |
| <code>\addlinespace{&lt;width&gt;}</code> Puts extra space, default <code>\defaultaddspace</code> , between a pair of tabular rows.  | 217 |
| <code>\addtocontents{&lt;file&gt;}{&lt;text&gt;}</code> Inserts <code>&lt;text&gt;</code> into <code>&lt;file&gt;</code> (ToC, etc).   | 142 |
| <code>\addtodef{&lt;macro&gt;}{&lt;prepend&gt;}{&lt;append&gt;}</code> Inserts <code>&lt;prepend&gt;</code> at the start of the current definition of <code>&lt;macro&gt;</code> and <code>&lt;append&gt;</code> at the end, treating the result as if it had been defined by <code>\renewcommand</code> .   | 323 |
| <code>\addtodef*{&lt;macro&gt;}{&lt;prepend&gt;}{&lt;append&gt;}</code> Inserts <code>&lt;prepend&gt;</code> at the start of the current definition of <code>&lt;macro&gt;</code> and <code>&lt;append&gt;</code> at the end, treating the result as if it had been defined by <code>\renewcommand*</code> .                                       | 324 |
| <code>\addtoiargdef{&lt;macro&gt;}{&lt;prepend&gt;}{&lt;append&gt;}</code> Inserts <code>&lt;prepend&gt;</code> at the start of the current definition of <code>&lt;macro&gt;</code> (which takes a single argument) and <code>&lt;append&gt;</code> at the end, treating the result as if it had been defined by <code>\renewcommand</code> .     | 323 |
| <code>\addtoiargdef*{&lt;macro&gt;}{&lt;prepend&gt;}{&lt;append&gt;}</code> Inserts <code>&lt;prepend&gt;</code> at the start of the current definition of <code>&lt;macro&gt;</code> (which takes a single argument) and <code>&lt;append&gt;</code> at the end, treating the result as if it had been defined by <code>\renewcommand*</code> .   | 324 |
| <code>\addtonotes{&lt;text&gt;}</code> Inserts <code>&lt;text&gt;</code> into the endnotes ent file.   | 247 |
| <code>\addtopsmarks{&lt;pagestyle&gt;}{&lt;prepend&gt;}{&lt;append&gt;}</code> Inserts <code>&lt;prepend&gt;</code> and <code>&lt;append&gt;</code> before and after the current definition of <code>\makepsmarks</code> for <code>&lt;pagestyle&gt;</code> .  | 115 |
| <code>\addtostream{&lt;stream&gt;}{&lt;text&gt;}</code> Adds <code>&lt;text&gt;</code> to the file associated with the output <code>&lt;stream&gt;</code> .  | 285 |
| <code>\begin{adjustwidth}{&lt;left&gt;}{&lt;right&gt;}</code> Temporarily adds the lengths <code>{&lt;left&gt;}</code> and <code>{&lt;right&gt;}</code> to the left and right margins.   | 129 |
| <code>\begin{adjustwidth*}{&lt;left&gt;}{&lt;right&gt;}</code> A sophisticated form of <code>adjustwidth</code> . Temporarily adds the lengths <code>{&lt;left&gt;}</code> and <code>{&lt;right&gt;}</code> to the spine and outer margins on odd (recto) pages, and on even (verso) pages adds them to the outer and spine margins, respectively. | 129 |
| <code>\afterbookskip</code> Spacing below a <code>\book</code> title.  | 80  |



|   |  |     |
|---|--|-----|
| <code>\afterchapskip</code>                             | 장 제목 이후의 공백.   | 85  |
| <code>\afterchapternum</code>                           | 장 헤딩 후에 호출되며, 기본값으로는 <code>\midchapskip</code> 공백을 삽입.   | 85  |
| <code>\afterchaptertitle</code>                         | 장 헤딩 후에 호출되며, 기본값으로는 <code>\afterchapskip</code> 공백을 삽입.   | 85  |
| <code>\afterepigraphskip</code>                         | Vertical space after an epigraph.  | 251 |
| <code>\afterbookskip</code>                             | Spacing below a <code>\part</code> title.  | 80  |
| <code>\afterPoemTitle</code>                            | Called after printing the title of a <code>\PoemTitle</code> .   | 263 |
| <code>\afterPoemTitlenum</code>                         | Called after printing the number of a <code>\PoemTitle</code> .  | 263 |
| <code>\afterPoemTitleskip</code>                        | Vertical space after a poem title  | 264 |
| <code>\afterXtitle</code>                               | Generic macro called after typesetting the title of the 'X List of'.   | 146 |
| <code>\aliaspagestyle{<i>alias</i>}original</code>      | Defines the <i>(alias)</i> pagestyle to be the same as the <i>(original)</i> pagestyle.  | 109 |
| <code>\alsoname</code>                                  | Wording for a <i>see also</i> index entry.   | 306 |
| <code>\begin{altverse}</code>                           | Alternate lines in the stanza are indented.  | 261 |
| <code>\amname</code>                                    | Abbreviation for ante meridiem used in <code>\printtime*</code> (default am)   | 321 |
| <code>\and</code>                                       | Use within the argument to <code>\author</code> to separate author's names.  | 66  |
| <code>\andnext</code>                                   | Use within the argument to <code>\author</code> to insert a newline..  | 66  |
| <code>\anyptfilebase</code>                             | *pt 클래스 옵션 사용시 c1o 파일 이름의 첫 부분 (기본값: mem)  | 4   |
| <code>\anyptsize</code>                                 | *pt 클래스 옵션 사용시 c1o 파일 이름의 둘째 부분 (pointsizes) (기본값: 10)   | 4   |
| <code>\begin{appendices}</code>                         | An environment form of <code>\appendix</code> ; chapters are restored to their condition (including numbering) after the environment ends. | 78  |
| <code>\appendix</code>                                  | Sets chapter numbering to alphabetic and sets the chapter name to <code>\appendixname</code> .   | 78  |
| <code>\appendixname</code>                              | Name given to chapters in appendices (default Appendix).   | 78  |
| <code>\appendixpage</code>                              | Creates an unnumbered anonymous part-like page with the title <code>\appendixpagename</code> and adds it to the ToC.                       | 78  |
| <code>\appendixpage*</code>                             | Like <code>\appendixpage</code> but makes no ToC entry.  | 78  |
| <code>\appendixpagename</code>                          | Title used for an <code>\appendixpage</code> (default Appendices).   | 78  |
| <code>\appendixrefname</code>                           | Name for an appendix used by <code>\Aref</code> .  | 294 |
| <code>\appendixtocname</code>                           | Title of ToC entry added by <code>\addappheadtotoc</code> (default Appendices).  | 78  |
| <code>\Aref{<i>labstr</i>}</code>                       | Prints a named ( <code>\appendixrefname</code> ) reference to a <code>\labeled</code> appendix.  | 294 |
| <code>\begin{array}[<i>pos</i>]{<i>preamble</i>}</code> | Environment for setting math elements in an array form.  | 205 |
| <code>\arraybackslash</code>                            | Use instead of <code>\\</code> in a tabular column.  | 222 |
| <code>\arraycolsep</code>                               | Half the space between columns in an array.  | 224 |
| <code>\arrayrulewidth</code>                            | Width of lines (e.g., <code>\hline</code> , <code>\vline</code> , etc.) in an array or tabular.  | 224 |
| <code>\arraystretch</code>                              | Multiplication factor for the normal row spacing in tabulars and arrays.   | 224 |

|   |     |
|---|-----|
| <code>\arraytostring{&lt;arrayname&gt;}{&lt;result&gt;}</code> .....  | 331 |
| Defines the macro <code>&lt;result&gt;</code> to be the sequence of characters in the array <code>&lt;arrayname&gt;</code> .  |     |
| <code>article</code> article 홍내 클래스 옵션 .....  | 5   |
| <code>article</code> .....  | 87  |
| article 클래스의 section 헤딩과 비슷하지만 다른 크기의 폰트가 사용되는 chapter 스타일.   |     |
| <code>\AtBeginClass{&lt;pack&gt;}{&lt;code&gt;}</code> .....  | 337 |
| Inserts <code>&lt;code&gt;</code> just before the <code>&lt;class&gt;</code> class is used.   |     |
| <code>\AtBeginFile{&lt;file&gt;}{&lt;code&gt;}</code> .....   | 337 |
| Inserts <code>&lt;code&gt;</code> just before the <code>&lt;file&gt;</code> is input (or included, etc.).   |     |
| <code>\AtBeginPackage{&lt;pack&gt;}{&lt;code&gt;}</code> .....  | 337 |
| Inserts <code>&lt;code&gt;</code> just before the <code>&lt;pack&gt;</code> package is used.  |     |
| <code>\atcentercr</code> Breaks a line in a (unusual) paragraph. ....   | 125 |
| <code>\AtEndClass{&lt;class&gt;}{&lt;code&gt;}</code> .....   | 337 |
| Inserts <code>&lt;code&gt;</code> just after the <code>&lt;class&gt;</code> class is used.  |     |
| <code>\AtEndFile{&lt;file&gt;}{&lt;code&gt;}</code> .....   | 337 |
| Inserts <code>&lt;code&gt;</code> just after the <code>&lt;file&gt;</code> is input (or included, etc.).  |     |
| <code>\AtEndPackage{&lt;pack&gt;}{&lt;code&gt;}</code> .....  | 337 |
| Inserts <code>&lt;code&gt;</code> just after the <code>&lt;pack&gt;</code> package is used.   |     |
| <code>\atendtheglossaryhook</code> .....  | 314 |
| Vacuous macro called as the first thing by <code>\end{theglossary}</code> .   |     |
| <code>\author{&lt;text&gt;}</code> .....  | 66  |
| Used by <code>\maketitle</code> to typeset <code>&lt;text&gt;</code> as the document author.  |     |
| <code>\autocols[&lt;width&gt;]{&lt;pos&gt;}{&lt;num&gt;}{&lt;style&gt;}{&lt;entries&gt;}</code> .....   | 227 |
| Lists the <code>&lt;entries&gt;</code> down <code>&lt;num&gt;</code> columns in a tabular fashion.  |     |
| <code>\autorows[&lt;width&gt;]{&lt;pos&gt;}{&lt;num&gt;}{&lt;style&gt;}{&lt;entries&gt;}</code> .....   | 226 |
| Lists the <code>&lt;entries&gt;</code> in rows across <code>&lt;num&gt;</code> columns in a tabular fashion.  |     |
| <code>b3paper</code> B3 용지 크기 클래스 옵션 .....  | 1   |
| <code>b4paper</code> B4 용지 크기 클래스 옵션 .....  | 1   |
| <code>b5paper</code> B5 용지 크기 클래스 옵션 .....  | 1   |
| <code>b6paper</code> B6 용지 크기 클래스 옵션 .....  | 1   |
| <code>\backmatter</code> .....  | 75  |
| Prohibits sectional numbering and floats, etc., will be numbered continuously.  |     |
| <code>\baselineskip (length)</code> .....   | 23  |
| 인접한 텍스트의 글줄의 baseline 사이의 기본 수직 간격. 폰트의 크기에 따라 달라진다.  |     |
| <code>\beforebookskip</code> Spacing above a <code>\book</code> title. ....   | 80  |
| <code>\beforechapskip</code> 장 이름과 번호 위의 공백. ....   | 85  |
| <code>\beforeepigraphskip</code> Vertical space before an epigraph. ....  | 251 |
| <code>\beforepartskip</code> Spacing above a <code>\part</code> title. ....   | 80  |
| <code>\beforePoemTitleskip</code> Vertical space before a poem title. ....  | 264 |
| <code>\begintheglossaryhook</code> .....  | 314 |
| Vacuous macro called as the last thing by <code>\begin{theglossary}</code> .  |     |
| <code>\belowcaptionskip</code> Vertical space below a caption. ....   | 201 |
| <code>\belowrulesep</code> Space below a tabular rule. ....   | 216 |
| <code>\bfseries</code> Declaration for using a bold font. ....  | 42  |
| <code>bianchi</code> A two line, centered chapterstyle with rules above and below. ....   | 89  |
| <code>\bibintoc</code> Title of thebibliography will be added to the ToC. ....  | 297 |
| <code>\bibitem[&lt;label&gt;]{&lt;labstr&gt;}</code> .....  | 299 |
| Introduces an entry in the bibliography. The <code>&lt;labstr&gt;</code> argument corresponds to a <code>\cite</code> 's <code>&lt;labstr&gt;</code> argument. The optional <code>&lt;label&gt;</code> overrides the default numerical printed entry label. |     |
| <code>\bibitem</code> Starts a new bibliographic entry in a thebibliography listing. ....   | 297 |

|  |   |     |
|--|---|-----|
| <code>\bibitemsep</code>   | Vertical space between entries in a bibliography.   | 299 |
| <code>\bibliography{&lt;bibfile-list&gt;}</code>   | Print the bibliography having used BibTeX to extract entries from the <bibfile-list> of comma-separated names of bib files. | 299 |
| <code>\bibliographystyle{&lt;style&gt;}</code>   | Typeset the bibliographic entries according to <style>.   | 299 |
| <code>\biblistextra</code>   | Called immediately after the bibitemlist is set up.   | 298 |
| <code>\bibmark</code>  | Can be used in pagestyles for page headers in a bibliography.   | 298 |
| <code>\bibname</code>  | The title for a bibliography  | 297 |
| <code>\bibsection</code>   | Initialises the bibliography and typesets the title.  | 298 |
| <code>\bicaption[&lt;label&gt;]{&lt;short1&gt;}{&lt;long1&gt;}{&lt;NAME&gt;}{&lt;long2&gt;}</code>                       | A bilingual caption in a float but only the first added to the ‘List of...’.  | 191 |
| <code>\bicontcaption{&lt;long1&gt;}{&lt;NAME&gt;}{&lt;long2&gt;}</code>  | A continued bilingual caption.  | 192 |
| <code>\bionumcaption[&lt;label&gt;]{&lt;short1&gt;}{&lt;long1&gt;}{&lt;NAME&gt;}{&lt;short2&gt;}{&lt;long2&gt;}</code>   | A bilingual caption with both captions numbered in the float but only the first in the ‘List of...’.                        | 190 |
| <code>\bitwonumcaption[&lt;label&gt;]{&lt;short1&gt;}{&lt;long1&gt;}{&lt;NAME&gt;}{&lt;short2&gt;}{&lt;long2&gt;}</code> | A bilingual caption with both captions numbered in the float and in the ‘List of...’.                                       | 190 |
| <code>\begin{blockdescription}</code>  | A list of descriptions of \items formatted as indented block paragraphs.  | 131 |
| <code>\blockdescriptionlabel{&lt;label&gt;}</code>   | Specifies the format of the <label> of an \item in a blockdescription environment.  | 131 |
| <code>\book{&lt;title&gt;}</code>  | Typesets a numbered book <title> on a page by itself, adding <title> to the ToC.  | 76  |
| <code>\bookblankpage</code>  | Follow a book title page with a blank page (the default).   | 81  |
| <code>\booknamefont</code>   | Font used by \printbookname for the book name.  | 80  |
| <code>\booknamenum</code>  | Called between printing a book name and number.   | 80  |
| <code>\booknumberline{&lt;num&gt;}</code>  | Typeset book number in ToC  | 150 |
| <code>\booknumberlinebox{&lt;length&gt;}{&lt;code&gt;}</code>  | The box command used to typeset the book number within the ToC, note that it will automatically align to the left           | 150 |
| <code>\booknumberlinehook{&lt;num&gt;}</code>  | The first thing to be called within \booknumberline, does nothing by default.   | 150 |
| <code>\booknumfont</code>  | Font used by \printbooknum for the book number.   | 80  |
| <code>\bookpageend</code>  | Code to finish off typesetting a book title page.   | 81  |
| <code>\bookpagemark{&lt;title&gt;}</code>  | For setting any marks with the title from a \book for a running header.   | 81  |
| <code>\bookrefname</code>  | Name for a book used by \Bref.  | 294 |
| <code>\booktitlefont</code>  | Font used by \printbooktitle for the title.   | 81  |
| <code>\bottomrule[&lt;width&gt;]</code>  | Draws a rule across a tabular, default width \heavyrulewidth.   | 216 |
| <code>\bottomsectionpenalty</code>   | Penalty on a \raggedbottomsection short page.   | 77  |
| <code>\bottomsectionskip</code>  | Amount of stretch on a \raggedbottomsection short page.   | 77  |
| <code>\begin{boxedverbatim}</code>   | May put a box around the verbatim material; lines may be numbered and page breaks are allowed.                              | 279 |
| <code>\begin{boxedverbatim*}</code>  | May put a box around the verbatim* material; lines may be numbered and page breaks are al-                                  | 279 |

|   |     |
|---|-----|
| lowed.  |     |
| <code>\boxedverbatiminput{⟨file⟩}</code> .....  | 286 |
| Acts like <code>boxedverbatim</code> except the contents is read from the <code>⟨file⟩</code> file.                         |     |
| <code>\boxedverbatiminput*{⟨file⟩}</code> .....   | 286 |
| Acts like <code>boxedverbatim*</code> except the contents is read from the <code>⟨file⟩</code> file.                        |     |
| <code>\break</code> TeX macro to break a line. ....   | 125 |
| <code>\Bref{⟨labstr⟩}</code> .....  | 294 |
| Prints a named ( <code>\bookrefname</code> ) reference to a <code>\labeled</code> book.                                     |     |
| <i>bringhurst</i> .....   | 89  |
| A raggedright, unnumbered, small caps chapterstyle with a textwidth rule below.   |     |
| broadsheetpaper broadsheet 용지 크기 클래스 옵션 .....   | 2   |
| <i>brotherton</i> .....   | 89  |
| A chapterstyle like the default but with the number spelled out.  |     |
| <code>\bs</code> prints <code>\</code> . ....   | 340 |
| <code>\bvbox</code> .....   | 280 |
| Rectangular boxes will be drawn for <code>boxedverbatim</code> environments.  |     |
| <code>\bvboxsep</code> .....  | 280 |
| Separation between text and framing in <code>boxedverbatim</code> environments.   |     |
| <code>\bvendofpage{⟨text⟩}</code> .....   | 280 |
| Use <code>⟨text⟩</code> as the <code>boxedverbatim</code> page break marker at the bottom of a page.                        |     |
| <code>\bvendrulehook</code> .....   | 280 |
| Called at the end of a <code>boxedverbatim</code> environment, and before a pagebreak.                                      |     |
| <code>\bvleftsidehook</code> .....  | 280 |
| Called before each line in a <code>boxedverbatim</code> environment.  |     |
| <code>\bvnumbersinside</code> Line numbers typeset inside a <code>boxedverbatim</code> box. ....                            | 281 |
| <code>\bvnumbersoutside</code> Line numbers typeset outside a <code>boxedverbatim</code> box. ....                          | 281 |
| <code>\bvperpagefalse</code> Do not mark page breaks in a <code>boxedverbatim</code> . ....                                 | 280 |
| <code>\bvperpagetrue</code> .....   | 280 |
| Visibly break a <code>boxedverbatim</code> at a page break using <code>\bvtopofpage</code> and <code>\bvendofpage</code> .  |     |
| <code>\bvrighsidehook</code> .....  | 280 |
| Called after each line in a <code>boxedverbatim</code> environment.   |     |
| <code>\bvsides</code> .....   | 280 |
| Draw vertical rules on each side of <code>boxedverbatim</code> environments.  |     |
| <code>\bvtopandtail</code> .....  | 280 |
| Draw horizontal rules before and after <code>boxedverbatim</code> environments.   |     |
| <code>\bvtopmidhook</code> .....  | 280 |
| Called after <code>\bvtoprulehook</code> at the start of a <code>boxedverbatim</code> environment.                          |     |
| <code>\bvtopofpage{⟨text⟩}</code> .....   | 280 |
| Use <code>⟨text⟩</code> as the <code>boxedverbatim</code> page break marker at the top of a page.                           |     |
| <code>\bvtoprulehook</code> .....   | 280 |
| Called at the start of a <code>boxedverbatim</code> environment and after a pagebreak.                                      |     |
| <code>\calccentering{⟨length⟩}</code> .....   | 130 |
| Sets the <code>⟨length⟩</code> command to the value to add/subtract from margins to center text on the physical page.       |     |
| <code>\cancelthanksrule</code> .....  | 69  |
| Specifies that the <code>\footnoterule</code> is to be used from now on.  |     |
| <code>\caption[⟨short⟩]{⟨long⟩}</code> .....  | 199 |
| Typeset a caption with title <code>⟨long⟩</code> , and add it, or <code>⟨short⟩</code> instead if given, to a ‘List of...’. |     |
| <code>\captiondelim{⟨delim⟩}</code> .....   | 182 |
| Specifies <code>⟨delim⟩</code> to be the delimiter between the number and title in a caption.                               |     |

|  |     |
|--|-----|
| <code>\captionnamefont{&lt;fontspec&gt;}</code> .....  | 182 |
| Set the font for the first part (name and number) of a caption, upto and including the delimiter.  |     |
| <code>\captionstyle[&lt;short&gt;]{&lt;style&gt;}</code> .....   | 182 |
| Set the paragraph style for the caption. The optional <i>&lt;short&gt;</i> is the style for captions shorter than a full line.   |     |
| <code>\captiontitlefinal{&lt;text&gt;}</code> .....  | 183 |
| <i>&lt;text&gt;</i> will be put immediately at the end of a caption title, but will not appear in a ‘List of...’.  |     |
| <code>\captiontitlefont{&lt;fontspec&gt;}</code> Set the font for the caption title text. ....   | 182 |
| <code>\captionwidth{&lt;length&gt;}</code> Set the caption width to <i>&lt;length&gt;</i> . ....   | 183 |
| <code>\cardinal{&lt;number&gt;}</code> Typesets <i>{&lt;number&gt;}</i> as a cardinal number. ....   | 327 |
| <code>\begin{center}</code> .....  | 123 |
| Text to be set raggedleft and raggedright, with each line centered.  |     |
| <code>\centerfloat</code> .....  | 123 |
| Within a float, centers it with respect to the typeblock; the float may extend into both margins.  |     |
| <code>\centering</code> .....  | 123 |
| Declaration for text to be set raggedleft and raggedright, with each line centered.  |     |
| <code>\cftaddnumtitleline{&lt;ext&gt;}{&lt;kind&gt;}{&lt;num&gt;}{&lt;title&gt;}{&lt;page&gt;}</code> .....  | 154 |
| Writes a <code>\contentsline</code> to the ‘List of...’ <i>&lt;ext&gt;</i> file for a <i>&lt;kind&gt;</i> entry with number <i>&lt;number&gt;</i> and <i>&lt;title&gt;</i> and <i>&lt;page&gt;</i> number. |     |
| <code>\cftaddtitleline{&lt;ext&gt;}{&lt;kind&gt;}{&lt;title&gt;}{&lt;page&gt;}</code> .....  | 154 |
| Writes a <code>\contentsline</code> to the ‘List of...’ <i>&lt;ext&gt;</i> file for a <i>&lt;kind&gt;</i> entry with <i>&lt;title&gt;</i> and <i>&lt;page&gt;</i> number.                                  |     |
| <code>\cftbeforeKskip</code> Generic vertical space before a ‘K’ entry in a ‘List of...’. ....   | 148 |
| <code>\cftbookbreak</code> Starts a <code>\book</code> entry in the ToC. ....  | 148 |
| <code>\cftchapterbreak</code> Starts a <code>\chapter</code> entry in the ToC. ....  | 148 |
| <code>\cftdot</code> The ‘dot’ in the dotted leaders in ‘List of...’. ....   | 147 |
| <code>\cftdotsep</code> .....  | 147 |
| The separation between dots in a dotted leader in a ‘List of...’.  |     |
| <code>\cftinsertcode{&lt;name&gt;}{&lt;code&gt;}</code> .....  | 155 |
| Defines Toc (LoF, LoT) <i>&lt;name&gt;</i> insertion to be <i>&lt;code&gt;</i> .   |     |
| <code>\cftinserthook{&lt;file&gt;}{&lt;name&gt;}</code> .....  | 155 |
| Inserts code <i>&lt;name&gt;</i> into <i>&lt;file&gt;</i> (e.g., <i>toc</i> , <i>lof</i> , etc).   |     |
| <code>\cftKafterpnum</code> .....  | 151 |
| Called after typesetting the page number of a ‘K’ entry in a ‘List of...’.   |     |
| <code>\cftKaftersnum</code> .....  | 149 |
| Called immediately after typesetting the number of a ‘K’ entry in a ‘List of...’.  |     |
| <code>\cftKaftersnumb</code> .....   | 149 |
| Called immediately after typesetting the number box of a ‘K’ entry in a ‘List of...’.  |     |
| <code>\cftKdotsep</code> .....   | 150 |
| Separation between dots in a leader between the title and page number of a ‘K’ entry in a ‘List of...’.  |     |
| <code>\cftKfont</code> .....   | 149 |
| Controls the appearance of the number and title of a ‘K’ entry in a ‘List of...’.  |     |
| <code>\cftKformatpnum{&lt;pnum&gt;}</code> .....   | 151 |
| Typesets the page number <i>&lt;pnum&gt;</i> of a ‘K’ entry in a ‘List of...’.   |     |
| <code>\cftKformatpnumhook{&lt;num&gt;}</code> .....  | 151 |
| When formatting the page number in the ToC (via <code>\cftKformatpnum</code> ) this hook is given the page value. Does nothing by default  |     |
| <code>\cftKindent</code> .....   | 148 |
| Generic indent of an ‘K’ entry from the left margin in a ‘List of...’.   |     |

|   |     |
|---|-----|
| <code>\cftKleader</code> .....  | 150 |
| Leader between the title and page number of a 'K' entry in a 'List of...'. .....  |     |
| <code>\cftKname</code> Called as the first element of the 'K' entry line in a 'List of...'. .....   | 149 |
| <code>\cftKnumwidth</code> .....  | 149 |
| Generic space for the number of a 'K' entry in a 'List of...'. .....  |     |
| <code>\cftKpagefont</code> Font for the page number of a 'K' entry in a 'List of...'. .....   | 151 |
| <code>\cftKpresnum</code> .....   | 149 |
| Called immediately before typesetting the number of a 'K' entry in a 'List of...'. .....  |     |
| <code>\cftlocalchange{&lt;ext&gt;}{&lt;pnumwidth&gt;}{&lt;tocrmarg&gt;}</code> .....  | 154 |
| Writes commands to the <ext> 'List of...' file resetting <code>\@pnumwidth</code> and <code>\@tocrmarg</code> to the specified values. .....  |     |
| <code>\cftnodots</code> .....   | 147 |
| A separation between dots in a dotted leader in a 'List of...' that is too large for any dots to occur. .....   |     |
| <code>\cftpagenumbersoff{&lt;kind&gt;}</code> .....   | 153 |
| Eliminates page numbers for the <kind> entries in a 'List of...'. .....   |     |
| <code>\cftpagenumberson{&lt;kind&gt;}</code> Reverses the effect of <code>\cftpagenumbersoff</code> . .....   | 153 |
| <code>\cftparfillskip</code> Fills the last line in a paragraph in a 'List of...'. .....  | 153 |
| <code>\cftparskip</code> The <code>\parskip</code> to be used in a 'List of...'. .....  | 147 |
| <code>\cftpartbreak</code> Starts a <code>\part</code> entry in the ToC. .....  | 148 |
| <code>\cftsetindents{&lt;kind&gt;}{&lt;indent&gt;}{&lt;numwidth&gt;}</code> .....   | 151 |
| Set the <kind> entry <code>indent</code> to <indent> and its <code>numwidth</code> to <numwidth>. .....   |     |
| <code>\cftwhatismyname</code> .....   | 150 |
| Since <code>\numberline</code> is shared by <code>\section</code> and siblings, <code>\cftwhatismyname</code> can be used to tell which section type is calling <code>\numberlinehook</code> .....  |     |
| <code>\changecaptionwidth</code> .....  | 183 |
| Captions will be set within the width specified by <code>\captionwidth</code> . .....   |     |
| <code>\changed{&lt;change-id&gt;}</code> .....  | 318 |
| Change mark for something changed; <change-id> is put in the margin. .....  |     |
| <code>\changeglossactual[&lt;file&gt;]{&lt;char&gt;}</code> .....   | 313 |
| Specifies <char> as the actual character for glossary <file>. .....   |     |
| <code>\changeglossnum[&lt;file&gt;]{&lt;thecounter&gt;}</code> .....  | 313 |
| Specifies <thecounter> as the <num> for glossary <file>. .....  |     |
| <code>\changeglossnumformat[&lt;file&gt;]{&lt;format&gt;}</code> .....  | 313 |
| Specifies <format> as the format for <num> for glossary <file>. .....   |     |
| <code>\changeglossref[&lt;file&gt;]{&lt;thecounter&gt;}</code> .....  | 313 |
| Specifies <thecounter> as the <ref> for glossary <file>. .....  |     |
| <code>\changemarks</code> Print change marks. ....  | 317 |
| <code>\chapindent</code> .....  | 89  |
| 장 스타일 (혹은 다른 임의의 것)을 정의할 때 사용할 수 있는 길이 .....  |     |
| <code>\chapnamefont</code> <code>\printchaptername</code> 에서 사용된 폰트. ....   | 85  |
| <code>\chapnumfont</code> <code>\printchapternum</code> 에서 사용된 폰트. ....   | 85  |
| <code>chappell</code> .....   | 90  |
| A centered chapterstyle with a rule between the number line (in a roman font) and the title line in italics. .....  |     |
| <code>\chapter[&lt;toc-title&gt;][&lt;head-title&gt;]{&lt;title&gt;}</code> .....   | 77  |
| Starts a new page and puts the chapter number and <title> at the top of the page, adding <title> to the ToC and possibly the running headers. If given <toc-title> is used instead of <title> for the ToC and running header. If given <head-title> is used for a running header. It restarts numbering of any subsidiary elements such as <code>\section</code> of floats. ..... |     |
| <code>\chapter*[&lt;head-title&gt;]{&lt;title&gt;}</code> .....   | 77  |
| Starts a new page and puts an unnumbered chapter <title> at the top of the page. If given .....   |     |

|  |     |
|--|-----|
| <code>&lt;head-title&gt;</code> is used for a running header.  |     |
| <code>\chapterheadstart</code> .....   | 85  |
| 장 헤딩의 시작에서 호출되며, 기본값으로는 <code>\beforechapskip</code> 공백을 삽입.   |     |
| <code>\chapternamenum</code> 장 이름과 번호 사이에 삽입되며, 보통의 경우 공백이다. ....  | 85  |
| <code>\chapternumberline{&lt;num&gt;}</code> Typeset chapter number in ToC .....   | 150 |
| <code>\chapternumberlinebox{&lt;length&gt;}{&lt;code&gt;}</code> .....   | 150 |
| The box command used to typeset the chapter number within the ToC, note that it will automatically align to the left   |     |
| <code>\chapternumberlinehook{&lt;num&gt;}</code> .....   | 150 |
| The first thing to be called within <code>\chapternumberline</code> , does nothing by default.   |     |
| <code>\chapterprecis{&lt;text&gt;}</code> <code>&lt;text&gt;</code> 를 식자하며 목차(ToC)에도 이를 추가. ....   | 92  |
| <code>\chapterprecishere{&lt;text&gt;}</code> <code>&lt;text&gt;</code> 를 장 요약문에 식자한다. ....  | 92  |
| <code>\chapterprecistoc{&lt;text&gt;}</code> .....   | 92  |
| <code>&lt;text&gt;</code> 를 장 요약문을 위해 목차(ToC)에 추가한다.   |     |
| <code>\chapterrefname</code> Name by <code>\Cref</code> . ....   | 294 |
| <code>\chapterstyle{&lt;style&gt;}</code> chapter의 헤딩 양식을 <code>&lt;style&gt;</code> 로 설정. ....  | 86  |
| <code>\chaptitelfont</code> <code>\printchaptertitle</code> 에서 사용된 폰트. ....  | 86  |
| <code>\checkandfixthelayout[&lt;algorithm&gt;]</code> .....  | 23  |
| 페이지 레이아웃 설정값을 검토하고 <code>&lt;algorithm&gt;</code> 을 적용하여 <code>\textheight</code> 을 조정한다. 그리고 이 값을 유효하게 한다. 계산에 쓰이는 <code>&lt;algorithm&gt;</code> 은 classic, fixed, lines, nearest 중의 하나이고 디폴트는 classic이다.                        |     |
| <code>\checkarrayindex{&lt;arrayname&gt;}{&lt;index&gt;}</code> .....  | 331 |
| Checks if <code>&lt;index&gt;</code> is a valid index value for the array <code>&lt;arrayname&gt;</code> . Sets <code>\ifbounderror</code> true if there is a problemn otherwise false.  |     |
| <code>\checkifinteger{&lt;num&gt;}</code> .....  | 332 |
| If <code>&lt;num&gt;</code> is an integer and not less than zero, sets <code>\ifinteger</code> true, otherwise false.  |     |
| <code>\checkoddpge</code> .....  | 325 |
| Sets <code>\ifoddpge</code> true if called on an odd-numbered page, otherwise false.   |     |
| <code>\checkthelayout[&lt;algorithm&gt;]</code> .....  | 23  |
| 페이지 레이아웃 지정값을 검토하여 <code>\textheight</code> 를 조정한다. <code>&lt;algorithm&gt;</code> 을 사용하여 계산하는데 classic, fixed, lines, nearest 중 하나이고 디폴트는 classic이다.  |     |
| <code>\circle{&lt;diam&gt;}</code> Picture object of a open circle diameter <code>&lt;diam&gt;</code> . ....   | 415 |
| <code>\circle*{&lt;diam&gt;}</code> Picture object of a black closed circle diameter <code>&lt;diam&gt;</code> . ....  | 415 |
| <code>\cite[&lt;detail&gt;]{&lt;labstr-list&gt;}</code> .....  | 297 |
| Citation in the text to bibliographic items specified in the <code>&lt;labstr-list&gt;</code> of comma-separated bibliographic identifiers; optional information, e.g., page number, is supplied via <code>&lt;detail&gt;</code> . |     |
| <code>\citeindexfile</code> File name for the citation index. ....   | 310 |
| <code>\clearforchapter</code> 새로운 장이 시작하는 쪽을 선택하는 명령어. ....  | 84  |
| <code>\cleartoevenpage[&lt;text&gt;]</code> .....  | 253 |
| Clears the current page and moves to the next verso page; the optional <code>&lt;text&gt;</code> is put on the skipped page (if there is one).   |     |
| <code>\cleartooddpge[&lt;text&gt;]</code> .....  | 326 |
| Flushes any pending floats to then start typesetting on the next odd page. The optional <code>&lt;text&gt;</code> is put on the skipped page (if there is one).  |     |
| <code>\cleartorecto</code> Simpler form of <code>\cleartooddpge</code> . ....  | 326 |
| <code>\cleartoverso</code> Simpler form of <code>\cleartoevenpage</code> . ....  | 326 |
| <code>\closeinputstream{&lt;stream&gt;}</code> .....   | 285 |
| Detaches and closes the file associated with the input <code>&lt;stream&gt;</code> .   |     |
| <code>\closeoutputstream{&lt;stream&gt;}</code> .....  | 285 |
| Detaches and closes the file associated with the output <code>&lt;stream&gt;</code> .  |     |



|   |     |
|---|-----|
| <code>\cmd{&lt;cmd&gt;}</code> .....  | 340 |
| where <i>&lt;cmd&gt;</i> is a macro name like <code>\cmd</code> , prints and indexes <code>\cmd</code> .  |     |
| <code>\cmdprint{&lt;cmd&gt;}</code> where <i>&lt;cmd&gt;</i> is a macro name like <code>\cmd</code> , prints <code>\cmd</code> . ....   | 340 |
| <code>\cmidrule[&lt;width&gt;](&lt;trim&gt;){&lt;m-n&gt;}</code> .....  | 217 |
| Draws a rule, default thickness <code>\cmidrulewidth</code> , across tabular columns <i>&lt;m&gt;</i> to <i>&lt;n&gt;</i> ; the ends may be <i>&lt;trim&gt;</i> ed by <code>\cmidrulekern</code> .  |     |
| <code>\cmidrulekern</code> Trim amount for <code>\cmidrule</code> . ....  | 217 |
| <code>\cmidrulewidth</code> Default width for a <code>\cmidrule</code> tabular rule. ....   | 217 |
| <code>\colorchapnum</code> Color for the number in the <i>pedersen</i> chapterstyle. ....   | 394 |
| <code>\colorchaptitle</code> Color for the title in the <i>pedersen</i> chapterstyle. ....  | 394 |
| <code>\columnsep</code> (length) 단 사이 간격 .....  | 20  |
| <code>\columnseprule</code> (length) 단 사이 께선의 두께 .....  | 20  |
| <code>\begin{comment}</code> Skip over the environment. ....  | 276 |
| <code>\commentsoff{&lt;name&gt;}</code> .....   | 276 |
| Process contents of the <i>&lt;name&gt;</i> comment environment.  |     |
| <code>\commentson{&lt;name&gt;}</code> .....  | 276 |
| Skip contents of the <i>&lt;name&gt;</i> comment environment.   |     |
| <i>companion</i> LaTeX <i>companion</i> 시리즈와 같은 느낌의 chapter 스타일. ....   | 87  |
| <code>\contcaption{&lt;text&gt;}</code> .....   | 185 |
| A continued caption, replacing the original title with <i>&lt;text&gt;</i> .  |     |
| <code>\contentsline{&lt;kind&gt;}{&lt;text&gt;}{&lt;page&gt;}</code> .....  | 140 |
| An entry in a “List of...” file for a <i>&lt;kind&gt;</i> entry, with <i>&lt;text&gt;</i> being the title which was on <i>&lt;page&gt;</i> .  |     |
| <code>\contentsname</code> The title for the Table of Contents. ....  | 145 |
| <code>\continuousmarks</code> .....   | 67  |
| Specifies that the thanks/footnote marker is not zeroed after titling.  |     |
| <code>\continuousnotenums</code> .....  | 245 |
| Declaration to make the numbering of endnotes continuous throughout the document.   |     |
| <code>\contsubbottom[&lt;list-entry&gt;][&lt;subtitle&gt;]{&lt;text&gt;}</code> .....   | 194 |
| A continued <code>\subbottom</code> .   |     |
| <code>\contsubcaption[&lt;list-entry&gt;]{&lt;subtitle&gt;}</code> A continued <code>\subcaption</code> . ....  | 194 |
| <code>\contsubtop[&lt;list-entry&gt;][&lt;subtitle&gt;]{&lt;text&gt;}</code> A continued <code>\subtop</code> . ....  | 194 |
| <code>\coppagestyle{&lt;copy&gt;}original</code> .....  | 109 |
| Creates a new pagestyle called <i>&lt;copy&gt;</i> using the <i>&lt;original&gt;</i> pagestyle specification.   |     |
| <code>\counterwithin{&lt;ctr&gt;}{&lt;within&gt;}</code> .....  | 322 |
| Makes the counter <i>ctr</i> (created via <code>\newcounter</code> ) act as though it had been initially defined to be reset by counter <i>within</i> . It also redefines <code>\thectr</code> to include <code>\thewithin</code> .   |     |
| <code>\counterwithin*{&lt;ctr&gt;}{&lt;within&gt;}</code> .....   | 322 |
| Makes the counter <i>ctr</i> (created via <code>\newcounter</code> ) act as though it had been initially defined to be reset by counter <i>within</i> , leaving the original definition of <code>\thectr</code> .   |     |
| <code>\counterwithout{&lt;ctr&gt;}{&lt;within&gt;}</code> .....   | 322 |
| Makes the counter <i>ctr</i> (created via <code>\newcounter{&lt;ctr&gt;}[&lt;within&gt;]</code> ) act as though it had been initially defined via <code>\newcounter{&lt;ctr&gt;}</code> . It also redefines <code>\thectr</code> to typeset as arabic numerals.   |     |
| <code>\counterwithout*{&lt;ctr&gt;}{&lt;within&gt;}</code> .....  | 322 |
| Makes the counter <i>ctr</i> (created via <code>\newcounter{&lt;ctr&gt;}[&lt;within&gt;]</code> ) act as though it had been initially defined via <code>\newcounter{&lt;ctr&gt;}</code> , leaving the original definition of <code>\thectr</code> .   |     |
| <code>\cplabel</code> .....   | 325 |
| Prefix for labels used by <code>\checkoddpage</code> odd/even page checking.  |     |
| <code>\createmark{&lt;sec&gt;}{&lt;marks&gt;}{&lt;show&gt;}{&lt;prefix&gt;}{&lt;postfix&gt;}</code> .....   | 112 |
| Defines the <code>\secmark</code> macro where <i>&lt;show&gt;</i> (shownumber or nonnumber) controls whether the division number will be displayed within <code>\mainmatter</code> , <i>&lt;marks&gt;</i> is left, both or right, and <i>&lt;prefix&gt;</i> and <i>&lt;postfix&gt;</i> are affixed before and after the <i>&lt;sec&gt;</i> (division) number. |     |



|  |     |
|--|-----|
| <code>\createplainmark{⟨type⟩}{⟨marks⟩}{⟨text⟩}</code> .....   | 112 |
| Defines the <code>\typemark</code> macro using <code>⟨text⟩</code> as the mark, where <code>⟨marks⟩</code> is left, both or right.   |     |
| <code>\Cref{⟨labstr⟩}</code> .....   | 294 |
| Prints a named ( <code>\chapterrefname</code> ) reference to a <code>\labeled</code> chapter.  |     |
| <i>crosshead</i> A centered chapterstyle in a bold font. ....  | 90  |
| <i>crownvopaper</i> crown octavo 용지 크기 클래스 옵션 .....  | 2   |
| <code>\cs{⟨name⟩}</code> prints <code>\name</code> . ....  | 340 |
| <code>\begin{ctabular}[⟨pos⟩]{⟨format⟩}</code> .....   | 225 |
| Like <code>tabular</code> except that it will continue over a page break.  |     |
| <i>culver</i> One line, centered, bold chapterstyle using Roman numerals. ....   | 90  |
| <code>\currenttitle</code> Gives the title of the last sectional division command. ....  | 296 |
| <br><code>\dashbox{⟨len⟩}(⟨width,height⟩)[⟨pos⟩]{⟨text⟩}</code> .....  | 410 |
| A picture object framing <code>⟨text⟩</code> (at position <code>⟨pos⟩</code> ) in a dashed box <code>⟨width⟩</code> by <code>⟨height⟩</code> . The dashes and spaces are each <code>⟨len⟩</code> long.   |     |
| <i>dash</i> .....  | 90  |
| Two line, centered, regular font, chapterstyle. The number has a dash on either side.  |     |
| <code>\date{⟨text⟩}</code> .....   | 66  |
| Used by <code>\maketitle</code> to typeset <code>⟨text⟩</code> as the document date.   |     |
| <i>dbillpaper</i> dollar bill 용지 크기 클래스 옵션 .....   | 2   |
| <code>\defaultaddspace</code> Default space for <code>\addlinespace</code> . ....  | 217 |
| <i>default</i> 기본 book 클래스의 chapter 스타일. ....  | 87  |
| <code>\defaultlists</code> .....   | 134 |
| Declaration specifying the default vertical spacing list-based environments.   |     |
| <code>\defaultsecnum</code> Declaration reversing the effect of <code>\hangsecnum</code> . ....  | 96  |
| <code>\deleted{⟨change-id⟩}</code> .....   | 318 |
| Change mark for something deleted; <code>⟨change-id⟩</code> is put in the margin.  |     |
| <code>\DeleteShortVerb{⟨backslash-char⟩}</code> .....  | 277 |
| Returns <code>⟨char⟩</code> to its normal meaning instead of being a shorthand for <code>\verb{⟨char⟩}</code> .  |     |
| <i>demo2</i> .....   | 90  |
| A two line chapterstyle with a large sanserif title; the number is above, centered and written (e.g., Six instead of 6) in a bold font. There are rules above and below the title.   |     |
| <i>demo3</i> .....   | 90  |
| A two line chapterstyle with a large sanserif title; the number is above, centered and written (e.g., Six instead of 6) in an italic font. There are rules above and below the title line. It is a modified version of the <i>demo2</i> style. |     |
| <i>demyvopaper</i> demy octavo 용지 크기 클래스 옵션 .....  | 2   |
| <code>\begin{description}</code> .....   | 131 |
| A list of descriptions of <code>\items</code> formatted as regular paragraphs.   |     |
| <code>\descriptionlabel{⟨label⟩}</code> .....  | 131 |
| Specifies the format of the <code>⟨label⟩</code> of an <code>\item</code> in a <code>description</code> environment.   |     |
| <code>\DisemulatePackage{⟨package⟩}</code> .....   | 337 |
| Undo a previous <code>\EmulatedPackage</code> or <code>\EmulatedPackageWithOptions</code> for the <code>⟨package⟩</code> package.  |     |
| <code>\doccoltocetc</code> .....   | 145 |
| Set the ToC, etc., in one or two columns according to the class option.  |     |
| <code>\doublerulesep</code> Space between adjacent rules in a tabular, or an array. ....   | 216 |
| <code>\begin{DoubleSpace}</code> Environment form of <code>\DoubleSpacing</code> .....   | 51  |
| <code>\begin{DoubleSpace*}</code> Environment form of <code>\DoubleSpacing*</code> .....   | 51  |
| <code>\DoubleSpacing</code> Declaration doubling the baselineskip. ....  | 50  |

|  |     |
|--|-----|
| <code>\DoubleSpacing*</code> .....   | 50  |
| Same as <code>\DoubleSpacing</code> but also effects page notes and floats.  |     |
| <code>dowding</code> .....   | 90  |
| A centered two line chapterstyle in an italic font and the number is spelled out.  |     |
| <code>\downbracefill</code> Fills a tabular column with a down brace. ....   | 218 |
| <code>draft</code> 초안본 클래스 옵션 .....  | 4   |
| <code>\dropchapter{&lt;length&gt;}</code> Lowers subsequent chapter heads by <code>&lt;length&gt;</code> . ....                                | 252 |
| <code>\droptitle</code> .....  | 64  |
| Length controlling the position of <code>\maketitle</code> on the page (default 0pt).  |     |
| <code>\easypagecheck</code> .....  | 325 |
| <code>\checkoddpag</code> will use a possibly inaccurate but fast method for checking for an odd page number.                                  |     |
| <code>ebook</code> 전자 책 용지 크기 클래스 옵션 .....   | 1   |
| <code>ell</code> .....   | 90  |
| A raggedleft large sanserif chapterstyle with the number in the margin. An 'L' shaped rule separates the number and title lines.               |     |
| <code>\eminnershape{&lt;shape&gt;}</code> .....  | 44  |
| Font shape for emphasized text within emphasized text.   |     |
| <code>\emph{&lt;text&gt;}</code> Use a change in font to emphasise <code>&lt;text&gt;</code> . ....  | 43  |
| <code>\emptythanks</code> Discards any text from previous uses of <code>\thanks</code> . ....  | 67  |
| <code>\EmulatedPackage{&lt;package&gt;}[&lt;date&gt;]</code> .....   | 336 |
| Claim that the <code>&lt;package&gt;</code> package has been loaded.   |     |
| <code>\EmulatedPackageWithOptions{&lt;optionlist&gt;}{&lt;package&gt;}[&lt;date&gt;]</code> .....  | 336 |
| Claim that the <code>&lt;package&gt;</code> package has been loaded with options <code>&lt;optionlist&gt;</code> .                             |     |
| <code>\endMakeFramed</code> Ends the <code>MakeFramed</code> environment. ....   | 273 |
| <code>\enlargethispage{&lt;length&gt;}</code> .....  | 52  |
| Increase (or decrease) the text height of the current page by <code>&lt;length&gt;</code> .  |     |
| <code>\begin{enumerate}[&lt;style&gt;]</code> .....  | 133 |
| An ordered list of <code>\items</code> . If <code>&lt;style&gt;</code> is given it overrides the default scheme for indicating the item order. |     |
| <code>\epigraph{&lt;text&gt;}{&lt;source&gt;}</code> .....   | 249 |
| Typesets the <code>&lt;text&gt;</code> and <code>&lt;source&gt;</code> of an epigraph.   |     |
| <code>\epigraphfontsize{&lt;fontsize&gt;}</code> Font size to be used for epigraphs. ....  | 251 |
| <code>\epigraphforheader[&lt;distance&gt;]{&lt;text&gt;}</code> .....  | 252 |
| Puts <code>&lt;text&gt;</code> into a zero-sized picture ( <code>\epigraphpicture</code> ) at the coordinate position (0, -metadistance).      |     |
| <code>\epigraphhead[&lt;distance&gt;]{&lt;text&gt;}</code> .....   | 251 |
| Stores <code>&lt;text&gt;</code> for printing at <code>&lt;distance&gt;</code> below the page header.  |     |
| <code>\epigraphpicture</code> .....  | 252 |
| A zero-sized picture holding the result of <code>\epigraphforheader</code> .   |     |
| <code>\epigraphposition{&lt;flush&gt;}</code> Sets the horizontal placement of epigraphs. ....   | 250 |
| <code>\epigraphrule</code> .....   | 251 |
| Thickness of the rule drawn between the text and source of an epigraph.  |     |
| <code>\begin{epigraphs}</code> Environment for several epigraphs. ....   | 249 |
| <code>\epigraphsourceposition{&lt;flush&gt;}</code> .....  | 250 |
| Sets the placement of the source within an epigraph.   |     |
| <code>\epigraphtextposition{&lt;flush&gt;}</code> Sets the justification for epigraph text. ....   | 250 |
| <code>\epigraphwidth</code> Textwidth for epigraphs. ....  | 250 |
| <code>executivepaper</code> executive-paper 용지 크기 클래스 옵션 .....   | 2   |
| <code>extrafontsizes</code> 25pt 초과 scalable 폰트 클래스 옵션 .....   | 3   |

|   |     |
|---|-----|
| <code>\extrarowheight</code> .....  | 224 |
| Length added to the normal row height in tabulars and arrays.   |     |
| <code>\extratabsurround</code> .....  | 225 |
| Adds additional space for <code>\firsthline</code> and <code>\lasthline</code> .  |     |
| <code>\fancybreak{&lt;text&gt;}</code> .....  | 98  |
| 중앙정렬된 <code>&lt;text&gt;</code> 로 이루어진 구획. 이어지는 문단은 들여써지지 않는다.  |     |
| <code>\fancybreak*{&lt;text&gt;}</code> .....   | 98  |
| 이어지는 문단이 들여써지지 않는다는 것을 제외하고 <code>\fancybreak</code> 와 동일.  |     |
| <code>\begin{fboxverbatim}</code> .....   | 279 |
| Puts a frame around the verbatim material. Page breaks are not allowed.   |     |
| <code>\fcardinal{&lt;number&gt;}</code> .....   | 327 |
| Typesets <code>{&lt;number&gt;}</code> as a cardinal number, with <code>\fnumbersep</code> between each triple of digits.   |     |
| <code>\feetabovelfloat</code> Typeset footnotes above bottom floats (the default). .....  | 230 |
| <code>\feetbelowfloat</code> Typeset footnotes below bottom floats. ....  | 230 |
| <code>\figurerefname</code> Name for a figure used by <code>\href</code> . ....   | 294 |
| final 인쇄용 최종본 클래스 옵션 .....  | 4   |
| <code>\firmlist</code> .....  | 134 |
| In a standard list, sets the vertical spacing intermediate between the default and <code>\tightlist(s)</code> .   |     |
| <code>\firmlists</code> .....   | 134 |
| Declaration for some vertical spacing in list-based environments. There may be some extra space before and after the environments.  |     |
| <code>\firmlists*</code> .....  | 134 |
| The same as <code>\firmlists</code> except that there is no space before and after the environments.  |     |
| <code>\firsthline</code> .....  | 225 |
| An <code>\hline</code> (the first) that does not effect vertical alignment of an array or tabular.  |     |
| <code>\flagverse{&lt;flag&gt;}</code> .....   | 262 |
| Used at the start of a verse line to put <code>&lt;flag&gt;</code> distance <code>\vleftskip</code> before the start of the line.   |     |
| <code>\legfigure</code> The name for a <code>\legend</code> in a figure. ....   | 188 |
| <code>\legfloat{&lt;name&gt;}</code> .....  | 188 |
| Where float is a float type (e.g. table), defines the <code>&lt;name&gt;</code> used by <code>\namedlegend</code> .   |     |
| <code>\legtable</code> The name for a <code>\legend</code> in a table. ....   | 188 |
| <code>\legtocfloat{&lt;title&gt;}</code> .....  | 188 |
| Where float is a float type (e.g., figure), called by <code>\namedlegend</code> to add <code>&lt;title&gt;</code> to a 'List of...'. .....  |     |
| fleqn 별행수식 왼쪽 정렬 클래스 옵션 .....   | 5   |
| <code>\begin{labelled}{&lt;name&gt;}{&lt;width&gt;}{&lt;sep&gt;}{&lt;indent&gt;}{&lt;left&gt;}{&lt;right&gt;}</code> .....  | 131 |
| A list of descriptions of <code>\items</code> with the labels formatted according to <code>\name</code> and the overall layout specified by the other list length arguments.                    |     |
| <code>\FloatBlock</code> .....  | 176 |
| Force $\LaTeX$ to place all unplaced floats before proceeding this point.   |     |
| <code>\FloatBlockAllowAbove</code> .....  | 176 |
| Lessens the restriction by <code>\FloatBlock</code> such that a float inserted <i>after</i> a <code>\FloatBlock</code> can appear at the top of the same page as <code>\FloatBlock</code> .     |     |
| <code>\FloatBlockAllowBelow</code> .....  | 176 |
| Lessens the restriction by <code>\FloatBlock</code> such that a float inserted <i>before</i> a <code>\FloatBlock</code> can appear at the bottom of the same page as <code>\FloatBlock</code> . |     |
| <code>\flushbottom</code> 페이지 높이가 일정하도록 마지막 행이 표시되도록 선언 .....   | 5   |
| <code>\begin{flushleft}</code> Text to be typeset flushleft and raggedright. ....   | 123 |
| <code>\flushletright</code> .....   | 125 |
| Following this declaration paragraphs are set in their usual form.  |     |
| <code>\begin{flushright}</code> Text to be typeset flushright and raggedleft. ....  | 123 |

|   |   |     |
|---|---|-----|
| <code>\fnsymbol{&lt;counter&gt;}</code>                                 | Typesets the representation of the footnote marker.   | 235 |
| <code>\fnumbersep</code>  | Separator between digit triples in numbers.   | 327 |
| <code>\foolscapvopaper</code>   | foolscap octavo 용지 크기 클래스 옵션  | 2   |
| <code>\footfootmark</code>  | Typesets the footnote mark at the bottom of the page.   | 233 |
| <code>\footfudgefiddle</code>   | Integer number (default 64) to help when typesetting <code>\paragraphfootnotes</code> .   | 231 |
| <code>\footmarksep</code>   | Offset from the footnote mark box for lines after the first.  | 233 |
| <code>\footmarkstyle{&lt;style&gt;}</code>                              | Style of the footnote mark at the bottom of the page.   | 233 |
| <code>\footmarkwidth</code>   | Width of footnote mark box.   | 233 |
| <code>\footnote[&lt;num&gt;]{&lt;text&gt;}</code>                       | Put <code>&lt;text&gt;</code> as a footnote.  | 229 |
| <code>\footnotemark[&lt;num&gt;]</code>                                 | Typesets a footnote mark.   | 229 |
| <code>\footnoterule</code>  | Rule separating footnotes from the main text.   | 235 |
| <code>\footnotetext[&lt;num&gt;]{&lt;text&gt;}</code>                   | Typesets <code>&lt;text&gt;</code> as a footnote at the bottom of the page but does not put a mark in the main text.  | 229 |
| <code>\footparindent</code>   | Paragraph indent for multiparagraph footnote text.  | 233 |
| <code>\footreflabstr</code>   | Reference a labelled footnote.  | 229 |
| <code>\footruleheight</code>  | Macro specifying the height of a normal rule above a footer.  | 110 |
| <code>\footruleskip</code>  | Macro specifying a distance sufficient to ensure that a rule above a footer will lie in the space between the footer and the typeblock.                         | 110 |
| <code>\footskip (length)</code>   | 조판 영역의 아래끝과 하단 면주 영역의 아래끝 사이의 간격  | 21  |
| <code>\foottextfont</code>  | Font for footnote text.   | 234 |
| <code>\foottopagenote</code>  | Declaration which turns <code>\footnotes</code> into <code>\pagenotes</code> .  | 248 |
| <code>\fordinal{&lt;number&gt;}</code>                                  | Typesets <code>{&lt;number&gt;}</code> as an ordinal number, with <code>\fnumbersep</code> between each triple of digits.                                       | 327 |
| <code>\frame{&lt;contents&gt;}</code>                                   | A picture object drawing a frame about <code>&lt;contents&gt;</code> .  | 410 |
| <code>\framebox(&lt;width,height&gt;)[&lt;pos&gt;]{&lt;text&gt;}</code> | A picture object framing <code>&lt;text&gt;</code> (at position <code>&lt;pos&gt;</code> ) in a box <code>&lt;width&gt;</code> by <code>&lt;height&gt;</code> . | 408 |
| <code>\FrameCommand</code>  | Draws a 'frame'.  | 273 |
| <code>\begin{framed}</code>   | Put a ruled box around the contents of the environment; the box can include pagebreaks.   | 272 |
| <code>\FrameHeightAdjust</code>   | Height of the top of a frame in a <code>framed</code> environment above the baseline at the top of a page.  | 272 |
| <code>\framepichead</code>  | Used by the <code>showlocs</code> pagestyle to draw a line at the header location.  | 119 |
| <code>\framepichook</code>  | First thing called inside the zero width pictures provided by <code>\framepichead</code> and <code>\framepictextfoot</code> . Empty by default.                 | 119 |
| <code>\framepictextfoot</code>  | Used by the <code>showlocs</code> pagestyle to draw a box around the textblock and a line at the footer location.   | 119 |
| <code>\FrameRestore</code>  | Restores settings after a 'frame'.  | 273 |
| <code>\FrameRule</code>   | Thickness of the rules around an <code>framed</code> environment.   | 272 |
| <code>\FrameSep</code>  | Separation between the surrounding box and text in a <code>framed</code> or <code>shaded</code> environment.  | 272 |
| <code>\fref{&lt;labstr&gt;}</code>                                      | Prints a named ( <code>\figurerefname</code> ) reference to a <code>\labeled</code> figure.   | 294 |

|   |     |
|---|-----|
| <code>\frontmatter</code> .....   | 75  |
| Sets folios to be printed in lowercase roman and prohibits sectional number.  |     |
| <code>\frontmatter*</code> Same as <code>\frontmatter</code> except that folios are unaltered. ....   | 75  |
| <code>fullptlayout</code> 소수점 버림 무력화 클래스 옵션 .....   | 5   |
| <code>\fussy</code> .....   | 51  |
| Declaration for TeX to minimise interword space variations in justified text lines.   |     |
| <br><code>ger</code> .....  | 90  |
| A raggedright, large, bold, two line chapterstyle with rules above and below.   |     |
| <code>\getarrayelement{⟨arrayname⟩}{⟨index⟩}{⟨result⟩}</code> .....   | 331 |
| Sets the parameterless macro <code>⟨result⟩</code> to the contents of the <code>{⟨index⟩}</code> location in array <code>⟨arrayname⟩</code> .   |     |
| <code>\glossary[⟨file⟩](⟨key⟩){⟨term⟩}{⟨description⟩}</code> .....  | 311 |
| Adds <code>⟨term⟩</code> and its description, <code>⟨desc⟩</code> , to a glossary file — <code>\jobname.glo</code> by default or to <code>\file.glo</code> . The optional argument <code>⟨key⟩</code> can be used to provide a different sort key for <code>⟨term⟩</code> . |     |
| <code>\glossarycolsep</code> Columns separation in a two column glossary. ....  | 314 |
| <code>\glossaryintoc</code> Declaration to add glossary title to the ToC. ....  | 314 |
| <code>\glossarymark</code> Redefine to specify marks for headers. ....  | 314 |
| <code>\glossaryname</code> Name for a glossary. ....  | 314 |
| <code>\glossaryrule</code> Width of inter-column rule in a two column glossary. ....  | 314 |
| <code>\glossitem{⟨term⟩}{⟨desc⟩}{⟨ref⟩}{⟨num⟩}</code> .....   | 311 |
| Glossary entry used in a <code>theglossary</code> environment   |     |
| <br><code>\hangcaption</code> Multiline captions will be typeset as a hanging paragraph. ....   | 182 |
| <code>\hangfrom{⟨stuff⟩}</code> Hangs a paragraph from <code>⟨stuff⟩</code> . ....  | 122 |
| <code>\@hangfrom{⟨code⟩}</code> .....   | 95  |
| Kernel macro aiding the setting hanging paragraphs.   |     |
| <code>hangnum</code> .....  | 87  |
| Section heading 형식이지만 번호표제가 마진 영역에 나타나는 chapter 스타일.  |     |
| <code>\hangpara{⟨indent⟩}{⟨num⟩}</code> .....   | 122 |
| Apply <code>⟨indent⟩</code> for <code>⟨num⟩</code> lines to the immediately following paragraph.  |     |
| <code>\begin{hangparas}{⟨indent⟩}{⟨num⟩}</code> .....   | 122 |
| Environment form of <code>\hangpara</code> , applying it to every paragraph in the environment.   |     |
| <code>\hangsecnum</code> .....  | 96  |
| Declaration making sectioning numbers hang in the margin.   |     |
| <code>\hangsubcaption</code> The subcaption version of <code>\hangcaption</code> . ....   | 195 |
| <code>\headdrop (length)</code> .....   | 21  |
| 트리밍된 페이지의 위끝과 상단 영역의 위끝 사이의 간격  |     |
| <code>\headheight (length)</code> 상단 영역의 높이 .....   | 21  |
| <code>\headnameref</code> Use header title for sectional title references. ....   | 295 |
| <code>\headsep (length)</code> 상단 영역의 아래끝과 조판 영역 위끝 사이의 간격 .....  | 21  |
| <code>\headstyles{⟨name⟩}</code> section 구획 heading 스타일로 <code>⟨name⟩</code> 을 사용. ....   | 101 |
| <code>\headwith</code> .....  | 110 |
| A (scratch) length normally used in the definition of headers and footers.  |     |
| <code>\heavyrulewidth</code> Default width for a heavy tabular rule. ....   | 216 |
| <code>\hideindexmarks</code> .....  | 303 |
| The <code>⟨stuff⟩</code> argument to <code>\index</code> and <code>\specialindex</code> will not be printed in the margin (the default).  |     |
| <code>\hmpunct</code> .....   | 321 |
| Punctuation between hours and minutes in <code>\printtime</code> (default:)   |     |
| <code>\hrulefill</code> Fills a tabular column with a rule. ....  | 218 |

|   |   |     |
|---|---|-----|
| <code>\idtextinnotes{⟨id⟩}</code>                 | Prints an endnote's <i>⟨id⟩</i> text  | 246 |
| <code>\ifdraftdoc</code>                          | true if the draft class option has been used.   | 317 |
| <code>\ifetex</code>                              | true if <i>etex</i> is the underlying engine, otherwise <i>false</i> .  | 332 |
| <code>\ifluatex</code>                            | true if LuaTeX is being used to process the document.   | 333 |
| <code>\ifoddpage</code>                           | Result of <code>\checkoddpaper</code> .   | 325 |
| <code>\ifonlyfloats{⟨yes⟩}{⟨no⟩}</code>           | Processes <i>⟨yes⟩</i> on a page containing only floats, otherwise process <i>⟨no⟩</i> .  | 117 |
| <code>\ifsamename</code>                          | Result from <code>\nametest</code> .  | 324 |
| <code>\ifsidecapleft</code>                       | true if sidecaptions will be set in the left margin, otherwise they will be set in the right margin.  | 196 |
| <code>\IfStreamOpen{⟨stream⟩}{⟨yes⟩}{⟨no⟩}</code> | If <i>⟨stream⟩</i> is open then the <i>⟨yes⟩</i> argument is processed otherwise the <i>⟨no⟩</i> argument is processed.   | 285 |
| <code>\ifxetex</code>                             | true if XeTeX is being used to process the document.  | 333 |
| <code>\ignoreidxfile</code>                       | Do not report attempts to use an <i>idx</i> file that has not been declared by <code>\makeindex</code> .  | 301 |
| <code>\iiirdstring</code>                         | Ordinal characters for 'rd', e.g., as in 3rd.   | 328 |
| <code>\iindstring</code>                          | Ordinal characters for 'nd', e.g., as in 2nd.   | 328 |
| <code>imperialvopaper</code>                      | imperial octavo 용지 크기 클래스 옵션  | 2   |
| <code>\indentafterchapter</code>                  | <code>\chapter</code> 뒤에 바로 이어지는 첫 문단이 들여써지도록 지정.   | 86  |
| <code>\indentcaption{⟨length⟩}</code>             | Multiline captions will be typeset as a hanging paragraph hung by <i>⟨length⟩</i> .   | 182 |
| <code>\indentpattern{⟨digits⟩}</code>             | Stanza lines in <i>patverse</i> environment are indented according to the <i>⟨digits⟩</i> pattern.  | 261 |
| <code>\index[⟨file⟩]{⟨stuff⟩}</code>              | Add <i>⟨stuff⟩</i> and the current page number to the raw index data. By default this is written to file <code>\jobname.idx</code> . If the optional argument is given it will be written to file <i>⟨file⟩.idx</i> . | 302 |
| <code>\indexcolsep (length)</code>                | Width of the gutter in two column indexes.  | 301 |
| <code>\indexintoc</code>                          | Add the index title to the ToC (the default).   | 301 |
| <code>\indexmark</code>                           | Can be used in <i>pagestyles</i> for page headers in an index.  | 301 |
| <code>\indexmarkstyle</code>                      | Font style for printing index marks in the margin.  | 303 |
| <code>\indexname</code>                           | Name used for the theindex title.   | 301 |
| <code>\indexrule (length)</code>                  | Width of the inter-column rule in two column indexes.   | 301 |
| <code>\insertchapterspace</code>                  | <code>\chapter</code> 에 의해 호출되어 LoF(그림 목차)와 LoT(표 목차)에 공백을 삽입.  | 86  |
| <code>\isopage[⟨spine⟩]</code>                    | ISO 비율 용지에 적합한 레이아웃을 생성한다.  | 29  |
| <code>\iststring</code>                           | Ordinal characters for 'st', e.g., as in 1st.   | 328 |
| <code>\item[⟨label⟩]</code>                       | Introduces a new element in a list. The effect of <i>⟨label⟩</i> depends on the particular list form.   | 131 |
| <code>\item</code>                                | Introduces a main index entry.  | 303 |
| <code>\begin{itemize}[⟨marker⟩]</code>            | An unordered list of <i>\items</i> . If given, the <i>⟨marker⟩</i> overrides the default marker for the elements.   | 132 |
| <code>\itshape</code>                             | Declaration for using an italic font.   | 42  |
| <code>\jobname</code>                             | The name of the document's main source file.  | 284 |
| <code>\justlastraggedleft</code>                  | Following this declaration paragraphs will be set justified except the last line will be set raggedleft.  | 128 |

|   |     |
|---|-----|
| <code>\begin{KeepFromToc}</code> .....  | 144 |
| Stop the titles of the enclosed <code>\listof...</code> commands from being added to the ToC.   |     |
| <code>\keepthetitle</code> .....  | 67  |
| Makes most aspects of <code>\maketitle</code> unavailable but keeps <code>\thetitle</code> , <code>\theauthor</code> and <code>\thedate</code> .  |     |
| <code>\killtitle</code> Makes all aspects of <code>\maketitle</code> unavailable. ....  | 67  |
| <code>komalike</code> A section-like chapterstyle in a sans serif font. ....  | 90  |
| <br><code>\label{&lt;labstr&gt;}</code> .....   | 293 |
| Associates the current (section, caption, ...) number, and page number, to <code>&lt;labstr&gt;</code> .  |     |
| <code>\label{&lt;bookmark&gt;}{&lt;labstr&gt;}</code> .....   | 194 |
| Associates <code>&lt;labstr&gt;</code> with the current (section, caption, etc.) number and page number. If used inside a subfloat and with the <code>hyperref</code> package the optional <code>&lt;bookmark&gt;</code> (note the parentheses not square brackets) is available to specify a <code>hyperref</code> bookmark. |     |
| <code>\begin{labelled}{&lt;name&gt;}</code> .....   | 131 |
| A list of descriptions of <code>\items</code> with the labels formatted according to <code>\name</code>   |     |
| <code>landscape</code> 용지 가로와 세로 크기를 바꾸는 클래스 옵션 .....   | 1   |
| <code>largecrownvopaper</code> large crown octavo 용지 크기 클래스 옵션 .....  | 2   |
| <code>largepostvopaper</code> large post octavo 용지 크기 클래스 옵션 .....  | 2   |
| <code>\lastthline</code> .....  | 225 |
| An <code>\hline</code> (the last) that does not effect vertical alignment of an array or tabular.   |     |
| <code>\lastlineparrule</code> .....   | 127 |
| The rule used by <code>\lastlinerulefill</code> to eliminate spaces at the ends of lines.   |     |
| <code>\lastlinerulefill</code> .....  | 127 |
| Ending a paragraph with this will cause any spaces at the ends of the lines will be filled with a rule ( <code>\lastlineparrule</code> ).   |     |
| <code>lastpage</code> .....   | 320 |
| Counter holding the number of the last page processed during the <i>previous</i> LaTeX run.   |     |
| <code>lastsheet</code> .....  | 320 |
| Counter holding the number of sheets processed during the <i>previous</i> LaTeX run.  |     |
| <code>\lminusname</code> Lowercase 'minus' name, default 'minus'. ....  | 329 |
| <code>\leadpagetoclevel</code> .....  | 83  |
| Holds the default toc level for <code>\newleadpage</code> generated macros, default is chapter.   |     |
| <code>\leavespergathering{&lt;num&gt;}</code> .....   | 321 |
| Ensure that the correct number of pages are output to make up gatherings of <code>&lt;num&gt;</code> leaves each.   |     |
| <code>ledgerpaper</code> ledger 용지 크기 클래스 옵션 .....  | 2   |
| <code>\begin{leftbar}</code> .....  | 273 |
| Draws a thick vertical line in the left margin alongside the contents of the environment.   |     |
| <code>\leftmark</code> .....  | 108 |
| Contains the value of the <code>&lt;left&gt;</code> argument of the last <code>\markboth</code> .   |     |
| <code>\leftspringright{&lt;lfrac&gt;}{&lt;rfrac&gt;}{&lt;ltext&gt;}{&lt;rtext&gt;}</code> .....   | 128 |
| Sets <code>&lt;ltext&gt;</code> flushleft and raggedright, and <code>&lt;rtext&gt;</code> raggedleft and flushright with horizontal space between the two texts.  |     |
| <code>legalpaper</code> legal-paper 용지 크기 클래스 옵션 .....  | 2   |
| <code>\legend{&lt;text&gt;}</code> A legend (an anonymous caption). ....  | 186 |
| <code>leqno</code> 수식 번호를 왼쪽에 붙이는 클래스 옵션 .....  | 5   |
| <code>letterpaper</code> letterpaper 용지 크기 클래스 옵션 .....   | 2   |
| <code>\lightrulewidth</code> Default width for a light tabular rule. ....   | 216 |
| <code>\line{&lt;dx,dy&gt;}{&lt;distance&gt;}</code> .....   | 413 |
| Picture object of a line, slope <code>&lt;dx,dy&gt;</code> and coordinate length <code>&lt;distance&gt;</code> .  |     |



|  |        |
|--|--------|
| <code>\linenottooshort[⟨length⟩]</code> .....  | 126    |
| Following this declaration the last line of a paragraph will not be shorter than ⟨length⟩ (default 2em).   |        |
| <code>\linenumberfont{⟨fontspec⟩}</code> Specify the font for line numbers. ....   | 281    |
| <code>\linenumberfrequency{⟨nth⟩}</code> .....   | 281    |
| Number every ⟨nth⟩ line in a <code>boxedverbatim</code> or a <code>verse</code> .  |        |
| <code>\linethickness{⟨len⟩}</code> .....   | 406    |
| Picture declaration for vertical and horizontal lines to be ⟨len⟩ thick.   |        |
| <code>\begin{list}{⟨default-label⟩}{⟨code⟩}</code> .....   | 134    |
| The general <code>list</code> environment. ⟨default-label⟩ is code that is used for an <code>\item</code> with no ⟨label⟩ and ⟨code⟩ is used to specify the list layout parameters.  |        |
| <code>\listfigurename</code> The title for the List of Figures. ....   | 145    |
| <code>\listoffigures</code> Typeset the LoF, adding its title to the ToC. ....   | 144    |
| <code>\listoffigures*</code> Typeset the LoF. ....   | 144    |
| <code>\listoftables</code> Typeset the LoT, adding its title to the ToC. ....  | 144    |
| <code>\listoftables*</code> Typeset the LoT. ....  | 144    |
| <code>\listtablename</code> The title for the List of Tables. ....   | 145    |
| <code>\loosesubcaptions</code> Specifies extra vertical space around subcaptions. ....   | 195    |
| <code>\lxvchars (length)</code> 개략적인 65문자 길이. ....   | 15     |
| <code>lyhne</code> .....   | 90     |
| A raggedleft bold sanserif chapter title set between two rules, with the name and number above. It requires the <code>graphicx</code> package.   |        |
| <br><code>madsen</code> .....  | <br>90 |
| A raggedleft large bold sanserif chapterstyle with the number in the margin and a rule between the number and title lines. It requires the <code>graphicx</code> package.  |        |
| <code>\mainmatter</code> .....   | 75     |
| Sets folio numbers to arabic, starting with 1. Floats, etc., will be numbered per chapter and sectional divisions will be numbered.  |        |
| <code>\mainmatter*</code> Same as <code>\mainmatter</code> except that folios are unaltered. ....  | 75     |
| <code>\makebox(⟨width,height⟩)[⟨pos⟩]{⟨text⟩}</code> .....   | 408    |
| A picture object putting ⟨text⟩ (at position ⟨pos⟩) in a box ⟨width⟩ by ⟨height⟩.  |        |
| <code>\makeevenfoot{⟨style⟩}{⟨left⟩}{⟨center⟩}{⟨right⟩}</code> .....   | 109    |
| Defines the ⟨left⟩, ⟨center⟩ and ⟨right⟩ parts of the even (verso) page footer of the ⟨style⟩ pagestyle.   |        |
| <code>\makeevenhead{⟨style⟩}{⟨left⟩}{⟨center⟩}{⟨right⟩}</code> .....   | 109    |
| Defines the ⟨left⟩, ⟨center⟩ and ⟨right⟩ parts of the even (verso) page header of the ⟨style⟩ pagestyle.   |        |
| <code>\makefootrule{⟨style⟩}{⟨width⟩}{⟨thickness⟩}{⟨skip⟩}</code> .....  | 110    |
| Specifies the ⟨width⟩ and ⟨thickness⟩ of the rule drawn ⟨skip⟩ (see <code>\footskip</code> ) above the footers of the ⟨style⟩ pagestyle.   |        |
| <code>\MakeFramed{⟨settings⟩}</code> .....   | 273    |
| The <code>MakeFramed</code> environment is the workhorse for the <code>framed</code> , <code>shaded</code> , etc., environments. The ⟨settings⟩ argument controls the final appearance and should include a <code>\FrameRestore</code> to reset things back to normal. |        |
| <code>\makeglossary[⟨file⟩]</code> .....   | 310    |
| Opens file <code>\jobname.glo</code> , or <code>\file.glo</code> , for glossary entries  |        |
| <code>\makeheadfootruleprefix{⟨style⟩}{⟨for headrule⟩}{⟨for footrule⟩}</code> .....  | 110    |
| Can be used to add alternative colors to the head/foot rule  |        |



|   |     |
|---|-----|
| <code>\makeheadposition{&lt;style&gt;}{&lt;headpos&gt;}{&lt;oheadpos&gt;}{&lt;efootpos&gt;}{&lt;ofootpos&gt;}</code> .....  | 110 |
| Specifies the horizontal positioning of the even and odd headers and footers respectively for the <style> pagestyle.  |     |
| <code>\makeheadrule{&lt;style&gt;}{&lt;width&gt;}{&lt;thickness&gt;}</code> .....   | 110 |
| Specifies the <width> and <thickness> of the rule drawn below the headers of the <style> pagestyle.   |     |
| <code>\makeheadstyles{&lt;name&gt;}{&lt;code&gt;}</code> .....  | 101 |
| 새로운 셋의 section 구획 헤딩 스타일을 만든다. <name>와 같은 이름을 갖고 <code>에 의해 정의된다.   |     |
| <code>\makeindex[&lt;file&gt;]</code> .....   | 300 |
| Preamble command to collect raw index information. By default this is written to file \jobname.idx. If the optional argument is used it may be written to file <file>.idx.                        |     |
| <code>\makeoddfoot{&lt;style&gt;}{&lt;left&gt;}{&lt;center&gt;}{&lt;right&gt;}</code> .....   | 109 |
| Defines the <left>, <center> and <right> parts of the odd (recto) page footer of the <style> pagestyle.   |     |
| <code>\makeoddhead{&lt;style&gt;}{&lt;left&gt;}{&lt;center&gt;}{&lt;right&gt;}</code> .....   | 109 |
| Defines the <left>, <center> and <right> parts of the odd (recto) page header of the <style> pagestyle.   |     |
| <code>\makepagenote</code> Preamble command for enabling page/end notes. ....   | 243 |
| <code>\makepagestyle{&lt;style&gt;}</code> Used to define a pagestyle <style>. ....   | 109 |
| <code>\makepsmarks{&lt;style&gt;}{&lt;code&gt;}</code> .....  | 110 |
| Hook into the <style> pagestyle, usually used for the <code> setting any marks.   |     |
| <code>\makerunningwidth{&lt;style&gt;}[&lt;footwidth&gt;]{&lt;headwidth&gt;}</code> .....   | 110 |
| Sets the width of the <style> pagestyle headers to <headwidth>. The footers are set to <headwidth>, or <footwidth> if it is given.  |     |
| <code>\MakeShortVerb{&lt;backslash-char&gt;}</code> .....   | 277 |
| Makes <char> a shorthand for \verb<char>.   |     |
| <code>\MakeTextLowercase{&lt;text&gt;}</code> .....   | 53  |
| Lower case <text> by leave math, references, citations and \NoCaseChange{<text>} alone.   |     |
| <code>\MakeTextUppercase{&lt;text&gt;}</code> .....   | 53  |
| Upper case <text> by leave math, references, citations and \NoCaseChange{<text>} alone.   |     |
| <code>\makethanksmark</code> Typesets the thanks marker and text at the foot. ....  | 69  |
| <code>\makethanksmarkhook</code> Code hook into \makethanksmark. ....   | 69  |
| <code>\maketitlehooka</code> Hook into \maketitle applied before the \title. ....   | 65  |
| <code>\maketitlehookb</code> .....  | 65  |
| Hook into \maketitle applied between the \title and \author.  |     |
| <code>\maketitlehookc</code> .....  | 65  |
| Hook into \maketitle applied between the \author and \date.   |     |
| <code>\maketitlehookd</code> Hook into \maketitle applied after the \date. ....   | 65  |
| <code>\marg{&lt;arg&gt;}</code> prints {<arg>}. ....  | 340 |
| <code>\begin{marginfigure}[&lt;length&gt;]</code> .....   | 169 |
| Environment which inserts its contents into the margin, and enables figure captions. The optional argument should be a length and is used to perform manual up/down adjustments to the placement. |     |
| <code>\marginpar[&lt;left-text&gt;]{&lt;text&gt;}</code> .....  | 236 |
| Puts <text> into the margin; if given, <left-text> will be used instead of <text> for the left margin.  |     |
| <code>\marginparmargin{&lt;placement&gt;}</code> .....  | 236 |
| Provides a more textual interface for the user to specify in which margin the margin note should be placed.   |     |
| <code>\marginparpush (length)</code> 여백 문단 상호간 거리 최소화 .....   | 21  |
| <code>\marginparsep (length)</code> 조판 영역의 끝에서 여백 문단까지의 수평 길이 .....   | 21  |
| <code>\marginparwidth (length)</code> 여백 문단 너비의 최대치 .....   | 21  |

|   |     |
|---|-----|
| <code>\begin{margintable}[&lt;length&gt;]</code> .....  | 169 |
| Environment which inserts its contents into the margin, and enables figure captions. The optional argument should be a length and is used to perform manual up/down adjustments to the placement. |     |
| <code>\markboth{&lt;left&gt;}{&lt;right&gt;}</code> .....   | 107 |
| Sets values of two markers to <code>&lt;left&gt;</code> and <code>&lt;right&gt;</code> respectively (see <code>\leftmark</code> and <code>\rightmark</code> ).                                    |     |
| <code>\markright{&lt;right&gt;}</code> .....  | 107 |
| Sets value of one marker to <code>&lt;right&gt;</code> (see <code>\rightmark</code> ).  |     |
| <code>\maxsecnumdepth{&lt;secname&gt;}</code> .....   | 79  |
| Sets division numbering level in the <code>\mainmatter</code> to <code>&lt;secname&gt;</code> .   |     |
| <code>\maxtocdepth{&lt;secname&gt;}</code> .....  | 145 |
| Sets the maximum value of the <code>tocdepth</code> counter.  |     |
| <code>mcrownvopaper</code> metric crown octavo 용지 크기 클래스 옵션 .....   | 1   |
| <code>mdemyvopaper</code> metric demy octavo 용지 크기 클래스 옵션 .....   | 1   |
| <code>\mdseries</code> Declaration for using a medium font. ....  | 42  |
| <code>\medievalpage[&lt;spine&gt;]</code> .....   | 29  |
| 초창기 인쇄기 시대의 모양을 따르는 레이아웃을 만든다.  |     |
| <code>mediumvopaper</code> medium octavo 용지 크기 클래스 옵션 .....   | 2   |
| <code>\medspace</code> A medium space (4/18 em). ....   | 333 |
| <code>\memappchapinfo{&lt;thechapter&gt;}{&lt;fortoc&gt;}{&lt;forhead&gt;}{&lt;title&gt;}</code> .....  | 339 |
| Code hook into an appendix <code>\chapter</code>  |     |
| <code>\memappchapstarinfo{&lt;fortoc&gt;}{&lt;title&gt;}</code> .....   | 339 |
| Code hook into an appendix <code>\chapter*</code>   |     |
| <code>\memapppageinfo{&lt;title&gt;}</code> Code hook into <code>\appendixpage</code> . ....  | 339 |
| <code>\memapppagestarinfo{&lt;title&gt;}</code> Code hook into <code>\appendixpage*</code> . ....   | 339 |
| <code>\membicaptioninfo{&lt;type&gt;}{&lt;thetype&gt;}{&lt;fortoc1&gt;}{&lt;title1&gt;}{&lt;name2&gt;}{&lt;title2&gt;}</code> .....   | 340 |
| Code hook into <code>\membicaption</code> .   |     |
| <code>\membionenumcaptioninfo{&lt;type&gt;}{&lt;thetype&gt;}{&lt;fortoc1&gt;}{&lt;title1&gt;}{&lt;name2&gt;}{&lt;fortoc2&gt;}{&lt;title2&gt;}</code> .....  | 340 |
| Code hook into <code>\membionenumcaption</code> .   |     |
| <code>\membitwonumcaptioninfo{&lt;type&gt;}{&lt;thetype&gt;}{&lt;fortoc1&gt;}{&lt;title1&gt;}{&lt;name2&gt;}{&lt;fortoc2&gt;}{&lt;title2&gt;}</code> .....  | 340 |
| Code hook into <code>\membitwonumcaption</code> .   |     |
| <code>\membookinfo{&lt;thebook&gt;}{&lt;fortoc&gt;}{&lt;title&gt;}</code> Code hook into <code>\book</code> .....   | 339 |
| <code>\membookstarinfo{&lt;title&gt;}</code> Code hook into <code>\book*</code> .....   | 339 |
| <code>\memcaptioninfo{&lt;type&gt;}{&lt;thetype&gt;}{&lt;fortoc&gt;}{&lt;title&gt;}</code> .....  | 340 |
| Code hook into <code>\caption</code>  |     |
| <code>\memchapinfo{&lt;thechapter&gt;}{&lt;fortoc&gt;}{&lt;forhead&gt;}{&lt;title&gt;}</code> .....   | 339 |
| Code hook into <code>\chapter</code>  |     |
| <code>\memchapstarinfo{&lt;fortoc&gt;}{&lt;title&gt;}</code> Code hook into <code>\chapter*</code> .....  | 339 |
| <code>\memskips</code> Adjusts the display skips according to <code>\memskipstretch</code> . ....   | 51  |
| <code>\memskipstretch</code> The current factor for increasing display skips. ....  | 51  |
| <code>\memendofchapterhook</code> .....   | 84  |
| <code>\chapter</code> 명령어의 가장 마지막 부분에서 실행되는 hook.   |     |
| <code>\memfontenc</code> <code>extrafontsizes</code> 폰트 인코딩 클래스 옵션 (기본값: T1) .....  | 3   |
| <code>\memfontfamily</code> <code>extrafontsizes</code> 폰트 패밀리 클래스 옵션 (기본값: lmr) .....  | 3   |
| <code>\memfontpack</code> <code>extrafontsizes</code> 폰트 패키지 클래스 옵션 (기본값: lmodern) .....  | 3   |
| <code>\menglodesc{&lt;desc&gt;}</code> Wrapper round a glossary description. ....   | 313 |
| <code>\menglonum{&lt;num&gt;}</code> Wrapper round glossary numbers. ....   | 313 |
| <code>\menglore{&lt;ref&gt;}</code> Wrapper round a glossary ref. ....  | 313 |
| <code>\mengloterm{&lt;term&gt;}</code> Wrapper round a glossary term. ....  | 313 |

|   |     |
|---|-----|
| <code>\memgobble{&lt;text&gt;}</code> Gobbles its argument. Do <i>not</i> redefine it. ....   | 336 |
| <code>\memjustarg{&lt;text&gt;}</code> Definition is just <text>. Do <i>not</i> redefine it. ....   | 336 |
| <code>\memleadpageinfo{&lt;pstyle&gt;}{&lt;cmdname&gt;}{&lt;title&gt;}</code> .....   | 339 |
| Code hook into <code>\newleadpage</code> and <code>\renewleadpage</code> .  |     |
| <code>\memleadpageinfo{&lt;pstyle&gt;}{&lt;cmdname&gt;}{&lt;title&gt;}</code> .....   | 339 |
| Code hook into <code>\newleadpage*</code> and <code>\renewleadpage*</code> .  |     |
| <code>\memlegendinfo{&lt;title&gt;}</code> Code hook into <code>\legend</code> .....  | 340 |
| <code>\memnamedlegendinfo{&lt;fortoc&gt;}{&lt;title&gt;}</code> Code hook into <code>\namedlegend</code> .....                            | 340 |
| <code>\memorigdb</code> Stores the original definition of <code>\.</code> .....   | 125 |
| <code>\memorigpar</code> Stores the original definition of <code>\par</code> . ....   | 125 |
| <code>\mempartinfo{&lt;thepart&gt;}{&lt;fortoc&gt;}{&lt;title&gt;}</code> Code hook into <code>\part</code> .....                         | 339 |
| <code>\mempartstarinfo{&lt;title&gt;}</code> Code hook into <code>\part*</code> .....   | 339 |
| <code>\mempoeminfo{&lt;title&gt;}</code> Code hook into <code>\poemtitle</code> .....   | 339 |
| <code>\mempoemstarinfo{&lt;title&gt;}</code> Code hook into <code>\poemtitle*</code> .....  | 339 |
| <code>\memPoemTitleinfo{&lt;thepoem&gt;}{&lt;fortoc&gt;}{&lt;forhead&gt;}{&lt;title&gt;}</code> .....                                     | 339 |
| Code hook into <code>\PoemTitle</code>  |     |
| <code>\memPoemTitlestarinfo{&lt;fortoc&gt;}{&lt;title&gt;}</code> Code hook into <code>\PoemTitle*</code> .....                           | 339 |
| <code>\mempostaddappagetotochook</code> .....   | 155 |
| Hook executed right <i>after</i> <code>\appendixpage</code> writes to the ToC   |     |
| <code>\mempostaddbooktototochook</code> .....   | 155 |
| Hook executed right <i>after</i> <code>\book</code> writes to the ToC   |     |
| <code>\mempostaddchaptertotochook</code> .....  | 155 |
| Hook executed right <i>after</i> <code>\chapter</code> writes to the ToC  |     |
| <code>\mempostaddparttototochook</code> .....   | 155 |
| Hook executed right <i>after</i> <code>\part</code> writes to the ToC   |     |
| <code>\mempreaddappagetotochook</code> .....  | 155 |
| Hook executed right <i>before</i> <code>\appendixpage</code> writes to the ToC  |     |
| <code>\mempreaddbooktototochook</code> .....  | 155 |
| Hook executed right <i>before</i> <code>\book</code> writes to the ToC  |     |
| <code>\mempreaddchaptertotochook</code> .....   | 155 |
| Hook executed right <i>before</i> <code>\chapter</code> writes to the ToC   |     |
| <code>\mempreaddparttototochook</code> .....  | 155 |
| Hook executed right <i>before</i> <code>\part</code> writes to the ToC  |     |
| <code>\memRTLleftskip</code> RTL (bidi) replacement for <code>\leftskip</code> .....  | 342 |
| <code>\memRTLraggedleft</code> RTL (bidi) replacement for <code>\raggedleft</code> .....  | 342 |
| <code>\memRTLraggedright</code> RTL (bidi) replacement for <code>\raggedright</code> .....  | 342 |
| <code>\memRTLrightskip</code> RTL (bidi) replacement for <code>\rightskip</code> .....  | 342 |
| <code>\memRTLvrightskip</code> RTL (bidi) replacement for <code>\vrightskip</code> .....  | 342 |
| <code>\memRTLvleftskip</code> RTL (bidi) replacement for <code>\vleftskip</code> .....  | 342 |
| <code>\memsecinfo{&lt;name&gt;}{&lt;thename&gt;}{&lt;fortoc&gt;}{&lt;forhead&gt;}{&lt;title&gt;}</code> .....                             | 339 |
| Code hook into the <code>\name</code> section command   |     |
| <code>\memsecstarinfo{&lt;name&gt;}{&lt;title&gt;}</code> .....   | 339 |
| Code hook into the <code>\name*</code> section command  |     |
| <code>\memUhead{&lt;text&gt;}</code> .....  | 112 |
| May uppercase <text>, depending on <code>\uppercaseheads</code> and <code>\nouppercaseheads</code> .                                      |     |
| <code>\meta{&lt;arg&gt;}</code> prints <arg>. ....  | 340 |
| <code>\midbcaption{&lt;text&gt;}</code> .....   | 192 |
| In bilingual captions, <text> is inserted after the first <code>\caption</code> and immediately before the second <code>\caption</code> . |     |
| <code>\midbookskip</code> Spacing between a <code>\book</code> 's number line and the title. ....   | 80  |
| <code>\midchapskip</code> 장 이름과 번호, 제목 사이의 공백. ....   | 85  |

|   |   |     |
|---|---|-----|
| <code>\midpartskip</code>                               | Spacing between a <code>\part</code> 's number line and the title.  | 80  |
| <code>\midPoemTitleskip</code>                          | Vertical space between the number and text of a poem title.   | 264 |
| <code>\midrule[⟨width⟩]</code>                          | Draws a rule across a tabular, default width <code>\lightrulewidth</code> .   | 216 |
| <code>\midsloppy</code>                                 | Declaration for TeX to allow moderate interword space variations in justified text lines.   | 51  |
| <code>\begin{midsloppypar}</code>                       | Typeset contents of the enclosed paragraph(s) using <code>\midsloppy</code> .   | 51  |
| <code>\minusname</code>                                 | Typeset for 'minus' before negative named numbers.  | 329 |
| <code>\mlargecrownvopaper</code>                        | metric large crown octavo 용지 크기 클래스 옵션  | 1   |
| <code>\movetoevenpage[⟨text⟩]</code>                    | Stops the current page to start typesetting on the next even page. The optional <code>⟨text⟩</code> is put on the skipped page (if there is one).   | 326 |
| <code>\movetooddpage[⟨text⟩]</code>                     | Stops the current page to start typesetting on the next odd page. The optional <code>⟨text⟩</code> is put on the skipped page (if there is one).  | 326 |
| <code>\mpjustification</code>                           | Specialized macro to be used within <code>\marginpars</code>  | 169 |
| <code>ms</code>   | 타자기 흉내 클래스 옵션   | 4   |
| <code>msmallroyalvopaper</code>                         | metric small royal octavo 용지 크기 클래스 옵션  | 1   |
| <code>\multfootsep</code>                               | Separator between adjacent footnote marks.  | 230 |
| <code>\multiput(⟨x,y⟩)(⟨dx,dy⟩){⟨num⟩}{⟨object⟩}</code> | Drawing command to place <code>⟨num⟩</code> copies of <code>⟨object⟩</code> , starting at coordinates <code>⟨x,y⟩</code> and stepping <code>⟨dx,dy⟩</code> for each copy after the first.         | 418 |
| <code>\namedlegend[⟨short⟩]{⟨long⟩}</code>              | Like <code>\caption</code> but no number and no 'List of...' entry.   | 188 |
| <code>\namedsubappendices</code>                        | Precede sub-appendix numbers with the name <code>\appendixname</code> .   | 78  |
| <code>\namenumberand</code>                             | The conjunction in named numbers, default ' and '.  | 329 |
| <code>\namenumbercomma</code>                           | The 'comma' in named numbers, default ', '.   | 329 |
| <code>\namerefoff</code>                                | Makes <code>\titleref</code> inoperative.   | 296 |
| <code>\namerefon</code>                                 | Makes <code>\titleref</code> operative.   | 296 |
| <code>\nametest{⟨str1⟩}{⟨str2⟩}</code>                  | Sets <code>\ifsamename</code> true if <code>⟨str1⟩</code> is the same as <code>⟨str2⟩</code> , otherwise false.   | 324 |
| <code>\Needspace{⟨length⟩}</code>                       | Starts a new page, leaving the current page short, unless there is actually at least <code>⟨length⟩</code> vertical space left on the current page.   | 326 |
| <code>\needspace{⟨length⟩}</code>                       | Starts a new page, leaving the current page short, unless there is estimated <code>⟨length⟩</code> vertical space left on the current page.   | 326 |
| <code>\Needspace*{⟨length⟩}</code>                      | Starts a new page, leaving the current page short unless <code>\flushbottom</code> is in effect, unless there is actually at least <code>⟨length⟩</code> vertical space left on the current page. | 326 |
| <code>\newarray{⟨arrayname⟩}{⟨low⟩}{⟨high⟩}</code>      | Defines a new indexed array datastructure called <code>⟨arrayname⟩</code> with the (integer) index ranging from <code>⟨low⟩</code> to <code>⟨high⟩</code> .                                       | 331 |
| <code>\newblock</code>                                  | Used in a bibliography to indicate a convenient place in an entry to have a pagebreak.  | 299 |
| <code>\newcolumntype{⟨char⟩}[⟨nargs⟩]{⟨spec⟩}</code>    | Creates a new column type <code>⟨char⟩</code> according to <code>⟨spec⟩</code> (which has <code>⟨nargs⟩</code> number of arguments).  | 210 |

|  |     |
|--|-----|
| <code>\newcomment{&lt;name&gt;}</code> .....   | 276 |
| Define a new comment environment called <code>&lt;name&gt;</code> .  |     |
| <code>\newcounter{&lt;ctr&gt;}[&lt;within&gt;]</code> .....  | 322 |
| Creates a new counter <code>ctr</code> , optionally reset when counter <code>within</code> changes.  |     |
| <code>\newfixedcaption[&lt;capcommand&gt;]{&lt;command&gt;}{&lt;float&gt;}</code> .....  | 189 |
| Defines a captioning command <code>\command</code> that may be used outside the <code>&lt;float&gt;</code> float as though it was inside it. The <code>\capcommand</code> must have been previously defined as a captioning command for <code>&lt;float&gt;</code> .   |     |
| <code>\newfloat[&lt;within&gt;]{&lt;fenv&gt;}{&lt;ext&gt;}{&lt;capname&gt;}</code> .....   | 167 |
| Creates new float environments, <code>fenv</code> and <code>fenv*</code> , using counter <code>fenv</code> , which may be restarted by the <code>&lt;within&gt;</code> counter, putting captioning information into the file with extension <code>&lt;ext&gt;</code> , and using <code>&lt;capname&gt;</code> as the name for a caption. |     |
| <code>\newfootnoteseries{&lt;series&gt;}</code> Create a new footnote <code>&lt;series&gt;</code> . .....  | 231 |
| <code>\newinputstream{&lt;stream&gt;}</code> Creates a new input stream called <code>&lt;stream&gt;</code> . .....   | 284 |
| <code>\newleadpage[&lt;page-style&gt;]{&lt;cmdname&gt;}{&lt;title&gt;}</code> .....  | 83  |
| Creates a macro to that when used will generate a sort of title page. Very similar to <code>\appendixpage</code> .   |     |
| <code>\newlistentry[&lt;within&gt;]{&lt;cntr&gt;}{&lt;ext&gt;}{&lt;level-1&gt;}</code> .....   | 162 |
| Creates the commands for typesetting an entry in a ‘List of...’. <code>&lt;cntr&gt;</code> is the new counter for the entry, which may be reset by the <code>&lt;within&gt;</code> counter. <code>&lt;ext&gt;</code> is the file extension and <code>&lt;level-1&gt;</code> is one less than the entry’s level.                          |     |
| <code>\newlistof{&lt;listofcom&gt;}{&lt;ext&gt;}{&lt;listofname&gt;}</code> .....  | 161 |
| Creates two new List of...commands, <code>\listofcom</code> and <code>\listofcom*</code> , which use a file with extension <code>&lt;ext&gt;</code> and <code>&lt;listofname&gt;</code> for the title.   |     |
| <code>\newloglike{&lt;cmd&gt;}{&lt;string&gt;}</code> .....  | 323 |
| Creates a new log-like function command <code>&lt;cmd&gt;</code> typesetting <code>&lt;string&gt;</code> .   |     |
| <code>\newloglike{&lt;cmd&gt;}{&lt;string&gt;}</code> .....  | 323 |
| Creates a new log-like function command <code>&lt;cmd&gt;</code> typesetting <code>&lt;string&gt;</code> , which can take limits.  |     |
| <code>\newoutputstream{&lt;stream&gt;}</code> .....  | 284 |
| Creates a new output stream called <code>&lt;stream&gt;</code> .   |     |
| <code>\newsfloat{&lt;float&gt;}</code> Creates subcaptions for use in the <code>&lt;float&gt;</code> float. ....   | 174 |
| <code>\nobibintoc</code> Title of thebibliography is not added to the ToC. ....  | 297 |
| <code>\nobookblankpage</code> Do not follow a book title page with a blank page. ....  | 81  |
| <code>\nobvbox</code> boxedverbatim environments will not be framed in any way. ....   | 280 |
| <code>\NoCaseChange{&lt;text&gt;}</code> .....   | 54  |
| The argument of this macro is not touched by <code>\MakeTextUppercase</code> or <code>\MakeTextLowercase</code> .  |     |
| <code>\nochangemarks</code> Do not print change marks. ....  | 317 |
| <code>\nocite{&lt;labstr&gt;}</code> .....   | 299 |
| Add entry <code>&lt;labstr&gt;</code> to the bibliography, but with no in-text citation.   |     |
| <code>\noDisplayskipStretch</code> No increased display skips. ....  | 51  |
| <code>\noglossaryintoc</code> .....  | 314 |
| Declaration to prohibit adding glossary title to the ToC.  |     |
| <code>\noindentafterchapter</code> .....   | 86  |
| <code>\chapter</code> 뒤에 바로 이어지는 첫 문단이 들여써지지 않도록 지정.   |     |
| <code>\noindexintoc</code> Do not add the index title to the ToC. ....   | 301 |
| <code>\nonzeroparskip</code> .....   | 49  |
| Sets the inter-paragraph spacing to a ‘perhaps not too unreasonable’ non-zero value.   |     |
| <code>\nopartblankpage</code> Do not follow a part title page with a blank page. ....  | 81  |
| <code>\noprelistbreak</code> .....   | 321 |
| Putting this immediately before an <code>itemize</code> (or <code>enumerate</code> , or ...) environment should prevent a pagebreak.   |     |

|   |   |     |
|---|---|-----|
| <code>\normalbottomsection</code>                         | Cancels any previous <code>\raggedbottomsection</code> .  | 77  |
| <code>\normalcaption</code>                               | Multiline captions will be typeset as a block paragraph.  | 182 |
| <code>\normalcaptionwidth</code>                          | Captions will be set to the full width.   | 183 |
| <code>\normalfont</code>                                  | Declaration setting the font to the normal body font (upright, Roman, and medium weight).   | 42  |
| <code>\normalmarginpar</code>                             | Sets the normal margins used by <code>\marginpar</code> (the default).  | 236 |
| <code>\normalrulethickness</code>                         | The normal thickness of a visible rule (default 0.4pt).   | 110 |
| <code>\normalsubcaption</code>                            | The subcaption version of <code>\normalcaption</code> .   | 195 |
| <code>\notedivision</code>                                | Heading printed by the <code>\printpagenotes</code> and <code>\printpagenotes*</code> macros.                                     | 245 |
| <code>\noteidinnotes{&lt;notenum&gt;}{&lt;id&gt;}</code>  | Prints an endnote's number or id in the endnote listing.  | 246 |
| <code>\notenuminnotes{&lt;num&gt;}</code>                 | Typesets the number <code>&lt;num&gt;</code> of a page note in the note listing.  | 246 |
| <code>\notenumintext{&lt;num&gt;}</code>                  | Typesets the number <code>&lt;num&gt;</code> of a page note in the main text.   | 245 |
| <code>\notepageref</code>                                 | Declaration that page numbers are available to notes in the endnote listing.  | 245 |
| <code>\notesname</code>                                   | Name for endnotes, default Notes.   | 245 |
| <code>\nouppercaseheads</code>                            | Defines <code>\memUCh</code> as <code>\relax</code> (i.e., do nothing).   | 112 |
| <code>\nouppercaseheads</code>                            | Do not uppercase the titles in the headings.  | 107 |
| <code>ntglike</code>                                      | A smaller version of the standard chapterstyle.   | 91  |
| <code>\nthstring</code>                                   | Ordinal characters for 'th', e.g., as in 6th.   | 328 |
| <code>\numberline{&lt;num&gt;}</code>                     | Typeset sectional number for <code>\section</code> and siblings in ToC  | 150 |
| <code>\numberlinebox{&lt;length&gt;}{&lt;code&gt;}</code> | The box command used to typeset the sectional number within the ToC, note that it will automatically align to the left            | 150 |
| <code>\numberlinehook{&lt;num&gt;}</code>                 | The first thing to be called within <code>\numberline</code> , does nothing by default.   | 150 |
| <code>\NumberPoemTitle</code>                             | Declaration for <code>\PoemTitle</code> to be numbered.   | 263 |
| <code>\NumtoName{&lt;number&gt;}</code>                   | Typesets <code>&lt;number&gt;</code> as a cardinal using lowercase words, but uppercase for the initial letter of each word.      | 328 |
| <code>\numtoName{&lt;number&gt;}</code>                   | Typesets <code>&lt;number&gt;</code> as a cardinal using lowercase words, but uppercase for the initial letter of the first word. | 328 |
| <code>\numtoname{&lt;number&gt;}</code>                   | Typesets <code>&lt;number&gt;</code> as a cardinal using lowercase words.   | 328 |
| <code>\oarg{&lt;arg&gt;}</code>                           | prints <code>[&lt;arg&gt;]</code> .   | 340 |
| <code>oldfontcommands</code>                              | old (LaTeX ver. 2.09) font 클래스 옵션   | 5   |
| <code>oldpaper</code>                                     | old 용지 크기 클래스 옵션  | 2   |
| <code>\begin{onecolabstract}</code>                       | 이단 문서에서 단단 요약문을 조판하는 환경   | 73  |
| <code>\onecolglossary</code>                              | Declaration for a single column glossary.   | 314 |
| <code>\twocolglossary</code>                              | Declaration for a two column glossary.  | 314 |
| <code>\onecolindex</code>                                 | Typeset index in one column.  | 301 |
| <code>\onecoltocetc</code>                                | Set the ToC, etc., in one column.   | 145 |
| <code>onecolumn</code>                                    | 1단 편집 클래스 옵션  | 4   |



|  |     |
|--|-----|
| <code>\begin{OnehalfSpace}</code> Environment form of <code>\OnehalfSpacing</code> .....   | 51  |
| <code>\begin{OnehalfSpace*}</code> Environment form of <code>\OnehalfSpacing*</code> .....   | 51  |
| <code>\OnehalfSpacing</code> .....   | 50  |
| Declaration increasing the baseline to create the illusion of double spacing.  |     |
| <code>\OnehalfSpacing*</code> .....  | 50  |
| Same as <code>\OnehalfSpacing</code> but also effects page note and floats.  |     |
| <code>\onelineskip (length)</code> .....   | 333 |
| Distance between baselines of the document's main font and size.   |     |
| <code>oneside</code> 단면 인쇄 클래스 옵션 .....  | 4   |
| <code>\openany</code> 새로운 장이 바로 다음 페이지에서 시작. ....  | 83  |
| <code>openany</code> 각 장이 짝수·홀수쪽 어디에서나 시작되는 클래스 옵션 .....   | 4   |
| <code>openbib</code> 참고문헌 항목의 둘째 줄부터 들여쓰기 클래스 옵션 .....   | 5   |
| <code>\openinputfile{&lt;filename&gt;}{&lt;stream&gt;}</code> .....  | 285 |
| Attaches the file <code>&lt;filename&gt;</code> to the input <code>&lt;stream&gt;</code> .   |     |
| <code>\openleft</code> 새로운 장이 항상 왼쪽(짝수쪽) 페이지에서 시작하도록 강제. ....  | 83  |
| <code>openleft</code> 각 장이 짝수쪽에서 시작되는 클래스 옵션 .....   | 4   |
| <code>\openoutputfile{&lt;filename&gt;}{&lt;stream&gt;}</code> .....   | 285 |
| Attaches the file <code>&lt;filename&gt;</code> to the output <code>&lt;stream&gt;</code> .  |     |
| <code>\openright</code> .....  | 83  |
| 새로운 장이 항상 오른쪽(홀수쪽) 페이지에서 시작하도록 강제.   |     |
| <code>openright</code> 각 장이 홀수쪽에서 시작되는 클래스 옵션 .....  | 4   |
| <code>\ordinal{&lt;number&gt;}</code> Typesets <code>{&lt;number&gt;}</code> as an ordinal number. ....  | 327 |
| <code>\OrdinaltoName{&lt;number&gt;}</code> .....  | 328 |
| Typeset <code>&lt;number&gt;</code> as an ordinal using lowercase words, but uppercase the initial letter of each word.  |     |
| <code>\ordinaltoName{&lt;number&gt;}</code> .....  | 328 |
| Typeset <code>&lt;number&gt;</code> as an ordinal using lowercase words, but uppercase the initial letter of the first word.   |     |
| <code>\ordinaltoname{&lt;number&gt;}</code> .....  | 328 |
| Typeset <code>&lt;number&gt;</code> as an ordinal using lowercase words.   |     |
| <code>\ordscript{&lt;chars&gt;}</code> Typesets the ordinal characters <code>&lt;chars&gt;</code> . ....   | 327 |
| <code>\oval(&lt;width,height&gt;)[&lt;portion&gt;]</code> .....  | 417 |
| Picture object of a rectangular box, size <code>&lt;width&gt;</code> by <code>&lt;height&gt;</code> , with rounded corners. The optional <code>&lt;portion&gt;</code> argument controls whether and which a quarter or a half of the object will be drawn (default is everything). |     |
| <code>\overridescapmargin{&lt;margin&gt;}</code> .....   | 198 |
| A one-time override of <code>\sidecapmargin</code> .   |     |
| <code>\pageinnotes{&lt;pagenum&gt;}</code> .....   | 246 |
| Controls the printing of an endnote's page reference number.   |     |
| <code>\pagenotesubhead{&lt;chapapp&gt;}{&lt;num&gt;}{&lt;title&gt;}</code> .....   | 247 |
| Typesets a subheading for notes from chapter or appendix <code>&lt;chapapp&gt;</code> <code>&lt;num&gt;</code> called <code>&lt;title&gt;</code> .   |     |
| <code>\pagenotesubheadstarred{&lt;chapapp&gt;}{&lt;num&gt;}{&lt;title&gt;}</code> .....  | 247 |
| Typesets a subheading for notes from unnumbered chapter or appendix <code>&lt;chapapp&gt;</code> <code>&lt;num&gt;</code> called <code>&lt;title&gt;</code> .  |     |
| <code>\pagenumbering{&lt;rep&gt;}</code> .....   | 105 |
| Resets the page number to 1, and causes the folios (page numbers) to be printed using the <code>&lt;rep&gt;</code> representation (e.g., arabic, roman, ...)   |     |
| <code>\pagenumbering*{&lt;rep&gt;}</code> .....  | 105 |
| Like <code>\pagenumbering</code> except that the page number is not reset.   |     |

|   |     |
|---|-----|
| <code>\pageref{&lt;labstr&gt;}</code> .....   | 293 |
| Prints the page number associated with <code>&lt;labstr&gt;</code> from a <code>\label</code> .   |     |
| <code>\pagerefname</code> Name for a page used by <code>\pref</code> . .....  | 294 |
| <code>\pagemerename</code> .....  | 246 |
| Holds the name prefix when referring to a page number, defaults to <code>page</code> .  |     |
| <code>\pagestyle{&lt;style&gt;}</code> Sets the current pagestyle to <code>&lt;style&gt;</code> . .....   | 106 |
| <code>\pagetofootnote</code> Declaration which turns <code>\pagenotes</code> into <code>\footnotes</code> . .....   | 248 |
| <code>\paperheight</code> (length) 트리밍한 용지의 높이 .....  | 12  |
| <code>\paperwidth</code> (length) 트리밍한 용지의 너비 .....   | 12  |
| <code>\par</code> Ends a paragraph. ....  | 49  |
| <code>\paragraphfootnotes</code> Typeset footnotes as a single paragraph. ....  | 231 |
| <code>\paragraphfootstyle{&lt;style&gt;}</code> .....   | 231 |
| Set the <code>&lt;series&gt;</code> footnotes to be typeset in single paragraph style.  |     |
| <code>\parahook</code> .....  | 96  |
| Hook called immediately before typesetting the title of a paragraph head.   |     |
| <code>\parg{&lt;arg&gt;}</code> prints <code>((&lt;arg&gt;))</code> . ....  | 340 |
| <code>\parindent</code> Indentation at the start of the first line of a paragraph. ....   | 49  |
| <code>\parskip</code> Space between paragraphs. ....  | 49  |
| <code>\parnopar</code> .....  | 238 |
| Forces a new paragraph, but with no apparent break in the text.   |     |
| <code>\parskip</code> (Extra) vertical space between paragraphs (default 0pt). ....   | 121 |
| <code>\part{&lt;title&gt;}</code> .....   | 76  |
| Typesets a numbered part <code>&lt;title&gt;</code> on a page by itself, adding <code>&lt;title&gt;</code> to the ToC.  |     |
| <code>\partblankpage</code> Follow a part title page with a blank page (the default). ....  | 81  |
| <code>\partmark{&lt;title&gt;}</code> .....   | 81  |
| For setting any marks with the title from a <code>\part</code> for a running header.  |     |
| <code>\partnamefont</code> Font used by <code>\printpartname</code> for the part name. ....   | 80  |
| <code>\partnamenum</code> Called between printing a part name and number. ....  | 80  |
| <code>\partnumberline{&lt;num&gt;}</code> Typeset part number in ToC .....  | 150 |
| <code>\partnumberlinebox{&lt;length&gt;}{&lt;code&gt;}</code> .....   | 150 |
| The box command used to typeset the part number within the ToC, note that it will automatically align to the left   |     |
| <code>\partnumberlinehook{&lt;num&gt;}</code> .....   | 150 |
| The first thing to be called within <code>\partnumberline</code> , does nothing by default.   |     |
| <code>\partnumfont</code> Font used by <code>\printpartnum</code> for the part number. ....   | 80  |
| <code>\partpageend</code> Code to finish off typesetting a part title page. ....  | 81  |
| <code>\partrefname</code> Name for a part used by <code>\Pref</code> . ....   | 294 |
| <code>\parttitlefont</code> Font used by <code>\printparttitle</code> for the title. ....   | 81  |
| <code>\patchcommand{&lt;macro&gt;}{&lt;start-code&gt;}{&lt;end-code&gt;}</code> .....   | 324 |
| Inserts <code>&lt;start-code&gt;</code> before the current definition of the <code>&lt;macro&gt;</code> and <code>{&lt;end-code&gt;}</code> at the end of the current definition.   |     |
| <code>\begin{patverse}</code> .....   | 261 |
| Stanza lines are indented according to the <code>\indentpattern</code> ; lines after the pattern is completed are not indented.   |     |
| <code>\begin{patverse*}</code> .....  | 261 |
| Like <code>patverse</code> except that the pattern will keep repeating.   |     |
| <code>pedersen</code> .....   | 91  |
| A single line chapterstyle in large italics with the number set in the righthand margin. The title and/or number may be colored. The <code>graphicx</code> package is required and the <code>color</code> (or <code>xcolor</code> ) package if you want to color. |     |



|  |     |
|--|-----|
| <code>\pfbreak</code> .....  | 99  |
| An alternative for <code>\plainfancybreak</code> using <code>\pfbreakskip</code> and <code>\pfbreakdisplay</code> .  |     |
| <code>\pfbreak*</code> .....   | 99  |
| An alternative for <code>\plainfancybreak*</code> using <code>\pfbreakskip</code> and <code>\pfbreakdisplay</code> .   |     |
| <code>\pfbreakdisplay{&lt;text&gt;}</code> <code>&lt;text&gt;</code> for a <code>\pfbreak</code> 's <code>\fancybreak</code> . ....  | 99  |
| <code>\pfbreakskip</code> Space for a <code>\pfbreak</code> 's <code>\plainbreak</code> . ....   | 99  |
| <code>\phantomsection</code> .....   | 145 |
| A macro to be put before <code>\addcontentsline</code> when the <code>hyperref</code> package is used.   |     |
| <code>\begin{picture}(&lt;width, height&gt;)</code> .....  | 406 |
| Creates a box of <code>&lt;width&gt;</code> times <code>&lt;height&gt;</code> (in terms of <code>\unitlength</code> ) in which you can use drawing commands. The origin is at (0,0).   |     |
| <code>\begin{picture}(&lt;width, height&gt;)(&lt;llx,lly&gt;)</code> .....   | 406 |
| Creates a box of <code>&lt;width&gt;</code> times <code>&lt;height&gt;</code> (in terms of <code>\unitlength</code> ) in which you can use drawing commands. The origin is at ( <code>&lt;llx&gt;</code> , <code>&lt;lly&gt;</code> ). |     |
| <code>\plainbreak{&lt;num&gt;}</code> .....  | 98  |
| 번호 없이 <code>&lt;num&gt;</code> 개의 빈 줄로 이루어진 구획. 이어지는 문단은 들여써지지 않는다.  |     |
| <code>\plainbreak*{&lt;num&gt;}</code> .....   | 98  |
| 이어지는 문단이 들여써지지 않는다는 것을 제외하고 <code>\plainbreak</code> 와 동일.   |     |
| <code>\plainfancybreak{&lt;space&gt;}{&lt;num&gt;}{&lt;text&gt;}</code> .....  | 99  |
| 페이지의 윗부분에 있을 경우 <code>\fancybreak</code> 처럼, 아래부분에 있을 경우 페이지에 남은 공간이 <code>&lt;space&gt;</code> 보다 적을 경우 <code>\plainbreak</code> 처럼 작동하는 번호 없는 장절구획.  |     |
| <code>\plainfancybreak*{&lt;space&gt;}{&lt;num&gt;}{&lt;text&gt;}</code> .....   | 99  |
| 이어지는 문단이 들여써지지 않는다는 것을 제외하고 <code>\plainfancybreak</code> 와 동일.  |     |
| <code>\plainfootnotes</code> .....   | 231 |
| Typeset footnotes as separate marked paragraphs (the default).   |     |
| <code>\plainfootstyle{&lt;series&gt;}</code> .....   | 231 |
| Set the <code>&lt;series&gt;</code> footnotes to be typeset plain style.   |     |
| <code>\PlainPoemTitle</code> Declaration for <code>\PoemTitle</code> to be unnumbered. ....  | 263 |
| <code>\pmname</code> .....   | 321 |
| Abbreviation for post meridiem used in <code>\printtime*</code> (default am)   |     |
| <code>\pnchap</code> Chapter title for <code>\pagenotesubhead</code> . Defaults to the ToC entry. ....   | 247 |
| <code>\pnschap</code> .....  | 247 |
| Starred chapter title for <code>\pagenotesubhead</code> . Defaults to the regular title.   |     |
| <code>\PoemTitle[&lt;fortoc&gt;][&lt;forhead&gt;]{&lt;title&gt;}</code> .....  | 263 |
| Typesets the title for a poem and puts it into the ToC.  |     |
| <code>\PoemTitle*{&lt;fortoc&gt;}[&lt;forhead&gt;]{&lt;title&gt;}</code> .....   | 263 |
| Typesets an unnumbered title for a poem but does not add it to the ToC.  |     |
| <code>\PoemTitlefont</code> Font for the text of a poem title .....  | 264 |
| <code>\PoemTitleheadstart</code> Called at the start of typesetting a <code>\PoemTitle</code> . ....   | 263 |
| <code>\poemtitlemark{&lt;forhead&gt;}</code> Used to set marks for a <code>\PoemTitle</code> . ....  | 263 |
| <code>\PoemTitlenumfont</code> Font for the number of a poem title .....   | 264 |
| <code>\poemtitlepstyle</code> Page style for a <code>\PoemTitle</code> . ....  | 263 |
| <code>\poemtitlestarmark{&lt;forhead&gt;}</code> Used to set marks for a <code>\PoemTitle*</code> . ....   | 263 |
| <code>\poemtitlestarpstyle</code> Page style for a <code>\PoemTitle*</code> . ....   | 263 |
| <code>\poemtoc</code> Kind of entry for a <code>\PoemTitle</code> in the ToC. ....   | 263 |
| <code>\postdate{&lt;text&gt;}</code> Command processed after the <code>\date</code> in <code>\maketitle</code> . ....  | 64  |
| <code>\postauthor{&lt;text&gt;}</code> .....   | 64  |
| Command processed after the <code>\author</code> in <code>\maketitle</code> .  |     |
| <code>\postbibhook</code> Called after typesetting the list of of bibliographic entries. ....  | 298 |
| <code>\postcaption{&lt;posttext&gt;}</code> .....  | 183 |
| <code>&lt;posttext&gt;</code> will be processed at the end of a caption.   |     |

|   |     |
|---|-----|
| <code>\postnoteinnotes</code> .....   | 246 |
| Called by <code>\noteentry</code> to finish the printing of an endnote.   |     |
| <code>\postnotetext</code> .....  | 247 |
| Called within a page note list entry to finish the printing of an endnote.  |     |
| <code>\posttitle{&lt;text&gt;}</code> Command processed after the <code>\title</code> in <code>\maketitle</code> . .....  | 64  |
| <code>postvopaper</code> post octavo 용지 크기 클래스 옵션 .....   | 2   |
| <code>pottvopaper</code> pott octavo 용지 크기 클래스 옵션 .....   | 2   |
| <code>\preauthor{&lt;text&gt;}</code> .....   | 64  |
| Command processed before the <code>\author</code> in <code>\maketitle</code> .  |     |
| <code>\prebibhook</code> .....  | 298 |
| Called between typesetting the title of a bibliography and starting the list of bibliographic entries.  |     |
| <code>\precaption{&lt;pretext&gt;}</code> .....   | 183 |
| <code>&lt;pretext&gt;</code> will be processed at the start of a caption.   |     |
| <code>\prechapterprecisshift</code> 장 헤딩과 장 요약문 사이의 공백. ....  | 92  |
| <code>\precistocfont</code> <code>\precistoctext</code> 식자에 사용될 폰트. ....  | 92  |
| <code>\precistocformat</code> <code>\precistoctext</code> 식자에 사용될 형식. ....  | 92  |
| <code>\precistoctext{&lt;text&gt;}</code> ToC에 들어갈 장 요약문 <code>&lt;text&gt;</code> ....   | 92  |
| <code>\predate{&lt;text&gt;}</code> Command processed before the <code>\date</code> in <code>\maketitle</code> . ....   | 64  |
| <code>\Pref{&lt;labstr&gt;}</code> .....  | 294 |
| Prints a named ( <code>\partrefname</code> ) reference to a <code>\labeled</code> part.   |     |
| <code>\pref{&lt;labstr&gt;}</code> .....  | 294 |
| Prints a named ( <code>\pagerefname</code> ) reference to a <code>\label</code> page reference.   |     |
| <code>\preglossaryhook</code> Vacuous macro called after a glossary title is typeset. ....  | 314 |
| <code>\preindexhook</code> .....  | 301 |
| Called between typesetting an index's title and the start of the list.  |     |
| <code>\prenoteinnotes</code> .....  | 246 |
| Called by <code>\noteentry</code> to initialise the printing of an endnote.   |     |
| <code>\prenotetext</code> .....   | 247 |
| Called within a page note list entry to initialise the printing of the text part of an endnote.   |     |
| <code>\prettitle{&lt;text&gt;}</code> .....   | 64  |
| Command processed before the <code>\title</code> in <code>\maketitle</code> .   |     |
| <code>\printbookname</code> .....   | 80  |
| Prints the book name ( <code>\bookname</code> ) using the <code>\booknamefont</code> .  |     |
| <code>\printbooknum</code> Prints a book number using the <code>\booknumfont</code> . ....  | 80  |
| <code>\printbooktitle</code> Prints the book title using the <code>\booktitlefont</code> . ....   | 81  |
| <code>\printchaptername</code> <code>\chapnamefont</code> 를 사용하여 장 제목을 출력. ....   | 85  |
| <code>\printchapternonum</code> 번호가 붙지 않은 장에서 장 이름과 번호를 대체한다. ....  | 86  |
| <code>\printchapternum</code> <code>\chapnumfont</code> 를 사용하여 장 번호를 출력. ....   | 85  |
| <code>\printchaptertitle{&lt;title&gt;}</code> .....  | 86  |
| 장 제목 <code>&lt;title&gt;</code> 을 폰트 <code>\chapttitlefont</code> 를 사용하여 출력.  |     |
| <code>\printglossary[&lt;file&gt;]</code> .....   | 311 |
| Prints the glossary from file <code>\jobname.gls</code> , or <code>\file.gls</code>   |     |
| <code>\printindex[&lt;file&gt;]</code> .....  | 300 |
| Print the sorted index. By default this is read from file <code>\jobname.ind</code> . If the optional argument is given it will read the data from file <code>&lt;file&gt;.ind</code> . |     |
| <code>\printpageinnotes{&lt;pagenum&gt;}</code> .....   | 246 |
| Prints an endnote's page reference number.  |     |
| <code>\printpageinnoteshyperref{&lt;pagenum&gt;}</code> .....   | 246 |
| Prints an endnote's page reference number whenever the <code>hyperref</code> package is used, it will include a hyperlink back to the page in question.                                 |     |

|   |     |
|---|-----|
| <code>\printpagenotes</code> .....  | 243 |
| Input the pagenote ent file for printing, then close it to any more notes.  |     |
| <code>\printpagenotes*</code> .....   | 243 |
| Input the pagenote ent file for printing, then empty it ready for further notes.  |     |
| <code>\printpartname</code> .....   | 80  |
| Prints the part name ( <code>\partname</code> ) using the <code>\partnamefont</code> .  |     |
| <code>\printpartnum</code> Prints a part number using the <code>\partnumfont</code> . ....  | 80  |
| <code>\printparttitle</code> Prints the part title using the <code>\parttitlefont</code> . ....   | 81  |
| <code>\printPoemTitlenonum</code> .....   | 263 |
| Used instead of <code>\printPoemTitlenum</code> for an unnumbered <code>\PoemTitle</code> .   |     |
| <code>\printPoemTitlenum</code> Typesets the number for a <code>\PoemTitle</code> . ....  | 263 |
| <code>\printPoemTitletitle{&lt;title&gt;}</code> Typesets the title of a <code>\PoemTitle</code> . ....   | 263 |
| <code>\printtime</code> Prints the time of day using a 24 hour clock. ....  | 321 |
| <code>\printtime*</code> Prints the time of day using a 12 hour clock. ....   | 321 |
| <code>\printXtitle{&lt;title&gt;}</code> .....  | 146 |
| Generic macro printing <code>&lt;title&gt;</code> as the title for the 'X List of'.   |     |
| <code>\providecounter{&lt;ctr&gt;}[&lt;within&gt;]</code> A 'provide' version of <code>\newcounter</code> . ....  | 323 |
| <code>\provideenvironment{&lt;name&gt;}[&lt;nummarks&gt;][&lt;optarg&gt;]{&lt;begindef&gt;}{&lt;enddef&gt;}</code> .....  | 323 |
| A 'provide' version of <code>\(re)newenvironment</code> .   |     |
| <code>\providexcaption[&lt;capcommand&gt;]{&lt;command&gt;}{&lt;float&gt;}</code> .....   | 189 |
| A 'provide' version of <code>\newfixedcaption</code> .  |     |
| <code>\providelength{&lt;cmd&gt;}</code> A 'provide' version of <code>\newlength</code> . ....  | 323 |
| <code>\provideloglike{&lt;cmd&gt;}{&lt;string&gt;}</code> A 'provide' version of <code>\newloglike</code> . ....  | 323 |
| <code>\provideloglike*{&lt;cmd&gt;}{&lt;string&gt;}</code> .....  | 323 |
| A 'provide' version of <code>\newloglike*</code> .  |     |
| <code>\put (&lt;x,y&gt;){&lt;object&gt;}</code> .....   | 407 |
| Drawing command to place <code>&lt;object&gt;</code> at coordinates <code>(&lt;x,y&gt;)</code> . In the simplest case <code>&lt;object&gt;</code> is just text.   |     |
| <code>\qbezier[&lt;num&gt;](&lt;Xs,Ys&gt;)(&lt;Xm,Ym&gt;)(&lt;Xe,Ye&gt;)</code> .....   | 421 |
| Picture command to draw a quadratic Bezier curve from <code>&lt;Xs,Ys&gt;</code> to <code>&lt;Xe,Ye&gt;</code> passing near <code>&lt;Xm,Ym&gt;</code> . If the optional argument is present exactly <code>&lt;num&gt;</code> segments will be used in drawing the curve. |     |
| <code>\qbeziermax</code> .....  | 423 |
| The maximum number of segments for drawing a Bezier curve.  |     |
| <code>\qitem{&lt;text&gt;}{&lt;source&gt;}</code> .....   | 249 |
| Typesets the <code>&lt;text&gt;</code> and <code>&lt;source&gt;</code> of an epigraph in an <code>epigrpahs</code> environment.   |     |
| <code>\quarkmarks</code> .....  | 319 |
| Trim marks in the style of Quark Xpress registration marks, typeset with <code>\registrationColour</code> .   |     |
| <code>\begin{quotation}</code> .....  | 124 |
| Contents set justified in a narrower measure with normal <code>\parindent</code> .  |     |
| <code>\begin{quote}</code> .....  | 124 |
| Contents set justified in a narrower measure, with zero <code>\parindent</code> .   |     |
| <code>\raggedbottom</code> .....  | 5   |
| 페이지 높이가 변할 수 있도록 마지막 행이 표시되는 것을 허용하는 선언   |     |
| <code>\raggedbottomsection</code> .....   | 77  |
| Pages will be typeset short because of a moved subhead as if <code>\raggedbottom</code> was in effect.  |     |
| <code>\raggedleft</code> Declaration for text to be set <code>raggedleft</code> and <code>flushright</code> . ....  | 123 |
| <code>\raggedright</code> Declaration for text to be set <code>flushleft</code> and <code>raggedright</code> . ....   | 123 |

|   |     |
|---|-----|
| <code>\leftcenterright</code> .....   | 128 |
| Following this declaration paragraphs will be set with the first line raggedright, the last raggedleft, and those in the middle centered.   |     |
| <code>\raggedrightthenleft</code> .....   | 128 |
| Following this declaration paragraphs will be set with the first line raggedright and the rest raggedleft.  |     |
| <code>\raggedyright[⟨space⟩]</code> .....   | 124 |
| Version of <code>\raggedright</code> with <code>⟨space⟩</code> providing control over the amount of raggedness.   |     |
| <code>\rargparindent</code> The <code>\parindent</code> for <code>\raggedyright</code> paragraphs. ....   | 124 |
| <code>\readaline{⟨stream⟩}</code> .....   | 286 |
| Reads a single line from the file associated with the input <code>⟨stream⟩</code> .   |     |
| <code>\readboxedverbatim{⟨stream⟩}</code> .....   | 286 |
| Acts like <code>boxedverbatim</code> except the contents is read from the file associated with the input <code>⟨stream⟩</code> .  |     |
| <code>\readboxedverbatim*{⟨stream⟩}</code> .....  | 286 |
| Acts like <code>boxedverbatim*</code> except the contents is read from the file associated with the input <code>⟨stream⟩</code> .   |     |
| <code>\readstream{⟨stream⟩}</code> .....  | 286 |
| Reads the entire contents of the file associated with the input <code>⟨stream⟩</code> .   |     |
| <code>\readverbatim{⟨stream⟩}</code> .....  | 286 |
| Acts like <code>verbatim</code> except the contents is read from the file associated with the input <code>⟨stream⟩</code> .   |     |
| <code>\readverbatim*{⟨stream⟩}</code> .....   | 286 |
| Acts like <code>verbatim*</code> except the contents is read from the file associated with the input <code>⟨stream⟩</code> .  |     |
| <code>\ref{⟨labstr⟩}</code> .....   | 293 |
| Prints the (section, or other) number associated with <code>⟨labstr⟩</code> from a <code>\label</code> .  |     |
| <code>\registrationColour{⟨mark⟩}</code> Typesets <code>\quarkmarks</code> . ....   | 319 |
| <code>\renewfixedcaption[⟨capcommand⟩]{⟨command⟩}{⟨float⟩}</code> .....   | 189 |
| A 'renew' version of <code>\newfixedcaption</code> .  |     |
| <code>\renewleadpage[⟨page-style⟩]{⟨cmdname⟩}{⟨title⟩}</code> .....   | 83  |
| Redefines an existing new lead page macro.  |     |
| <code>reparticle</code> .....   | 87  |
| article 옵션을 통해 article 클래스의 section 헤딩과 동일하게 해준다.   |     |
| <code>\reportnoidxfile</code> .....   | 301 |
| Report attempts to use an <code>idx</code> file that has not been declared by <code>\makeindex</code> .   |     |
| <code>\RequireAtEndClass{⟨class⟩}{⟨code⟩}</code> .....  | 337 |
| Inserts <code>⟨code⟩</code> just after the <code>⟨class⟩</code> class is used, or immediately if <code>⟨class⟩</code> has already been used.  |     |
| <code>\RequireAtEndPackage{⟨pack⟩}{⟨code⟩}</code> .....   | 337 |
| Inserts <code>⟨code⟩</code> just after the <code>⟨pack⟩</code> package is used, or immediately if <code>⟨pack⟩</code> has already been used.  |     |
| <code>\RequireXeTeX</code> .....  | 333 |
| Generates an error if the document is not being processed by XeTeX.   |     |
| <code>\resetbvlinenumber</code> Resets the <code>boxedverbatim</code> line number to zero. ....   | 281 |
| <code>\restorepagenumber</code> .....   | 105 |
| Sets the page number to that saved by the most recent <code>\savepagenumber</code> .  |     |
| <code>\restoretrivseps</code> .....   | 137 |
| Sets the current <code>\topsep</code> and <code>\partopsep</code> to the values saved by <code>\savetrivseps</code> .   |     |
| <code>\reversemarginpar</code> Reverses the normal margins used by <code>\marginpar</code> . ....   | 236 |
| <code>\rightmark</code> .....   | 108 |
| Contains the value of the <code>⟨right⟩</code> argument of the first <code>\markboth</code> or <code>\markright</code> on the page; if there is none then the value of the most recent <code>⟨right⟩</code> argument. |     |
| <code>\rmfamily</code> Declaration for using a Roman font. ....   | 42  |

|   |     |
|---|-----|
| royalvopaper royal octavo 용지 크기 클래스 옵션 .....  | 2   |
| \russianpar .....   | 126 |
| Ending a paragraph with \russianpar causes it to be set following Russian typographic rules.  |     |
| \savebox<box>(<width, height>)[<pos>]{<text>} .....   | 412 |
| Picture command to save <text> in a (pre-existing) storage box <box> making it size <width> times <height>. The optional argument controls the position of the <text>.  |     |
| \savepagenumber Saves the current page number. ....   | 105 |
| \savetrivseps .....   | 137 |
| Stores the current \topsep and \partopsep for trivlists.  |     |
| \saythanks onecolabstract에 이어서 \thanks 명령이 인쇄되도록 한다. ....   | 73  |
| \scshape Declaration for using a small caps font. ....  | 42  |
| \@secntformat{<code>} .....   | 96  |
| Kernel macro that formats the number in a sectional head.   |     |
| \sechook .....  | 96  |
| Hook called immediately before typesetting the title of a section head.   |     |
| \section[<toc-title>][<head-title>]{<title>} .....  | 76  |
| Typesets a section subhead <title>, adding <title> to the ToC and possibly the running headers. If given <toc-title> is used instead of <title> for the ToC and running header. If given <head-title> is used for a running header. |     |
| \section*{<title>} .....  | 76  |
| Typesets an unnumbered section subhead <title>. There are no ToC or running header entries.   |     |
| section Section 헤딩 형식의 chapter 스타일. ....  | 87  |
| \sectionrefname Name for a section used by \Sref. ....  | 294 |
| \see see entry in an index using \seename for the wording. ....   | 306 |
| \seealso see also entry in an index using \alsoname for the wording. ....   | 306 |
| \seename Wording for a see index entry. ....  | 306 |
| \semiisopage[<spine>] .....   | 29  |
| ISO 비율 용지에 적합하지만 \isopage보다 여백이 좁은 레이아웃을 생성한다.  |     |
| \setafterparaskip{<skip>} Sets the \afterskip for a paragraph head. ....  | 95  |
| \setafterseccskip{<skip>} Sets the \afterskip for a section head. ....  | 95  |
| \setafterSskip{<skip>} Sets the \afterskip for an S head. ....  | 95  |
| \setaftersubparaskip{<skip>} .....  | 95  |
| Sets the \afterskip for a subparagraph head.  |     |
| \setaftersubseccskip{<skip>} .....  | 95  |
| Sets the \afterskip for a subsection head.  |     |
| \setaftersubsubseccskip{<skip>} .....   | 95  |
| Sets the \afterskip for a subsubsection head.   |     |
| \setarrayelement{<arrayname>}{<index>}{<text>} .....  | 331 |
| Makes <text> the contents of the {<index>} location in array <arrayname>.   |     |
| \setbeforeparaskip{<skip>} .....  | 93  |
| Sets the \beforeskip for a \paragraph head.   |     |
| \setbeforeseccskip{<skip>} Sets the \beforeskip for a \section head. ....   | 93  |
| \setbeforeSskip{<skip>} Sets the \beforeskip for an S head. ....  | 93  |
| \setbeforesubparaskip{<skip>} .....   | 93  |
| Sets the \beforeskip for a \subparagraph head.  |     |
| \setbeforesubseccskip{<skip>} .....   | 93  |
| Sets the \beforeskip for a \subsection head.  |     |
| \setbeforesubsubseccskip{<skip>} .....  | 93  |
| Sets the \beforeskip for a \subsubsection head.   |     |

|   |     |
|---|-----|
| <code>\setbiblabel{&lt;style&gt;}</code> .....  | 299 |
| Define the look of the bibliographic entry identifiers.   |     |
| <code>\setbinding{&lt;length&gt;}</code> 안쪽 여백에 제본 허용치를 추가 .....  | 19  |
| <code>\setbvlínenums{&lt;first&gt;}{&lt;startat&gt;}</code> .....   | 281 |
| The first line of the following boxedverbatim is number {<first>} and the first printed line number should be <startat>.  |     |
| <code>\setcolsepandrúle{&lt;colsep&gt;}{&lt;thickness&gt;}</code> .....   | 20  |
| 단 사이 간격의 크기와 단 사이 공백에 그리는 패션의 두께를 설정한다.   |     |
| <code>\setDisplayskipStretch{&lt;factor&gt;}</code> .....   | 51  |
| Increase the display skips by gmetafactor.  |     |
| <code>\setfloatadjustment{&lt;floatname&gt;}{&lt;code&gt;}</code> .....   | 168 |
| Add global internal adjustment to a given type of float. Empty by default, but can easily be used to make all floats centered or all tables in a smaller font size. |     |
| <code>\setFloatBLockFor{&lt;sectional name&gt;}</code> .....  | 176 |
| Adds \FloatBlock within the \<section name> macro.  |     |
| <code>\setfloatlocations{&lt;float&gt;}{&lt;locs&gt;}</code> .....  | 175 |
| Sets the default location for the <float> (e.g., table) to <locs> (default tbp).  |     |
| <code>\setFloatSpacing</code> Explicitly set the spacing used inside floats. ....   | 50  |
| <code>\setfootins{&lt;length for normal&gt;}{&lt;length for minipage&gt;}</code> .....  | 236 |
| Sets \skip\footins and its minipage counterpart.  |     |
| <code>\sethangfrom{&lt;code&gt;}</code> User macro redefining \hangfrom to <code>. ....   | 95  |
| <code>\setheaderspaces{&lt;headdrop&gt;}{&lt;headsep&gt;}{&lt;ratio&gt;}</code> .....   | 21  |
| 상단 영역의 위 아래 간격 설정   |     |
| <code>\setheadfoot{&lt;headheight&gt;}{&lt;footskip&gt;}</code> 상단 하단 영역을 설정한다. ....  | 21  |
| <code>\setlrmargins{&lt;spine&gt;}{&lt;edge&gt;}{&lt;ratio&gt;}</code> .....  | 17  |
| 현재 조판 영역의 너비를 정하기 위해 안쪽 여백과 바깥쪽 여백 값을 설정한다.   |     |
| <code>\setlrmarginsandblock{&lt;spine&gt;}{&lt;edge&gt;}{&lt;ratio&gt;}</code> .....  | 18  |
| 조판 영역의 너비를 수정하여 안쪽 여백과 바깥쪽 여백을 설정한다.  |     |
| <code>\setlrvchars[&lt;fontspec&gt;]</code> .....   | 15  |
| \lrvchars를 <fontspec>으로 주어지는 폰트(기본값은 \normalfont)에서의 65글자에 해당하는 길이로 설정한다.   |     |
| <code>\setmarginnotes{&lt;separation&gt;}{&lt;width&gt;}{&lt;push&gt;}</code> .....   | 21  |
| 여백 문단의 길이 파라미터를 설정한다.   |     |
| <code>\setmpjustification{&lt;at left of textblock&gt;}{&lt;at right of textblock&gt;}</code> .....   | 169 |
| Loads the \mpjustification command to execute the left part when placed at the left of the text block and vice versa.   |     |
| <code>\setpagebl{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 29  |
| 주어진 크기의 페이지를 용지의 왼쪽 아래에 놓는다. \settrimmedsize를 보라.   |     |
| <code>\setpageml{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 29  |
| 주어진 크기의 페이지를 용지의 왼쪽 중앙에 놓는다. \settrimmedsize를 보라.   |     |
| <code>\setpagetl{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 29  |
| 주어진 크기의 페이지를 용지의 왼쪽 위에 놓는다. \settrimmedsize를 보라.  |     |
| <code>\setpagebm{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 32  |
| 주어진 크기의 페이지를 용지의 bottom middle에 놓는다. \settrimmedsize를 보라.   |     |
| <code>\setpagebr{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 32  |
| 주어진 크기의 페이지를 용지의 bottom right에 놓는다. \settrimmedsize를 보라.  |     |
| <code>\setpagecc{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 32  |
| 주어진 크기의 페이지를 용지의 center에 놓는다. \settrimmedsize를 보라.  |     |
| <code>\setpagemr{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 32  |
| 주어진 크기의 페이지를 용지의 middle right에 놓는다. \settrimmedsize를 보라.  |     |



|   |     |
|---|-----|
| <code>\setPagenoteSpacing</code> .....  | 50  |
| Explicitly set the spacing used inside page notes such including footnotes.   |     |
| <code>\setpagetm{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 32  |
| 주어진 크기의 페이지를 용지의 top middle에 놓는다. <code>\settrimmedsize</code> 를 보라.  |     |
| <code>\setpagetr{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....   | 32  |
| 주어진 크기의 페이지를 용지의 top right에 놓는다. <code>\settrimmedsize</code> 를 보라.   |     |
| <code>\setparaheadstyle{&lt;font&gt;}</code> Sets the style (font) for a paragraph head. ....                             | 95  |
| <code>\setparahook{&lt;text&gt;}</code> Redefines <code>\parahook</code> to be <code>&lt;text&gt;</code> . ....           | 96  |
| <code>\setparaindent{&lt;length&gt;}</code> Sets the <code>\indent</code> for a <code>\paragraph</code> head. ....        | 95  |
| <code>\setpnumwidth{&lt;length&gt;}</code> .....  | 147 |
| Sets the width of the page number box ( <code>\@pnumwidth</code> ) in a 'List of...' to <code>&lt;length&gt;</code> .     |     |
| <code>\setrmarg{&lt;length&gt;}</code> .....  | 147 |
| Sets the right hand title margin ( <code>\@tocrmarg</code> ) in a 'List of...' to <code>&lt;length&gt;</code> .           |     |
| <code>\setseheadstyle{&lt;font&gt;}</code> Sets the style (font) for a section head. ....                                 | 95  |
| <code>\setsechook{&lt;text&gt;}</code> Redefines <code>\sechook</code> to be <code>&lt;text&gt;</code> . ....             | 96  |
| <code>\setsecindent{&lt;length&gt;}</code> Sets the <code>\indent</code> for a section head. ....                         | 95  |
| <code>\setsecnumdepth{&lt;secname&gt;}</code> Sets division numbering level to <code>&lt;secname&gt;</code> . ....        | 79  |
| <code>\setsecnumformat{&lt;code&gt;}</code> Redefines <code>\@secntformat</code> to <code>&lt;code&gt;</code> . ....      | 96  |
| <code>\setSheadstyle{&lt;font&gt;}</code> Sets the style (font) for an S head. ....                                       | 95  |
| <code>\setShook{&lt;text&gt;}</code> Redefines <code>\Shook</code> to be <code>&lt;text&gt;</code> . ....                 | 96  |
| <code>\setsidcappos{&lt;pos&gt;}</code> .....   | 197 |
| Declaration of the vertical position of a sidecaption with respect to the float.  |     |
| <code>\setsidebarheight{&lt;height&gt;}</code> .....  | 239 |
| Sets the height of sidebars. The default is <code>\textheight</code> .  |     |
| <code>\setsidebars{&lt;hsep&gt;}{&lt;width&gt;}{&lt;vsep&gt;}{&lt;topsep&gt;}{&lt;font&gt;}{&lt;height&gt;}</code> .....  | 240 |
| Sets the several sidebar parameters.  |     |
| <code>\setsidecaps{&lt;sep&gt;}{&lt;width&gt;}</code> .....   | 196 |
| Sets the lengths <code>\sidecapsep</code> and <code>\sidcapwidth</code> to the given values.                              |     |
| <code>\setSindent{&lt;length&gt;}</code> Sets the <code>\indent</code> for an S head. ....                                | 95  |
| <code>\setSingleSpace{&lt;factor&gt;}</code> Change the baselineskip by <code>&lt;factor&gt;</code> . ....                | 50  |
| <code>\setstocksize{&lt;height&gt;}{&lt;width&gt;}</code> .....   | 8   |
| 용지 크기를 <code>&lt;height&gt; × &lt;width&gt;</code> 로 설정한다.  |     |
| <code>\setsubparaheadstyle{&lt;font&gt;}</code> .....   | 95  |
| Sets the style (font) for a subparagraph head.  |     |
| <code>\setsubparahook{&lt;text&gt;}</code> Redefines <code>\subparahook</code> to be <code>&lt;text&gt;</code> . ....     | 96  |
| <code>\setsubparaindent{&lt;length&gt;}</code> .....  | 95  |
| Sets the <code>\indent</code> for a <code>\subparagraph</code> head.  |     |
| <code>\setsubseheadstyle{&lt;font&gt;}</code> Sets the style (font) for a subsection head. ....                           | 95  |
| <code>\setsubsechook{&lt;text&gt;}</code> Redefines <code>\subsechook</code> to be <code>&lt;text&gt;</code> . ....       | 96  |
| <code>\setsubsecindent{&lt;length&gt;}</code> Sets the <code>\indent</code> for a <code>\subsection</code> head. ....     | 95  |
| <code>\setsubsubseheadstyle{&lt;font&gt;}</code> .....  | 95  |
| Sets the style (font) for a subsubsection head.   |     |
| <code>\setsubsubsechook{&lt;text&gt;}</code> Redefines <code>\subsubsechook</code> to be <code>&lt;text&gt;</code> . .... | 96  |
| <code>\setsubsubsecindent{&lt;length&gt;}</code> .....  | 95  |
| Sets the <code>\indent</code> for a <code>\subsubsection</code> head.   |     |
| <code>\settocdepth{&lt;secname&gt;}</code> .....  | 145 |
| Sets the value of the <code>tocdepth</code> counter in the toc file.  |     |
| <code>\settocpreprocessor{&lt;type&gt;}{&lt;code&gt;}</code> .....  | 156 |
| Provide a method for preprocessing certain TOC entries before they are written to the .toc file.                          |     |
| <code>\settrimmedsize{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> 트리밍한 용지의 크기 .....                              | 12  |

|   |     |
|---|-----|
| <code>\settrims{&lt;top&gt;}{&lt;foredge&gt;}</code> .....  | 12  |
| 용지의 상단과 바깥쪽 트리밍할 크기를 설정한다.  |     |
| <code>\settypeblocksize{&lt;height&gt;}{&lt;width&gt;}{&lt;ratio&gt;}</code> .....  | 16  |
| 조판 영역의 크기를 설정한다.  |     |
| <code>\settypeoutlayoutunit</code> .....  | 25  |
| 레이아웃 리스트를 출력할 때 사용할 단위를 설정할 수 있다. 지원하는 단위는 pt, mm, cm, in, bp, dd, cc이다.  |     |
| <code>\setulmargins{&lt;upper&gt;}{&lt;lower&gt;}{&lt;ratio&gt;}</code> .....   | 19  |
| 조판 영역이 주어질 때 상단 및 하단 여백을 설정한다.  |     |
| <code>\setulmarginsandblock{&lt;upper&gt;}{&lt;lower&gt;}{&lt;ratio&gt;}</code> .....   | 19  |
| 상단 여백과 하단 여백을 설정하여 조판 영역의 높이가 수정되도록 한다.   |     |
| <code>\setverbatimfont{&lt;fontspec&gt;}</code> Sets the font to be used for verbatim text. ....  | 278 |
| <code>\setverselinenums{&lt;first&gt;}{&lt;startat&gt;}</code> .....  | 262 |
| The first line of the following verse is number {<first>} and the first printed line number should be {<startat>}.  |     |
| <code>\setxlvchars[&lt;fontspec&gt;]</code> .....   | 15  |
| <code>\xlvchars</code> 를 {<fontspec>}으로 주어지는 폰트(기본값은 <code>\normalfont</code> )에서의 45글자에 해당하는 길이로 설정한다.   |     |
| <code>\sffamily</code> Declaration for using a Sans serif font. ....  | 42  |
| <code>\begin{shaded}</code> .....   | 272 |
| Put a colored background behind the contents of the environment, which can include page-breaks. The color extends into the margins a little.  |     |
| <code>sheetsequence</code> Counter for sheets (similar to page for pages). ....   | 320 |
| <code>\Shook</code> .....   | 96  |
| Hook called immediately before typesetting the title of an S head.  |     |
| <code>\shortstack[&lt;pos&gt;]{&lt;text&gt;}</code> .....   | 411 |
| Vertically stacks each line of {<text>} into a column, normally centered but can be left or right aligned via {<pos>}. Usually used as a picture object, but can be used outside the environment. |     |
| <code>\shortsubcaption</code> The subcaption version of <code>\shortcaption</code> . ....   | 195 |
| <code>\showcols</code> .....  | 211 |
| Writes a list of all <code>\newcolumn</code> types to the terminal and log file.  |     |
| <code>\showheadfootlocoff</code> .....  | 119 |
| Prevents <code>\framepichead</code> and <code>\framepictextfoot</code> from drawing lines at the header and footer locations.   |     |
| <code>\showindexmarks</code> .....  | 303 |
| The {<stuff>} argument to <code>\index</code> and <code>\specialindex</code> will be printed in the margin (for use in noting what has been indexed where).                                       |     |
| <code>\showtextblockoff</code> .....  | 119 |
| Prevents <code>\framepictextfoot</code> from drawing a box around the textblock.  |     |
| <code>showtrims</code> 트림 마크 표시 클래스 옵션 .....  | 4   |
| <code>\showtrimsoff</code> Switch off any trim marks. ....  | 318 |
| <code>\showtrimson</code> .....   | 318 |
| If the <code>showtrims</code> option has been used, switch on any trim marks (this is the default).   |     |
| <code>\sidebar{&lt;text&gt;}</code> Typesets {<text>} in a sidebar. ....  | 238 |
| <code>\sidebarfont</code> Font used for sidebars. ....  | 239 |
| <code>\sidebarform</code> Form (e.g., <code>\raggedright</code> ) used for sidebars. ....   | 239 |
| <code>\sidebarhsep</code> Space between the edge of the main text and sidebars. ....  | 239 |
| <code>\sidebarmargin{&lt;margin&gt;}</code> Specifies the {<margin>} (s) for sidebars. ....   | 239 |
| <code>\sidebartopsep</code> .....   | 239 |
| Controls the vertical position of a sidebar. The default is 0pt which aligns the tops of the type-block and the sidebar.  |     |



|  |     |
|--|-----|
| <code>\sidebarvsep</code> .....  | 239 |
| Vertical space between sidebars that fall on the same page.  |     |
| <code>\sidebarwidth</code> Width of sidebars. ....   | 239 |
| <code>\sidecapfloatwidth{&lt;length&gt;}</code> .....  | 198 |
| Macro holding the width of a float with a sidecaption.   |     |
| <code>\sidecapmargin{&lt;margin&gt;}</code> Sets the margin for sidecaptions. ....   | 196 |
| <code>\sidecapraise</code> .....   | 198 |
| Vertical distance added to the default vertical placement of a sidecaption.  |     |
| <code>\sidecapsep</code> .....   | 196 |
| Length specifying the horizontal separation between a sidecaption and the float.   |     |
| <code>\sidecapstyle</code> Style settings for a sidecaption. ....  | 197 |
| <code>\begin{sidecaption}[&lt;fortoc&gt;]{&lt;title&gt;}[&lt;label&gt;]</code> .....   | 196 |
| Environment for setting a sidecaption.   |     |
| <code>\sidecapwidth</code> Length specifying the maximum width of a sidecaption. ....  | 196 |
| <code>\begin{sidecontcaption}{&lt;title&gt;}[&lt;label&gt;]</code> .....   | 197 |
| Environment for setting a continued sidecaption.   |     |
| <code>\begin{sidelegend}{&lt;title&gt;}[&lt;label&gt;]</code> .....  | 197 |
| Environment for setting a legend kind of sidecaption.  |     |
| <code>\begin{sidenamedlegend}{&lt;title&gt;}[&lt;label&gt;]</code> .....   | 197 |
| Environment for setting a named legend kind of sidecaption.  |     |
| <code>\sidepar[&lt;left&gt;]{&lt;right&gt;}</code> .....   | 237 |
| Like <code>\marginpar</code> except that the note does not move vertically.  |     |
| <code>\siderparfont</code> The font which the <code>\sidepars</code> are typeset. ....   | 237 |
| <code>\sideparform</code> Macro holding placement like <code>\raggedright</code> and such. ....  | 237 |
| <code>\sideparmargin{&lt;placement&gt;}</code> .....   | 237 |
| Specify into which margin the <code>\sidepar</code> goes.  |     |
| <code>\sideparvshift</code> Move a <code>\sidepar</code> up/down by this amount. ....  | 237 |
| <code>\begin{SingleSpace}</code> Environment form of <code>\SingleSpacing</code> .....   | 51  |
| <code>\SingleSpacing</code> .....  | 50  |
| Declaration restoring normal single spacing (or that set by <code>\setSingleSpace</code> ). Note, this added a skip at the end.  |     |
| <code>\SingleSpacing*</code> .....   | 50  |
| Same as <code>\SingleSpacing</code> , but does not add a skip at the end.  |     |
| <code>\slashfrac{&lt;top&gt;}{&lt;bottom&gt;}</code> .....   | 330 |
| Typesets like $\frac{3}{4}$ , using the <code>\slashfracstyle</code> font.   |     |
| <code>\slashfracstyle{&lt;num&gt;}</code> .....  | 330 |
| Typesets <code>&lt;num&gt;</code> in a particular (font, size) style.  |     |
| <code>\sloppy</code> .....   | 51  |
| Declaration for TeX to allow large interword space variations in justified text lines.   |     |
| <code>\sloppybottom</code> .....   | 52  |
| Declaration for TeX to allow an extra line at the bottom of a page. The <code>\topskip</code> must have been increased beforehand.   |     |
| <code>\begin{sloppypar}</code> .....   | 51  |
| Typeset contents of the enclosed paragraph(s) using <code>\sloppy</code> .   |     |
| <code>\slshape</code> Declaration for using a slanted font. ....   | 42  |
| <code>smalldemyvopaper</code> small demy octavo 용지 크기 클래스 옵션 .....   | 2   |
| <code>smallroyalvopaper</code> small royal octavo 용지 크기 클래스 옵션 .....   | 2   |
| <code>\begin{snugshade}</code> Like <code>shaded</code> but does not bleed into the margins. ....  | 272 |
| <code>\sourceatright[&lt;length&gt;]{&lt;text&gt;}</code> .....  | 124 |
| At the end of a paragraph puts <code>&lt;text&gt;</code> at the end of the line if the line is short enough for a space <code>&lt;length&gt;</code> and the <code>&lt;text&gt;</code> , otherwise puts <code>&lt;text&gt;</code> flushright on the following line. |     |

|  |     |
|--|-----|
| <code>southall</code> .....  | 91  |
| A raggedright chapterstyle with the number and title on the same line and a rule below.                                    |     |
| <code>\begin{SingleSpace}{\factor}</code> Environment form of <code>\setSingleSpace</code> .....                           | 51  |
| <code>\specialindex{\file}{\counter}{\stuff}</code> .....  | 303 |
| Add <code>\stuff</code> and the current value of <code>\counter</code> to the raw index data file <code>\file.idx</code> . |     |
| <code>\specialrule{\width}{\abovespace}{\belowspace}</code> .....  | 217 |
| Draws a rule with the given parameters across a tabular.   |     |
| <code>\Sref{\labstr}</code> .....  | 294 |
| Prints a named ( <code>\sectionrefname</code> ) reference to a <code>\labeled</code> section.                              |     |
| <code>\stanzaskip</code> Vertical space between verse stanzas. ....  | 258 |
| <code>statementpaper</code> statement 용지 크기 클래스 옵션 .....   | 2   |
| <code>\stockheight</code> (length) 용지의 세로 길이. ....   | 8   |
| <code>\stockwidth</code> (length) 용지의 가로 길이. ....  | 8   |
| <code>\strictpagecheck</code> .....  | 325 |
| <code>\checkoddpages</code> will use an accurate but time and space consuming method for checking for an odd page number.  |     |
| <code>\stringtoarray{\arrayname}{\string}</code> .....   | 331 |
| Puts each character from <code>\string</code> sequentially into array <code>\arrayname</code> , starting at index 1.       |     |
| <code>\begin{subappendices}</code> .....   | 78  |
| Like the <code>appendices</code> environment but used at the end of a chapter for per-chapter sub-appendices.              |     |
| <code>\subbottom[\list-entry][\subtitle]{\text}</code> .....   | 193 |
| Puts a subcaption identifier, and optionally <code>\subtitle</code> , below <code>\text</code> .                           |     |
| <code>\subcaption[\list-entry]{\subtitle}</code> .....   | 193 |
| Analogous to <code>\caption</code> but for an identified subcaption within a float.  |     |
| <code>\subcaptionfont{\fontspec}</code> Font for subcaption titles. ....   | 195 |
| <code>\subcaptionlabelfont{\fontspec}</code> Font for subcaption identifiers. ....   | 195 |
| <code>\subcaptionref{\labstr}</code> .....   | 194 |
| Print the subcaption identifier for a <code>\labstr</code> labelled subcaption.  |     |
| <code>\subcaptionsize{\size}</code> Font size for subcaptions. ....  | 195 |
| <code>\subcaptionstyle{\style}</code> Paragraph <code>\style</code> for subcaptions. ....                                  | 195 |
| <code>\subconcluded</code> .....   | 194 |
| Indicates (to LaTeX) that a continued subfloat is finished.  |     |
| <code>\subitem</code> Introduces a subsidiary index entry. ....  | 303 |
| <code>\subparahook</code> .....  | 96  |
| Hook called immediately before typesetting the title of a subparagraph head.   |     |
| <code>\subsechook</code> .....   | 96  |
| Hook called immediately before typesetting the title of a subsection head.   |     |
| <code>\subsubitem</code> Introduces a third level index entry. ....  | 303 |
| <code>\subsubsechook</code> .....  | 96  |
| Hook called immediately before typesetting the title of a subsubsection head.  |     |
| <code>\subtop[\list-entry][\subtitle]{\text}</code> .....  | 193 |
| Puts a subcaption identifier, and optionally <code>\subtitle</code> , on top of <code>\text</code> .                       |     |
| <code>superroyalvopaper</code> super royal octavo 용지 크기 클래스 옵션 .....   | 2   |
| <code>\suppressfloats[\pos]</code> .....   | 176 |
| Suppresses any floats on the current page at the given <code>\pos</code> placement.  |     |
| <code>\symbolthanksmark</code> .....   | 67  |
| Set the thanks marks to be printed using the footnote series of symbols.   |     |
| <code>\tabcolsep</code> Half the space between columns in a tabular. ....  | 224 |
| <code>\tableofcontents</code> Typeset the ToC, adding its title to the ToC itself. ....                                    | 144 |

|   |  |     |
|---|--|-----|
| <code>\tableofcontents*</code>                            | Typeset the ToC.   | 144 |
| <code>\tablerefname</code>                                | Name for a table used by <code>\tref</code> .  | 294 |
| <code>\tabsoff</code>                                     | Ignore extra TAB spaces in a verbatim.   | 278 |
| <code>\tabson[⟨number⟩]</code>                            | Set ⟨number⟩ of spaces in a verbatim for a TAB character; default 4.   | 278 |
| <code>\begin{tabular}[⟨pos⟩]{⟨preamble⟩}</code>           | Environment for setting text elements in a tabular form.   | 205 |
| <code>\begin{tabular*}[⟨width⟩][⟨pos⟩]{⟨preamble⟩}</code> | Environment for setting text elements in a tabular form within an overall ⟨width⟩; intercolumn spacing is adjusted to suit.                  | 205 |
| <code>\begin{tabularx}[⟨width⟩][⟨pos⟩]{⟨preamble⟩}</code> | Environment for setting text elements in a tabular form within an overall ⟨width⟩; column widths are adjusted to suit.                       | 205 |
| <code>\tabularxcolumn</code>                              | Column type for an X column in a <code>tabularx</code> .   | 222 |
| <code>tandh</code>  | A simple section-like chapterstyle in a bold font.   | 91  |
| <code>\tensunitsep</code>                                 | The separator/conjoiner between tens and units in named numbers, default ‘-’.  | 329 |
| <code>\textbf{⟨text⟩}</code>                              | Typeset ⟨text⟩ with a bold font.   | 41  |
| <code>\textheight</code>                                  | (length) 조판 영역의 높이   | 16  |
| <code>\textit{⟨text⟩}</code>                              | Typeset ⟨text⟩ with an italic font.  | 41  |
| <code>\textmd{⟨text⟩}</code>                              | Typeset ⟨text⟩ with a medium font.   | 41  |
| <code>\textrm{⟨text⟩}</code>                              | Typeset ⟨text⟩ with a Roman font.  | 41  |
| <code>\textsc{⟨text⟩}</code>                              | Typeset ⟨text⟩ with a small caps font.   | 41  |
| <code>\textsf{⟨text⟩}</code>                              | Typeset ⟨text⟩ with a Sans serif font.   | 41  |
| <code>\textsl{⟨text⟩}</code>                              | Typeset ⟨text⟩ with a slanted (oblique) font.  | 41  |
| <code>\textsubscript{⟨sub⟩}</code>                        | Typesets ⟨sub⟩ as a subscript.   | 330 |
| <code>\textsuperscript{⟨super⟩}</code>                    | Typesets ⟨super⟩ as a superscript.   | 330 |
| <code>\texttt{⟨text⟩}</code>                              | Typeset ⟨text⟩ with a Typewriter (monospaced) font.  | 41  |
| <code>\textup{⟨text⟩}</code>                              | Typeset ⟨text⟩ with an upright font.   | 41  |
| <code>\textwidth</code>                                   | (length) 조판 영역의 너비   | 16  |
| <code>\thanksfootmark</code>                              | Handle the inner part of the thanks mark at the foot.  | 69  |
| <code>\thanksfootmark</code>                              | Typesets a thanks mark at the foot.  | 68  |
| <code>\thanksheadextra{⟨pre⟩}{⟨post⟩}</code>              | Inserts ⟨pre⟩ and ⟨post⟩ before and after thanks markers in the titling code.  | 67  |
| <code>\thanksmark{⟨n⟩}</code>                             | Prints a thanks mark identical to the n <sup>th</sup> (previously) printed mark.   | 68  |
| <code>\thanksmarksep</code>                               | Indentation of second and subsequent thanks text lines at the foot.  | 68  |
| <code>\thanksmarkseries{⟨format⟩}</code>                  | Thanks marks will be printed using ⟨format⟩ series of symbols.   | 67  |
| <code>\thanksmarkstyle{⟨defn⟩}</code>                     | Sets the style for the thanks marks at the foot.   | 68  |
| <code>\thanksmarkwidth</code>                             | Width of box for the thanks marks at the foot.   | 68  |
| <code>\thanksrule</code>                                  | The rule to be typeset before the thanks in the foot.  | 69  |
| <code>thatcher</code>                                     | A centered small caps chapterstyle with the number line separated from the title by a short rule.  | 91  |
| <code>\theauthor</code>                                   | Copy of ⟨text⟩ from <code>\author</code> .   | 66  |
| <code>\begin{thebibliography}{⟨exlabel⟩}</code>           | Environment for typesetting a bibliography. ⟨exlabel⟩ is an arbitrary piece of text as wide as the widest label for the bibliographic items. | 297 |
| <code>\thectr</code>                                      | Typesets the value of the counter ctr.   | 322 |
| <code>\thedata</code>                                     | Copy of ⟨text⟩ from <code>\date</code> .   | 66  |

|  |     |
|--|-----|
| <code>\begin{theglossary}</code> Environment for typesetting a glossary. ....  | 311 |
| <code>\begin{theindex}</code> Environment for typesetting an index ....  | 301 |
| <code>\thepoem</code> Typeset the current Poem Title number ....   | 263 |
| <code>\thepoemline</code> ....   | 262 |
| The numeric representation of verse line numbers (default arabic).   |     |
| <code>\thesheetsequence</code> Typesets the current sheet sequence number. ....  | 320 |
| <code>\thetitle</code> Copy of <code>\text</code> from <code>\title</code> . ....  | 66  |
| <code>\theTitleReference{&lt;num&gt;}{&lt;text&gt;}</code> ....  | 296 |
| Called by <code>\titleref</code> and <code>\currenttitle</code> with the number and text of the title to print the values.   |     |
| <code>\thicklines</code> Picture declaration for lines to be thick. ....   | 406 |
| <code>\thinlines</code> Picture declaration for lines to be thin. ....   | 406 |
| <code>\thinspace</code> A thin space (3/18 em). ....   | 333 |
| <code>\thispagestyle{&lt;style&gt;}</code> ....  | 106 |
| Sets the pagestyle to <code>&lt;style&gt;</code> for the current page only.  |     |
| <code>\threecolumnfootnotes</code> Typeset footnotes in three columns. ....  | 231 |
| <code>\threecolumnfootstyle{&lt;series&gt;}</code> ....  | 231 |
| Set the <code>&lt;series&gt;</code> footnotes to be typeset in three column style.   |     |
| <code>\tightlist</code> In a standard list, removes extra vertical spacing. ....   | 134 |
| <code>\tightlists</code> ....  | 134 |
| Declaration removing extra vertical space from list-based environments.  |     |
| <code>\tightsubcaptions</code> ....  | 195 |
| Specifies the default vertical space around subcaptions.   |     |
| <code>\title{&lt;text&gt;}</code> ....   | 66  |
| Used by <code>\maketitle</code> to typeset <code>&lt;text&gt;</code> as the document title.  |     |
| <code>\titleref{&lt;labstr&gt;}</code> ....  | 295 |
| Prints the (section, or other) title of the number associated with <code>&lt;labstr&gt;</code> from a <code>\label</code> .  |     |
| <code>\begin{titlingpage}</code> ....  | 65  |
| Environment for a title page, resets the page counter to 1 after it  |     |
| <code>\begin{titlingpage*}</code> ....   | 65  |
| Like <code>\begin{titlingpage}</code> , but does not reset the page counter.   |     |
| <code>\titlingpageend</code> ....  | 65  |
| Can be used to set what kind of page clearing is issued at the end of a titling page. The default for the two args are <code>\cleardoublepage</code> and <code>\clearpage</code> . |     |
| <code>\tmarkbl</code> Trim mark for bottom left of trimmed page. ....  | 319 |
| <code>\tmarkbm</code> Trim mark for bottom middle of trimmed page. ....  | 319 |
| <code>\tmarkbr</code> Trim mark for bottom right of trimmed page. ....   | 319 |
| <code>\tmarkml</code> Trim mark for middle left of trimmed page. ....  | 319 |
| <code>\tmarkmr</code> Trim mark for middle right of trimmed page. ....   | 319 |
| <code>\tmarktl</code> Trim mark for top left of trimmed page. ....   | 319 |
| <code>\tmarktm</code> Trim mark for top middle of trimmed page. ....   | 319 |
| <code>\tmarktr</code> Trim mark for top right of trimmed page. ....  | 319 |
| <code>\tocnameref</code> Use ToC title for sectional title references. ....  | 295 |
| <code>\toprule[&lt;width&gt;]</code> ....  | 216 |
| Draws a rule across a tabular, default width <code>\heavyrulewidth</code> .  |     |
| <code>\topskip (length)</code> ....  | 23  |
| 페이지 상의 텍스트 첫 줄의 높이. <code>\baselineskip</code> 보다 대개 작은 값이다.   |     |
| <code>\tracingtabularx</code> ....   | 222 |
| Writes information about the changing column widths while setting a <code>tabularx</code> .  |     |
| <code>\traditionalparskip</code> ....  | 49  |
| Sets the interparagraph spacing to its traditional value.  |     |

|   |     |
|---|-----|
| <code>\tref{⟨labstr⟩}</code> .....  | 294 |
| Prints a named ( <code>\tablerefname</code> ) reference to a <code>\labeled</code> table.   |     |
| <code>\trimedge (length)</code> 용지 바깥쪽 마진의 트리밍할 값 .....   | 12  |
| <code>\trimFrame</code> .....   | 318 |
| Trim mark of a frame drawn round the trimmed page boundary.   |     |
| <code>\trimLmarks</code> .....  | 318 |
| Trim marks of ‘L’ shapes at the four corners of the trimmed page.   |     |
| <code>\trimmark</code> Cross mark used by <code>\trimXmarks</code> . .....  | 319 |
| <code>\trimmarks</code> .....   | 319 |
| Displays 8 (in)visible trim marks round the boundary of the trimmed page.   |     |
| <code>\trimmarkscolor</code> .....  | 318 |
| Empty macro that can be redefined to give a specific color to the trimmarks.  |     |
| <code>\trimNone</code> No trim marks. ....  | 318 |
| <code>\trimtop (length)</code> 용지 상단의 트리밍할 값 .....  | 12  |
| <code>\trimXmarks</code> .....  | 318 |
| Trim marks of crosses at the four corners of the trimmed page.  |     |
| <code>\ttfamily</code> Declaration for using a Typewriter (monospaced) font. ....   | 42  |
| <code>\twocolindex</code> Typeset index in two columns (the default). ....  | 301 |
| <code>\twocoltocetc</code> Set the ToC, etc., in two columns. ....  | 145 |
| <code>twocolumn</code> 2단 편집 클래스 옵션 .....   | 4   |
| <code>\twocolumnfootnotes</code> Typeset footnotes in two columns. ....   | 231 |
| <code>\twocolumnfootstyle{⟨series⟩}</code> .....  | 231 |
| Set the <code>⟨series⟩</code> footnotes to be typeset in two column style.  |     |
| <code>twoside</code> 양면 인쇄 클래스 옵션 .....   | 4   |
| <code>\TX@verb</code> A poor man’s <code>\verb</code> for use in a <code>tabularx</code> . ....                                   | 223 |
| <code>\typeoutlayout</code> .....   | 25  |
| 클래스의 레이아웃 파라미터 값을 터미널과 로그파일에 출력한다.  |     |
| <code>\typeoutstandardlayout</code> .....   | 25  |
| 표준 LaTeX 레이아웃 파라미터의 현재값을 터미널과 로그파일에 출력한다.   |     |
| <code>\ucminusname</code> .....   | 329 |
| Lowercase ‘minus’ name with initial uppercase letter, default ‘Minus’.  |     |
| <code>\undodrop</code> .....  | 252 |
| Following a <code>\dropchapter</code> restores subsequent chapter heads to their normal position.                                 |     |
| <code>\unitlength</code> The unit of length in a picture environment. Default 1pt. ....   | 405 |
| <code>\unnamedsubappendices</code> .....  | 78  |
| Do not precede the sub-appendix number with any name (the default).   |     |
| <code>\upbracefill</code> Fills a tabular column with an up brace. ....   | 218 |
| <code>\uppercaseheads</code> Defines <code>\memUChad</code> as equivalent to <code>\MakeUppercase</code> . ....                   | 112 |
| <code>\uppercaseheads</code> Set the titles in the headings pagestyle in Uppercase. ....  | 107 |
| <code>\upshape</code> Declaration for using an upright font. ....   | 42  |
| <code>\usethanksrule</code> .....   | 69  |
| Specifies that the <code>\thanksrule</code> is to be typeset in the <code>\titlingpage</code> environment.                        |     |
| <code>\vector(⟨dx,dy⟩){⟨distance⟩}</code> .....   | 415 |
| Picture object of a line with an arrowhead at the end, slope <code>⟨dx,dy⟩</code> and coordinate length <code>⟨distance⟩</code> . |     |
| <code>veelo</code> .....  | 91  |
| A raggedleft large bold chapterstyle with a large black square in the margin by the number line.                                  |     |
| It requires the <code>graphicx</code> package.  |     |
| <code>\begin{verbatim}</code> Typeset the contents verbatim. ....   | 278 |

|  |     |
|--|-----|
| <code>\verbatimbreakchar{⟨char⟩}</code> .....  | 279 |
| Character indicating a verbatim line is being wrapped.   |     |
| <code>\verbatimindent</code> Indent for wrapped overlong verbatim lines. ....  | 279 |
| <code>\verbatiminput{⟨file⟩}</code> .....  | 286 |
| Acts like <code>verbatim</code> except the contents is read from the <code>⟨file⟩</code> file.   |     |
| <code>\verbatiminput*{⟨file⟩}</code> .....   | 286 |
| Acts like <code>verbatim*</code> except the contents is read from the <code>⟨file⟩</code> file.  |     |
| <code>\begin{verbatimoutput}{⟨file⟩}</code> .....  | 285 |
| The contents of the environment are written verbatim to the <code>⟨file⟩</code> file, overwriting anything previously in the file.   |     |
| <code>\verbfootnote[⟨num⟩]{⟨text⟩}</code> .....  | 230 |
| Like <code>\footnote</code> except that <code>⟨text⟩</code> can contain verbatim material.   |     |
| <code>\begin{verse}[⟨length⟩]</code> .....   | 258 |
| Environment for typesetting verse; if given the midpoint of <code>⟨length⟩</code> is placed at the center of the typeblock measure.  |     |
| <code>\verselinebreak[⟨length⟩]</code> .....   | 259 |
| Makes a break in a verse line, indenting the next part by twice <code>\vgap</code> , or by <code>⟨length⟩</code> if it is given.   |     |
| <code>\verselinenumbersleft</code> .....   | 262 |
| Following this declaration verse line numbers are set at the left of the verse lines.  |     |
| <code>\verselinenumbersright</code> .....  | 262 |
| Following this declaration verse line numbers are set at the right of the verse lines.   |     |
| <code>\versewidth</code> Scratch length, typically for use in verse typesetting. ....  | 258 |
| <i>verville</i> .....  | 91  |
| A single line, large, centered, chapterstyle with rules above and below.   |     |
| <code>\vinphantom{⟨text⟩}</code> Leaves a space as wide as <code>⟨text⟩</code> . ....  | 259 |
| <code>\leftmargin</code> General verse indent from the left of the typeblock. ....   | 258 |
| <code>\vleftofline{⟨text⟩}</code> ‘Hanging left’ <code>⟨text⟩</code> at the start of a verse line. ....  | 260 |
| <code>\leftskip</code> .....   | 262 |
| Space between the argument to <code>\flageverse</code> and <code>\flagverse</code> .   |     |
| <code>\begin{vplace}[⟨num⟩]</code> .....   | 336 |
| The contents of this environment are centered vertically. The optional <code>⟨num⟩</code> argument can be used to specify the ratio of the upper space to the lower space. |     |
| <code>\rightskip</code> .....  | 262 |
| Verse line numbers are set distance <code>\rightskip</code> into the margin.   |     |
| <i>wilsondob</i> A one line flushright chapterstyle in a large italic font. ....   | 91  |
| <code>\wrappingoff</code> .....  | 279 |
| The normal behaviour of not wrapping overlong verbatim lines.  |     |
| <code>\wrappingon</code> Wrap overlong verbatim lines. ....  | 279 |
| <code>\begin{writeverbatim}{⟨stream⟩}</code> .....   | 285 |
| The contents of the environment are written verbatim to the <code>⟨stream⟩</code> stream.  |     |
| <code>\Xheadstart</code> Generic macro called before printing a ‘X List of’ title. ....  | 146 |
| <code>\xlvchars (length)</code> 개략적인 45문자 길이. ....   | 15  |
| <code>\Xmark</code> Generic macro setting the marks for the ‘X List of’. ....  | 146 |
| <code>\zerotrivseps</code> Eliminate space before and after a <code>trivlist</code> . ....   | 137 |

---

## 문헌목록

---

CTAN is the Comprehensive TeX Archive Network. Information on how to access CTAN is available at <http://www.tug.org>.

- [AHK90] Paul W. Abrahams, Kathryn Hargreaves and Karl Berry. *TeX for the Impatient*. Addison-Wesley, 1990. (Available at <ftp://tug.org/tex/impatient>)
- [Ars99] Donald Arseneau. *The url package*. February, 1999. (Available from CTAN via [/macros/latex/contrib/url/](#))
- [Ars01a] Donald Arseneau. *The titleref package*. April, 2001. (Available from CTAN via [/macros/latex/contrib/titleref/](#))
- [Ars01b] Donald Arseneau. *The chapterbib package*. September, 2001. (Available from CTAN via [/macros/latex/contrib/cite/](#))
- [Ars07] Donald Arseneau. *The framed package* v0.95. October, 2007. (Available from CTAN via [/macros/latex/contrib/framed/](#))
- [Ber02] Jens Berger. *The titlesec and titletoc packages*. September, 2002. (Available from CTAN via [/macros/latex/contrib/titlesec/](#))
- [Bez99] Javier Bezos. *The titlesec and titletoc packages*. February, 1999. (Available from CTAN via [/macros/latex/contrib/titlesec/](#))
- [Bir04] Derek Birdsall. *notes on book design*. Yale University Press, 2004. ISBN 0-300-10347-6.
- [Bra97] Johannes Braams. *The alltt environment*. June, 1997. (Available as `alltt.dtx` and `alltt.ins` from CTAN via [/macros/latex/base/](#))
- [Bri99] Robert Bringhurst. *The Elements of Typographic Style*. Hartley & Marks, second edition, 1999. ISBN 0-88179-033-8.
- [Car14] David Carlisle. *The delarray package*. October, 2014. (Available from CTAN via [/macros/latex/required/tools/](#))
- [Car95] David Carlisle. *The afterpage package*. October, 1995. (Available from CTAN via [/macros/latex/required/tools/](#))
- [Car98b] David Carlisle. *The longtable package*. May, 1998. (Available from CTAN via [/macros/latex/required/tools/](#))
- [Car98c] David Carlisle. *The enumerate package*. August, 1998. (Available from CTAN via [/macros/latex/required/tools/](#))



- [Car16] David Carlisle. *The tabularx package*. February, 2016. (Available from CTAN via [/macros/latex/required/tools/](#))
- [CR99] David Carlisle and Sebastian Rahtz. *The graphicx package*. February, 1999. (Available from CTAN via [/macros/latex/required/graphics/](#))
- [Car14] David Carlisle. *The dcolumn package*. May, 2001. (Available from CTAN via [/macros/latex/required/tools/](#))
- [Car04] David Carlisle. *The textcase package*. October, 2004. (Available from CTAN in [/macros/latex/contrib/textcase](#))
- [Car05] David Carlisle. *Packages in the graphics bundle* (includes the color package). November, 2005. (Available from CTAN via [/macros/latex/required/graphics/](#))
- [CB99] Warren Chappell and Robert Bringhurst. *A Short History of the Printed Word*. Hartley & Marks, 1999. ISBN 0-88179-154-7.
- [CH88] Pehong Chen and Michael A. Harrison. 'Index Preparation and Processing'. *Software: Practice and Experience*, 19:8, pp. 897-915, September, 1988. (Available from CTAN via [/indexing/makeindex/paper/](#))
- [Chi93] *The Chicago Manual of Style*, Fourteenth Edition. The University of Chicago, 1993. ISBN 0-226-10389-7.
- [Dal99a] Patrick W. Daly. *Natural Sciences Citations and References*. May, 1999. (Available from CTAN via [/macros/latex/contrib/natbib/](#))
- [Dal99b] Patrick W. Daly. *Customizing Bibliographic Style Files*. August, 1999. (Available from CTAN via [/macros/latex/contrib/custom-bib/](#))
- [Dow96] Geoffrey Dowding. *Finer Points in the Spacing & Arrangement of Type*. Hartley & Marks, 1996. ISBN 0-88179-119-9.
- [Dow00] Michael J. Downes. *The patchcmd package*. July, 2000. (Available from CTAN via [/macros/latex/contrib/patchcmd/](#))
- [Eij92] Victor Eijkhout. *TeX by Topic*. Addison-Wesley, 1992. ISBN 0-201-56882-9. (Available from <http://www.eijkhout.net/tbt/>).
- [Eij99] Victor Eijkhout. *comment.sty* October, 1999. (Available from CTAN via [/macros/latex/contrib/comment/](#))
- [Fai00] Robin Fairbairns. *footmisc — a portmanteau package for customising footnotes in LaTeX2e*. March, 2000. (Available from CTAN via [/macros/latex/contrib/footmisc/](#))
- [FAQ] Robin Fairbairns. *The UK TeX FAQ*. (Available from CTAN via <http://faq.tug.org/>)
- [Far90] Gerald Farin. *Curves and Surfaces for Computer Aided Geometric Design — A Practical Guide*. Academic Press, 2 edition, 1990.
- [FP80] I. D. Faux and M. J. Pratt. *Computational Geometry for Design and Manufacture*. Ellis Horwood, 1980.
- [Fea16] Simon Fear. *Publication quality tables in LaTeX*. April, 2016. (Available from CTAN via [/macros/latex/contrib/booktabs/](#))



- [Fly98] Peter Flynn. *Formatting Information: A Beginner's Introduction to Typesetting with LaTeX2*. 2002. (Available from CTAN via [/info/beginlatex/](#))
- [GM<sup>+</sup>07] Michel Goossens, Frank Mittelbach, et al. *The LaTeX Graphics Companion: Second edition*. Addison-Wesley, 2007. ISBN 0-321-50892-0.
- [GR99] Michel Goossens and Sebastian Rahtz (with Eitan Gurari, Ross Moore and Robert Sutor). *The LaTeX Web Companion: Integrating TeX, HTML and XML*. Addison-Wesley, 1999. ISBN 0-201-43311-7.
- [Hoe98] Alan Hoenig. *TeX Unbound: LaTeX and TeX strategies for fonts, graphics, and more*. Oxford University Press, 1998. ISBN 0-19-509686-X.
- [Jon95] David M. Jones. *A new implementation of LaTeX's indexing commands*. September, 1995. (Available from CTAN via [/macros/latex/contrib/camel](#))
- [Keh98] Roger Kehr. *xindy: A flexible indexing system*. February, 1998. (Available from CTAN via [/indexing/xindy/](#))
- [Ker07] Uwe Kern. *Extending LaTeX's color facilities: the xcolor package*. January, 2007. (Available from CTAN via [/macros/latex/contrib/xcolor/](#))
- [Kha10] Vafa Khalighi. *The Bidi package*. 2010. (Available from CTAN via [/macros/latex/contrib/bidi/](#))
- [Knu84] Donald E. Knuth. *The TeXbook*. Addison-Wesley, 1984. ISBN 0-201-13448-9.
- [Knu86] Donald E. Knuth. *TeX: The Program*. Addison-Wesley, 1986. ISBN 0-201-13437-3.
- [Knu87] Donald E. Knuth. *Computer Modern Typefaces*. Addison-Wesley, 1987. ISBN 0-201-134446-2.
- [Knu92] Donald E. Knuth. *The METAFONT Book*. Addison-Wesley, 1992. ISBN 0-201-13444-6.
- [Lam94] Leslie Lamport. *LaTeX: A Document Preparation System*. Addison-Wesley, 1994. ISBN 0-201-52983-1.
- [LEB04] Leslie Lamport, Victor Eijkhout and Johannes Braams. *NTG document classes for LaTeX version 2e*. June, 2004. (Available from CTAN via [/macros/latex/contrib/ntgclass/](#))
- [Lea03] Christopher League. *TeX support for the FontSite 500 CD*. May 2003. (Available from <http://contrapunctus.net/fs500tex>)
- [Leh04] Philipp Lehman. *The Font Installation Guide*. December 2004. (Available from CTAN via [/info/Type1fonts/fontinstallationguide](#))
- [Leu92] Mary-Claire van Leunen. *A Handbook for Scholars*. Oxford University Press, 1992. ISBN 0-19-506954-4.
- [Lon91] F. W. Long. *multind*. August, 1991. (Available from CTAN as [/macros/latex209/contrib/misc/multind.sty](#))
- [Mad06] Lars Madsen. *Various chapter styles for the memoir class*. July, 2006. (Available from CTAN via [/info/latex-samples/MemoirChapStyles/](#))
- [Mad07] Lars Madsen. *The Memoir Experimental Support Package*. 2007. (Available from CTAN via [/macros/latex/contrib/memexsupp/](#))

- [McD98] Rowland McDonnell. *The sectsty package*. November, 1998. (Available from CTAN via [/macros/latex/contrib/sectsty/](#))
- [McL80] Ruari McLean. *The Thames & Hudson Manual of Typography*. Thames & Hudson, 1980. ISBN 0-500-68022-1.
- [Mit18] Frank Mittelbach. *An environment for multicolumn output*. April, 2018. (Available from CTAN (the `multicol` package) via [/macros/latex/required/tools/](#))
- [MC18] Frank Mittelbach and David Carlisle. *A new implementation of LaTeX's tabular and array environment*. May, 2018. (Available from CTAN (the `array` package) via [/macros/latex/required/tools/](#))
- [MC00] Frank Mittelbach and David Carlisle. *The fixltx2e package*. December, 2016. As of 2015 the functionality of this package has been merged with the  $\text{\LaTeX}$  kernel. (Available from CTAN via [/macros/latex/base/](#))
- [MG<sup>+</sup>04] Frank Mittelbach, Michael Goossens, et al. *The LaTeX Companion: Second Edition*. Addison-Wesley, 2004. ISBN 0-201-36299-6.
- [Mor85] Michael E. Mortenson. *Geometric Modeling*. John Wiley & Sons, 1985.
- [NG98] Rolf Niespraschk and Hubert Gäßlein. *The sidecap package*. June, 1998. (Available from CTAN via [/macros/latex/contrib/sidecap/](#))
- [Oet] Tobias Oetiker. *The Not So Short Introduction to LaTeX2e*. (Available from CTAN via [/info/lshort/](#))
- [Oos96] Piet van Oostrum. *Page Layout in LaTeX*. June, 1996. (Available from CTAN via [/macros/latex/contrib/fancyhdr/](#))
- [Pak01] Scott Pakin. *The Comprehensive LaTeX Symbol List*. July, 2001. (Available from CTAN via [/info/symbols/comprehensive/](#))
- [dP84] H. de Parville. Recreations mathematique: La Tour d'Hanoi et la question du Tonkin. *La Nature*, part I:285-286, Paris 1884.
- [Pat88a] Oren Patashnik. *BibTeXing*. February, 1988. (Available from CTAN as [/bibliography/bibtex/distrib/doc/btxdoc.tex](#))
- [Pat88b] Oren Patashnik. *Designing BibTeX Styles*. February, 1988. (Available from CTAN as [/bibliography/bibtex/distrib/doc/btxhak.tex](#))
- [Pug02] Diego Puga. *The Pazo Math fonts for mathematical typesetting with the Palatino fonts*. May, 2002. (Available from CTAN via [/fonts/mathpazo/](#))
- [Rahtz01] Sebastian Rahtz. *Section name references in LaTeX*. January, 2001. (Available from CTAN (the `nameref` package) via [/macros/latex/contrib/hyperref/](#))
- [Rahtz02] Sebastian Rahtz. *Hypertext marks in LaTeX*. May, 2002. Now maintained and frequently updated by Heiko Oberdiek. (Available from CTAN via [/macros/latex/contrib/hyperref/](#))
- [Rec97] Keith Reckdahl. *Using Imported Graphics in LaTeX2e*. December, 1997. Updated in 2006. (Available from CTAN via [/info/epslatex.pdf](#))

- [Rei07] Edward M. Reingold. ‘Writing numbers in words in TeX’. *TUGboat*, 28, 2 pp 256–259, 2007.
- [RBC74] W. W. Rouse Ball and H. S. M. Coxeter. *Mathematical Recreations and Essays*. University of Toronto Press, twelfth edition, 1974.
- [SW94] Douglas Schenck and Peter Wilson. *Information Modeling the EXPRESS Way*. Oxford University Press, 1994. ISBN 0–19–508714–3.
- [SRR99] Rainer Schöpf, Bernd Raichle and Chris Rowley. *A New Implementation of LaTeX’s verbatim and verbatim\* Environments*. December, 1999. (Available from CTAN via [/macros/latex/required/tools/](#))
- [Sch07] Martin Scharrer, *Version Control of LaTeX Documents with svn-multi*. *The PracTeX Journal*, 3, 2007. ISSN 1556-6994.
- [Sch09] Martin Scharrer, *The svn-multi package*, 2009. (Available from CTAN via [/macros/latex/contrib/svn-multi/](#))
- [Sne04] Maarten Sneep. *The atmosphere in the laboratory: cavity ring-down measurements on scattering and absorption*. Phd thesis, Vrije Universiteit, Amsterdam, 2004.
- [Tal06] Nicola L. C. Talbot. *datetime.sty: Formatting Current Date and Time*. December, 2006. (Available from CTAN via [/macros/latex/contrib/datetime/](#))
- [Thi98] Christina Thiele. ‘Hey — it works: Ornamental rules’. *TUGboat*, vol. 19, no. 4, p 427, December 1998.
- [Thi99] Christina Thiele. ‘The Treasure Chest: Package tours from CTAN’, *TUGboat*, vol. 20, no. 1, pp 53–58, March 1999.
- [TJ05] Kresten Krab Thorup, Frank Jensen (and Chris Rowley). *The calc package — Infix notation arithmetic in LaTeX*. August, 2005. (Available from CTAN via [/macros/latex/required/tools/](#))
- [Tob00] Geoffrey Tobin. *setspace.sty*. December, 2000. (Available from CTAN via [/macros/latex/contrib/setspace/](#))
- [Tsc91] Jan Tschichold. *The Form of the Book*. Lund Humphries, 1991. ISBN 0–85331–623–6.
- [Ume99] Hideo Umeki. *The geometry package*. November, 1999. (Available from CTAN in [/macros/latex/contrib/geometry/](#))
- [Wil00] Graham Williams. *The TeX Catalogue*. (Latest version on CTAN as [/help/Catalogue/catalogue.html](#))
- [Wil93] Adrian Wilson. *The Design of Books*. Chronicle Books, 1993. ISBN 0–8118–0304–X.
- [Wil99b] Peter Wilson. *The tocvsec2 package*. January, 1999. (Available from CTAN via [/macros/latex/contrib/tocvsec2/](#))
- [Wil00a] Peter Wilson. *The epigraph package*. February, 2000. (Available from CTAN via [/macros/latex/contrib/epigraph/](#))
- [Wil00b] Peter Wilson. *LaTeX files for typesetting ISO standards*. February, 2000. (Available from CTAN via [/macros/latex/contrib/isostds/iso/](#))

- [Wil00c] Peter Wilson. *The nextpage package*. February, 2000. (Available from CTAN as [/macros/latex/contrib/misc/nextpage.sty](#))
- [Wil00e] Peter Wilson. *The xtab package*. April 2000. (Available from CTAN via [/macros/latex/contrib/xtab](#))
- [Wil01a] Peter Wilson. *The abstract package*. February, 2001. (Available from CTAN via [/macros/latex/contrib/abstract/](#))
- [Wil01d] Peter Wilson. *The ccaption package*. March, 2001. (Available from CTAN via [/macros/latex/contrib/ccaption/](#))
- [Wil01e] Peter Wilson. *The chngcntr package*. April, 2001. (Available from CTAN via [/macros/latex/contrib/chngcntr/](#))
- [Wil01f] Peter Wilson. *The hanging package*. March, 2001. (Available from CTAN via [/macros/latex/contrib/hanging/](#))
- [Wil01g] Peter Wilson. *The titling package*. March, 2001. (Available from CTAN via [/macros/latex/contrib/titling/](#))
- [Wil01h] Peter Wilson. *The tocbibind package*. April, 2001. (Available from CTAN via [/macros/latex/contrib/tocbibind/](#))
- [Wil01i] Peter Wilson. *The tocloft package*. April, 2001. (Available from CTAN via [/macros/latex/contrib/tocloft/](#))
- [Wil03a] Peter Wilson. *The layouts package*. November, 2003. (Available from CTAN in [/macros/latex/contrib/layouts/](#))
- [Wil03b] Peter Wilson. *ledmac: A presumptuous attempt to port EDMAC and TABMAC to LaTeX*. November, 2003. (Available from CTAN via [/macros/latex/contrib/ledmac/](#))
- [Wil04a] Peter Wilson. *The bez123 and multiply packages*, April 2004. (Available from CTAN in [/macros/latex/contrib/bez123/](#))
- [Wil04b] Peter Wilson. *The pagenote package*. September, 2004. (Available from CTAN via [/macros/latex/contrib/pagenote/](#))
- [Wil07a] Peter Wilson. *Some Examples of Title Pages*. Herries Press, 2007. (Available from CTAN via [/info/latex-samples/TitlePages/](#))
- [Wil07e] Peter Wilson. ‘Glisterings’, *TUGboat*, 28(2):229–232, 2007.
- [Wil08a] Peter Wilson. *The changepage package*. March, 2008. (Available from CTAN via [/macros/latex/contrib/changepage/](#))
- [Wil08b] Peter Wilson. ‘Glisterings’, *TUGboat*, 29(2):324–327, 2008.
- [Wil09a] Peter Wilson. *The fonttable package*. April, 2009. (Available from CTAN via [/macros/latex/contrib/fonttable/](#))
- [Wil09b] Peter Wilson (with the assistance of Lars Madsen). *The LaTeX memoir class for configurable book typesetting: source code*. July, 2009. (Available from CTAN via [/macros/latex/contrib/memoir/](#))

- [Wil07c] Peter Wilson (with the assistance of Lars Madsen). *The Memoir Class for Configurable Typesetting — User Guide* August, 2009. Regularly updated. (Available from CTAN via [/macros/latex/contrib/memoir/](#))
- [Wil09d] Peter Wilson. *A Few Notes on Book Design* August, 2009. (Available from CTAN via [/info/memdesign/](#))
- [Wil??] Peter Wilson. *A Rumour of Humour: A scientist's commonplace book*. To be published.
- [Wri18] Joseph Wright. *Siunitx — A comprehensive (SI) units package* May, 2018. (Available from CTAN via [/macros/latex/contrib/siunitx](#))
- [Zan98] Timothy Van Zandt. *Documentation for fancybox.sty: Box tips and tricks for LaTeX*, November, 1998. (Available from CTAN via [/macros/latex/contrib/fancybox/](#))



The first page number is usually, but not always, the primary reference to the indexed topic.

## 마

- Metafont, 35
- `\midbicaption`, 192
- `\midbookskip`, 80
- `\midchapskip` (length), 85, 395
- `midpage` (package), 189
- `\midpartskip`, 80
- `\midPoemTitleskip` (length), 264
- `\midrule`, 216
- `\midsloppy`, 51, 52
- `midsloppypar` (environment), 52
- Miedinger, Max, 39
- Miller & Richard, 39
- Minion, 345
- `minipage`,
  - in float, 172
- `minipage` (environment), 51, 172, 188, 193, 198, 199, 229, 271, 350
- `\miniscule`, 45, 46, 48
- `minus` (keyword), 434
- `\minusname`, 329, 335
- `minus`, 434, 436
- Misplaced &, 447
- Misplaced `\cr`, 447
- Misplaced `\noalign`, 447
- Misplaced `\omit`, 447
- Misplaced `\span`, 447
- Missing { inserted, 448
- Missing = inserted ..., 448
- Missing @-exp ..., 455
- Missing # inserted ..., 448
- Missing \$ inserted, 448
- Missing arg: token ignored, 462
- Missing control sequence inserted, 448
- Missing `\cr` inserted, 447
- Missing delimiter(. inserted), 449
- Missing `\begin{document}`, 455
- Missing `\endcsname` inserted, 448
- Missing `\endgroup` inserted, 448
- Missing `\insert`, 448
- Missing number ..., 449
- Missing p-arg ..., 456
- Missing `\right` inserted, 448
- mixing fonts, 42
- `\mkern`, 100
- `mlargercrownvopaper` (option), 1
- mode, 431
  - display math, 431
  - horizontal, 431
  - internal vertical, 431
  - LR, 407
  - math, 431
  - paragraph, 412
  - picture, 407, 408, 411, 412
  - restricted horizontal, 431
  - vertical, 431
- Modern, 469
- `\morecmidrules`, 217
- `moreverb` (package), 336
- Morison, Stanley, 40
- `\movetoevenpage`, 326
- `\movetooddpage`, 326
- moving argument, 296, 444
- `\mpjustification`, 169
- `ms` (option), 4
- `msmallroyalvopaper` (option), 1
- `\multfootsep`, 230

multicol (package), 157, 175, 272  
 multicol (environment), 157  
 \multicolumn, 211, 223, 455, 456, 463  
 multind (package), 257  
 \multiply, 433–436  
 \multiput, 407, 418, 421, 453  
*myheading* (pagestyle), 113  
*myheadings* (pagestyle), 106–108

## N

\n@me@number, 330  
 name,  
   index, 301  
 named,  
   number, 327, 328  
 \namedlegend, 187–189  
 \namedsubappendices, 78  
 \namenumberand, 329, 330, 335  
 \namenumbercomma, 329, 335  
 \nameref (package), 294  
 \nameref off, 296  
 \nameref on, 296  
 \nametest, 324, 325  
 natbib (package), 298, 300, 310  
 \Needspace, 326  
 \needspace, 257, 268, 326  
 needspace (package), 336  
 \Needspace\*, 326  
 new,  
   counter, 288  
   environment, 288  
 New Baskerville, 469  
 New Century Schoolbook, 3, 16, 40, 63  
 \newarray, 331, 462  
 \newblock, 299  
 \newcolumn type, 208, 210, 211, 222, 465, 466  
 \newcommand, 210, 323, 425, 430, 446  
 \newcommand\*, 324, 449  
 \newcomment, 276  
 \newcount, 432  
 \newcounter, 162, 322, 432, 456  
 \newdimen, 433, 434  
 \newenvironment, 446, 453  
 newfile (package), 336  
 \newfixedcaption, 189

\newfloat, 167, 168, 175  
 \newfootnoteseries, 231, 232  
 \newfootseries, 231  
 \newif, 437  
 \newinputstream, 284, 465  
 \newleadpage, 82, 83  
 \newlength, 434, 435  
 \newline, 77, 451, 457  
 \newlistentry, 162, 163  
 \newlistof, 77, 161, 162  
 \newloglike, 323  
 \newloglike\*, 323  
 \newoutputstream, 284, 466  
 \newpage, 326  
 News Gothic, 469  
 \newsavebox, 271, 412, 421  
 newsgroup, xxiii  
 \newskip, 433–435  
 \news subfloat, 174, 192  
 \newtheorem, 453, 456  
 nextpage (package), 326, 336  
 \nextpageref, 165  
 Nicholas Cochin, 469  
 No array called ..., 462  
 No \author given, 459  
 No counter ... defined, 456  
 No more to read from stream ..., 465  
 No positions in optional float specifier ..., 459  
 No room for a new ..., 456  
 No room for a new read, 284  
 No room for a new write, 284  
 No \title given, 456  
 \noalign, 447  
 \nobibintoc, 297  
 \nobookblankpage, 81, 82  
 \nobvbox, 279–281  
 \NoCaseChange, 54  
 \nochangemarks, 317  
 \nocite, 299  
 \noDisplayskipStretch, 51  
 \nofiles, 427, 428  
 \noglossaryintoc, 314  
 \noindent, 93, 250  
 \noindentafterchapter, 86  
 \noindexintoc, 301  
 \nolimits, 447



\nonzeroparskip, 49  
 \nopartblankpage, 81, 82  
 \noprelistbreak, 321  
 \normalbottomsection, 77  
 \normalcaption, 182  
 \normalcaptionwidth, 183  
 \normalfont, 15, 16, 42, 237  
 \normalmarginpar, 236  
 \normalrulethickness, 117  
 \normalrulethickness (length), 110  
 \normalsize, 44–46, 121, 237  
 \normalsubcaption, 195, 196  
 Not a letter, 449  
 Not defined: ..., 462  
 Not in outer par mode, 456  
 Not redefinable: ..., 463  
 \notedivision, 245, 247, 335  
 \noteidinnotes, 246  
 \notenuminnotes, 246  
 \notenumintext, 245  
 \notepageref, 245, 246  
 \notesname, 245, 335  
 \nouppercaseheads, 107, 112  
*ntgl* (chapterstyle), 91, 103  
*ntgl* (headstyles), 103  
 \nthstring, 328  
 number, 327  
     named, 327, 328  
     numeric, 327  
     representation, 327  
 Number too big, 449  
 numbered lines, 279  
 \numberline, 140, 150, 154, 156, 157  
 \numberlinebox, 150  
 \numberlinehook, 150  
 \NumberPoemTitle, 262, 263  
 numeric,  
     number, 327  
 \NumToName, 328  
 \numtoName, 328  
 \numtoname, 328, 329  
 Nyman, Patrick, 122

## O

\oarg, 340  
 Oberdiek, Heiko, 338

\oddsidemargin (length), 23  
 old-style,  
   Olde English, 469  
 oldfontcommands (option), 5, 462  
 oldpaper (option), 2  
   colorchapnum, 394  
   colorchaptitle, 394  
 \omit, 447  
 onecolabstract (environment), 73  
 \onecolglossary, 314  
 \onecolindex, 301  
 \onecoltocetc, 144, 145  
 onecolumn (option), 4, 145, 167  
 \OnehalfSpacing, 50, 358  
 \OnehalfSpacing\*, 50  
 \onelineskip, 50, 204, 241  
 \onelineskip (length), 50, 333, 378  
 oneside (option), 4, 5, 25, 83  
 Only one column-spec. allowed, 463  
   footnotesinmargin, 240  
   footnotesize, 69  
 \openany, 83, 84  
 openany (option), 4, 66, 83  
 openbib (option), 5, 299  
 \openinputfile, 285  
 \openleft, 83, 84  
 openleft (option), 4, 83  
 \openoutputfile, 285  
 \openright, 83, 84  
 openright (option), 4, 83  
 Opentype, 35  
 Optima, 469  
 option,  
   \*pt, 3, 464  
   10pt, 2, 3, 5, 46  
   11pt, 2, 46  
   12pt, 2, 5, 46  
   14pt, 2, 3, 46, 110  
   17pt, 2, 3, 46, 463  
   20pt, 2, 3, 46  
   25pt, 2, 46, 463  
   30pt, 3, 46  
   36pt, 3, 46  
   48pt, 3, 46  
   60pt, 3, 46  
   9pt, 2, 46  
   a3paper, 1

- a4paper, [1](#), [26](#), [29](#)
  - a5paper, [1](#)
  - a6paper, [1](#)
  - article, [5](#), [77](#), [83](#), [92](#)
  - b3paper, [1](#)
  - b4paper, [1](#)
  - b5paper, [1](#)
  - b6paper, [1](#)
  - broadsheetpaper, [2](#)
  - crownvopaper, [2](#)
  - dbillpaper, [2](#)
  - demyvopaper, [2](#)
  - draft, [4](#), [111](#), [290](#), [317](#)
  - ebook, [1](#), [5](#)
  - executivepaper, [2](#)
  - extrafontsizes, [2](#), [3](#), [48](#), [463](#)
  - final, [4](#), [290](#), [317](#)
  - fleqn, [5](#)
  - foolscapvopaper, [2](#)
  - fullptlayout, [5](#)
  - imperialvopaper, [2](#)
  - landscape, [1](#)
  - largecrownvopaper, [2](#)
  - largepostvopaper, [2](#)
  - ledgerpaper, [2](#)
  - legalpaper, [2](#)
  - leqno, [5](#)
  - letterpaper, [1](#), [2](#), [5](#), [26](#), [29](#)
  - mcrownvopaper, [1](#)
  - mdemyvopaper, [1](#)
  - mediumvopaper, [2](#)
  - mlargecrownvopaper, [1](#)
  - ms, [4](#)
  - msmallroyalvopaper, [1](#)
  - oldfontcommands, [5](#), [462](#)
  - oldpaper, [2](#)
  - onecolumn, [4](#), [145](#), [167](#)
  - oneside, [4](#), [5](#), [25](#), [83](#)
  - openany, [4](#), [66](#), [83](#)
  - openbib, [5](#), [299](#)
  - openleft, [4](#), [83](#)
  - openright, [4](#), [83](#)
  - postvopaper, [2](#)
  - pottvopaper, [2](#)
  - royalvopaper, [2](#)
  - sectionbib, [298](#)
  - showtrims, [4](#), [318](#)
  - smalldemyvopaper, [2](#)
  - smallroyalvopaper, [2](#)
  - statementpaper, [2](#)
  - superroyalvopaper, [2](#)
  - titlepage, [65](#), [71](#)
  - twocolumn, [4](#), [5](#), [71–73](#), [145](#), [167](#)
  - twoside, [4](#), [5](#), [25](#), [33](#), [83](#), [238](#)
  - Option clash for ..., [456](#)
  - Optional argument is not one of: ..., [463](#)
  - Optional argument of \twocolumn ..., [459](#), [465](#)
  - Opus, [469](#)
  - \or, [440](#)
  - \ordinal, [327](#)
  - ordinal,
    - \OrdinalToName, [328](#)
    - \ordinaltoName, [328](#)
    - \ordinaltoname, [328](#)
    - \ordscript, [327](#), [328](#)
  - orphan
    - line, [52](#), [53](#)
  - postbibhook, [298](#)
  - postnotetext, [247](#)
  - outline,
    - font, [35](#), [44](#), [48](#)
  - \output, [449](#)
  - Output loop ..., [449](#)
  - Output stream ... is already defined, [466](#)
  - Output stream ... is not open, [466](#)
  - Output stream ... is open, [466](#)
  - \oval, [417](#), [418](#), [459](#)
  - oval, *see also* picture object
    - reference point, [417](#)
  - \oval, \circle, or \line size unavailable, [459](#)
  - Overfull \hbox ..., [449](#)
  - overfull lines, [51–52](#)
  - Overfull \vbox ..., [449](#)
  - overfull, [431](#)
  - \overridescapmargin, [198](#)
  - \overridesidecapmargin, [462](#)
- ## P
- p (position argument), [168](#), [175](#), [180](#)
  - package, , [xxiii](#), [72](#), [288](#), [351](#), [352](#)
    - abstract, [71](#), [336](#)

afterpage, 164, 189  
alltt, 255, 375  
amsmath, 375  
amsfonts, 455  
answer, 292  
appendix, 336  
array, 205, 206, 336  
bidi, 342, 343  
bookmark, 165  
booktabs, 205, 216, 336  
bringhurst, 352  
calc, 24, 26, 239, 399, 400  
caption, 203, 204  
ccaption, 181, 336  
changepage, 325  
chapterbib, 298  
chngcntr, 322, 336  
chngpage, 129, 325  
color, 91, 272, 375  
comment, 277  
crop, 336, 397  
datetime, 321  
dcolumn, 205, 208, 336  
delarray, 205, 336  
endnotes, 243  
enumerate, 132, 336  
enumitem, 133, 134  
epigraph, 249, 336  
eso-pic, 399  
etex, 375  
etoolbox, 133, 399  
fancybox, 273  
fancyhdr, 106, 336  
fixltx2e, 116, 375  
flafter, 176  
fontenc, 375  
fonttable, 376  
footmisc, 230, 232  
framed, 272, 275, 336  
geometry, 7, 336  
graphicx, 90, 91, 375, 387, 388, 391, 396  
hanging, 122  
hyperref, 145, 149, 156, 159, 160, 165,  
194, 246, 294, 303, 304, 338, 340  
ifetex, 332  
ifmtarg, 336  
ifpdf, 332, 336  
ifxetex, 333  
index, 257, 336, 337  
jurabib, 300  
latexsym, 375, 455  
layouts, 29, 147, 376  
ledmac, 230, 232  
lmodern, 3  
longtable, 225  
makebst, 300  
makeidx, 336  
mathpazo, 16  
memhfixc, 338  
memsty, 158, 312, 376  
midpage, 189  
moreverb, 336  
multicol, 157, 175, 272  
multind, 257  
nameref, 294  
natbib, 298, 300, 310  
needspace, 336  
newfile, 336  
nextpage, 326, 336  
pagenote, 336  
parskip, 336  
patchcmd, 324, 336  
pifont, 41, 100, 375  
placeins, 176  
ragged2e, 169  
sectsty, 75  
setspace, 50, 336  
shortvrb, 278, 336  
showidx, 336  
sidecap, 183, 336  
siunitx, 208  
subfigure, 192, 336  
tabularx, 205, 336  
tccolorbox, 272, 281  
textcase, 53, 472  
titleref, 294, 296, 336  
titlesec, 75, 336  
tocbibind, 139, 336  
tocloft, 139, 336  
tocvsec2, 79, 145  
url, 358, 375  
verbatim, 278, 336  
verse, 336  
wrapfig, 199

- xcolor, 272, 375
- xtab, 225
- packages before class, 16
- pag (fontfamily), 38
- page, 12
  - break, 225
  - current number, 293
  - height, 12, 17, 19
  - location, 22
  - of floats, 떠다니는 개체뿐인  
페이지, 117
  - reference, 294
  - size, 8, 12, 22
  - specifying size, 12, 20
  - width, 12, 17, 18
- page break,
  - asynchronous, 427
- page color, 5
- page (counter), 105
- Page height already too large, 456
- page layout, 7, 22
  - change, 360
  - check parameters, 23
  - class parameters, 8, 22, 25
  - default, 7
  - design, 8
  - LaTeX parameters, 8
  - LaTeX parameters, 22, 25
  - parameters, 23
- \pageaiai, 1
- \pageaiv, 1
- \pageav, 1
- \pageavi, 1
- \pagebiii, 1
- \pagebiv, 1
- \pagebroadsheet, 2
- \pagebv, 1
- \pagebvi, 1
- \pagecrownvo, 2
- \pagedbill, 2
- \pagedemyvo, 2
- \pageexecutive, 2
- \pagefoolscapvo, 2
- \pageimperialvo, 2
- \pageinnotes, 246
- \pagelargecrownvo, 2
- \pagelargepostvo, 2
- \pageledger, 2
- \pagelegal, 2
- \pageletter, 2
- \pagemdemyvo, 1
- \pagemediumvo, 2
- \pagemetriccrownvo, 1
- \pagemlargecrownvo, 1
- \pagemsmallroyalvo, 1
- \pagename, 335
- \pagenote, 243, 245, 247, 248
- pagenote (counter), 245, 247
- pagenote (package), 336
- \pagenotesubhead, 247
- \pagenotesubheadstarred, 247
- \pagenumbering, 105
- \pagenumbering\*, 105
- \pageold, 2
- \pagepostvo, 2
- \pagepottvo, 2
- \pageref, 164, 165, 293, 459, 460
- \pagerefname, 246, 294, 335
- \pageroyalvo, 2
- \pagesmalldemyvo, 2
- \pagesmallroyalvo, 2
- \pagestatement, 2
- \pagestyle, 86, 106, 110, 146, 162
- pagestyle, 7
  - asu, 360
  - book, 107
  - chapter, 77, 83, 107, 146
  - class, 106
  - cleared, 107
  - combining, 117
  - companion, 107, 114, 115, 117, 377
  - empty, 65, 83, 106, 107, 109, 111, 146,  
360, 361
  - epigraph, 107, 253
  - float pages, 116–119
  - floatcomp, 117
  - heading, 106
  - headings, 7, 106, 107, 111, 114
  - index, 116
  - index pages, 116
  - myheading, 113
  - myheadings, 106–108
  - part, 107

- plain*, 64, 66, 106–108, 111, 117, 252, 360, 361
- Ruled*, 106, 107
- ruled*, 7, 106
- section*, 87
- showlocs*, 119, 318
- simple*, 106
- specifying, 116
- title*, 64, 107
- titlingpage*, 65, 107
- \pagesuperroyalvo, 2
- \pagetofootnote, 248
- pagination, 105
  - changing, 105
  - interrupt, 105
- Palatino, 15, 16, 35, 40, 469
- paper, 1, 8, 27, 164
  - end, 154
  - size, 1
    - A3, 1
    - A4, 1, 26, 130
    - A5, 1
    - A6, 1
    - B3, 1
    - B4, 1
    - B5, 1
    - B6, 1
  - broadsheet, 2
  - crown octavo, 2
  - demy octavo, 2
  - dollar bill, 2
  - executive, 2
  - foolscap octavo, 2
  - imperial octavo, 2
  - large crown octavo, 2
  - large post octavo, 2
  - ledger, 2
  - legal, 2
  - letterpaper, 1, 2, 26, 130, 346
  - medium octavo, 2
  - metric crown octavo, 1
  - metric demy octavo, 1
  - metric large crown octavo, 1
  - metric small royal octavo, 1
  - old, 2
  - post octavo, 2
  - pott octavo, 2
  - royal octavo, 2
  - small demy octavo, 2
  - small royal octavo, 2
  - statement, 2
  - super royal octavo, 2
  - stock, 8
- \paperheight and/or \trimtop are too large ..., 463
- \paperheight (length), 12, 22, 23, 463, 464
- \paperwidth, 18
- \paperwidth and/or \trimedge are too large ..., 463
- \paperwidth (length), 12, 22, 23, 130, 346, 463
- \par, 160, 444, 449
- \paragraph, 76, 79, 97, 148, 334
- paragraph, 5, 121–124, 130, 153, 255, 345, 348
  - block, 96, 121, 182, 349
    - reasons against, 121
  - hanging, 95, 96, 122–123, 130, 349
    - in list, 122
  - indentation, 72, 98, 99, 121, 124, 182, 250
  - mode, 412
  - outdentation, 121
  - typeset as a unit, 121, 122, 124
- paragraph break,
  - invisible, 238
- Paragraph ended before ..., 449
- paragraph indentation, 49
- \paragraphfootnotes, 231
- \paragraphfootstyle, 231
- \paraheadstyle, 102
- parallel texts, 226
- \parbox, 97, 206, 222
- \parfillskip, 153
- \parg, 340
- \parindent (length), 16, 49, 121, 124, 126, 207
- \parnopar, 238
- \parsep (length), 299
- \parshape, 130, 257
- parskip (package), 336
- \parskip (length), 49, 50, 121, 147, 201

- \part, [5](#), [76](#), [79–83](#), [107](#), [147](#), [148](#), [150](#), [151](#),  
[155](#), [156](#), [253](#), [335](#), [339](#), [401](#)
- part, [140](#), [142](#), [143](#)
  - 부분, [76](#)
- part (pagestyle), [107](#)
- \part\*, [339](#)
- \partblankpage, [81](#)
- \partmark, [81](#), [83](#)
- \partname, [81](#), [335](#)
- \partnamefont, [80](#), [81](#), [102](#)
- \partnamenum, [80](#), [81](#)
- \partnumberline, [150](#)
- \partnumberlinebox, [150](#)
- \partnumberlinehook, [150](#)
- \partnumfont, [80](#), [81](#), [102](#)
- \partopsep (length), [137](#)
- \partpageend, [81](#), [82](#)
- \partrefname, [294](#), [335](#)
- \parttitlefont, [81](#), [102](#)
- de Parville, Henri, [438](#)
- \patchcmd, [462](#), [463](#)
- patchcmd (package), [324](#), [336](#)
- \patchcommand, [324](#)
- patverse (environment), [259](#), [261](#), [267](#),  
[331](#), [461](#)
- patverse\* (environment), [261](#), [262](#), [461](#)
- pbk (fontfamily), [39](#)
- pcr (fontfamily), [39](#)
- \Pcstyle, [377](#)
- pdf (file), [284](#)
- pdfLaTeX, [332](#), [333](#)
- pedersen (chapterstyle), [75](#), [91](#), [103](#), [393](#)
- Pedersen, Troels, [91](#)
- period, *see also* full stop
- \pfbreak, [99](#)
- \pfbreak\*, [99](#)
- \pfbreakdisplay, [99](#)
- \pfbreakskip (length), [99](#)
- \phantomsection, [145](#)
- Phemister, Alexander, [39](#)
- phv (fontfamily), [39](#)
- picture, [405](#)
  - box, [406](#)
  - mode, [407](#), [408](#), [411](#), [412](#)
  - zero-sized, [407](#)
- picture (environment), [405–409](#), [419](#),  
[428](#), [453](#), [459](#)
- picture object, [407](#)
  - Bezier curve, *see also* Bezier curve
  - box, [408](#)
  - circle, *see also* circle
  - dashed box, [409](#)
  - frame, [410](#)
  - framed box, [408](#)
    - text position, [408](#)
  - line, *see also* line
  - oval, *see also* box, rounded
  - picture, [419](#)
  - regular pattern, [418](#)
  - stack, [411](#)
  - text, [407](#)
  - two-dimensional pattern, [421](#)
  - unframed box, [409](#)
    - text position, [409](#)
    - zero size, [409](#)
  - vector, *see also* vector
- pifont (package), [41](#), [100](#), [375](#)
- pilcrow (¶), [133](#)
- placeins (package), [176](#)
- plain (pagestyle), [64](#), [66](#), [106–108](#), [111](#),  
[117](#), [252](#), [360](#), [361](#)
- \plainbreak, [98](#), [99](#)
- \plainbreak\*, [98](#)
- \plainfancybreak, [99](#)
- \plainfancybreak\*, [99](#)
- \plainfootnotes, [231](#)
- \plainfootstyle, [231](#)
- \PlainPoemTitle, [262](#), [263](#), [265](#)
- plates, [164](#)
- Please type a command ..., [450](#)
- plus (keyword), [434](#)
- plus, [434](#), [436](#)
- \pmname, [321](#)
- \pmname, [321](#), [335](#)
- pnc (fontfamily), [40](#)
- \pnchap, [247](#)
- \pnschap, [247](#)
- poem,
  - author, [265](#)
- poem title, [263–265](#)
  - in ToC, [263](#), [265](#)
  - styling, [267](#)
- poemline (counter), [262](#)
- \PoemTitle, [262](#), [263](#), [339](#)

\poemtitle, 265, 294, 339  
 \PoemTitle\*, 263  
 \PoemTitlefont, 264  
 \PoemTitleheadstart, 263, 264  
 \poemtitlemark, 263  
 \PoemTitlenumfont, 264  
 \poemtitlepstyle, 263  
 \poemtitlestarmark, 263  
 \poemtitlestarpstyle, 263  
 \poemtoc, 263, 265  
 pool size, 453  
 \poptabs, 456  
 \postauthor, 64  
 \postbibhook, 298  
 \postcaption, 183, 192  
 \postchapterprecis, 92  
 \postdate, 64  
 \postnoteinnotes, 246  
 \postnotetext, 246  
 PostScript, 35, 469  
 PostScript, 포스트스크립트, 35  
 \posttitle, 64  
 postvopaper (option), 2  
 pottvopaper (option), 2  
 uppercaseheads, 107  
 ppl (fontfamily), 40  
 \Ppstyle, 376, 377  
 preamble, 5, 27, 69, 79, 116, 143, 147, 151,  
     183, 235, 288, 300, 351, 352, 376,  
     454, 458  
 \preauthor, 64  
 \prebibhook, 254, 298  
 \precaption, 183, 192  
 \prechapterprecis, 92  
 \prechapterprecisshift (length), 92  
 \precisfont, 92  
 \precistocfont, 92, 93, 156  
 \precistocformat, 92, 93, 156  
 \precistoctext, 92, 93, 156  
 \predate, 64  
 \Pref, 294, 335  
 \pref, 294, 335  
 \preglossaryhook, 314  
 \preindexhook, 254, 301  
 \prenoteinnotes, 246  
 \prenotetext, 246, 247  
 \prettitle, 64

\printanswer, 290  
 \printanswers, 290  
 \printbookname, 80  
 \printbooknum, 80, 81  
 \printbooktitle, 81  
 \printchaptername, 85, 88  
 \printchapternonum, 86, 88  
 \printchapternum, 85  
 \printchaptertitle, 86, 146, 348  
 \printfibterm, 439, 440  
 \printfigures, 289  
 \printglossary, 311, 316  
 \printindex, 300, 301  
 \printpageinnotes, 246  
 \printpageinnoteshyperref, 246  
 \printpagenotes, 243, 245  
 \printpagenotes\*, 243–245, 247  
 \printpartname, 80, 81  
 \printpartnum, 80, 81  
 \printparttitle, 81  
 \printPoemTitlenonum, 263, 264  
 \printPoemTitlenum, 263, 264  
 \printPoemTitletitle, 263, 264  
 \printtime, 321  
 \printtime\*, 321  
 \printXtitle, 146  
 \priorpageref, 165  
 program,  
     BibTeX, 299, 300  
     MakeIndex, 304, 306, 307, 309–313,  
         316, 377  
     xindy, 304  
 proportion  
     book, 8  
     margin, 17  
     typeblock, 13  
 \protect, 55, 101, 142, 143, 157, 203, 247,  
     285, 287, 296, 444  
 protect, 101, 291  
 \providecommand, 323, 430, 446  
 \providecommand\*, 430  
 \providecounter, 323, 465  
 \provideenvironment, 323, 465  
 \providexcaption, 189  
 \providelength, 323, 465  
 \provideloglike, 323  
 \provideloglike\*, 323

pseudo (counter), 288, 289  
 psnfss, 15, 35  
 \pstyle, 376, 377  
 psy (fontfamily), 41  
 ptm (fontfamily), 40  
 \published, 65  
 \pushtabs, 456  
 \pushtabs and \poptabs don't match,  
     456  
 \put, 407, 413, 415, 418  
 put (fontfamily), 40  
 \pwayii (length), 349, 350  
 \pwayi (length), 349, 350  
 pzc (fontfamily), 41  
 pzd (fontfamily), 41

## Q

\qbezier, 407, 421, 423, 453  
 \qbeziermax, 422, 423  
 qfame (environment), 276  
 qframe (environment), 276  
 \qitem, 249, 250  
 qshade (environment), 276  
 \quarkmarks, 319, 321  
 question (counter), 292  
 questions and answers, 289–292  
 \quietref, 291  
 quotation, 121, 124, 249, 251, 252  
 quotation (environment), 71, 124, 129,  
     131, 134, 276, 457  
 quote (environment), 92, 124, 129, 131,  
     134

## R

r (position argument), 226, 227, 409, 411,  
     418  
 ragged2e (package), 169  
 \raggedbottom, 5, 52, 77, 230, 326  
 \raggedbottomsection, 77  
 \raggedleft, 123, 124, 182, 195, 199, 222,  
     342  
 raggedleft, 123  
 \raggedright, 123, 124, 182, 195, 199,  
     222, 342  
 raggedright, 123, 239

\raggedrightthenleft, 128  
 \raggedyright, 123, 124  
 \ragrparindent (length), 123, 124  
 ranging,  
   \readaline, 286  
   \readboxedverbatim, 286  
   \readboxedverbatim\*, 286  
   \readstream, 286  
   \readverbatim, 286  
   \readverbatim\*, 286  
 Redefining primitive column ..., 466  
 \ref, 54, 194, 289, 291–293, 459, 460  
 reference,  
   by name, 294–296  
   by number, 293–294  
   current value, 293  
   set current value, 293, 294  
   to appendix, 294  
   to book, 294  
   to chapter, 294  
   to counter, 303  
   to figure, 294  
   to label, 293  
   to page, 293, 294, 303  
   to part, 294  
   to section, 294  
   to table, 294  
   unexpected result, 293, 295  
 Reference ... on page ..., 460  
 reference mark, *see also* endnote mark,  
     footnote mark, 235  
 reference point, 407  
   box, 408  
   circle, 415  
   line, 413  
   oval, 417  
   stack, 411  
   text, 407  
   vector, 415  
 \refstepcounter, 290, 293, 294, 432  
 registered trademark, 334  
 \registrationColour, 319  
 \relax, 112, 433  
 \renewcommand, 88, 110, 140, 149–151,  
     188, 201, 285, 322, 324, 325, 423,  
     430, 446  
 \renewcommand\*, 198, 324, 430



\renewenvironment, 446  
 \renewfixedcaption, 189  
 \renewleadpage, 82, 83  
*reparticle* (chapterstyle), 87  
 \repeat, 440  
 report (class), 64, 71, 88, 101, 142  
 \reportnoidxfile, 301  
 representation,  
     number, 327  
 \RequireAtEndClass, 337, 338  
 \RequireAtEndPackage, 337  
 \RequirePackage, 16, 456  
 \RequirePackage or \LoadClass in Op-  
     tions Section, 456  
 \RequireXeTeX, 333  
 \resetbvlinenumber, 281  
 \resizebox, 396  
 \restorepagenumber, 105  
 \restoretrivseps, 137  
 \reversemarginpar, 236  
 \right, 212, 213, 445, 448  
 \rightmark, 107, 108, 111, 113, 114, 116  
 \rightskip, 342  
 \rmfamily, 42  
 roman numerals, 105  
 Roman, 105  
 roman, 105  
 Rosslaire, 469  
 royalvopaper (option), 2  
 RTL, 342  
 rule,  
     in margin, 273  
     invisible, 117  
     thickness, 20, 110, 117  
 ruled,  
     float, 170  
*Ruled* (pagestyle), 106, 107  
*ruled* (pagestyle), 7, 106  
 Runaway argument, 450  
 Runaway definition, 450  
 Runaway preamble, 450  
 Runaway text, 450  
 running BibTeX, 300  
 \russianpar, 126

## S

Sabon, 469  
 save stack size, 453  
 \savebox, 271, 412, 421  
 \savepagenumber, 105  
 \savetrivseps, 137  
 Savoy, 469  
 \saythanks, 73  
 \sbox, 271, 412, 413, 421  
 \scapmargleftfalse, 196  
 \scapmarglefttrue, 196  
 Schnittger, 469  
 Schusterjungen, *see* orphan  
 scrbook (class), 90, 103  
 Script  
     type, 41  
 \scriptsize, 45, 46  
 \scshape, 42  
 \secheadstyle, 102  
 secnumdepth (counter), 79  
 secnumdepth (counter), 77, 79  
 \section, 5, 76–79, 87, 95, 96, 98, 115, 142,  
     148, 157, 239, 293, 295, 296, 339,  
     349, 400  
 section, *see also* subhead  
*section* (chapterstyle), 87, 88  
*section* (pagestyle), 87  
 \section\*, 76  
 sectional division, *see also* subhead  
     level number, 79  
 sectionbib (option), 298  
 \sectionmark, 108, 113, 114  
 \sectionrefname, 294, 335  
 sectsty (package), 75  
 \see, 306, 335  
 \seealso, 306, 335  
 \seename, 306, 335  
 \semiisopage, 29  
 Serifa, 470  
 Serific, 470  
 \setafterseccskip, 348  
 \setafterSskip, 95  
 \setarrayelement, 331  
 \setbeforeseccskip, 348  
 \setbeforeSskip, 93  
 \setbiblabel, 299  
 \setbinding, 19, 22  
 \setbvlinenums, 281

---

\setcolsepandrul, 20  
\setcounter, 105, 139, 287, 322, 432, 453, 456, 463  
\setDisplayskipStretch, 51  
\setfloatadjustment, 168, 169  
\setFloatBlockFor, 176  
\setfloatlocations, 175  
\setFloatSpacing, 50  
\setfootins, 22, 236  
\sethangfrom, 95, 96, 349  
\setheaderspaces, 21, 22  
\setheadfoot, 20–22  
\setlength, 8, 22, 72, 85, 110, 134, 148, 149, 198, 201, 250, 251, 258, 368, 400, 405, 435  
\setlist, 133  
\setlrmargins, 17, 19, 22  
\setlrmarginsandblock, 16, 18, 22  
\setlrxvchars, 15  
\setmarginfloatcaptionadjustment, 169  
\setmarginnotes, 21, 22, 196, 236, 237, 240, 467  
\setmpjustification, 169  
\setpagebl, 29  
\setpagebm, 32  
\setpagebr, 32  
\setpagecc, 13, 32  
\setpageml, 29  
\setpagemr, 32  
\setPagenoteSpacing, 50  
\setpagetl, 29  
\setpagetm, 32  
\setpagetr, 32  
\setpageXX, 32  
\setparahook, 98  
\setpnumwidth, 147, 151  
\setrmarg, 147  
\setseheadstyle, 348  
\setsecnumdepth, 79, 145, 463  
\setsecnumformat, 78, 96, 98  
\setSheadstyle, 95  
\setShook, 96  
\setsidcaps, 196  
\setsidebarheight, 239, 240  
\setsidebars, 240  
\setsidecapps, 196, 197, 462  
\setsidecaps, 196  
\setsidefeet, 241  
\setsidefootheight, 241  
\setSindent, 95  
\setSingleSpace, 50  
setspace (package), 50, 336  
\setstocksize, 8, 12, 22  
\setsubseheadstyle, 349  
\setsubsehook, 96  
\settocdepth, 139, 145, 158, 351, 404, 463, 466  
\settocpreprocessor, 156  
\settodepth, 436  
\settoheight, 436  
\settowidth, 436  
\settrimes, 22  
\settrimmedsize, 8, 12, 16, 22, 29  
\settrims, 12  
\settypeblocksize, 16, 17, 22, 324  
\settypeoutlayoutunit, 25  
\setulmargins, 17, 19, 21, 22  
\setulmarginsandblock, 16, 19, 20, 22  
\setupmaintoc, 160  
\setupparasubsecs, 159, 161  
\setupshorttoc, 158  
\setverbatimfont, 278, 358  
\setverselinenum, 262  
\setxlvchars, 15  
\sffamily, 42, 202  
\sfseries, 345  
shaded (environment), 272, 273, 276  
sheet, 8  
sheetsequence (counter), 320  
\Shook, 96  
\shortstack, 411  
\shortsubcaption, 195, 196  
shortvrb (package), 278, 336  
\showcols, 211  
\showheadfootlocoff, 119  
showidx (package), 336  
\showindexmarks, 303  
showlocs (pagestyle), 119, 318  
\showtextblockoff, 119  
showtrims (option), 4, 318  
\showtrimsoff, 318  
\showtrimson, 318  
side footnote

text, 242  
 side note, 237  
   adjust position, 237  
   text for particular margin, 238  
`\sidebar`, 238–240  
 sidebar, 238, 394  
   styling, 239  
`\sidebarfont`, 239, 240  
`\sidebarform`, 239  
`\sidebarhsep` (length), 239, 240  
`\sidebarmargin`, 238, 239  
`\sidebartopsep` (length), 239, 240  
`\sidebarvsep` (length), 239, 240  
`\sidebarwidth` (length), 239, 240  
 sidecap (package), 183, 336  
`\sidecapfloatwidth`, 198  
`\sidecapmargin`, 196, 198, 464  
`\sidecapraise` (length), 198  
`\sidecapsep` (length), 196, 198  
`\sidecapstyle`, 197  
`\sidecaption`, 464  
 sidecaption (environment), 196, 197, 199  
`\sidecapwidth` (length), 196  
 sidecontcaption (environment), 197  
`\sidefootadjust`, 241  
`\sidefootadjust` (length), 241  
`\sidefootnote`, 241  
`\sidefootfont`, 241  
`\sidefootform`, 242  
`\sidefoothsep`, 241  
`\sidefoothsep` (length), 241  
`\sidefootmargin`, 241  
`\sidefootmarksep` (length), 242  
`\sidefootmarkstyle`, 242  
`\sidefootmarkwidth` (length), 242  
`\sidefootnote`, 241  
`\sidefootnotemark`, 241  
`\sidefootnotetext`, 241  
`\sidefootparindent` (length), 242  
`\sidefoottextfont`, 242  
`\sidefootvsep`, 241  
`\sidefootvsep` (length), 241  
`\sidefootwidth`, 241  
`\sidefootwidth` (length), 241  
 sidelegend (environment), 197  
 sidenamedlegend (environment), 197

`\sidepar`, 237, 238, 240  
`\sideparfont`, 237  
`\sideparform`, 237  
`\sideparmargin`, 237–239  
`\sideparvshift` (length), 237  
*simple* (pagestyle), 106  
 single column,  
   index, 300, 301  
`\SingleSpacing`, 50  
`\SingleSpacing*`, 50  
 siunitx (package), 208  
`\sist@cn`, 433  
 size,  
   page, 8, 12, 22  
   paper, 1  
   stock, 1, 8, 12, 22  
   typeblock, 22  
 Size substitutions ..., 460  
`\skip`, 433–435, 456  
`\slashfrac`, 330  
`\slashfracstyle`, 330  
 Slimbach, Robert, 40  
 slope, 413, 414  
   line, 413  
   vector, 415  
`\sloppy`, 51, 52, 451  
`\sloppybottom`, 52  
 sloppypar (environment), 51  
`\slshape`, 42  
`\small`, 45, 46, 121, 134, 168, 222, 251, 282, 345, 378  
 smalldemyvopaper (option), 2  
 smallroyalvopaper (option), 2  
 snugshade (environment), 272, 273  
 snugshaded (environment), 272  
 Some shapes ..., 460  
 Something's wrong ..., 456  
 Sorry, but I'm not ..., 450  
 source2e.tex (file), 430  
`\sourceatright`, 124  
*southall* (chapterstyle), 91, 394  
 space,  
   at start of paragraph, *see* paragraph indentation  
   between lines, *see* leading  
   double, *see* (ouble spacing)i  
   gobble, 290

- inter-paragraph, 49
- interword, 51–52
- \spacefactor, 451
- \span, 445, 447
- \specialindex, 303
- \specialrule, 217
- \spinemargin and/or \textwidth  
and/or \foremargin are too  
large ..., 463
- \spinemargin (length), 22, 23, 130, 463
- spread, 8, 17
- \Sref, 294, 335
- stack
  - reference point, 411
- stacking
  - text, 411
  - vertical spacing, 412
- stanza,
  - end, 255
  - indent alternate lines, 261, 265
  - indent pattern, 261, 269
  - last line, 258
    - numbering, 258
  - line break, 259, 267
    - indent, 259
  - long line, 266
  - number, 262, 268
  - prevent page break, 258
  - space, 258
- \stanzaskip (length), 258
- start new page, 189
- statementpaper (option), 2
- \stepcounter, 432
- stock, 4, 7, 8, 12, 21, 22, 26, 346
  - commercial printing, 8
  - default, 1
  - height, 8
  - paper, 8
  - size, 1, 8, 12, 22
    - A3, 1
    - A4, 1, 8
    - A5, 1
    - A6, 1
    - B3, 1
    - B6, 1
  - broadsheet, 2
  - crown octavo, 2
  - demy octavo, 2
  - dollar bill, 2
  - ebook, 1
  - executive, 2
  - foolscap octavo, 2
  - imperial octavo, 2
  - large crown octavo, 2
  - large post octavo, 2
  - ledger, 2
  - legal, 2
  - letterpaper, 1, 2, 8
  - medium octavo, 2
  - metric crown octavo, 1
  - metric demy octavo, 1
  - metric large crown octavo, 1
  - metric small royal octavo, 1
  - old, 2
  - post octavo, 2
  - pott octavo, 2
  - royal octavo, 2
  - small demy octavo, 2
  - small royal octavo, 2
  - statement, 2
  - super royal octavo, 2
  - specifying size, 8, 22
  - specifying trimming, 12
  - trimmed, 8, 12
  - width, 8
- stock paper size option, 8, 12
- \stockaiii, 1
- \stockaiv, 1
- \stockav, 1
- \stockavi, 1
- \stockbiii, 1
- \stockbiv, 1
- \stockbroadsheet, 2
- \stockbv, 1
- \stockbvi, 1
- \stockcrownvo, 2
- \stockdbill, 2
- \stockdemyvo, 2
- \stockexecutive, 2
- \stockfoolscapvo, 2
- \stockheight (length), 22, 23, 463
- \stockimperialvo, 2
- \stocklargecrownvo, 2
- \stocklargepostvo, 2

\stockledger, 2  
 \stocklegal, 2  
 \stockletter, 2  
 \stockmdemyvo, 1  
 \stockmediumvo, 2  
 \stockmetriccrownvo, 1  
 \stockmlargecrownvo, 1  
 \stockmsmallroyalvo, 1  
 \stockold, 2  
 \stockpostvo, 2  
 \stockpottvo, 2  
 \stockroyalvo, 2  
 \stocksmalldemyvo, 2  
 \stocksmallroyalvo, 2  
 \stockstatement, 2  
 \stocksuperroyalvo, 2  
 \stockwidth (length), 22, 23, 346, 463  
 \stop, 450  
 stream, 284–292  
     check open, 285  
     close input, 285  
     close output, 285  
     input, 284, 285  
     limited number, 284  
     new input, 284  
     new output, 284  
     output, 284, 285, 289, 290  
 Stream ... is not open, 466  
 \strictpagecheck, 129, 236, 325  
 \strictpagecheck, 198  
 \stringtoarray, 331  
 \strip@pt, 349  
 Struktor, 469  
 \strut, 111  
 strut, 412  
 subappendices (environment), 78  
 \subbottom, 174, 193  
 \subcaption, 174, 193  
 \subcaptionfont, 195  
 \subcaptionlabelfont, 195  
 \subcaptionref, 194  
 \subcaptionsize, 195  
 \subcaptionstyle, 195  
 \subconcluded, 194  
 subfigure (package), 192, 336  
 subhead  
     소제목, 75

\subitem, 303  
 \subparagraph, 334  
 \subparagraph, 76, 79, 95, 148  
 \subparaheadstyle, 102  
 \subseheadstyle, 102  
 \subsection, 76, 79, 95, 96, 98, 148, 159, 339, 400  
 \subsubitem, 303  
 \subsubseheadstyle, 102  
 \subsubsection, 76, 79, 95, 148  
 \subtop, 174, 193  
 Suggested extra height ..., 456  
 superroyalvopaper (option), 2  
 superscript, 334  
 \suppressfloats, 176  
 Symbol, 41, 375  
 symbol, 334  
 symbols (environment), 136  
 \symbolthanksmark, 67  
 Syntax, 345, 469  
 syntax (environment), 377

## T

t (position argument), 168, 175, 180, 409, 418  
 Tab overflow, 457  
 tabbing (environment), 454, 456, 457  
 \tabcolsep (length), 224  
 table, 117, 142, 163, 167, 171, 181, 185, 187–189, 192, 345, 351  
     column  
         cut-in head, 214  
         decked head, 214  
         head, 214  
         spanner head, 214  
         spanner rule, 214  
         stub, 214  
     half and half, 216  
     long, 225  
     reference, 294  
     row fill, 218–219  
     rule, 215–218  
         horizontal, 214  
         vertical, 214  
     subtable, 192–196

- table (environment), 167, 169, 187, 188, 226, 454
- \tablename, 167, 188, 335
- \tableofcontents, 77, 107, 139, 140, 142, 144, 147, 160, 335, 428
- \tableofcontents\*, 139, 144, 403
- \tablerefname, 294, 335
- \tabsoff, 278, 279
- \tabson, 278
- tabular, 220–223, 445
  - automatic, 226–228
    - by column, 227
    - by row, 226
    - column style, 227
    - column width, 227
    - position, 227
    - table width, 227
  - column width, 220, 221
  - continuous, 225
    - position, 225
  - controlling width, 220
  - free, 225–228
    - caption, 226
  - intercolumn space, 220, 221, 224
  - new column type, 222
  - raggedright, 222
  - row spacing, 224
  - rule, 220
  - vertical position, 224
  - X column, 220, 222
- tabular (environment), 172, 199, 205, 207, 211, 220–222, 224, 225, 229, 377, 445, 447, 448, 453, 455, 456, 461, 462
- tabular\* (environment), 205, 220–222, 224
- tabularx (environment), 205, 220–223, 466
- tabularx (package), 205, 336
- \tabularxcolumn, 222
- Tahoma, 353, 369
- tandh (chapterstyle), 91, 103
- tandh (headstyles), 103
- tcolorbox (package), 272, 281
- \tensunitsep, 329
- TeX,
  - error, 444–453
    - warning, 444–452
- TeX capacity exceeded ..., 450, 452–453
- tex (file), 284
- text,
  - Text line contains ..., 450
- Text page ... contains only floats, 460
- \textasteriskcentered, 133
- \textbf, 41
- \textbullet, 132
- textcase (package), 53, 472
- \textendash, 133
- \textfloatsep (length), 179, 181
- \textfraction, 179, 180
- \textheight (length), 16, 22–24, 239, 240, 464
- \textit, 41
- \textmd, 41
- \textperiodcentered, 133
- \textregistered, 334
- \textrm, 41
- \textsc, 41
- \textsf, 41
- \textsl, 41
- \textsubscript, 330, 331
- \textsuperscript, 334
- \textsuperscript, 330, 331
- \texttrademark, 334
- \texttt, 41
- \textup, 41
- \textwidth, 5
- textwidth, 15
- \textwidth (length), 16–18, 22, 23, 110, 130, 225, 463
- \thanks, 57, 65, 67–69, 73, 231, 232, 465
- thanks, 67
  - styling, 67–69
- \thanksfootmark, 68, 69
- \thanksheadextra, 67
- \thanksmark, 68
- \thanksmarksep (length), 68
- \thanksmarkseries, 67
- \thanksmarkstyle, 68
- \thanksmarkwidth (length), 68
- \thanksrule, 69
- \thanksscript, 69
- That makes 100 errors ..., 450
- thatcher (chapterstyle), 91

- Thatcher, Scott, 91
- `\the`, 433, 434, 436
- The ... font command is deprecated ..., 466
- The ‘extrafontsizes’ option ..., 463
- The combination of argument values ..., 463
- The counter will not be printed ..., 466
- The file needs format ..., 457
- `\theauthor`, 66, 67
- `\thebibliography`, 335
- `thebibliography` (environment), 107, 297, 298, 314, 456, 465
- `\thechapter`, 287
- `\thectr`, 322
- `\thedata`, 66, 67
- `\theglossary`, 335
- `theglossary` (environment), 311, 314
- `\theindex`, 335
- `theindex` (environment), 107, 301, 303, 314
- `\thepage`, 105, 320
- `\thepoem`, 262
- `\thepoemline`, 262
- There were multiply defined labels, 460
- There were undefined references, 460
- There’s no line to end here, 457
- `\thesection`, 98
- `\thesheetsequence`, 320
- `\thetitle`, 66, 67
- `\theTitleReference`, 296
- `\thicklines`, 406
- thickness  
line, 406
- `\thinlines`, 406
- `\thinspace`, 333
- This can’t happen ..., 450
- This may be a LaTeX bug, 457
- `\thispagestyle`, 106
- `\thr@@`, 433
- `\threecolumnfootnotes`, 231
- `\threecolumnfootstyle`, 231
- `tightcenter` (environment), 377
- `\tightlist`, 134
- `\tightlists`, 133, 134
- `\tightsubcaptions`, 195
- Times, 353
- Times New Roman, 40
- Times Roman, 15, 16, 40, 369
- `\tiny`, 45, 46
- tip in, 164
- `\title`, 57, 64, 66, 456, 465
- title  
styling, 57–67
- title page, 57, 63, 65–66, 336
- title* (pagestyle), 64, 107
- `titledframe` (environment), 275
- `\TitleFrame`, 275
- `titlepage` (environment), 65
- `titlepage` (option), 65, 71
- `\titleref`, 294–296
- `titleref` (package), 294, 296, 336
- `titlesec` (package), 75, 336
- titling,  
`titlingpage` (environment), 65, 66, 69, 106, 107
- titlingpage* (pagestyle), 65, 107
- `\titlingpageend`, 65
- `\tmarkbl`, 318, 319
- `\tmarkbm`, 318, 319
- `\tmarkbr`, 318, 319
- `\tmarkml`, 318, 319
- `\tmarkmr`, 318, 319
- `\tmarktl`, 318, 319
- `\tmarktm`, 318, 319
- `\tmarktr`, 318, 319
- ToC, 71, 76–78, 83, 91–93, 101, 114, 139, 140, 142–151, 153–162, 164, 263, 265, 271, 293, 295, 297, 301, 326, 345, 348, 351, 360, 361, 363, 364, 369, 399, 401–404, 444, 452
- controlling entries, 168
- `toc` (file), 92, 139, 140, 156, 243, 284, 428
- `tocbibind` (package), 139, 336
- `tocdepth` (counter), 139, 145, 158, 162, 168
- `tocloft` (package), 139, 336
- `\tocmark`, 145
- `\tocnameref`, 295
- `tocvsec2` (package), 79, 145
- token, 426
- Too deeply nested, 457
- Too many }’s, 451
- Too many columns ..., 457



- Too many unprocessed floats, [457](#)
- `\topfraction`, [179–181](#)
- `\topmargin` (length), [19, 23](#)
- `topnumber` (counter), [179](#)
- `\toprule`, [216](#)
- `\topsep` (length), [137](#)
- `\topskip`, [85, 349](#)
- `\topskip` (length), [23, 24, 52](#)
- `totalnumber` (counter), [179](#)
- `to`, [431](#)
- `\tracingtabularx`, [222](#)
- trademark, [334](#)
- `\traditionalparskip`, [49](#)
- Transitional
  - type, [40](#)
- `\tref`, [294, 335](#)
- trim,
  - specifying, [22](#)
- `\trimedge` (length), [22, 23, 26, 346, 463](#)
- `\trimFrame`, [318](#)
- `\trimLmarks`, [318](#)
- `\trimmark`, [319](#)
- `\trimmarks`, [318, 319](#)
- `\trimmarkscolor`, [318](#)
- `\trimNone`, [318](#)
- `\trintop` (length), [22, 23, 26, 463](#)
- `\trimXmarks`, [318, 319](#)
- `trivlist` (environment), [136–138, 283, 377](#)
- TrueType, [35, 469](#)
- TrueType, 트루타입, [35](#)
- `\ttfamily`, [42](#)
- Turing complete language, [425](#)
- Turing, Alan, [425](#)
- `\tw@`, [433](#)
- Two `\documentclass` commands, [457](#)
- Two `\LoadClass` commands, [457](#)
- `\twocolglossary`, [314](#)
- `\twocolindex`, [301](#)
- `\twocoltocetc`, [144, 145](#)
- `\twocolumn`, [73, 459, 465](#)
- `twocolumn` (option), [4, 5, 71–73, 145, 167](#)
- `\twocolumnfootnotes`, [231, 236](#)
- `\twocolumnfootstyle`, [231](#)
- `twoside` (option), [4, 5, 25, 33, 83, 238](#)
- `\TX@verb`, [223](#)
- type
  - Blackletter, [469](#)
  - Decorative, [470](#)
  - Didone, [469](#)
  - Free Form, [469](#)
  - Geralde, [469](#)
  - Mediaeval, [469](#)
  - Modern, [469](#)
  - Sans Serif, [469](#)
  - Script, [41, 470](#)
  - Slab Serif, [470](#)
  - Symbol, [470](#)
  - Transitional, [40, 469](#)
  - Uncial, [469](#)
  - Venetian, [469](#)
- type size, [2](#)
  - default, [3](#)
- typeblock, [5, 7, 8, 16–20, 26, 27, 66, 110, 114, 130, 249, 250, 258, 345, 346, 348–350](#)
  - height, [16, 17, 19](#)
  - location, [17, 20, 22](#)
  - size, [22](#)
  - specifying size, [16, 20, 22](#)
  - width, [16–18](#)
- typeface, [15](#)
  - Alte Schwabacher, *see* Alte Schwabacher
  - ATF Clearface, *see* ATF Clearface
  - Avant Garde Gothic, *see* Avant Garde Gothic
  - Barbedour, *see* Barbedour
  - Basel, *see* Basel
  - Basilia, *see* Basilia
  - Baskerville, *see* Baskerville
  - Bembo, *see* Bembo
  - Bergamo, *see* Bergamo
  - Bernhard Modern, *see* Bernhard Modern
  - Bodoni, *see* Bodoni
  - Bookman, *see* Bookman
  - Caslon, *see* Caslon
  - Centaur, *see* Centaur
  - Century Old Style, *see* Century Old Style
  - Chantilly, *see* Chantilly
  - Charter, *see* Charter
  - Cheltenham, *see* Cheltenham



Clarendon, *see* Clarendon  
 Computer Modern, *see* Computer Modern  
 Computer Sans, *see* Computer Sans  
 Computer Typewriter, *see* Computer Typewriter  
 Concrete Roman, *see* Concrete Roman  
 Courier, *see* Courier  
 Della Robbia, *see* Della Robbia  
 Egyptian, *see* Egyptian  
 English Serif, *see* English Serif  
 Engravers Litho, *see* Engravers Litho  
 Engravers Old English, *see* Engravers Old English  
 Fette Fraktur, *see* Fette Fraktur  
 Fette Gotisch, *see* Fette Gotisch  
 Flanders, *see* Flanders  
 Franklin Gothic, *see* Franklin Gothic  
 Function, *see* Function  
 Futura, *see* Futura  
 Garamond, *see* Garamond  
 Gill Sans, *see* Gill Sans  
 Glypha, *see* Glypha  
 Glytus, *see* Glytus  
 Goudy Old Style, *see* Goudy Old Style  
 Helvetica, *see* Helvetica  
 Jenson Recut, *see* Jenson Recut  
 Jessica, *see* Jessica  
 Joanna, *see* Joanna  
 Lanston Bell, *see* Lanston Bell  
 Lanston Koch, *see* Lanston Koch  
 Latin Modern, *see* Latin Modern  
 Linden, *see* Linden  
 Litho Antique, *see* Litho Antique  
 Lydian, *see* Lydian  
 Melior, *see* Melior  
 Minion, *see* Minion  
 Modern, *see* Modern  
 New Baskerville, *see* New Baskerville  
 New Century Schoolbook, *see* New Century Schoolbook  
 News Gothic, *see* News Gothic  
 Nicholas Cochon, *see* Nicholas Cochon

Olde English, *see* Olde English  
 Optima, *see* Optima  
 Opus, *see* Opus  
 Palatino, *see* Palatino  
 Rosslaire, *see* Rosslaire  
 Sabon, *see* Sabon  
 Savoy, *see* Savoy  
 Schnittger, *see* Schnittger  
 Serifa, *see* Serifa  
 Serific, *see* Serific  
 Struktor, *see* Struktor  
 Symbol, *see* Symbol  
 Syntax, *see* Syntax  
 Times New Roman, *see* Times New Roman  
 Times Roman, *see* Times Roman  
 Unitus, *see* Unitus  
 Univers, *see* Univers  
 University Old Style, *see* University Old Style  
 URW Antiqua, *see* URW Antiqua  
 URW Latino, *see* URW Latino  
 URW Palladio, *see* URW Palladio  
 Utopia, *see* Utopia  
 Vendome, *see* Vendome  
 Walbaum, *see* Walbaum  
 Zapf Chancery, *see* Zapf Chancery  
 Zapf Dingbats, *see* Zapf Dingbats

\typeout, [15](#)  
 \typeoutlayout, [25](#)  
 \typeoutstandardlayout, [25](#)  
 Typewriter, [223](#)  
 typewriter, [371](#)  
 typist, [371](#)

## U

\ucminusname, [329](#), [335](#)  
 numberline, [400](#)  
 Unbalanced output routine, [451](#)  
 Unbalanced write command, [451](#)  
 \unboldmath, [458](#)  
 Undefined control sequence, [451](#)  
 Undefined index file ..., [466](#)  
 Undefined tab position, [457](#)  
 Underfull \hbox ..., [451](#)  
 Underfull \vbox ..., [451](#)

- underfull, [431](#)
  - `\undodrop`, [252](#)
  - Unicode, 유니코드, [35](#)
  - unit length, [405](#)
  - `\unitlength`, [406](#), [407](#)
  - `\unitlength` (length), [131](#), [161](#), [252](#), [349](#), [405](#), [406](#)
  - Unitus, [469](#)
  - Univers, [469](#)
  - University Old Style, [469](#)
  - Unknown document division ..., [463](#)
  - Unknown mark setting type ..., [463](#)
  - Unknown numbering type ..., [463](#)
  - Unknown option ..., [458](#)
  - Unknown toplevel for ..., [466](#)
  - `\unletcounter`, [322](#)
  - `\unnamedsubappendices`, [78](#)
  - Unrecognized argument for `\sidecapmargin`, [464](#)
  - Unused global option(s) ..., [460](#)
  - `\upbracefill`, [218](#)
  - `\uppercaseheads`, [107](#), [112](#), [113](#)
  - `\uppermargin` and/or `\textheight` and/or `\lowermargin` are too large ..., [464](#)
  - `\uppermargin` (length), [19](#), [22](#), [23](#), [462](#), [464](#)
  - `\upshape`, [42](#)
  - url (package), [358](#), [375](#)
  - URW Antiqua, [469](#)
  - URW Latino, [470](#)
  - URW Palladio, [469](#)
  - Use of ... doesn't match ..., [451](#)
  - `\usebox`, [271](#), [412](#)
  - `\usepackage`, [336](#), [337](#), [454](#), [455](#), [458](#)
  - `\usepackage` before `\documentclass`, [458](#)
  - `\usethanksrule`, [69](#)
  - Utopia, [16](#), [40](#)
- V**
- `\valign`, [445](#), [448](#)
  - `\vbox`, [431](#), [444](#), [449](#), [451](#)
  - `\vector`, [415](#), [416](#), [454](#)
  - vector, *see also* picture object reference point, [415](#)
  - restricted slope, [415](#)
  - slope, [415](#)
  - veelo* (chapterstyle), [91](#), [395](#), [396](#)
  - Veelo, Bastiaan, [91](#), [238](#), [398](#)
  - Vendome, [469](#)
  - `\verb`, [222](#), [223](#), [277](#), [303](#)
  - `\verb`, [458](#)
  - `\verb` ended by end of line, [458](#)
  - `\verb` illegal in command argument, [271](#), [458](#)
  - `\verb` may be unreliable ..., [466](#)
  - `\verb*`, [223](#), [277](#), [278](#)
  - `\verbatim`, [278](#), [283](#), [284](#)
  - verbatim, [271](#), [277–284](#)
    - changing font, [278](#)
    - font, [282](#)
    - frame, [279](#), [286](#)
    - styling, [280](#)
    - in argument, [271](#)
    - new, [281–284](#)
    - short, [277](#)
    - with tab spaces, [278](#)
    - wrap long lines, [279](#)
    - write, [286](#), [289](#)
  - verbatim (environment), [138](#), [256](#), [277–279](#), [282](#), [283](#), [286](#), [378](#), [453](#), [465](#)
  - verbatim (package), [278](#), [336](#)
  - verbatim\* (environment), [277–279](#)
  - `\verbatim@font`, [283](#)
  - `\verbatim@line`, [283](#)
  - `\verbatim@processline`, [283](#)
  - `\verbatim@startline`, [283](#), [284](#)
  - `\verbatimbreakchar`, [279](#)
  - `\verbatimindent` (length), [279](#)
  - `\verbatiminput`, [286](#)
  - `\verbatiminput*`, [286](#)
  - verbatimoutput (environment), [285](#)
  - `\verbfootnote`, [230](#)
  - Verdana, [353](#), [369](#)
  - verse, [255–270](#)
    - centering, [257](#), [258](#)
    - end a line, [255](#)
    - end a stanza, [255](#)
    - indent line, [256](#), [257](#)
    - indent pattern, [257](#), [267](#)
    - indent space, [258](#), [259](#)
    - long line, [257](#), [258](#)

- long lines, 256
- multiple indexes, 257
- prevent page break, 257
- typesetting environments, 255–257
- wrapped line indent, 258
- verse (environment), 255–258, 260–262
- verse (package), 336
- \verselinebreak, 259, 267
- \verselinenumbersleft, 262
- \verselinenumbersright, 262
- \versewidth (length), 257, 258
- vertical,
  - centering, 336
- vertical mode, 431
- verville (chapterstyle), 91
- Verville, Guy, 91
- \vfil, 436
- \vfill, 436
- \vfilneg, 436
- \vgap (length), 258, 259, 261
- \vin, 258
- \vindent (length), 258
- \vinphantom, 259
- \vleftmargin (length), 258
- \vleftoffline, 259
- \vleftskip, 342
- \vleftskip (length), 262
- \vline, 224
- vminipage (environment), 51
- vplace (environment), 336
- \vrightskip, 342
- \vrightskip (length), 262
- \vskip, 50, 436
- \vspace\*, 85
- \vss, 436

## W

- Walbaum, 469
- warning,
  - LaTeX, 458–460
  - memoir class, 464–466
  - TeX, 444–452
- \wd, 432
- widow
  - line, 52, 53
- \width (length), 273

- wilsondob (chapterstyle), 91, 104
- wilsondob (headstyles), 103, 104
- wrapfig (package), 199
- \wrappingoff, 279
- \wrappingon, 279
- \write, 451
- write,
  - verbatim, 291
- writelnfigure (environment), 288, 289
- writelnverbatim (environment), 285, 289

## X

- X columns too narrow (table too wide), 223
- X columns too narrow ..., 466
- xcolor (package), 272, 375
- \xdef, 430
- Xdepth (counter), 168
- XeTeX, 35, 333, 464, 469
- XeTeX is required to process this document, 464
- \Xheadstart, 146
- xindy (program), 304
- \xindyindex, 304
- \xlvchars (length), 15
- \Xmark, 146
- xtab (package), 225

## Y

- You can't use ... in ..., 451
- You can't use 'macro parameter character #' in ... mode, 451
- You can't use '\spacefactor' in vertical mode, 451
- You have requested release ..., 460
- You have requested version ..., 460
- You have used the '\*pt' option but file ..., 464

## Z

- \z0, 378, 433, 436
- Zapf Chancery, 41
- Zapf Dingbats, 41, 375
- Zapf, Hermann, 40

zero-sized picture, 119  
 \zerotrivseps, 137

## 가

각주, 67–69, 101  
   마크, 101  
   장절 헤딩 내, 101  
   표지, 67  
 감사의 말, 67  
   양식화, 67  
 패션  
   두께, 20, 117  
   보이지 않는, 117  
 구현, xxiii  
 그림, 117  
 글꼴  
   Computer Modern, 35  
   Metafont, 35  
   비트맵, 35  
   트루타입, 35  
   포스트스크립트, 35  
 기본값  
   용지, 1  
   인쇄 옵션, 4  
   페이지 레이아웃, 7  
   활자 크기, 3  
 길이  
   45글자, 15  
   65글자, 15  
 꽃문양, 100

## 나

뉴스그룹, xxiii  
 다단  
   단단, 13, 73  
   이단, 13, 20  
 단  
   두, 116

## 다

단 사이 간격, 20  
 들어쓰기, 98, 99  
 떠다니는

  페이지, 116–119  
 떠다니는 개체, 5

## 라

로마 숫자, 105

## 마

마진, 7, 17, 71, 72  
 머릿글, 106–110, 114–117  
 Metafont, 35  
 문단, 5, 121  
   내어쓰기, 121  
   단위로 조판, 122  
   들어쓰기, 72, 121  
   블록, 121  
   반대 이유, 121

## 바

바깥쪽 여백, 20  
 바닥글, 106–108, 110, 114–117  
 방주, 114  
 번호 없는 장절 구획  
   스타일링, 100  
 번호 없는 장절구획, 98  
 부록, 87  
 비율  
   여백, 17  
   조판영역, 13  
   책, 8  
 비트맵, 35  
   글꼴, 35

## 사

삽화, 105  
 상단  
   크기 설정, 20–22  
 상단 면주, 26  
 상단면주, 7  
 색인, 116  
 색인화, 116  
 선  
   두께, 110

## 아

알파벳 길이, 15  
 알파벳 번호, 105  
 여백, 7, 17, 22, 71, 72  
   바깥, 114  
   바깥쪽, 17, 18, 26, 116  
   바깥쪽 여백, 8  
   상단, 17, 19, 22, 26  
   안쪽, 17, 18, 22, 26, 114  
   안쪽 여백, 8  
   왼쪽, 121  
   재단, 114  
   재단 여백, 106  
   크기 설정, 18-20, 22  
   크기 지정, 17, 18  
   하단, 17, 19, 22, 26  
 여백 문단, 21, 26  
 외부 패키지, xxiii  
 요약, 66  
 요약문, 71  
   단단, 73  
   스타일짜기, 71  
   표제, 71  
 용지, 4, 7, 8, 12, 21, 22, 26, 27  
   기본값, 1  
   너비, 8  
   높이, 8  
   상업 출판, 8  
   크기, 1, 8, 12, 22  
     A3, 1  
     A4, 1, 8, 26  
     A5, 1  
     A6, 1  
     B3, 1  
     B6, 1  
   broadsheet, 2  
   crown octavo, 2  
   demy octavo, 2  
   dollar bill, 2  
   ebook, 1  
   executive, 2  
   foolscap octavo, 2  
   imperial octavo, 2  
   large crown octavo, 2  
   large post octavo, 2  
   ledger, 2  
   legal, 2  
   letterpaper, 1, 2, 8, 26

medium octavo, 2  
 metric crown octavo, 1  
 metric demy octavo, 1  
 metric large crown octavo, 1  
 metric small royal octavo, 1  
 old, 2  
 post octavo, 2  
 pott octavo, 2  
 royal octavo, 2  
 small demy octavo, 2  
 small royal octavo, 2  
 statement, 2  
 super royal octavo, 2  
 크기 설정, 8, 22  
 트리밍, 8, 12  
 트리밍 설정, 12  
 용지 크기 옵션, 8, 12  
 인덱스, 116  
 인쇄 영역, 8  
 인용문, 85, 121  
 일러스트, 85

## 자

작성, xxiii  
 장, 4, 5  
   요약, 91  
   요약문, 93  
 장 스타일, 91  
 장스타일, 86  
 적정문자수표, 13  
 전처리부, 5  
 제목  
   장, 83  
 제본 부분, 25  
 제본 영역, 22  
 제본여백, 19  
 조판 영역, 5, 7, 8, 16-20, 26, 27, 66, 110, 114  
   너비, 16-18  
   높이, 16, 17, 19  
   위치, 17, 20, 22  
   크기, 22  
   크기 설정, 16, 20, 22  
 종이, 1  
   크기, 1  
     A3, 1

A4, 1  
 A5, 1  
 A6, 1  
 B3, 1  
 B4, 1  
 B5, 1  
 B6, 1  
 broadsheet, 2  
 crown octavo, 2  
 demy octavo, 2  
 dollar bill, 2  
 executive, 2  
 foolscap octavo, 2  
 imperial octavo, 2  
 large crown octavo, 2  
 large post octavo, 2  
 ledger, 2  
 legal, 2  
 letterpaper, 1, 2  
 medium octavo, 2  
 metric crown octavo, 1  
 metric demy octavo, 1  
 metric large crown octavo, 1  
 metric small royal octavo, 1  
 old, 2  
 post octavo, 2  
 pott octavo, 2  
 royal octavo, 2  
 small demy octavo, 2  
 small royal octavo, 2  
 statement, 2  
 super royal octavo, 2

## 차

초고 문서, 111

## 카

카운터 표시, 105  
 컬럼, 13  
   double, 4  
   단단, 71  
   이단, 71  
 코드, xxiii  
 크기  
   용지, 1, 8, 12, 22

조판 영역, 22  
 종이, 1  
 페이지, 8, 12, 22  
 크기가 영인 그림, 119  
 클래스, xxiii  
 클래스 옵션, 1  
   article, 5  
   bibliography, 5  
   fonts, 5  
   layout truncation, 5  
   math, 5  
   크기, 1  
   활자 크기, 2  
 클래스 이전에 오는 패키지, 16

## 타

트루타입, 35  
 트리밍  
   설정, 22

## 파

패키지, xxiii, 72  
 페이지, 12  
   너비, 12, 17, 18  
   높이, 12, 17, 19  
   위치, 22  
   크기, 8, 12, 22  
   크기 설정, 20  
   크기 지정, 12  
 페이지 레이아웃, 7, 22  
   LaTeX 파라미터, 8, 25  
   LaTeX의 파라미터, 22  
   memoir의 파라미터, 22, 25  
   기본값, 7  
   디자인, 8  
   설정값 검토, 23  
   클래스 파라미터, 8  
   파라미터, 23  
 페이지 매김, 105  
   변경, 105  
   중단, 105  
 페이지 번호, 20  
 페이지 스타일, 7  
 페이지 양식  
   결합, 117

떠다니는 페이지, 116–119  
 색인 페이지, 116  
 지정, 106–116  
 클래스, 106  
 페이지 컬러, 5  
 펼침면, 8, 17  
 포스트스크립트, 35  
 폰트, 15  
   메타폰트, 15  
   적정문자수, 13  
   커누스의 폰트, 15  
   포스트스크립트, 15  
 폴리오, 20, 106, 116  
 표시 변경, 105  
 표, 117  
 표제, 65  
   양식화, 67  
   요약문, 71  
 표제어, 116  
 표지, 57, 63, 66, 107, 114  
 프리앰블, 27, 116  
 필자, xxiii

## 하

하단, 21  
 하단면주, 7  
 헤더, 101  
 헤딩  
   장, 86, 91  
 활자 크기, 2  
   기본값, 3  
 황금분할, 26  
 황금비, 26

## Alphabetics

\!, 333  
 ! (level specifier), 304  
 !h float specifier ..., 459  
 \#, 446, 452  
 \&, 447  
 \(., 445, 454  
 \), 454  
 \*pt (option), 3, 464  
 \+, 457  
 \., 333

\-, 452, 457  
 ... allowed only in math mode, 454  
 ... at index ... in pattern ..., 464  
 ... is negative, 461  
 ... is not a counter, 461  
 ... is not a macro, 464  
 ... is not an input stream, 464  
 ... is not an output stream, 464  
 ... is zero or negative, 461  
 \:, 333  
 \;, 333  
 \<, 454, 457  
 \< in mid line, 454  
 <{...}at wrong position ..., 461  
 \=, 457  
 =, 430  
 \>, 457  
 >{...}at wrong position ..., 461  
 @,  
   in macro code, 143, 163, 185, 201, 352,  
     357, 429, 451  
 @ (actual specifier), 306  
 @-expression, 455  
 @@end, 450  
 @@wrglom@m, 312  
 \@MM, 433  
 \@Mi, 433  
 \@Mii, 433  
 \@Miii, 433  
 \@Miv, 433  
 \@bsphack, 290  
 \@caption, 200, 201  
 \@capttype, 199, 200  
 \@cclv, 433  
 \@cclvi, 433  
 \@cftasnum, 157  
 \@cftasnumb, 157  
 \@cftbsnum, 157  
 \@chapapp, 87  
 \@dblfpbot (length), 179, 180  
 \@dblfpsep (length), 179  
 \@dblfpstop (length), 179, 180  
 \@dblftop (length), 180  
 \@dotsep, 140, 143, 150  
 \@dottedtocline, 142  
 \@esphack, 290  
 \@fibnext, 439

\@fibseries, 439–441

\@fnsymbol, 235

\@fpbot (length), 179, 180

\@fpsep (length), 179, 180

\@fptop (length), 179, 180

\@hangfrom, 95, 96, 122, 349

\@m, 433

\@makecaption, 200–202

\@makefnmark, 232

\@minus, 434

\@namedef, 431

\@nameuse, 431

\@ne, 433

\@plus, 434

\@pnumwidth, 140, 147, 154

\@pnumwidth (length), 151

\@seccntformat, 96

\@setref, 291

\@startsection, 163

\@tempdima, 437

\@tempdimb, 437

\@thefnmark, 232, 233

\@tocrmarg, 140, 142, 147, 154

\@whiledim, 440

\@whilenum, 440, 441

\@xfloat, 200

\@xxxii, 433

\@zerosecs, 283, 378

\[, 205, 212, 445, 454

\ (escape specifier), 307

\\*, 183, 257, 258

\&gt;, 259, 267

\!, 258

\], 205, 212, 454

\ (encap specifier), 306

10pt (option), 2, 3, 5, 46

11pt (option), 2, 46

12pt (option), 2, 5, 46

14pt (option), 2, 3, 46, 110

17pt (option), 2, 3, 46, 463

20pt (option), 2, 3, 46

25pt (option), 2, 46, 463

30pt (option), 3, 46

36pt (option), 3, 46

48pt (option), 3, 46

60pt (option), 3, 46

9pt (option), 2, 46

## A

A box was supposed to be here, 444

A pattern has not been specified, 461

a3paper (option), 1

A4 paper, 8

A4 용지, 8

a4paper (option), 1, 26, 29

a5paper (option), 1

a6paper (option), 1

\abnormalparskip, 49

\abovecaptionskip, 204

\abovecaptionskip (length), 201

\aboverulesep (length), 216, 217

\abslabeldelim, 72

\absleftindent (length), 72

\absnamepos, 72

\absparindent (length), 72

\absparsep (length), 72

\absrightindent (length), 72

\abstitlekip (length), 72

abstract, 66, 71

heading, 71

one column, 73

styling, 71–72

abstract (environment), xxiii, 71–73, 335

abstract (package), 71, 336

\abstractcol, 71

\abstractintoc, 71

\abstractname, 71, 72, 335

\abstractnamefont, 72

\abstractnum, 71, 72

\abstractrunin, 71, 72

\abstracttextfont, 72

Adams, William, 89, 319

add to a macro, 323

add to contents, 142

\addappheadtotoc, 78

\addcontentsline, 140, 142, 143, 145, 165, 187

\added, 317, 318

\addlinespace, 217

\addpenalty, 456

\addperiod, 334

\addtocontents, 142, 143, 155, 165

\addtocounter, 105, 453, 456



- \addtodef, 162, 323, 360, 464
- \addtodef\*, 324
- \addtoiargdef, 323, 324, 464
- \addtoiargdef\*, 324
- \addtolength, 22, 72, 85, 134, 258, 368, 436
- \addtonotes, 247
- \addtopsmarks, 115
- \addtostream, 285
- \addvspace, 86, 456
- adjustwidth (environment), 89, 129, 130, 134, 276
- adjustwidth\* (environment), 66, 129
- \advance, 433, 434, 436
- \afterbookskip, 80, 81
- \afterchapskip (length), 85
- \afterchapternum, 85, 88
- \afterchaptertitle, 85, 146, 348
- \afterepigraphskip (length), 251
- \afternextrecto, 164
- \afternextverso, 164
- \afterpage, 164
- afterpage (package), 164, 189
- \afterpartskip, 80, 82, 254
- \afterPoemTitle, 263, 264
- \afterPoemTitlenum, 263, 264
- \afterPoemTitleskip (length), 264
- \afterXtitle, 146
- pagenote, 246
- mainmatter\*, 79
- makeheadposition, 110
- MakeTextUppercase, 107
- \aliaspagestyle, 109
- alltt (environment), 255, 256
- alltt (package), 255, 375
- Alph, 105
- alph, 105
- alphabel lentgh, 15
- alphabetic numbering, 105
- \alsoname, 306, 335
- Alte Schwabacher, 469
- altverse (environment), 259, 261, 265
- \amname, 321, 335
- amsfonts (package), 455
- amsmath (package), 375
- \and, 66
- \andnext, 66
- anonymous division, 98
  - styling, 99–100
- ans (file), 290
- answer (environment), 290, 291
- answer (package), 292
- \anyptfilebase, 3, 464
- \anyptsize, 3, 4, 464
- appendices (environment), 78
- \appendix, 78, 362
- appendix, 81, 87, 144, 153, 154
  - 부록, 77, 78
- appendix (package), 336
- \appendixname, 78, 247, 335
- \appendixpage, 78, 81, 155, 335, 401, 404
- \appendixpage\*, 78
- \appendixpagename, 78, 335
- \appendixrefname, 294
- \appendixtableofcontents, 404
- \appendixtocname, 78, 335
- \apsparindent (length), 72
- arabic, 105
- \Aref, 294
- marginpar, 169
- marginparmargin, 169
- argument,
  - optional, 292
- Argument of ... has an extra }, 444
- Argument to \overridesidecapmargin
  - neither ..., 462
- Argument to \setsidecappos is not ..., 462
- Arial, 353, 369
- Arithmetic overflow, 444
- array, 445
  - intercolumn space, 224
  - row fill, 218–219
  - row spacing, 224
- array (environment), 205, 207, 211, 212, 218, 222, 224, 225, 445, 447, 448, 453, 455, 456, 461, 462
- array (package), 205, 206, 336
- \arraybackslash, 222
- \arraycolsep (length), 224
- \arrayrulewidth (length), 224
- \arraystretch, 223, 224
- \arraytostring, 331
- arrow, *see* vector

Arseneau, Donald, 52, 234, 238, 272, 274, 336  
*article* (chapterstyle), 87  
*article* (class), 71, 87, 142  
*article* (option), 5, 77, 83, 92  
*asu* (chapterstyle), 361  
*asu* (pagestyle), 360  
*asuappendix* (chapterstyle), 362  
\AtBeginClass, 337  
\AtBeginDocument, 337  
\AtBeginEnvironment, 133  
\AtBeginFile, 337  
\AtBeginPackage, 337  
\atcenter, 125  
\atcentercr, 125  
patchcmd, 462  
date, 66  
\AtEndClass, 337, 338  
\AtEndDocument, 337  
\AtEndFile, 337  
\AtEndOfClass, 337, 338  
\AtEndOfPackage, 337, 338  
\AtEndPackage, 337, 338  
\atendtheglossaryhook, 314  
ATF Clearface, 469  
\author, 57, 64, 66, 459, 465  
\autocols, 227, 228  
\autorows, 226–228  
aux (file), 284, 293, 427, 428  
Avant Garde Gothic, 16, 38

## B

b (position argument), 168, 175, 180, 409, 418  
b3paper (option), 1  
b4paper (option), 1  
b5paper (option), 1  
b6paper (option), 1  
back matter, 75, 297  
\backmatter, 75, 77  
Bad \line or \vector argument, 454  
Bad math environment delimiter, 454  
Bad \sidebarmargin argument, 464  
Barbedour, 469  
Basel, 469  
\baselineskip, 50, 85

\baselineskip (length), 21, 23, 24, 50, 121, 122, 201, 251, 333, 378  
Basilia, 469  
Baskerville, 15, 469  
bch (fontfamily), 39  
\beforebookskip, 80  
\beforechapskip, 85  
\beforechapskip (length), 85, 395  
\beforeepigraphskip (length), 251  
\beforepartskip, 80, 254  
\beforePoemTitleskip (length), 264  
\begin, 157, 282, 454, 455  
\begin{...} ended by \end{...}, 454  
\begintheglossaryhook, 314  
\belowcaptionskip, 204  
\belowcaptionskip (length), 201  
\belowrulesep (length), 216, 217  
Bembo, 469  
Benguat, Ed, 39  
Benton, Morris, 40  
Bergamo, 469  
Bernhard Modern, 469  
Bezier curve, *see also* picture object  
    control points, 422  
    linearized rendition, 423  
Bezier, Pierre, 421  
\bfseries, 42, 80, 81, 85, 86, 95, 133  
*bianchi* (chapterstyle), 89  
Bianchi, Stefano, 89  
bib (file), 299, 300  
\bibindent, 5  
\bibintoc, 297  
\bibitem, 297, 299, 458, 459, 465  
bibitemlist (environment), 297–299  
\bibitemsep (length), 299  
\biblabeled, 460  
bibliographic database, 299  
\bibliography, 299  
bibliography, 154, 164, 254, 297–300  
    explanatory text, 298  
    flushleft entries, 298  
    heading, 298  
    label styling, 299  
    list styling, 298–299  
    title in ToC, 297  
\bibliographystyle, 299  
\biblistextra, 298, 363

- \bibmark, 298
- \bibname, 297, 335
- \bibsection, 297, 298, 363
- BibTeX database, 300
- BibTeX (program), 299, 300
- BibTeX style, 299, 300
  - abbrv, 300
  - alpha, 300
  - changing, 300
  - plain, 300
  - unsrt, 300
- \bicaption, 191
- \bicontcaption, 192
- bidi (package), 342, 343
- bilingual captions, 190–192
- binding allowance, 19, 22, 25
- \bionenumcaption, 190
- bitmap
  - font, 35, 48
- bitmaps, 35
- \bitwonumcaption, 190
- blank space, 259
- blockdescription (environment), 131
- \blockdescriptionlabel, 131
- Bodoni, 469
- body font, 41, 44
- boek (class), 91, 103
- \boldmath, 458
- \book, 76, 79–83, 107, 147, 148, 150, 155, 156, 253, 254, 335, 339, 401
- book
  - 책, 76
- book (class), 71, 87, 88, 101, 103, 111, 142
- book (pagestyle), 107
- \book\*, 339
- \bookblankpage, 81
- Bookman, 15, 16, 39
- bookmark (package), 165
- \bookname, 80, 335
- \booknamefont, 80, 81, 102
- \booknamenum, 80, 81
- \booknumberline, 150
- \booknumberlinebox, 150
- \booknumberlinehook, 150
- \booknumfont, 80, 81, 102
- \bookpageend, 81, 82
- \bookpagemark, 81
- \bookrefname, 294, 335
- booktabs (package), 205, 216, 336
- \booktitlefont, 81, 102
- \bottomfraction, 179–181
- bottomnumber (counter), 179
- \bottomrule, 216, 217
- \bottomsectionpenalty, 77
- \bottomsectionskip (length), 77
- \box, 444
- box, 167, 225, 271, 408
  - framed, 272–276, 408
  - include pagebreak, 272
  - picture, 406
  - reference point, 408
  - rounded, *see also* oval
    - half, 417
    - quarter, 417
  - saved object, 412
  - shaded background, 272
  - unbreakable, 406
  - using saved object, 412
- \box255, 449
- boxed verbatim, 279
- boxedverbatim (environment), 279–281, 286, 287
- boxedverbatim\* (environment), 279
- \boxedverbatiminput, 286
- \boxedverbatiminput\*, 286
- \break, 125
- \Bref, 294, 335
- brighthurst (chapterstyle), 89, 103
- brighthurst (headstyles), 103
- brighthurst (package), 352
- Brighthurst, Robert, 13
- \bringpicl, 350
- \bringpicr, 350
- broadsheetpaper (option), 2
- brotherton (chapterstyle), 89
- \bs, 340
- bst (file), 300
- buffer size, 452
- \bvbox, 279–281
- \bvboxsep (length), 279, 280
- \bvendofpage, 280
- \bvendrulerhook, 280
- \bvleftsidehook, 280
- \bvnumberinside, 281

\bvnumbersinside, 281  
 \bvnumbersoutside, 281  
 \bvperpagefalse, 280  
 \bvperpagetrue, 280  
 \bvrighsidehook, 280  
 \bvsides, 279–281  
 \bvtopandtail, 279–281  
 \bvtopmidhook, 280  
 \bvtopofpage, 280  
 \bvtoprulehook, 280  
 by (keyword), 433

## C

c (position argument), 226, 227  
 calc (package), 24, 26, 239, 399, 400  
 \calccentering, 66, 130, 131  
 Can only be used in the preamble, 454  
 \cancelthanksrule, 69  
 Cannot change a macro that has delimited arguments, 462  
 \caption, 140, 148, 154, 165, 167, 185, 186, 188–190, 192–194, 199, 200, 203, 226, 293, 295, 296, 315, 335, 339, 351, 453, 454  
 caption, 154, 167, 181–204  
   LaTeX methods, 199–202  
   anonymous, 181, 186–188  
   bilingual, 190–192  
     in list of, 190  
     styling, 192  
   continuation, 181  
   continued, 185–186  
     outside a float, 189  
   delimiter, 182, 202  
   fixed, 172, 188–190, 226  
   font, 182, 184, 201, 202  
   footnote, 202–203  
   multiline, 182, 185  
   multiple, 172  
   new subcaption, 174  
   on opposite page, 189  
   outside a float, 188–190  
   paragraph style, 182  
   ruled, 183  
   short style, 182  
   side, 196–199

  side caption, 183  
   space above, 201  
   style, 167, 181–185  
   subcaption, 192–196  
     continued, 194  
     in list of, 193  
     referencing, 194  
     styling, 195  
   width, 183  
   캡션, 75  
 \caption outside float, 454  
 caption (package), 203, 204  
 \captiondelim, 181, 182  
 \captionnamefont, 182, 197  
 \captionstyle, 182  
 \captiontitlefinal, 183  
 \captiontitlefont, 182  
 \captionwidth, 183  
 \cardinal, 327  
 cardinal,  
   Carnase, Tom, 38  
   Carter, Matthew, 39  
 \cases, 213  
 Caslon, 469  
 ccaption (package), 181, 336  
 \cdot, 208  
 Centaur, 469  
 \center, 123  
 center (environment), 72, 123, 130, 137, 138, 201, 377  
 \centerfloat, 123  
 \centering, 122–125, 182, 184, 195, 199, 201, 222, 264, 377  
 centering,  
   float, 123  
   vertical, 336  
 \centerlastline, 182, 185, 195  
 Century, 353  
 Century Old Style, 63, 469  
 \cftaddnumtitleline, 154  
 \cftaddtitleline, 154  
 \cftbeforeKskip (length), 148  
 \cftbookbreak, 148  
 \cftchapterbreak, 148  
 \cftchapterleader, 151  
 \cftdot, 147  
 \cftdotsep, 147, 150

---

\cftinsertcode, 155  
 \cftinserthook, 155  
 \cftKafterpnum, 151, 152, 156  
 \cftKaftersnum, 149, 150, 152, 157  
 \cftKaftersnumb, 149, 150, 152, 157  
 \cftKdotsep, 150  
 \cftKfont, 149, 152, 156  
 \cftKformatpnum, 151  
 \cftKformatpnumhook, 151  
 \cftKindent (length), 148  
 \cftKleader, 150, 152, 153  
 \cftKname, 149  
 \cftKnumwidth (length), 148, 149  
 \cftKpagefont, 151  
 \cftKpresnum, 149, 150, 157  
 \cftlocalchange, 154  
 \cftnodots, 147, 150  
 \cftpagenumbersoff, 153, 164  
 \cftpagenumberson, 153  
 \cftparfillskip, 153  
 \cftparskip (length), 147  
 \cftpartbreak, 148  
 \cftsetindents, 151, 163  
 \cftwhatismyname, 150, 400  
 \changecaptionwidth, 183  
 \changed, 317, 318  
 \changeglossactual, 313  
 \changeglossnum, 313, 314  
 \changeglossnumformat, 313  
 \changeglossref, 313  
 \changemarks, 317  
 changepage (package), 325  
 Chantilly, 469  
 \chapindent (length), 89  
 \chapnamefont, 85, 86, 102  
 \chapnumfont, 85, 102  
 chappell (chapterstyle), 90, 392  
 \chapter, 5, 75–80, 83–87, 92, 107, 108, 115, 142, 144, 148, 150, 155, 156, 162, 251–253, 263, 293, 296, 335, 339, 400, 401  
 chapter, 4, 5, 140  
   precis, 91–93  
   챕터, 76  
   장, 75, 78  
 chapter (counter), 288  
 chapter (pagestyle), 77, 83, 107, 146  
 \chapter\*, 77, 86, 251, 252, 339  
 chapterbib (package), 298  
 \chapterheadstart, 85  
 \chaptermark, 108, 114  
 \chaptername, 78, 247, 335  
 \chapternamenum, 85, 86  
 \chapternumberline, 150  
 \chapternumberlinebox, 150  
 \chapternumberlinehook, 150  
 \chapterprecis, 92, 317, 403  
 \chapterprecishere, 92  
 \chapterprecistoc, 92, 156, 403  
 \chapterrefname, 294, 335  
 \chapterstyle, 86, 88  
 chapterstyle, 86–91, 379–396  
   article, 87  
   asu, 361  
   asuappendix, 362  
   bianchi, 89  
   bringhurst, 89, 103  
   brotherton, 89  
   chappell, 90, 392  
   companion, 87, 89, 377  
   crosshead, 90, 103  
   culver, 90  
   dash, 90  
   default, 87–89, 252  
   demo, 393  
   demo2, 90, 393  
   demo3, 90, 103, 393  
   dowding, 90, 103  
   ell, 90  
   fred, 87  
   ger, 90  
   hangnum, 87, 88  
   komalike, 90, 103  
   lyhne, 90  
   madsen, 90  
   ntglke, 91, 103  
   pedersen, 75, 91, 103, 393  
   reparticle, 87  
   section, 87, 88  
   southall, 91, 394  
   tandh, 91, 103  
   thatcher, 91  
   veelo, 91, 395, 396  
   verville, 91

- wilsondob*, 91, 104
- \chaptertoc, 403
- \chaptitelfont, 86, 102
- Characters dropped after \end{...}, 465
- Charter, 16, 39
- \checkandfixthelayout, 21, 23, 25, 29, 32, 52, 196, 240, 346
- \checkarrayindex, 331
- \checkifinteger, 332
- \checkoddpages, 325
- \checkthelayout, 23, 24, 463
- Cheltenham, 470
- chnctr (package), 322, 336
- chnpage (package), 129, 325
- \circle, 415, 416, 459
- circle, *see also* picture object
  - disk, 415
  - open, 415
  - reference point, 415
  - restricted diameter, 416
- \circle\*, 415, 416
- Citation ... on page ..., 458
- Citation ... undefined, 458
- \cite, 54, 297, 299, 458–460
- cite bibliographic item, 297
- \citeindexfile, 310
- \citeindextrue, 310
- Clarendon, 470
- class
  - article, 71, 87, 142
  - boek, 91, 103
  - book, 71, 87, 88, 101, 103, 111, 142
  - iso, 317
  - memoir, 1, 100, 142, 144, 145, 163, 257, 295, 333
  - report, 64, 71, 88, 101, 142
  - scrbook, 90, 103
- class option, 44
- class options, 1
  - article, 5
  - bibliography, 5
  - fonts, 5
  - layout truncation, 5
  - math, 5
  - stock size, 1
  - type size, 2
- \cleaders, 100
- \cleardoublepage, 106, 107, 175, 190, 253, 326
- cleared* (pagestyle), 107
- \clearforchapter, 84
- \clearmark, 113
- \clearpage, 84, 175, 176, 189, 326, 453
- \clearplainmark, 113
- \cleartoevenpage, 190, 253, 326
- \cleartooddpages, 326
- \cleartorecto, 84, 107, 326
- \cleartoverso, 84, 107, 326
- \cline, 224
- clo (file), 464
- \closeinputstream, 285
- \closeoutputstream, 285
- \club, 100
- \cmd, 340
- \cmdname, 83
- \cmdname\*, 83
- \cmdprint, 340
- \cmidrule, 217, 218
- \cmidrulekern (length), 217, 218
- \cmidrulesep (length), 217
- \cmidrulewidth (length), 217
- colophon, 130
- color (package), 91, 272, 375
- \colorchapnum, 394
- \colorchaptitle, 394
- columnn
  - double, 116
- column, 13
  - double, 4, 13, 20, 71, 116, 375
  - multiple, 13, 175
  - single, 13, 71, 73
- Column ... is already defined, 465
- \columnsep (length), 20, 23
- \columnseprule (length), 20, 23
- Command \... already defined ..., 341, 454
- Command ... invalid ..., 454, 458
- Command ... not provided ..., 455
- comment (environment), 276, 277
- comment out text, 276
- comment (package), 277
- \commentsoff, 276
- \commentson, 276
- companion* (chapterstyle), 87, 89, 377

*companion* (pagestyle), 107, 114, 115, 117, 377

Computer Modern, 3, 15, 16

Computer Sans, 15, 16

Computer Typewriter, 15, 16

concordance, 301

Concrete Roman, 15, 16

conditional, 437

configuration file

    MakeIndex, 304

Connes, Frederic, 304

\contcaption, 185

\contentsline, 140, 142, 154

\contentsname, 145, 146, 335

\continuousmarks, 67

\continuousnotenums, 245, 247

control sequence, 426

\contsubbottom, 194

\contsubcaption, 194

\contsubtop, 194

\contsuptop, 194

coordinate, 405

coordinate pair, 405

coordinate system, 405

\copy, 444

copyfitting, 13

\coppagestyle, 109

\count, 456

count, 432

counter, 167, 432

    bottomnumber, 179

    chapter, 288

    dbltopnumber, 179

    footnote, 67, 229

    increment, 290

    lastpage, 320

    lastsheet, 320

    maxsecnumdepth, 77

    page, 105

    pagenote, 245, 247

    poemline, 262

    pseudo, 288, 289

    question, 292

    secnumbdepth, 79

    secnumdepth, 77, 79

    sheetsequence, 320

    tocdepth, 139, 145, 158, 162, 168

    topnumber, 179

    totalnumber, 179

    Xdepth, 168

Counter ... already defined, 465

counter representation, 105

    Alph, 105

    alph, 105

    arabic, 105

    Roman, 105

    roman, 105

Counter too large, 455

\counterwithin, 322

\counterwithin\*, 322

\counterwithout, 322

\counterwithout\*, 322

Courier, 16, 39

\cplabel, 325

\cr, 445, 447

\createmark, 112, 113, 463

\createplainmark, 112, 113, 463

\Cref, 294, 335

crop (package), 336, 397

cross reference, 293

    automatic, 293

    specified, 293

*crosshead* (chapterstyle), 90, 103

*crosshead* (headstyles), 103

crownvopaper (option), 2

\cs, 340

\csname, 431, 445, 448

\cstyle, 377

ctabular (environment), 225, 226

CTAN, 35

CTT, 342, 395

*culver* (chapterstyle), 90

Culver, Christopher, 90

\currenttitle, 296

## D

*dash* (chapterstyle), 90

\dashbox, 409, 410

\date, 57, 64, 66, 465

datetime (package), 321

dbillpaper (option), 2

\dblfloatpagefraction, 179

\dblfloatsep (length), 179



\dbltextfloatsep (length), 179  
 \dbltopfraction, 179  
 dbltopnumber (counter), 179  
 dcolumn (package), 205, 208, 336  
 \def, 430, 451  
 default,  
     page layout, 7  
     printing options, 4  
     stock, 1  
     type size, 3  
 default (chapterstyle), 87–89, 252  
 default (headstyles), 101, 103  
 \defaultaddspace, 217  
 \defaultaddspace (length), 217, 218  
 \defaultlists, 133, 134  
 \defaultsecnum, 96  
 delarray (package), 205, 336  
 \delcode, 449  
 \deleted, 317, 318  
 \DeleteShortVerb, 277, 278  
 \delimiter, 449  
 Della Robbia, 469  
 demo (chapterstyle), 393  
 demo2 (chapterstyle), 90, 393  
 demo3 (chapterstyle), 90, 103, 393  
 demyovopaper (option), 2  
 description (environment), 131, 134  
 \descriptionlabel, 131  
 diagram, 405  
 \diamond, 100  
 \dimen, 433–435  
 dimension, 433  
 Dimension too large, 444  
 \ding, 100  
 \DisemulatePackage, 336  
 disk, *see* circle  
 Display math should end with \$\$, 445  
 \divide, 433–436  
 divide by zero, 444  
 division,  
     anonymous, 98  
     sectional, *see also* subhead, 79  
 \do, 440  
 Do not use \footnote ..., 465  
 \doccoltocetc, 144, 145  
 document (environment), 5, 337, 427, 428

\documentclass, 1, 3, 5, 16, 41, 455, 457, 458  
 double column,  
     index, 300, 301  
 double spacing, 49  
 Double subscript, 445  
 Double superscript, 445  
 \doublerulesep (length), 216, 217, 224  
 \DoubleSpacing, 50, 358  
 \DoubleSpacing\*, 50  
 dowing (chapterstyle), 90, 103  
 dowing (headstyles), 103  
 \downbracefill, 218  
 Downes, Michael, 52, 324  
 \dp, 432  
 draft document, 111  
 draft (option), 4, 111, 290, 317  
 draw, 405  
 \dropchapter, 252  
 \droptitle (length), 64  
 dvi (file), 284, 426, 428  
 Dye, Thomas, 91, 394

## E

headstyles, 101  
 \easypagecheck, 129, 325  
 ebook (option), 1, 5  
 secmark, 108  
 sectionname, 78  
 \edef, 430  
 seename, 306  
 leftmargin (length), 258  
 Egyptian, 470  
 ell (chapterstyle), 90  
 Els, Danie, 83, 149  
 \else, 437, 440, 441  
 \emminershape, 44  
 \emph, 43, 44  
 emphasis, 43  
 Empty ‘thebibliography’ environment, 465  
 empty (pagestyle), 65, 83, 106, 107, 109, 111, 146, 360, 361  
 Empty preamble: ‘I’ used, 462  
 \emptythanks, 67  
 \EmulatedPackage, 336, 337



- \EmulatedPackageWithOptions, 336, 337
- \end, 157, 282, 445, 450, 454
- end
  - line, 411
- end floats, 286–289
- \end occurred inside a group ..., 445
- \end occurred when ..., 445
- \endcsname, 431, 445, 448
- \endgroup, 445, 448
- \endinput, 352
- \endlinechar, 160
- \endlist, 136
- \endMakeFramed, 273
- \endnote, 243
- endnote
  - mark, *see also* reference mark
- endnotes, 286, 292, 364
- endnotes (package), 243
- \endwriteverbatim, 289
- English Serif, 469
- Engravers Litho, 469
- Engravers Old English, 469
- \enlargethispage, 52, 365, 456
- \enlargthispage, 456
- ent (file), 243–245, 247
- enumerate (environment), 122, 131–134, 293, 466
- enumerate (package), 132, 336
- enumitem (package), 133, 134
- environment,
  - abstract, xxiii, 71–73, 335
  - adjustwidth, 89, 129, 130, 134, 276
  - adjustwidth\*, 66, 129
  - alltt, 255, 256
  - altverse, 259, 261, 265
  - answer, 290, 291
  - appendices, 78
  - array, 205, 207, 211, 212, 218, 222, 224, 225, 445, 447, 448, 453, 455, 456, 461, 462
  - bibitemlist, 297–299
  - blockdescription, 131
  - boxedverbatim, 279–281, 286, 287
  - boxedverbatim\*, 279
  - center, 72, 123, 130, 137, 138, 201, 377
  - comment, 276, 277
  - ctabular, 225, 226
  - description, 131, 134
  - document, 5, 337, 427, 428
  - enumerate, 122, 131–134, 293, 466
  - epigraphs, 249–252
  - eqnarray, 457
  - equation, 293
  - fboxverbatim, 279, 289
  - figure, 167, 169, 187, 189, 200, 287, 288, 405, 454, 456
  - flexlabelled, 132
  - flushleft, 72, 123, 138
  - flushright, 72, 123, 138
  - framed, 169, 272–274, 276
  - framedminipage, 271, 272
  - frametitle, 275
  - framewithtitle, 274, 275
  - hangparas, 122
  - itemize, 131, 132, 134, 239, 321, 456
  - KeepFromToc, 144
  - labelled, 131, 132
  - lcode, 282, 283, 378
  - leftbar, 273
  - list, 72, 131, 134, 136, 258, 378
  - lrbox, 271
  - MakeFramed, 273
  - marginfigure, 169
  - marginable, 169
  - midsloppypar, 52
  - minipage, 51, 172, 188, 193, 198, 199, 229, 271, 350
  - multicols, 157
  - new, 290
  - oncolabstract, 73
  - patverse, 259, 261, 267, 331, 461
  - patverse\*, 261, 262, 461
  - picture, 405–409, 419, 428, 453, 459
  - qfame, 276
  - qframe, 276
  - qshade, 276
  - quotation, 71, 124, 129, 131, 134, 276, 457
  - quote, 92, 124, 129, 131, 134
  - shaded, 272, 273, 276
  - sidecaption, 196, 197, 199
  - sidecontcaption, 197
  - sidelegend, 197

- sidenamedlegend, 197
- sloppypar, 51
- snugshade, 272, 273
- snugshaded, 272
- subappendices, 78
- symbols, 136
- syntax, 377
- tabbing, 454, 456, 457
- table, 167, 169, 187, 188, 226, 454
- tabular, 172, 199, 205, 207, 211, 220–222, 224, 225, 229, 377, 445, 447, 448, 453, 455, 456, 461, 462
- tabular\*, 205, 220–222, 224
- tabularx, 205, 220–223, 466
- thebibliography, 107, 297, 298, 314, 456, 465
- theglossary, 311, 314
- theindex, 107, 301, 303, 314
- tightcenter, 377
- titledframe, 275
- titlepage, 65
- titlingpage, 65, 66, 69, 106, 107
- trivlist, 136–138, 283, 377
- verbatim, 138, 256, 277–279, 282, 283, 286, 378, 453, 465
- verbatim\*, 277–279
- verbatimoutput, 285
- verse, 255–258, 260–262
- vminipage, 51
- vplace, 336
- writefigure, 288, 289
- writerverbatim, 285, 289
- Environment ... already defined, 465
- Environment ... undefined, 455
- \epigraph, 249–252
- epigraph, 85, 249–254
- epigraph (package), 249, 336
- epigraph* (pagestyle), 107, 253
- \epigraphfontsize, 251
- \epigraphforheader, 252
- \epigraphhead, 107, 251, 252
- \epigraphpicture, 252
- \epigraphposition, 250
- \epigraphrule (length), 251
- epigraphs (environment), 249–252
- \epigraphsourceposition, 250
- \epigraphtextposition, 250
- \epigraphwidth (length), 250, 252
- eqnarray (environment), 457
- equation (environment), 293
- error, 443
  - LaTeX, 453–458
  - memoir class, 461–464
  - TeX, 444–453
- error message,
  - response, 443
    - continue, 443
    - edit, 443
    - exit, 443
    - help, 443
    - insert, 443
    - quiet, 443
    - run, 443
    - scroll, 443
- descriptionlabel, 131
- eso-pic (package), 399
- etex, 332
- etex (package), 375
- etoolbox (package), 133, 399
- \evensidemargin (length), 23
- \everydisplay, 51
- \everypar, 128
- exception dictionary, 452
- executivepaper (option), 2
- \ext@type, 200
- extend a macro, 323
- Extra ..., 445
- Extra ... or forgotten ..., 445
- Extra alignment tab ..., 445
- Extra \else, 445
- Extra \endcsname, 445
- Extra \fi, 445
- Extra \or, 445
- Extra \right, 445
- \extracolsep, 211
- extrafontsizes (option), 2, 3, 48, 463
- \extrarowheight (length), 224
- \extratabsurround, 225
- \extratabsurround (length), 225
- textwidth, 241
- textwidth (length), 110

## F

- fancybox (package), 273
- \fancybreak, 98, 99
- \fancybreak\*, 98
- fancyhdr (package), 106, 336
- \fbox, 271–273, 279
- \fboxrule (length), 292
- \fboxsep (length), 292
- fboxverbatim (environment), 279, 289
- \fcardinal, 327
- \feetabovelfloat, 230
- \feetbelowfloat, 230
- Fette Fraktur, 469
- Fette Gotisch, 469
- \fi, 437, 440
- \fibseries, 438–440
- \fibtogo, 439
- figure, 117, 129, 142, 151, 154, 163, 167, 168, 171, 181, 189, 190, 192, 193, 201, 203, 253, 345, 351, 405
  - float definition, 167
  - reference, 294
  - sub-, 163
  - subfigure, 192–196
- figure (environment), 167, 169, 187, 189, 200, 287, 288, 405, 454, 456
- \figurename, 167, 202, 335
- \figurerefname, 294, 335
- figures,
- file, 284–292
  - ans, 290
  - aux, 284, 293, 427, 428
  - bib, 299, 300
  - bst, 300
  - clo, 464
  - close, 285
  - dvi, 284, 426, 428
  - ent, 243–245, 247
  - idx, 300–302, 304, 310
  - ind, 300, 301, 304, 309
  - ist, 304, 307
  - jobname.idx, 302
  - jobname.ind, 301
  - lof, 140
  - log, 284, 336, 428, 443
  - lot, 140
  - mem10.clo, 464
  - open, 285
  - pdf, 284
  - read, 271, 284–286, 289
    - single line, 286
    - verbatim, 286
  - source2e.tex, 430
  - tex, 284
  - toc, 92, 139, 140, 156, 243, 284, 428
  - write, 271, 284–285, 288, 290
    - verbatim, 285
- File ended while scanning ..., 446
- File not found ..., 455
- filll, 436
- fill, 436
- fil, 436
- final (option), 4, 290, 317
- \finishwritefigure, 289
- \firmlist, 134
- \firmslists, 133, 134
- \firmslists\*, 133, 134
- \firsthline, 225
- fixltx2e (package), 116, 375
- \fixthelayout, 23, 25, 467
- flafter (package), 176
- \flagverse, 262, 268
- Flanders, 469
- \flegfigure, 188
- \flegfloat, 188
- \flegtable, 188
- \flegtocfigure, 188
- \flegtocfloat, 188
- \flegtocfloat, 188
- \flegtocfloat, 188
- fleqn (option), 5
- fleuron, 100, 470
- flexlabelled (environment), 132
- float, 5, 167, 181, 183, 185–189, 192, 194, 200, 203, 229, 326, 351, 375
  - bottom, 175, 176, 179
  - centering, 123
  - double column, 167, 175, 179, 181
  - flush, 175
  - framed, 169
  - here, 175, 176, 179
  - multiple, 171–175
    - table and figure, 172
  - new, 167–169
  - new diagram, 168
  - new subfloat, 174

- page, 116–119, 175, 176
- parameters, 176
- placement, 175–181
- position, 168
- ruled, 170
- set off, 169–171
- single column, 167, 175
- subfloat, 192–196
- suppress, 176
- suppress bottom, 176
- suppress top, 176
- top, 175, 176, 179
- 떠다니는객체, 75
- Float too large ..., 459
- Float(s) lost, 455
- \FloatBlock, 176
- \FloatBlockAllowAbove, 176
- \FloatBlockAllowBelow, 176
- floatcomp* (pagestyle), 117
- \floatpagefraction, 179–181
- \floatsep (length), 179, 181
- \flushbottom, 5, 24, 77, 326
- flushleft, 123
- flushleft (environment), 72, 123, 138
- \flushleftright, 125
- flushright, 123
- flushright (environment), 72, 123, 138
- \fnsymbol, 235
- \fnum@figure, 201, 202
- \fnum@type, 200, 201
- \fnumbersep, 327
- folio, 20, 106, 116, 164, 165, 345, 349
  - changing representation, 105
  - 폴리오, 75
- font
  - bitmap, 35, 48
  - Computer Modern, 35
  - Knuthian, 15
  - measuring, 13
  - Metafont, 15
  - Metafont, 35
  - Opentype, 35
  - outline, 35, 44, 48
  - PostScript, 15, 35, 469
  - PostScript, 포스트스크립트, 35
  - TrueType, 35, 469
  - TrueType, 트루타입, 35
  - Font ... not loadable ..., 446
  - font characteristic,
    - family, 41, 42
    - series, 41, 42
    - shape, 41, 42
  - Font command ... is not supported, 462
  - font commands, 41
  - font declarations, 42
  - Font shape ..., 459
  - font size, 44
  - fontenc (package), 375
  - fontfamily, 38
    - bch, 39
    - pag, 38
    - pbk, 39
    - pcr, 39
    - phv, 39
    - pnc, 40
    - ppl, 40
    - psy, 41
    - ptm, 40
    - put, 40
    - pzc, 41
    - pzd, 41
  - FontSite, 63
  - fonttable (package), 376
  - foolscapvopaper (option), 2
  - footer, 7, 20–21, 106–108, 110, 114–117, 317, 345
  - \footfootmark, 233
  - \footfudgefiddle, 231
  - \footmarksep (length), 232–234
  - \footmarkstyle, 233
  - \footmarkwidth (length), 232–234
  - footmisc (package), 230, 232
  - \footnote, 101, 203, 229–232, 240, 241, 243, 248, 465
  - footnote, 44, 67–69, 101, 236
    - bottom float, 230
    - fragile, 203
    - in caption, 202–203, 444
    - in float, 203
    - in heading, 101, 444
    - mark, *see also* reference mark, 67, 101, 203
    - marker, 232
    - multiple, 234

- styling, 232
- marker separator, 230
- new series, 231
- reference, 229
- style, 232
- styles, 231
- styling, 232–236
- symbol, 235
  - order, 235
- text, 203, 232, 233
  - font, 234
- too long, 231
- verbatim text, 230
- footnote (counter), 67, 229
- footnote, 각주, 69
- \footnotemark, 68, 203, 229, 232, 248
- \footnoterule, 69, 232, 235
- footnotes,
  - as a paragraph, 231
  - as paragraphs, 231
  - as three columns, 231
  - as two columns, 231
- \footnotesatfoot, 240
- \footnotesinmargin, 240
- \footnotesize, 44–46, 69, 134, 234, 242, 251
- \footnotetext, 203, 229, 240, 248
- \footparindent (length), 233
- \footref, 229
- \footruleheight, 110
- \footruleskip, 110
- \footskip is too large ..., 462
- \footskip (length), 21–23, 26, 346, 462
- \foottextfont, 234, 358
- \foottopagenote, 248
- Forbidden control sequence found ..., 446
- Ford, Matthew, 260
- \fordinal, 327
- fore-edge, 20
- \foremargin (length), 22, 23, 238, 399, 463
- \frac, 330
- fragile, 157, 296, 444
- fragile command, 101
- \frame, 410
- frame,
  - box, 272–276

- styling, 273
- minipage, 271
  - verbatim, 271
- narrow box, 273
- rounded corners, 273
- title, 274–275
- verbatim, 279, 286
  - styling, 280
- \framebox, 408, 409
- \FrameCommand, 273
- framed,
  - box, 408
  - float, 169
  - verbatim, 289
- framed (environment), 169, 272–274, 276
- framed (package), 272, 275, 336
- framedminipage (environment), 271, 272
- \FrameHeightAdjust, 273
- \FrameHeightAdjust (length), 272
- \framepichead, 119
- \framepichook, 119
- \framepictextfoot, 119
- \FrameRestore, 273
- \FrameRule (length), 272
- \FrameSep (length), 272
- \FrameTitle, 274
- frametitle (environment), 275
- framewithtitle (environment), 274, 275
- Franklin Gothic, 469
- fred* (chapterstyle), 87
- \freetabcaption, 226
- \fref, 294, 335
- front matter, 75
- frontispiece, 154
- \frontmatter, 72, 75, 79, 86, 339
- \frontmatter\*, 75
- Frutiger, Adrian, 39
- full stop, *see also* period
- fullptlayout (option), 5
- Function, 469
- \fussy, 51, 52
- Futura, 469
- \futurelet, 324

## G

- Garamond, 353, 369, 469

Garcia, Gerardo, 90  
 gathering, 320  
 \gdef, 430  
 geometry (package), 7, 336  
 ger (chapterstyle), 90  
 \getarrayelement, 331  
 \gfibseries, 438, 440  
 Gill Sans, 469  
 \global, 430  
 \glossary, 310–312, 316, 453  
 \glossarycolsep (length), 314  
 \glossaryentry, 313  
 \glossaryintoc, 314  
 \glossarymark, 314  
 \glossaryname, 314, 335  
 \glossaryrule (length), 314  
 \glossitem, 311–313, 315  
 glue, 434  
 Glypha, 470  
 Glytus, 470  
 golden ratio, 26  
 golden section, 26  
 Goudy Old Style, 469  
 \gparindent (length), 283, 284, 378  
 graphicx (package), 90, 91, 375, 387, 388, 391, 396  
 group, 430  
 gutter, 20  
     width, 20

## H

h (position argument), 175, 180  
 h float specifier ..., 459  
 haeder, 107  
 \halign, 445, 448  
 \hangcaption, 182  
 \hangfrom, 122  
 hanging,  
 hanging (package), 122  
 hangnum (chapterstyle), 87, 88  
 \hangpara, 122  
 hangparas (environment), 122  
 \hangsecnum, 96  
 \hangsubcaption, 195, 196  
 chapter, 80  
 hash size, 453

\hbext@, 431  
 \hbox, 100, 431, 444, 449, 451  
 \headdrop (length), 21  
 header, 7, 20–21, 26, 101, 106–110, 114–117, 251, 317, 345, 349  
     specifying size, 20–22  
     머리글, 76  
 \headheight and/or \headsep are too large ..., 462  
 \headheight (length), 19, 21–23, 26, 462  
 heading, 5, 144, 176, 250  
     abstract, 71  
     book, 79–82  
     chapter, 5, 83–86, 91, 154, 251, 253  
     part, 5, 79–82  
     sections, 5, 93–98  
     장, 5  
     절, 5  
     편, 5  
 heading (pagestyle), 106  
 headings (pagestyle), 7, 106, 107, 111, 114  
 \headmargin (length), 22, 23, 26  
 \headnameref, 295  
 \headsep (length), 19, 21, 23, 26, 349, 462  
 \headskip, 22  
 \headstyles, 101  
 headstyles,  
     bringhurst, 103  
     crosshead, 103  
     default, 101, 103  
     dowding, 103  
     komalike, 103  
     memman, 101, 103  
     ntglike, 103  
     tandh, 103  
     wilsondob, 103, 104  
 \headwidth (length), 110  
 \heavyrulewidth (length), 216, 217  
 Helvetica, 15, 16, 39  
 \hfil, 100, 149, 153, 436  
 \hfill, 153, 172, 185, 436  
 \hfilneg, 436  
 Høgholm, Morten, 13, 15  
 \hhrule, 172  
 \hideindexmarks, 303  
 \hline, 224  
 \hmpunct, 321

horizontal mode, 431  


\hsize (length), 273  
\hskip, 436  
\hss, 436  
\ht, 432  
\HUGE, 45, 46, 48  
\Huge, 45, 46, 81, 86  
\huge, 45, 46, 80, 81, 85  
Huge page cannot be shipped out, 446  
Hurenkinder, *see* widow  
hyperindex, 304  
hyperref (package), 145, 149, 156, 159,  
160, 165, 194, 246, 294, 303, 304,  
338, 340  
\hyphenation, 447, 449, 452  
hyphenation, 239

## I

I can't find file ..., 446  
I can't go on meeting you like this, 446  
I can't write on file ..., 446  
sidecapfloatwidth, 198  
\idtextinnotes, 246  
idx (file), 300–302, 304, 310  
\idxmark, 116  
if-then-else, 437  
\ifbounderror, 331  
\ifcase, 440, 441  
\ifdim, 437  
\ifdraftdoc, 111, 290, 317  
\ifetex, 332  
ifetex (package), 332  
\ifinteger, 332  
\ifluatex, 333  
ifmtarg (package), 336  
\ifnum, 437  
\ifodd, 437  
\ifoddpage, 325  
\ifonlyfloats, 116, 117  
\ifpdf, 332  
ifpdf (package), 332, 336  
\ifsamenam, 324  
\ifscapmargleft, 196  
\IfStreamOpen, 285, 291

\ifxetex, 333  
ifxetex (package), 333  
\ignorenoidxfile, 301  
\iiirdstring, 328  
\iindstring, 328  
Illegal character ..., 455  
Illegal parameter number ..., 446  
Illegal pream-token ..., 462  
Illegal unit of measure ..., 446, 447  
illustration, 85, 105, 154, 164, 171, 172,  
188, 201  
multiple, 171  
imperialvopaper (option), 2  
Improper \hyphenation ..., 447  
\include, 303, 337, 455, 456  
\include cannot be nested, 455  
\includegraphics, 172  
\includeonly, 303  
Incomplete ..., 447  
ind (file), 300, 301, 304, 309  
\indentafterchapter, 86  
\indentcaption, 182  
vindent (length), 258  
\indentpattern, 261, 267, 269  
\index, 302–304, 306, 453  
index, 116, 154, 164, 254, 257, 376, 377  
double column, 300, 301  
gutter, 301  
entry levels, 303  
explanatory text, 301  
main entry, 303  
multiple, 257, 300, 302  
name, 301  
preparation, 301  
print, 301  
printing, 300–301  
see also reference, 302, 306  
see reference, 302, 306  
show indexed items, 303  
single column, 300, 301  
subentry, 303  
subsubentry, 303  
title in ToC, 301  
Index ... for pattern ..., 465  
Index ... outside limits ..., 462  
index (package), 257, 336, 337  
index (pagestyle), 116



\indexcolsep (length), 301  
 indexing, 116  
 \indexintoc, 301  
 \indexmark, 301  
 \indexmarkstyle, 303  
 \indexname, 301, 335  
 \indexrule (length), 301  
 Infinite glue shrinkage ..., 447  
 \input, 286, 337, 446, 455  
 input stack size, 453  
 Input stream ... is already defined, 465  
 Input stream ... is not open, 465  
 Input stream ... is open, 465  
 \InputIfFileExists, 337, 338  
 insert in contents, 142  
 \insertchapterspace, 86, 162, 361  
 interlinear space, *see* leading  
 \intertextsep (length), 179  
 iso (class), 317  
 \isopage, 29  
 ist (file), 304, 307  
 \iststring, 328  
 \item, 131–134, 250, 293, 299, 303, 455–457  
 itemize (environment), 131, 132, 134, 239, 321, 456  
 \itemsep (length), 299  
 \itshape, 42, 93

## J

Jenson Recut, 469  
 Jessica, 469  
 Joanna, 469  
 \jobname, 284  
 jobname.idx (file), 302  
 jobname.ind (file), 301  
 jurabib (package), 300  
 \justlastraggedleft, 128

## K

KeepFromToc (environment), 144  
 \keepthetitle, 67  
 Kettler, Howard, 39  
 keyword,  
     by, 433

    minus, 434  
     plus, 434  
 \killtitle, 67  
 komalike (chapterstyle), 90, 103  
 komalike (headstyles), 103

## L

l (position argument), 226, 227, 408, 411, 418  
 \l@book, 148  
 \l@kind, 140  
 \l@section, 142  
 \label, 54, 164, 172, 189, 194, 229, 289, 290, 292–296, 432, 453, 459, 460  
 label, 293  
 Label ... multiply defined, 459  
 Label(s) may have changed ..., 459  
 labelled (environment), 131, 132  
 landscape (option), 1  
 Lanston Bell, 469  
 Lanston Koch, 469  
 \LARGE, 45, 46  
 \Large, 45, 46, 348  
 \large, 45, 46, 95, 121, 263  
 largecrownvopaper (option), 2  
 largepostvopaper (option), 2  
 \lasthline, 225  
 \lastlineparrule, 127  
 \lastlinerulefill, 127  
 lastpage (counter), 320  
 lastsheets (counter), 320  
 LaTeX,  
     error, 453–458  
     warning, 458–460  
 latexsym (package), 375, 455  
 Latin Modern, 3  
 layouts (package), 29, 147, 376  
 \lccode, 449  
 \lcminusname, 329, 335  
 lcode (environment), 282, 283, 378  
 leading, 50, 333  
 \leadpagetoclevel, 83  
 League, Christopher, 63, 469  
 \leavespergathering, 321  
 \leavevmode, 100, 432  
 ledgerpaper (option), 2



---

ledmac (package), 230, 232  
 \left, 212, 213, 445  
 leftbar (environment), 273  
 \leftcenteright, 128  
 \leftcenterright, 128  
 \leftmargini (length), 258  
 \leftmark, 107, 108, 111, 113, 114, 116  
 \leftskip, 342  
 \leftspringright, 128  
 legalpaper (option), 2  
 \legend, 154, 186, 188, 296, 339, 351  
 legend, 186  
     in list of, 187  
     named, 188  
 length, 433  
     \@dblfpbot, 179, 180  
     \@dblfpsep, 179  
     \@dblfpstop, 179, 180  
     \@dblftop, 180  
     \@fpbot, 179, 180  
     \@fpsep, 179, 180  
     \@fptop, 179, 180  
     \@pnumwidth, 151  
     \abovecaptionskip, 201  
     \aboverulesep, 216, 217  
     \absleftindent, 72  
     \absparindent, 72  
     \absparsep, 72  
     \absrightindent, 72  
     \abstitlesep, 72  
     \afterchapskip, 85  
     \afterepigraphskip, 251  
     \afterPoemTitleskip, 264  
     \apsparindent, 72  
     \arraycolsep, 224  
     \arrayrulewidth, 224  
     \baselineskip, 21, 23, 24, 50, 121, 122, 201, 251, 333, 378  
     \beforechapskip, 85, 395  
     \beforeepigraphskip, 251  
     \beforePoemTitleskip, 264  
     \belowcaptionskip, 201  
     \belowrulesep, 216, 217  
     \bibitemsep, 299  
     \bottomsectionskip, 77  
     \bvboxsep, 279, 280  
     \cftbeforeKskip, 148  
     \cftKindent, 148  
     \cftKnumwidth, 148, 149  
     \cftparskip, 147  
     \chapindent, 89  
     \cmidrulekern, 217, 218  
     \cmidrulesep, 217  
     \cmidrulewidth, 217  
     \columnsep, 20, 23  
     \columnseprule, 20, 23  
     \dblfloatsep, 179  
     \dbltextfloatsep, 179  
     \defaultaddspace, 217, 218  
     \doublerulesep, 216, 217, 224  
     \droptitle, 64  
     leftmargini, 258  
     \epigraphrule, 251  
     \epigraphwidth, 250, 252  
     \evensidemargin, 23  
     \extrarowheight, 224  
     \extratabsurround, 225  
     textwidth, 110  
     \fbboxrule, 292  
     \fbboxsep, 292  
     \floatsep, 179, 181  
     \footmarksep, 232–234  
     \footmarkwidth, 232–234  
     \footparindent, 233  
     \footskip, 21–23, 26, 346, 462  
     \foremargin, 22, 23, 238, 399, 463  
     \FrameHeightAdjust, 272  
     \FrameRule, 272  
     \FrameSep, 272  
     \glossarycolsep, 314  
     \glossaryrule, 314  
     \gparindent, 283, 284, 378  
     \headdrop, 21  
     \headheight, 19, 21–23, 26, 462  
     \headmargin, 22, 23, 26  
     \headsep, 19, 21, 23, 26, 349, 462  
     \headwidth, 110  
     \heavyrulewidth, 216, 217  
     \hsize, 273  
     vindent, 258  
     \indexcolsep, 301  
     \indexrule, 301  
     \intextsep, 179  
     \itemsep, 299

`\leftmargini`, 258  
`\lightrulewidth`, 216, 217  
`\linewidth`, 142, 198  
`\lowermargin`, 22, 462, 464  
`\lxvchars`, 15  
`\marginparpush`, 21, 23  
`\marginparsep`, 21–23, 196, 237, 349, 350  
`\marginparwidth`, 21, 23, 196, 237, 349, 350  
`\midchapskip`, 85, 395  
`\midPoemTitleskip`, 264  
`\normalrulethickness`, 110  
`\oddsidemargin`, 23  
`\onelineskip`, 50, 333, 378  
`\paperheight`, 12, 22, 23, 463, 464  
`\paperwidth`, 12, 22, 23, 130, 346, 463  
`\parindent`, 16, 49, 121, 124, 126, 207  
`\parsep`, 299  
`\parskip`, 49, 50, 121, 147, 201  
`\partopsep`, 137  
`\pfbreakskip`, 99  
`\prechapterprecisshift`, 92  
`\pwayii`, 349, 350  
`\pwayi`, 349, 350  
`\ragrparindent`, 123, 124  
`rigid`, 433, 435  
`rubber`, 433–435  
`\sidebarhsep`, 239, 240  
`\sidebartopsep`, 239, 240  
`\sidebarvsep`, 239, 240  
`\sidebarwidth`, 239, 240  
`\sidecapraise`, 198  
`\sidecapsep`, 196, 198  
`\sidecapwidth`, 196  
`\sidefootadjust`, 241  
`\sidefoothsep`, 241  
`\sidefootmarksep`, 242  
`\sidefootmarkwidth`, 242  
`\sidefootparindent`, 242  
`\sidefootvsep`, 241  
`\sidefootwidth`, 241  
`\sideparvshift`, 237  
`\spinemargin`, 22, 23, 130, 463  
`\stanzaskip`, 258  
`\stockheight`, 22, 23, 463  
`\stockwidth`, 22, 23, 346, 463  
`\tabcolsep`, 224  
`\textfloatsep`, 179, 181  
`\textheight`, 16, 22–24, 239, 240, 464  
`\textwidth`, 16–18, 22, 23, 110, 130, 225, 463  
`\thanksmarksep`, 68  
`\thanksmarkwidth`, 68  
`\topmargin`, 19, 23  
`\topsep`, 137  
`\topskip`, 23, 24, 52  
`\trimedge`, 22, 23, 26, 346, 463  
`\trimtop`, 22, 23, 26, 463  
`\unitlength`, 131, 161, 252, 349, 405, 406  
`\uppermargin`, 19, 22, 23, 462, 464  
`\verbatimindent`, 279  
`\versewidth`, 257, 258  
`\vgap`, 258, 259, 261  
`\vindent`, 258  
`\vleftmargin`, 258  
`\vleftskip`, 262  
`\vrightskip`, 262  
`\width`, 273  
`\xlvchars`, 15  
Length ... already defined, 465  
`leqno` (option), 5  
`\let`, 157, 430  
`\letcountercounter`, 322  
`letterpaper`, 8  
`letterpaper` (option), 1, 2, 5, 26, 29  
`\lightrulewidth` (length), 216, 217  
Limit controls ..., 447  
`\limits`, 447  
Limits for array ... , 462  
Linden, 469  
`\line`, 413, 415, 416, 454, 459  
`line`, , *see also* picture object  
    `arrowhead`, *see* vector  
    `end`, 411  
    `length`, 413  
    `orphan`, 52, 53  
    `reference point`, 413  
    `restricted slope`, 413, 414  
    `short`, 413  
    `slope`, 413  
    `thickness`, 406  
    `widow`, 52, 53

- line number, 258, 259, 268, 279, 287
  - font, 262, 281
  - frequency, 262, 281
  - position, 262, 281
  - reset, 281
- line too long, *see* overfull lines
- `\linebreak`, 451
- `\linenottooshort`, 126
- `\linenumberfont`, 262, 281
- `\linenumberfrequency`, 262, 281
- `\linethickness`, 406
- `\linewidth` (length), 142, 198
- lining,
- Linotype, 39
- `\list`, 136
- list, 131–138
  - new, 134–136
  - new list of, 161–165
  - spaces, 283
  - tight, 134
- list (environment), 72, 131, 134, 136, 258, 378
- `\listanswername`, 161
- `\listfigurename`, 145, 146, 335
- `\listofanswers`, 161
- `\listoffigures`, 335
- `\listoffigures`, 107, 139, 144, 147
- `\listoffigures*`, 139, 144
- `\listofplates`, 164
- `\listoftables`, 107, 139, 142, 144, 147, 335
- `\listoftables*`, 139, 144
- `\listplatename`, 164
- `\listtablename`, 145, 146, 335
- Litho Antique, 470
- `\llap`, 89
- lmodern (package), 3
- `\LoadClass`, 337, 455–457, 520
- `\LoadClass` in package file, 455
- LoF, 139, 140, 143–147, 149, 154, 162, 164, 345, 351, 360, 361, 452
- lof (file), 140
- `\lofmark`, 145
- log (file), 284, 336, 428, 443
- Lonely `\item` ..., 455
- `\long`, 430
- longtable (package), 225
- `\loop`, 440
- `\loosesubcaptions`, 195
- LoT, 139, 140, 143–147, 162, 164, 345, 351, 360, 361
- lot (file), 140
- `\lotmark`, 145
- lowercase,
- `\lowermargin` (length), 22, 462, 464
- LR
  - mode, 407
- lrbox (environment), 271
- alsiname, 306
- LTR, 342
- Lubalin, Herb, 38
- Lucas, Édouard, 438
- Lucida Bright, 353, 369
- Luecking, Daniel, 151
- `\lxvchars` (length), 15
- Lydian, 469
- lyhne* (chapterstyle), 90
- Lyhne, Anders, 90



---

## 첫 행 색인

---

Beautiful Railway Bridge of the Silv'ry Tay, [303](#)

Fury said to, [270](#)

His judgement rendered, he dissolved the Thing, [260](#)

I am François, which is unfortunate, [226](#)

I used to love my garden, [255](#), [265](#)

In a cavern, in a canyon, [268](#)

In mathematics he was greater, [267](#)

Je suis François, dont il me pois, [226](#)

Prince, do not ask in a week, [43](#)

Prince, n'enquerez de sepmaine, [43](#)

Then God created Newton, [266](#)

There was a young lady of Ryde, [268](#)

There was a young man of Quebec, [265](#)

There was an old party of Lyme, [256](#)

What a funny thing is a flea, [266](#)



## Colophon

이 사용안내서는 Leslie Lamport가 처음 만든 LaTeX 시스템과 memoir 클래스로 조판하였다. 원본(영문)은 Hermann Zapf가 디자인한 Palatino 글꼴(이탤릭 및 작은대문자 포함)로 33pc에 10/12포인트를 본문 텍스트로 삼았으며, Sans, Slanted, Typewriter 글꼴은 Donald Knuth의 Computer Modern 글꼴가족을 사용하였다.

한글 번역본은 원본의 레이아웃을 그대로 유지하였으며 한글과 한자를 Noto Serif CJK와 Noto Sans CJK 폰트로 식자하고 라틴 문자에 TeX Gyre Pagella 글꼴과 Latin Modern Sans, Typewriter를 적용하였으며 한글 처리를 위하여 Xe<sub>La</sub>TeX과 ko<sub>La</sub>TeX(xetexko)을 썼다.