


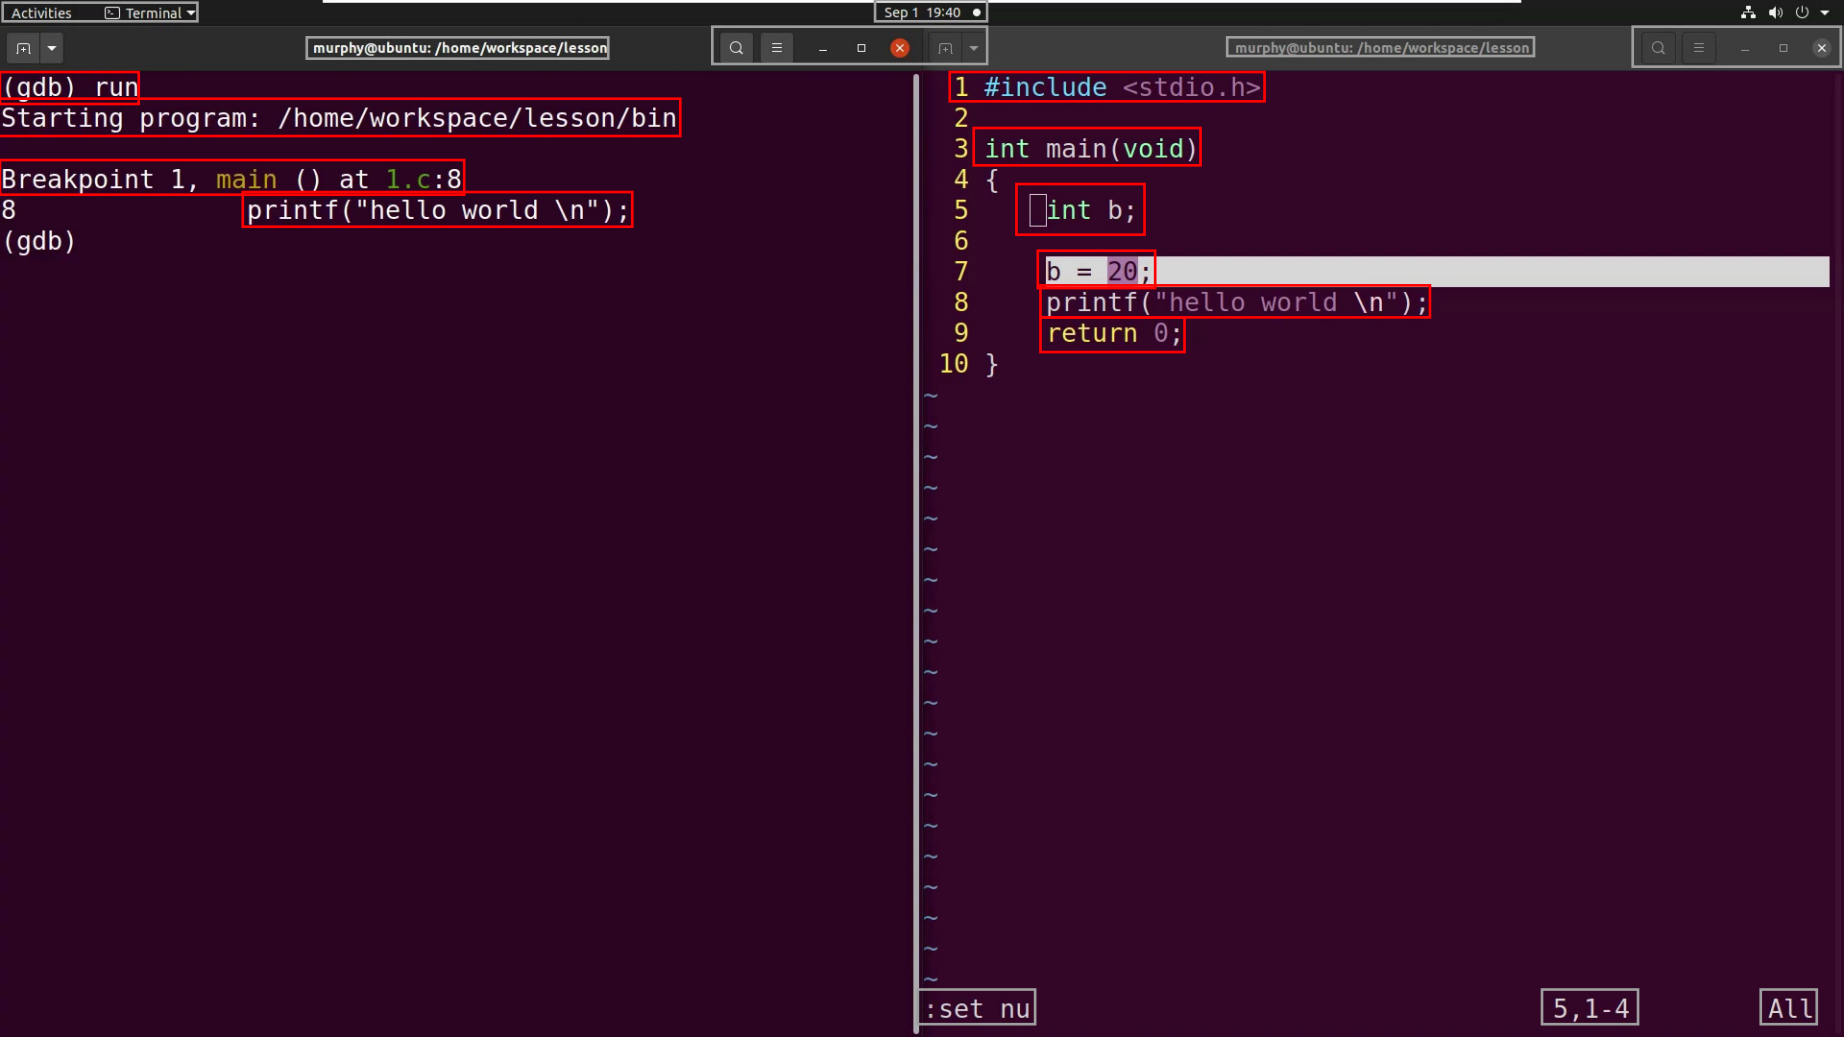

```
(gdb) run
Starting program: /home/workspace/lesson/bin

Breakpoint 1, main () at 1.c:8
8      printf("hello world \n");
(gdb)
```

```
1 #include <stdio.h>
2
3 int main(void)
4 {
5     int b;
6
7     b = 20;
8     printf("hello world \n");
9     return 0;
10 }
```

```
:set nu
```

```
5,1-4
```

```
All
```