


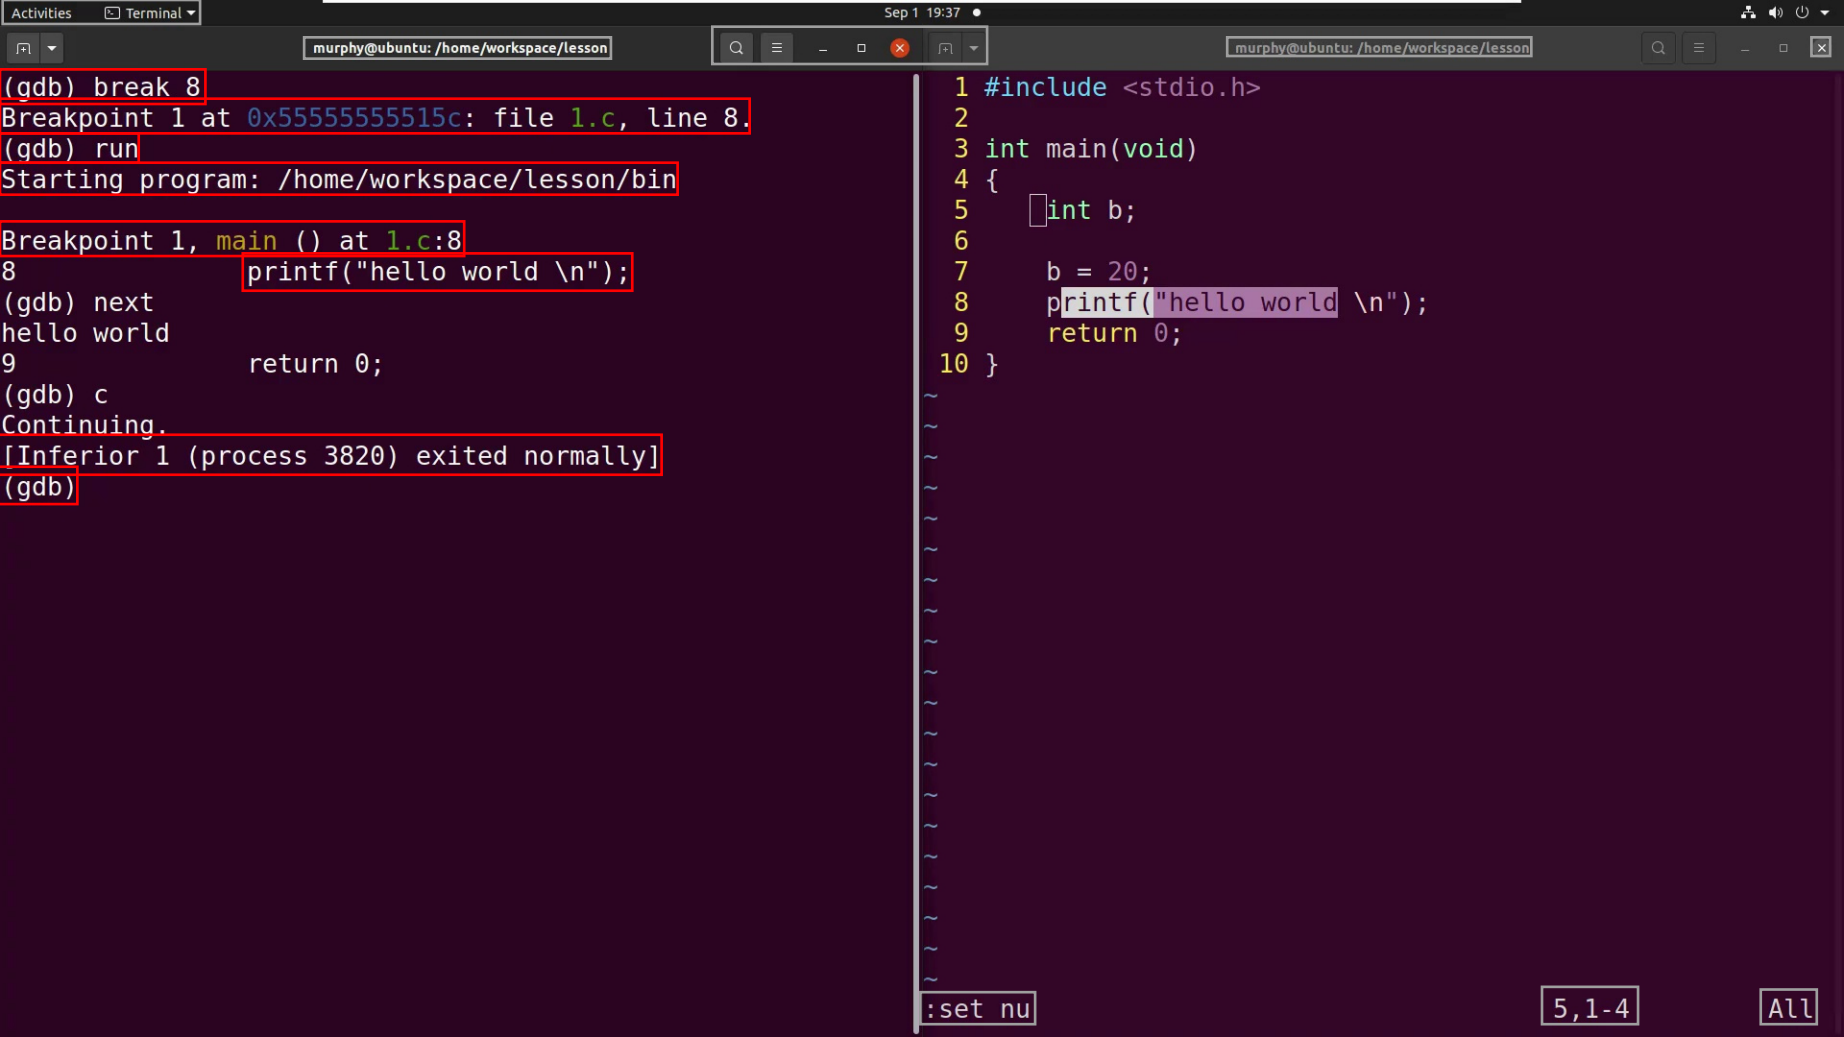

```
(gdb) break 8
Breakpoint 1 at 0x5555555515c: file 1.c, line 8.
(gdb) run
Starting program: /home/workspace/lesson/bin
Breakpoint 1, main () at 1.c:8
8      printf("hello world \n");
(gdb) next
hello world
9      return 0;
(gdb) c
Continuing.
[Inferior 1 (process 3820) exited normally]
(gdb)
```

```
1 #include <stdio.h>
2
3 int main(void)
4 {
5     int b;
6
7     b = 20;
8     printf("hello world \n");
9     return 0;
10 }
```

```
:set nu
```

```
5,1-4
```

```
All
```