


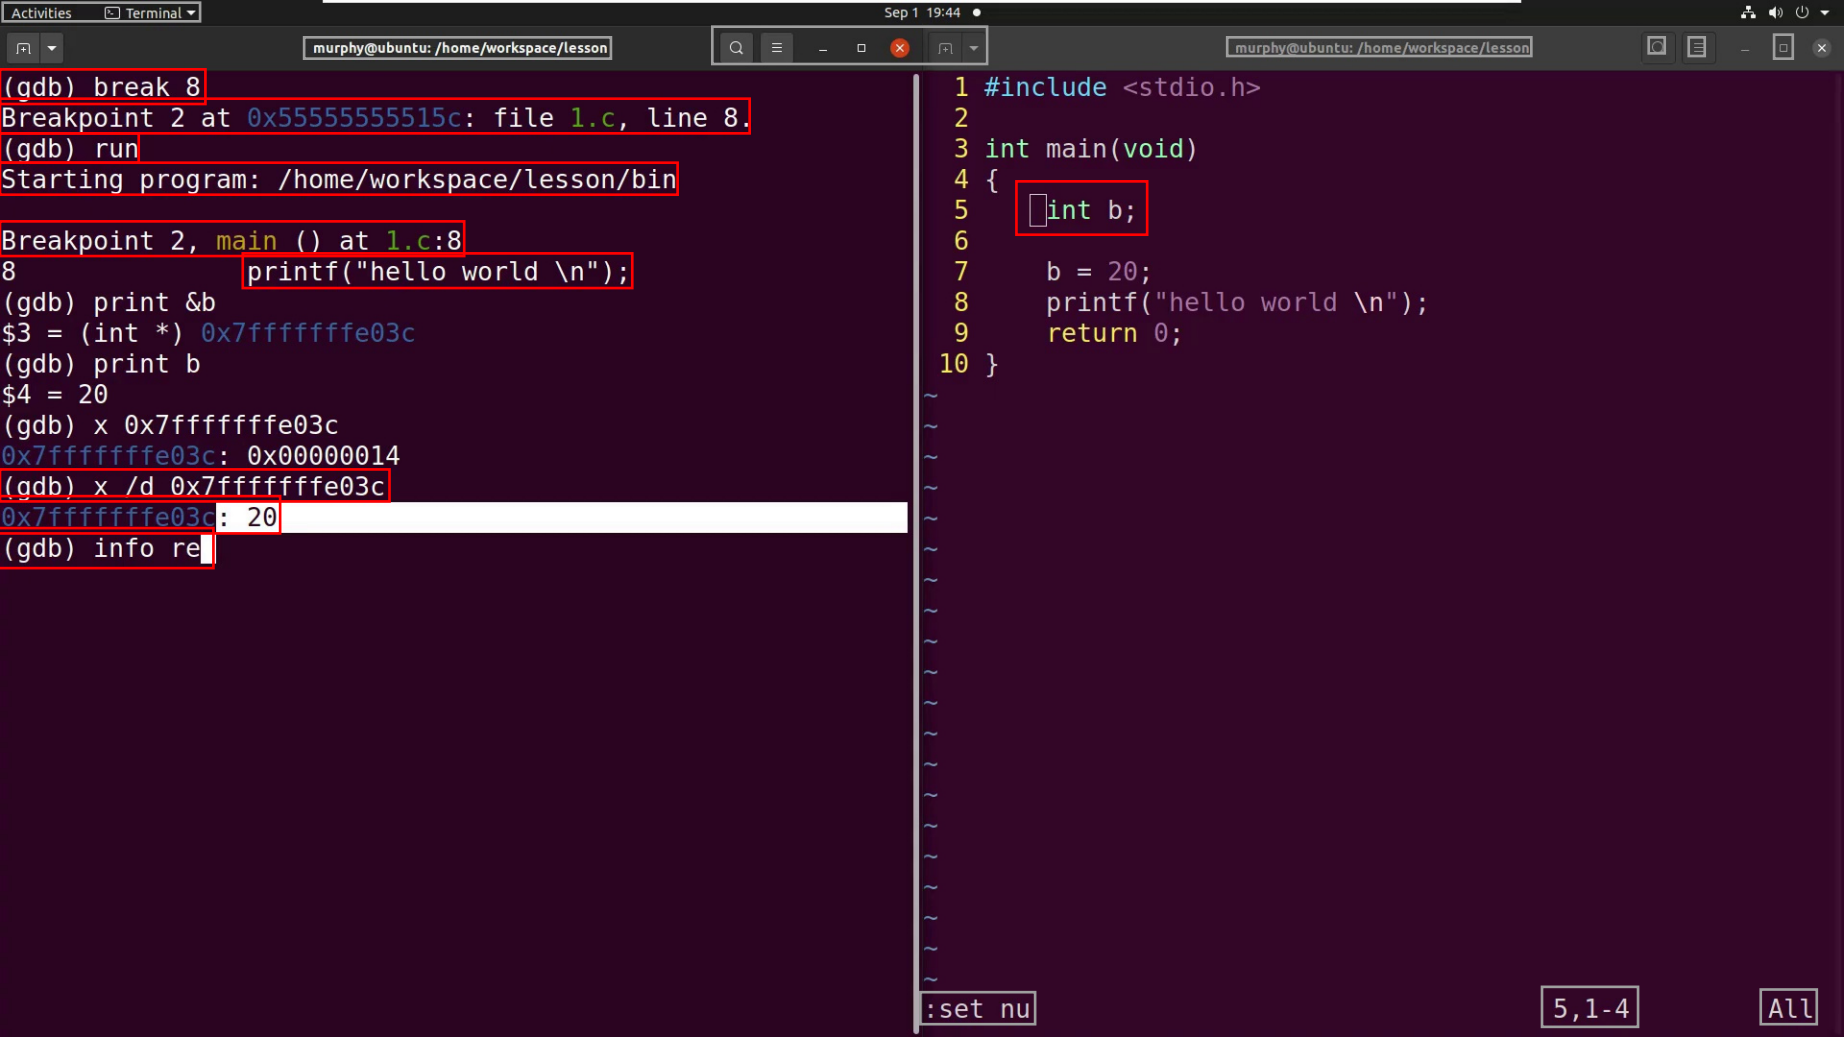

```
(gdb) break 8
Breakpoint 2 at 0x5555555515c: file 1.c, line 8.
(gdb) run
Starting program: /home/workspace/lesson/bin
Breakpoint 2, main () at 1.c:8
8      printf("hello world \n");
(gdb) print &b
$3 = (int *) 0x7fffffffef03c
(gdb) print b
$4 = 20
(gdb) x 0x7fffffffef03c
0x7fffffffef03c: 0x00000014
(gdb) x /d 0x7fffffffef03c
0x7fffffffef03c: 20
(gdb) info re
```

```
1 #include <stdio.h>
2
3 int main(void)
4 {
5     int b;
6
7     b = 20;
8     printf("hello world \n");
9     return 0;
10 }
```

```
:set nu
```

```
5,1-4
```

```
All
```