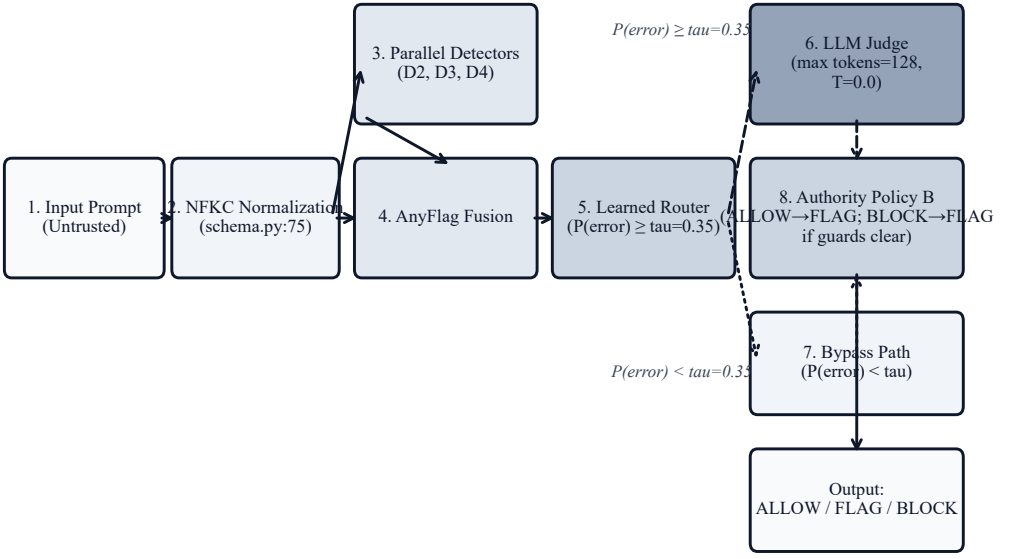

1. Input Prompt (Untrusted)
2. NFKC Normalization (schema.py:75)
3. Parallel Detectors (D2, D3, D4)
4. AnyFlag Fusion
5. Learned Router (P(error) ≥ tau=0.35)
P(error) ≥ tau=0.35
6. LLM Judge (max tokens=128, T=0.0)
8. Authority Policy B (ALLOW→FLAG; BLOCK→FLAG if guards clear)
P(error) < tau=0.35
7. Bypass Path (P(error) < tau)
Output: ALLOW / FLAG / BLOCK
Data flow (all paths)
Conditional: P(error) ≥ tau (router sends to judge)
Bypass: P(error) < tau (skips judge)