Normal-mode tradeoffs: exact buffer events, control activity, common clock drift

Each point is one seed; horizontal bars are means. Buffer points are all-event actual extrema, not certificates.

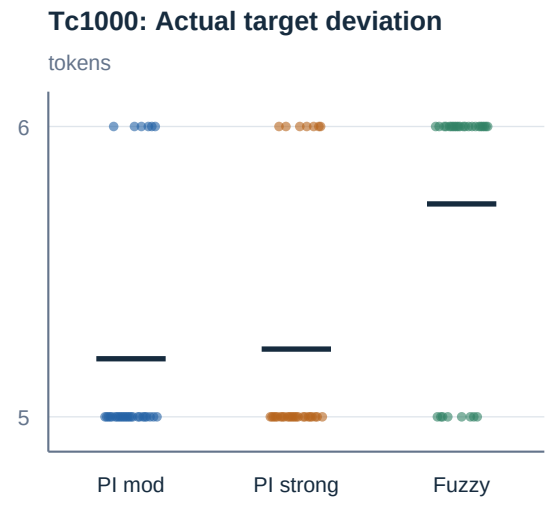

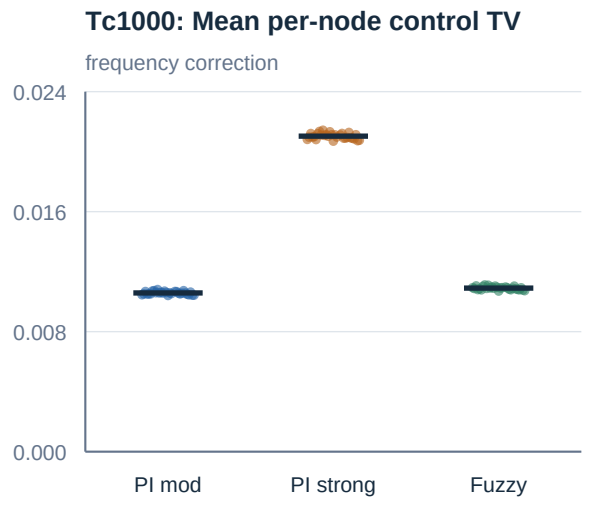

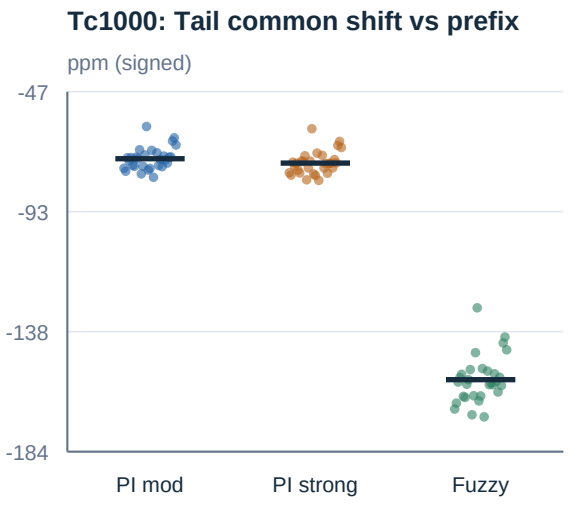

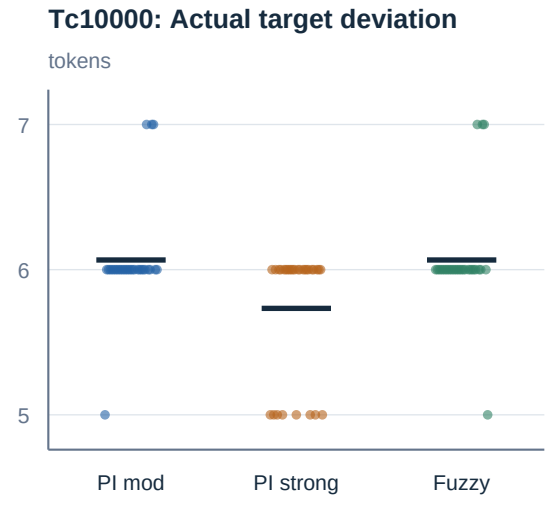

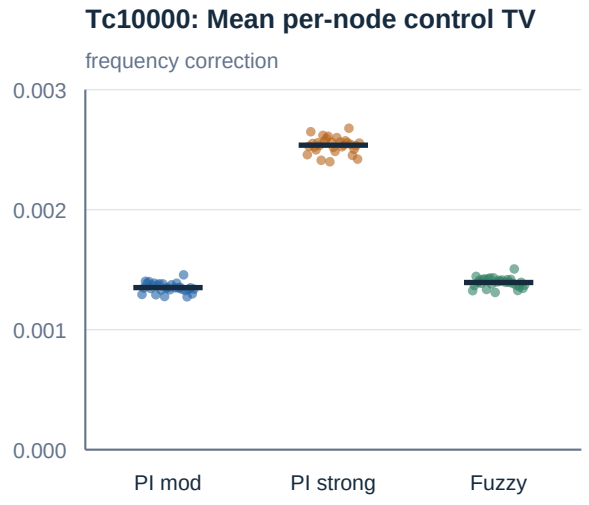

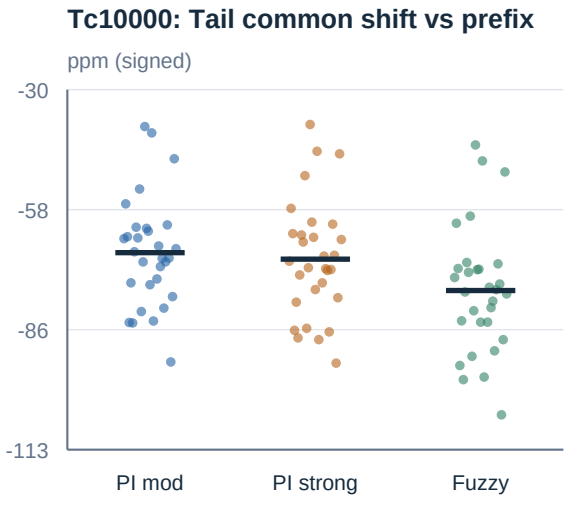

Common shift is relative to each controller's settled nominal level, not absolute reference accuracy. No JIT runtime ranking.
TV = total variation. Buffer/TV window: [2e6,4e6]; tail shift: [3.6e6,4e6] versus nominal [1.9e6,2e6] reference ticks.