

C20 Distributed Systems

Lecture 1

Kostas Margellos

University of Oxford



Logistics

- **Who:** Kostas Margellos, Control Group, IEB 50.16
contact : kostas.margellos@eng.ox.ac.uk
 - **When:** 4 lectures,
weeks 5 & 6 – Wed & Fri @12pm
 - **Where:** Remotely via Teams
 - **Other info :**
 - ▶ There is 1 example class : week 7 HT – Thu 4/3 @2-5pm (via Teams)
 - ▶ Lecture slides available on WebLearn
 - ▶ Teaching style : Mix of slides and hand-written notes

References

-  **Bertsekas & Tsitsiklis (1989)**
Parallel and distributed computation : Numerical methods
Athena Scientific (some figures taken from Chapter 3).
 -  **Bertsekas (2015)**
Convex optimization algorithms
Athena Scientific (Chapter 5).
 -  **Facchinei, Scutari & Sagratella (2015)**
Parallel selective algorithms for nonconvex big data optimization,
IEEE Transactions on Signal Processing, 63(7), 1874-1889.
 -  **Nedich, Ozdaglar & Parrilo (2010)**
Constrained consensus and optimization in multi-agent networks,
IEEE Transactions on Automatic Control, 55(4), 922-938.
 -  **Margellos, Falsone, Garatti & Prandini (2018)**
Distributed constrained optimization and consensus in uncertain networks via proximal minimization,
IEEE Transactions on Automatic Control, 63(5), 1372-1387.
 -  **Falsone, Margellos, Garatti & Prandini (2018)**
Distributed constrained optimization and consensus in uncertain networks via proximal minimization,
Automatica, 84(10), 149-158.

Motivation

- Networks (Power, Social, etc.)
 - ▶ Large scale infrastructures
 - ▶ Multi-agent – Multiple interacting entities/users
 - ▶ Heterogeneous – Different physical or technological constraints per agent; different objectives per agent
 - Challenge : Optimizing the performance of a network ...
 - ▶ Computation : Problem size too big !
 - ▶ Communication : Not all communication links at place ; link failures
 - ▶ Information privacy : Agents may not want to share information with everyone (e.g. facebook)

Why go decentralized/distributed?

- ➊ Scalable methodology
 - ▶ Communication :
 - Decentralized : With some central authority
 - Distributed : Only between neighbours
 - ▶ Computation : Only local ; in parallel for all agents
- ➋ Information privacy
 - ▶ Agents do not reveal information about their preferences (encoded by objective and constraint functions) to each other
- ➌ Resilience to communication failures
- ➍ Numerous applications
 - ▶ Wireless networks
 - ▶ Optimal power flow
 - ▶ Electric vehicle charging control
 - ▶ Energy management in building networks

Hilary Term 2020-21


C20 Distributed Systems

February 9, 2021

5 / 26


Decentralized vs. Distributed

- ➊ Decentralized : All agents with a central authority/coordinator

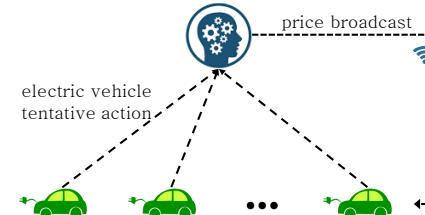

Decentralized vs. Centralized : Agents “broadcast” only tentative information **not** everything

- ➋ Distributed : Only with some agents, termed neighbours

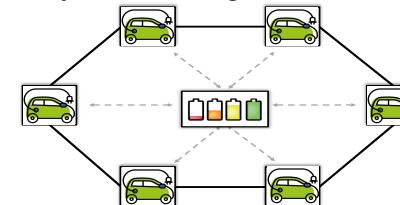

Hilary Term 2020-21


C20 Distributed Systems

February 9, 2021

6 / 26

Multi-agent problem classes

Motivating example : Electric vehicle charging

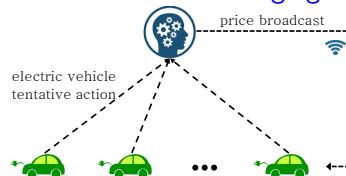

- Charging rate of each vehicle : x_i (in units of power)
- Electric vehicles are like batteries : X_i encodes limits on charging rate

Price depends on everybody's consumption

$$\text{minimize} \sum_i \mathbf{x}_i^\top p(\sum_i \mathbf{x}_i) \quad [\text{price function } p(\cdot)]$$

subject to : $\mathbf{x}_i \in X_i$, for all i [limitations on the charging rate]

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

7 / 26

Cost coupled problems

$$\text{minimize } F(x_1, \dots, x_m)$$

subject to

$$x_i \in X_i, \forall i = 1, \dots, m$$

- Agents have **separate decisions** : x_i for agent i
- Agents have **separate constraint sets** : X_i for agent i
- Agents aim at minimizing a **single objective function** F that couples their decisions

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

8 / 26

Multi-agent problem classes


Decision coupled problems

$$\begin{aligned} & \text{minimize} \sum_{i=1}^m f_i(x) \\ & \text{subject to} \\ & \quad x \in X_i, \forall i = 1, \dots, m \end{aligned}$$

- Agents have a **common decision** : x for all agents
- Agents have **separate constraint sets** : X_i for agent i
- Agents have **separate objective functions** : f_i for agent i

Multi-agent problem classes

Constraint coupled problems : Electric vehicle charging

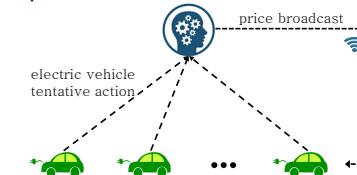

- Charging rate of each vehicle : x_i (in units of power)
- Electric vehicles are like batteries : X_i encodes limits on charging rate

Price independent of others consumption

$$\text{minimize} \sum_i c_i^\top x_i \quad [\text{charging cost}]$$

subject to : $x_i \in X_i$, for all i [limitations on the charging rate]

$$\sum_i (A_i x_i - \frac{b}{m}) \leq 0 \quad [\text{power grid constraint}]$$

Multi-agent problem classes

Constraint coupled problems (cont'd)

$$\begin{aligned} & \text{minimize} \sum_{i=1}^m f_i(x_i) \\ & \text{subject to} \\ & \quad x_i \in X_i, \forall i = 1, \dots, m \\ & \quad \sum_{i=1}^m g_i(x_i) \leq 0 \end{aligned}$$

- Agents have **separate decisions** : x_i for agent i
- Agents have **separate constraint sets** : X_i for agent i
- Agents have a **common constraint** that couples their decisions, i.e. $\sum_i g_i(x_i) \leq 0$

Can we transform one problem class to another ?

From decision coupled to constraint coupled problems

$$\begin{aligned} & \text{minimize} \sum_i f_i(x_i) \\ & \text{subject to} \\ & \quad x_i \in X_i, \forall i = 1, \dots, m \\ & \quad \color{red}{x_i = x}, \forall i = 1, \dots, m \end{aligned}$$

- Introduce m new decision vectors, as many as the agents : $x_i, i = 1, \dots, m$
- Introduce **consistency** constraints : make sure all those auxiliary decisions are the same, i.e. $x_i = x$ for all $i = 1, \dots, m$
- Price to pay** : Number of constraints grows with the number of agents

Can we transform one problem class to another?

From cost coupled to constraint coupled problems

$$\text{minimize } \gamma = \sum_i \frac{\gamma}{m}$$

subject to

$$x_i \in X_i, \forall i = 1, \dots, m$$

$$F(x_1, \dots, x_m) \leq \gamma$$

- Introduce an additional scalar epigraphic variable γ
- Move coupling to the constraints, i.e. $F(x_1, \dots, x_m) \leq \gamma$
- **Price to pay** : Coupling can **not** be split among several functions, each of them depending only on x_i , i.e. not in the form $\sum_i g_i(x_i) \leq 0$

Can we transform one problem class to another?

From decision coupled to cost coupled problems

$$\text{minimize } F(x_1, \dots, x_m) = \sum_i f_i(x) + I_{X_i}(x)$$

subject to : **no constraints**

- Lift the constraints in the objective function via characteristic functions, i.e., for each i ,

$$I_{X_i}(x) = \begin{cases} 0 & \text{if } x \in X_i; \\ +\infty & \text{otherwise.} \end{cases}$$

- New problem does not have any constraints
- **Price to pay** : The new objective function is **not** differentiable, even if each f_i is differentiable

Can we transform one problem class to another?

Yes, but ...

- We can transform from some problem classes to others
- Often those reformulations are useful
- However, they come with drawbacks :
 - may increase number of decision variables,
 - or lead to non-separable constraints,
 - or non-differentiable objective functions

So necessary to develop algorithms tailored to each problem class

Part I.A : Decentralized algorithms

Cost coupled problems

Cost coupled problems¹

$$\text{minimize } F(x_1, \dots, x_m)$$

subject to

$$x_i \in X_i, \forall i = 1, \dots, m$$

- Denote by x^* a minimizer of the cost coupled problem
- Denote by F^* its minimum value

1. Throughout we assume that all functions and sets are **convex**

Mathematical prelims : Lipschitz & Contraction mappings

- Let $T: X \rightarrow X$. We call T a **Lipschitz** mapping if there exists $\alpha > 0$ such that

$$\|T(x) - T(y)\| \leq \alpha \|x - y\|, \text{ for all } x, y \in X$$

- We call a Lipschitz mapping T **contraction** mapping if $\alpha \in [0, 1)$
- Parameter $\alpha \in [0, 1)$ is called the modulus of contraction of T
- We should always specify the norm


Convergence of contractive iterations

Assume T is a contraction with modulus $\alpha \in [0, 1)$ and X is a closed set.

- T has a unique fixed-point $T(x^*) = x^*$
- The Picard-Banach iteration $x(k+1) = T(x(k))$ converges to x^* geometrically, i.e.

$$\|x(k) - x^*\| \leq \alpha^k \|x(0) - x^*\|, \text{ for all } k \geq 0$$

Mathematical prelims : Convexity vs strong convexity

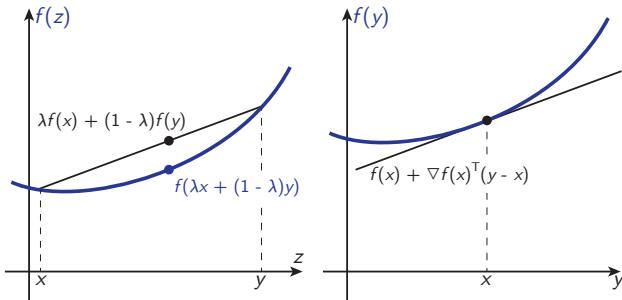

- Strong convexity is “stronger” than convexity – uniqueness of optimum & lower bound on growth

$$f(y) \geq f(x) + \nabla f(x)^T (y - x) + \sigma \|y - x\|^2, \text{ where } \sigma > 0$$

- We can fit a quadratic function between the “true” function and its linear approximation
- For quadratic functions strong is the same with strict convexity

The Jacobi algorithm

- Iterative algorithm

Initialize: Select (arbitrarily) $x_i(0) \in X_i$, for all $i = 1, \dots, m$

For each iteration $k = 1, \dots$

- Collect $x(k) = (x_1(k), \dots, x_m(k))$ from central authority
- Agents update their local decision in parallel, i.e. for all $i = 1, \dots, m$

$$x_i(k+1) = \arg \min_{x_i \in X_i} F(x_1(k), \dots, x_{i-1}(k), x_i, x_{i+1}(k), \dots, x_m(k))$$

end for

- Collect $x(k) = (x_1(k), \dots, x_m(k))$ from central authority

- Agents update their local decision in parallel

$$x_i(k+1) = \arg \min_{x_i \in X_i} F(x_1(k), \dots, x_{i-1}(k), x_i, x_{i+1}(k), \dots, x_m(k))$$

- Block coordinate descent method ; agents act in **best response**
- Parallelizable method : Agent i uses the k -th updates of all agents

Jacobi algorithm : Convergence

Theorem : Convergence of Jacobi algorithm

If F is differentiable and there exists small enough γ such that

$$T(x) = x - \gamma \nabla F(x)$$

is a contraction mapping (modulus in $[0, 1]$), then there exists a minimizer x^* of the cost coupled problem such that

$$\lim_{k \rightarrow \infty} \|x(k) - x^*\| = 0$$

- Best response but a gradient step appears in convergence
- A sufficient condition for T to be a contractive map is F to be a strongly convex function
- Can we relax this condition ?

The regularized Jacobi algorithm

- ① Collect $x(k) = (x_1(k), \dots, x_m(k))$ from central authority
- ② Agents update their local decision in parallel

$$x_i(k+1) = \arg \min_{x_i \in X_i} F(x_1(k), \dots, x_{i-1}(k), \textcolor{blue}{x}_i, x_{i+1}(k), \dots, x_m(k)) + \textcolor{red}{c} \|x_i - x_i(k)\|_2^2$$

- Jacobi algorithm + regularization term
- Penalty term acts like “inertia” from previous tentative solution of agent i
- New objective function is strongly convex due to regularization

Regularized Jacobi algorithm : Convergence

Theorem : Convergence of regularized Jacobi algorithm

Assume that F is convex and ∇F is Lipschitz continuous with constant L .

Assume also that

$$\textcolor{red}{c} > \frac{m-1}{2m-1} \sqrt{mL}$$

We then have that $\lim_{k \rightarrow \infty} \|F(x(k)) - F^*\| = 0$

- Algorithm converges in value, not necessarily in iterates, i.e. not necessarily $\lim_{k \rightarrow \infty} \|x(k) - x^*\| = 0$
- Penalty term c increases as $m \rightarrow \infty$
- The more agents the “slower” the overall process

The Gauss-Seidel algorithm

- ① Collect $x(k) = (x_1(\textcolor{red}{k+1}), \dots, x_{i-1}(\textcolor{red}{k+1}), x_i(k), \dots, x_m(k))$
- ② Agent i updates

$$x_i(k+1) = \arg \min_{x_i \in X_i} F(x_1(\textcolor{red}{k+1}), \dots, x_{i-1}(\textcolor{red}{k+1}), \textcolor{blue}{x}_i, x_{i+1}(k), \dots, x_m(k))$$

- Block coordinate descent method ; agents act in best response
- Sequential : Agent i uses the $(k+1)$ -th updates of preceding agents
- Similar convergence results with Jacobi algorithm : If F is strongly convex (strict convexity is sufficient) with respect to each individual argument, then $\lim_{k \rightarrow \infty} \|F(x(k)) - F^*\| = 0$

Summary

Decentralized algorithms for cost coupled problems

$$\begin{aligned} & \text{minimize } F(x_1, \dots, x_m) \\ & \text{subject to } x_i \in X_i, \forall i = 1, \dots, m \end{aligned}$$

- The Jacobi algorithm : parallel updates
 F differentiable and **strongly convex**
- The regularized Jacobi algorithm : parallel updates
 F differentiable and just convex
- The Gauss-Seidel algorithm : sequential updates
 F differentiable and **strongly convex** per agent's decision
 - ⇒ For quadratic functions $x^T Qx$:
 - convex if $Q \succeq 0$; strongly convex if $Q > 0$
 - Strong convexity = strict convexity

C20 Distributed Systems Lecture 2

Kostas Margellos

University of Oxford



Summary

Decentralized algorithms for cost coupled problems

$$\begin{aligned} & \text{minimize } F(x_1, \dots, x_m) \\ & \text{subject to } x_i \in X_i, \forall i = 1, \dots, m \end{aligned}$$

- The Jacobi algorithm : parallel updates
 F differentiable and **strongly convex**
- The regularized Jacobi algorithm : parallel updates
 F differentiable and just convex
- The Gauss-Seidel algorithm : sequential updates
 F differentiable and **strongly convex** per agent's decision
 - ⇒ For quadratic functions $x^T Qx$:
 - convex if $Q \succeq 0$; strongly convex if $Q > 0$
 - Strong convexity = strict convexity

Part I.B : Decentralized algorithms Decision coupled problems

Decision coupled problems – The primal

$$\begin{aligned} & \text{minimize } \sum_i f_i(x) \\ & \text{subject to} \\ & \quad x \in X_i, \forall i = 1, \dots, m \end{aligned}$$

Part I.B : Decentralized algorithms

Decision coupled problems

Decentralized solution roadmap

- ➊ The main algorithm for this is the [Alternating Direction Method of Multipliers \(ADMM\)](#)
- ➋ The predecessor of ADMM is the [Augmented Lagrangian](#) algorithm
- ➌ The Augmented Lagrangian is in turn based on the [Proximal algorithm](#)

Proximal \implies Augmented Lagrangian \implies ADMM

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

4 / 24

The proximal minimization algorithm

- Consider a differentiable function F . The following problems are equivalent

Standard minimization program

$$\begin{aligned} & \text{minimize } F(x) \\ & \text{subject to : } x \in X \end{aligned}$$

Proximal minimization program

$$\begin{aligned} & \text{minimize } F(x) + \frac{1}{2c} \|x - y\|^2 \\ & \text{subject to : } x \in X, y \in \mathbb{R}^n \end{aligned}$$

- The proximal problem has an objective function which is differentiable and strongly convex (for any fixed y)
- We can solve it iteratively via the Gauss-Seidel algorithm ; converges for any $c > 0$ (see Lecture 1)
- Alternate between minimizing x and y

Hilary Term 2020-21

C20 Distributed Systems


February 9, 2021

5 / 24

The proximal minimization algorithm

Geometric interpretation

- Let $\Phi_c(y) = \min_{x \in X} \{F(x) + \frac{1}{2c} \|x - y\|^2\}$ achieved at $x = x(y, c)$
- Hence, $\Phi_c(y) = F(x(y, c)) + \frac{1}{2c} \|x(y, c) - y\|^2 \leq F(x) + \frac{1}{2c} \|x - y\|^2$
 $\Rightarrow \Phi_c(y) - \frac{1}{2c} \|x - y\|^2 \leq F(x)$, with equality at $x = x(y, c)$

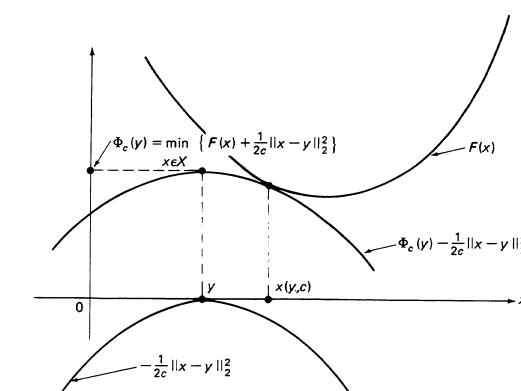

The proximal minimization algorithm

- The following problems are equivalent

Standard minimization program

$$\begin{aligned} & \text{minimize } F(x) \\ & \text{subject to : } x \in X \end{aligned}$$

Proximal minimization program

$$\begin{aligned} & \text{minimize } F(x) + \frac{1}{2c} \|x - y\|^2 \\ & \text{subject to : } x \in X, y \in \mathbb{R}^n \end{aligned}$$

Proximal algorithm :

$$➊ x(k+1) = \arg \min_{x \in X} F(x) + \frac{1}{2c} \|x - y(k)\|^2$$

$$➋ y(k+1) = x(k+1)$$

... or

$$➊ x(k+1) = \arg \min_{x \in X} F(x) + \frac{1}{2c} \|x - x(k)\|^2$$

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

6 / 24

Hilary Term 2020-21

C20 Distributed Systems


February 9, 2021

7 / 24

The proximal minimization algorithm

Geometric interpretation

- Effect of **large** and **small** values of c

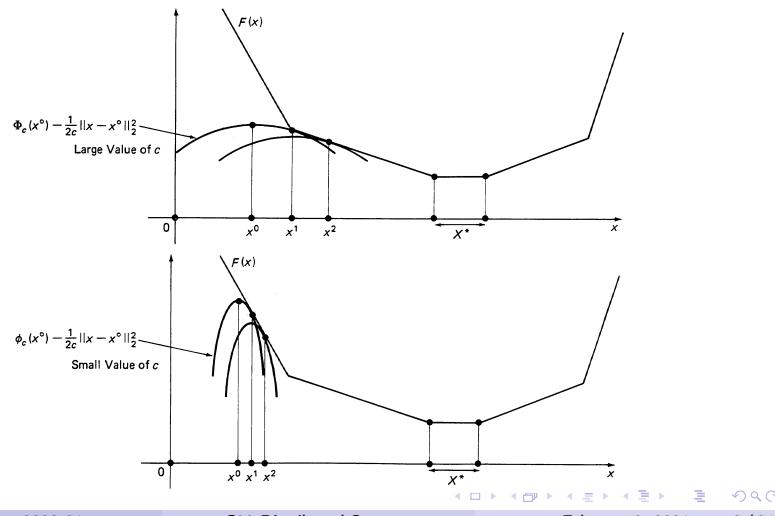

Hilary Term 2020-21

C20 Distributed Systems


February 9, 2021

8 / 24

The proximal minimization algorithm

Geometric interpretation

- Effect of the **growth** of F (flat and steep functions)

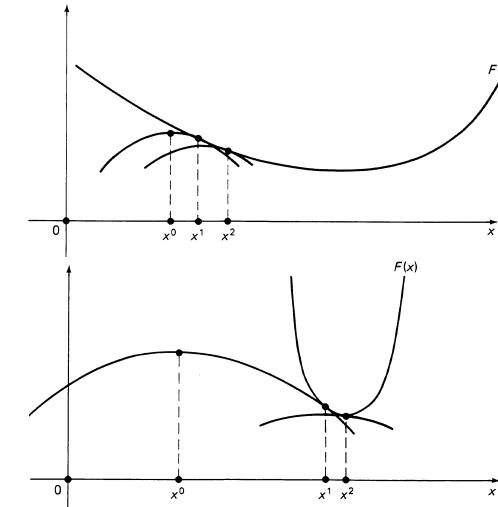

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

9 / 24

The augmented Lagrangian algorithm

- Consider the following problems

Standard program

$$\begin{aligned} & \text{minimize}_{x \in X} F(x) \\ & \text{subject to : } Ax = b \end{aligned}$$

Augmented program

$$\begin{aligned} & \text{minimize}_{x \in X} F(x) + \frac{c}{2} \|Ax - b\|^2 \\ & \text{subject to : } Ax = b \end{aligned}$$

- Trivially equivalent problems : For any feasible x , the "proxy" term becomes zero
- Resembles the structure of the proximal algorithm
- $Ax = b$ models *complicating constraints* : if $F(x) = \sum_i f_i(x_i)$ and $X = X_1 \times \dots \times X_m$, then $Ax = b$ models coupling among agents' decisions

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

10 / 24

The augmented Lagrangian algorithm

- Construct the Lagrangian of the augmented program

$$L_c(x, \lambda) = F(x) + \lambda^\top (Ax - b) + \frac{c}{2} \|Ax - b\|^2$$

Augmented Lagrangian algorithm :

- ① $x(k+1) = \arg \min_{x \in X} F(x) + \lambda(k)^\top (Ax - b) + \frac{c}{2} \|Ax - b\|^2$
- ② $\lambda(k+1) = \lambda(k) + c(Ax(k+1) - b)$

- For simplicity we assumed a unique minimum for the primal variables ; this depends on A
- Apply a primal-dual scheme : minimization for primal followed by gradient ascent for dual

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

11 / 24

The augmented Lagrangian algorithm

Augmented Lagrangian algorithm :

- ① $x(k+1) = \arg \min_{x \in X} F(x) + \lambda(k)^T(Ax - b) + \frac{c}{2} \|Ax - b\|^2$
- ② $\lambda(k+1) = \lambda(k) + c(Ax(k+1) - b)$

Theorem : Convergence of Augmented Lagrangian algorithm

For any $c > 0$, we have that :

- ① there exists an optimal dual solution λ^* such that

$$\lim_{k \rightarrow \infty} \|\lambda(k) - \lambda^*\| = 0$$

- ② primal iterates converge to the optimal value F^* , i.e.

$$\lim_{k \rightarrow \infty} \|F(x(k)) - F^*\| = 0$$

Proof

Augmented Lagrangian algorithm :

- ① $x(k+1) = \arg \min_{x \in X} F(x) + \lambda(k)^T(Ax - b) + \frac{c}{2} \|Ax - b\|^2$
- ② $\lambda(k+1) = \lambda(k) + c(Ax(k+1) - b)$

- Notice that the dual function of the original problem is given by

$$q(y) = \min_{x \in X} F(x) + y^T(Ax - b)$$

where y contains the dual variables associated with $Ax \leq b$

Step 1 : Equivalently write the primal minimization step as

$$\begin{aligned} \min_{x \in X} F(x) + \lambda(k)^T(Ax - b) + \frac{c}{2} \|Ax - b\|^2 \\ = \min_{x \in X, z, Ax-b=z} F(x) + \lambda(k)^T z + \frac{c}{2} \|z\|^2 \end{aligned}$$

The minimizers are denoted by $x(k+1)$ and $z(k+1)$

Proof (cont'd)

Step 2 :

- Dualize the coupling constraint in Step 1 using multipliers y and consider the optimum of the dual problem

$$y^* = \arg \max_y \left\{ \min_{x \in X} (F(x) + y^T(Ax - b)) + \min_z ((\lambda(k) - y)^T z + \frac{c}{2} \|z\|^2) \right\}$$

- Using the definition of the $q(y)$ this is equivalent to

$$y^* = \arg \max_y \left\{ q(y) + \min_z ((\lambda(k) - y)^T z + \frac{c}{2} \|z\|^2) \right\}$$

- The inner minimization is an unconstrained quadratic program ; calculate its minimizer by setting the objective's gradient equal to zero

$$\bar{z} = \frac{y - \lambda(k)}{c} \text{ and hence } z(k+1) = \frac{y^* - \lambda(k)}{c}$$

Step 3 :

- Substituting back the value of \bar{z}

$$\begin{aligned} y^* &= \arg \max_y \left\{ q(y) + \min_z ((\lambda(k) - y)^T z + \frac{c}{2} \|z\|^2) \right\} \\ &= \arg \max_y \left\{ q(y) - \frac{1}{2c} \|y - \lambda(k)\|^2 \right\} \end{aligned}$$

- At the same time, due to the equality constraint in Step 1, $z(k+1) = Ax(k+1) - b$, hence

$$\lambda(k+1) = \lambda(k) + c(Ax(k+1) - b) \implies \lambda(k+1) = y^*$$

which in turn implies that

$$\lambda(k+1) = \arg \max_y q(y) - \frac{1}{2c} \|y - \lambda(k)\|^2$$

Proof (cont'd)

Step 4 : Putting everything together ...

- The augmented Lagrangian primal dual scheme

$$① \quad x(k+1) = \arg \min_{x \in X} F(x) + \lambda(k)^\top (Ax - b) + \frac{c}{2} \|Ax - b\|^2$$

$$② \quad \lambda(k+1) = \lambda(k) + c(Ax(k+1) - b)$$

... is equivalent to

$$① \quad \lambda(k+1) = \arg \max_y q(y) - \frac{1}{2c} \|y - \lambda(k)\|^2$$

- Proximal algorithm for the dual function $q(y)$!
- It converges for any c as $q(y)$ is the dual function thus always concave, i.e. $\lim_{k \rightarrow \infty} \|\lambda(k) - \lambda^*\| = 0$ for some optimal λ^*
- For the primal variables we can only show something slightly weaker : they asymptotically achieve the optimal value F^*

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

16 / 24

Back to decision coupled problems

Recall the equivalence between decision and constraint coupled problems

Decision coupled problem

$$\text{minimize } \sum_i f_i(x)$$

subject to : $x \in X_i, \forall i$

Constraint coupled problem

$$\text{minimize } \sum_i f_i(x_i)$$

subject to : $x_i \in X_i, \forall i$

$$x_i = z, \forall i$$

- We will show that this constraint coupled problem is in the form of

$$\text{minimize}_{x \in X} F(x)$$

subject to : $Ax = b$

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

17 / 24

Decision coupled problems

Augmented Lagrangian for the reformulated constraint coupled problem

① Primal update

$$(x_1(k+1), \dots, x_m(k+1), z(k+1))$$

$$= \arg \min_{x_1 \in X_1, \dots, x_m \in X_m, z} \sum_i f_i(x_i) + \lambda_i^\top(k)(z - x_i) + \frac{c}{2} \|z - x_i\|^2$$

② Dual update

$$\lambda_i(k+1) = \lambda_i(k) + c(z(k+1) - x_i(k+1))$$

- Primal update in the form **cost coupled problems via a single function**

$$F(x_1, \dots, x_m, z) = \sum_i f_i(x_i) + \lambda_i(k)^\top(z - x_i) + \frac{c}{2} \|z - x_i\|^2$$

- Can solve via Gauss-Seidel algorithm, alternating between minimizing with respect to (x_1, \dots, x_m) and z

Decision coupled problems

Consider the following assignments :

- Decision vector

$$x \leftarrow (x_1, \dots, x_m, z)$$

- Constraint sets

$$X \leftarrow X_1 \times \dots \times X_m \times \mathbb{R}^n$$

- Objective function

$$F(x_1, \dots, x_m, z) \leftarrow \sum_i f_i(x_i) + \lambda_i(k)^\top(z - x_i) + \frac{c}{2} \|z - x_i\|^2$$

- Matrices A and b :

$$Ax = b \Leftrightarrow \begin{bmatrix} -1 & 0 & \dots & 0 & 1 \\ 0 & -1 & \dots & 0 & 1 \\ \vdots & & \ddots & & \vdots \\ 0 & 0 & \dots & -1 & 1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_m \\ z \end{bmatrix} = 0$$

- Dual variable : $\lambda \leftarrow (\lambda_1, \dots, \lambda_m)$

$$\lambda(k)^\top(Ax - b) = \sum_i \lambda_i^\top(k)(z - x_i) \text{ and } \|Ax - b\|^2 = \sum_i \|z - x_i\|^2$$

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

18 / 24

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

19 / 24

Decision coupled problems

Primal update : Can solve via Gauss-Seidel algorithm, alternating between minimizing with respect to (x_1, \dots, x_m) and z

$$(x_1(k+1), \dots, x_m(k+1), z(k+1)) \\ = \arg \min_{x_1 \in X_1, \dots, x_m \in X_m, z} \sum_i f_i(x_i) + \lambda_i^T(k)(z - x_i) + \frac{c}{2} \|z - x_i\|^2$$

- **Update of z** : Unconstrained quadratic minimization with respect to z . Take the derivative and set it equal to zero leads to

$$z = \frac{1}{m} \sum_i x_i - \frac{1}{mc} \sum_i \lambda_i(k)$$

- **Update of x_1, \dots, x_m** : For fixed z problem is separable across agents (no longer coupled in the cost). Hence for all i ,

$$x_i = \arg \min_{x_i \in X_i} f_i(x_i) - \lambda_i(k)^T x_i + \frac{c}{2} \|z - x_i\|^2$$

Decision coupled problems

begin loop

- ❶ Primal update for z information from central authority

$$z = \frac{1}{m} \sum_i x_i - \frac{1}{mc} \sum_i \lambda_i(k)$$

- ❷ Primal update for x_i in parallel for all agents

$$x_i = \arg \min_{x_i \in X_i} f_i(x_i) - \lambda_i(k)^T x_i + \frac{c}{2} \|z - x_i\|^2$$

end loop

- ❸ Dual update in parallel for all agents

$$\lambda_i(k+1) = \lambda_i(k) + c(z(k+1) - x_i(k+1))$$

- Nested iteration with Gauss-Seidel inner loop – Can we do any better ?

Decision coupled problems

What if we only do one Gauss-Seidel pass ?

- ❶ Primal update for z information from central authority

$$z(k+1) = \frac{1}{m} \sum_i x_i(k) - \frac{1}{mc} \sum_i \lambda_i(k)$$

- ❷ Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) - \lambda_i(k)^T x_i + \frac{c}{2} \|z(k+1) - x_i\|^2$$

- ❸ Dual update in parallel for all agents

$$\lambda_i(k+1) = \lambda_i(k) + c(z(k+1) - x_i(k+1))$$

- Does this scheme converge ? ADMM provides the answer ! [Lecture 3](#)

Summary

Decision coupled problems

$$\text{minimize } \sum_i f_i(x)$$

subject to

$$x \in X_i, \forall i = 1, \dots, m$$

Introduced three different algorithms

- Proximal minimization algorithm
- Augmented Lagrangian algorithm
- Augmented Lagrangian with one pass of the inner loop = ADMM

Proximal \implies Augmented Lagrangian \implies ADMM

C20 Distributed Systems

Lecture 3

Kostas Margellos

University of Oxford



Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

1 / 28

Recap

Decision coupled problems

$$\text{minimize } \sum_i f_i(x)$$

subject to

$$x \in X_i, \forall i = 1, \dots, m$$

Introduced three different algorithms

- Proximal minimization algorithm
- Augmented Lagrangian algorithm
- Augmented Lagrangian with one pass of the inner loop = ADMM

Proximal \implies Augmented Lagrangian \implies ADMM

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

2 / 28


Example

Feasibility problem – part of Question 4, Example Paper

Find a point x^* at the intersection (assumed to be non-empty) of two (possibly different) convex sets X_1 and X_2 , i.e.

$$\begin{aligned} & \text{minimize } 0 && [\text{any constant would work}] \\ & \text{subject to } x \in X_1 \text{ and } x \in X_2 \end{aligned}$$

Apply Augmented Lagrangian algorithm initializing at $\lambda_1(0) = \lambda_2(0) = 0$.

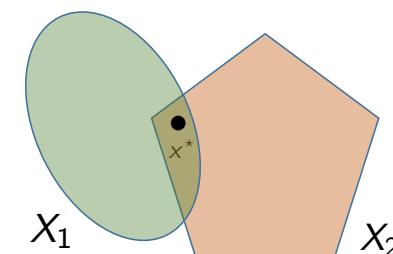

Recap : Augmented Lagrangian algorithm

Inner loop : Gauss-Seidel algorithm !

begin loop

- ① Primal update for z information from central authority

$$z = \frac{1}{m} \sum_i x_i - \frac{1}{mc} \sum_i \lambda_i(k)$$

- ② Primal update for x_i in parallel for all agents

$$x_i = \arg \min_{x_i \in X_i} f_i(x_i) - \lambda_i(k)^T x_i + \frac{c}{2} \|z - x_i\|^2$$

end loop

- ③ Dual update in parallel for all agents

$$\lambda_i(k+1) = \lambda_i(k) + c(z(k+1) - x_i(k+1))$$

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

3 / 28

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

4 / 28

Example (cont'd)

- Decision coupled problem with 2 agents ; notice that $f_1(x) = f_2(x) = 0$
- Consider $k = 0$ and focus at the **inner loop** of the Augmented Lagrangian algorithm
- Recall that $\lambda_1(0) = \lambda_2(0) = 0$

Outer loop at $k = 0$; main steps of inner loop

$$① \quad z = \frac{x_1 + x_2}{2} - \frac{\lambda_1(0) + \lambda_2(0)}{2c} = \frac{x_1 + x_2}{2}$$

$$② \quad \begin{aligned} x_1 &\leftarrow \arg \min_{x_1 \in X_1} -\lambda_1(0)x_1 + \frac{c}{2}\|z - x_1\|^2 = \arg \min_{x_1 \in X_1} \frac{c}{2}\|z - x_1\|^2 \\ x_2 &\leftarrow \arg \min_{x_2 \in X_2} -\lambda_2(0)x_2 + \frac{c}{2}\|z - x_2\|^2 = \arg \min_{x_2 \in X_2} \frac{c}{2}\|z - x_2\|^2 \end{aligned}$$

- Second step exhibits a nice structure and geometric interpretation
- Solve the unconstrained quadratic program and project on the constraint set (X_1 and X_2 , respectively)

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

5 / 28

Example (cont'd)

- Denote by $\Pi_{X_i}[z]$ the projection of z on the set X_i
- Inner loop becomes then ...

Outer loop at $k = 0$; main steps of inner loop

$$① \quad z = \frac{x_1 + x_2}{2}$$

$$② \quad \begin{aligned} x_1 &\leftarrow \arg \min_{x_1 \in X_1} \frac{c}{2}\|z - x_1\|^2 = \Pi_{X_1}[z] \\ x_2 &\leftarrow \arg \min_{x_2 \in X_2} \frac{c}{2}\|z - x_2\|^2 = \Pi_{X_2}[z] \end{aligned}$$

- This is just the Gauss-Seidel to solve the problem

$$\text{minimize}_{z, x_1 \in X_1, x_2 \in X_2} \frac{c}{2} \sum_{i=1,2} \|z - x_i\|^2$$

- Hence it converges to the minimum, which occurs when $x_1 = x_2 = z$

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

6 / 28

Example (cont'd)

- Since upon convergence of the inner loop $x_1 = x_2 = z$, then the outer loop update becomes

$$\lambda_i(1) = \lambda_i(0) + c(z(1) - x_i(1)) = 0, \text{ for } i = 1, 2$$

- Similarly, $\lambda_i(k) = 0$ for all $k \geq 0$
- Effectively we only have one loop !

Simplified single-loop algorithm

$$① \quad \text{Averaging step : } z(k+1) = \frac{x_1(k) + x_2(k)}{2}$$

- Parallel projections :

$$x_1(k+1) = \Pi_{X_1}[z(k+1)] \text{ and } x_2(k+1) = \Pi_{X_2}[z(k+1)]$$


Simplified single-loop algorithm

$$① \quad \text{Averaging step : } z(k+1) = \frac{x_1(k) + x_2(k)}{2}$$

- Parallel projections :

$$x_1(k+1) = \Pi_{X_1}[z(k+1)] \text{ and } x_2(k+1) = \Pi_{X_2}[z(k+1)]$$

Schematic illustration of the single-loop iterations

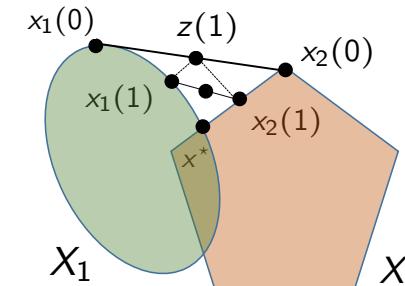

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

7 / 28

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

8 / 28

For decision coupled problems ...

Augmented Lagrangian with one Gauss-Seidel pass = ADMM

- ① Primal update for z information from central authority

$$z(k+1) = \frac{1}{m} \sum_i x_i(k) - \frac{1}{mc} \sum_i \lambda_i(k)$$

- ② Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) - \lambda_i(k)^T x_i + \frac{c}{2} \|z(k+1) - x_i\|^2$$

- ③ Dual update

$$\lambda_i(k+1) = \lambda_i(k) + c(z(k+1) - x_i(k+1))$$

For decision coupled problems ...

Equivalent notation in line with ADMM literature (the roles of x and z are reversed) – only notational change !

- ① Primal update for x information from central authority

$$x(k+1) = \frac{1}{m} \sum_i z_i(k) - \frac{1}{mc} \sum_i \lambda_i(k)$$

- ② Primal update for z_i in parallel for all agents

$$z_i(k+1) = \arg \min_{z_i \in Z_i} f_i(z_i) - \lambda_i(k)^T z_i + \frac{c}{2} \|x(k+1) - z_i\|^2$$

- ③ Dual update

$$\lambda_i(k+1) = \lambda_i(k) + c(x(k+1) - z_i(k+1))$$

The Alternating Direction Method of Multipliers (ADMM)

- ADMM even more general than decision coupled problems
- Splitting algorithm : decouples optimization across groups of variables

Group variables

$$\begin{aligned} & \text{minimize } F_1(x) + F_2(Ax) \\ & \text{subject to : } x \in C_1, \quad Ax \in C_2 \end{aligned}$$

Equivalent reformulation

$$\begin{aligned} & \text{minimize } F_1(x) + F_2(z) \\ & \text{subject to : } x \in C_1, \quad z \in C_2 \\ & \quad Ax = z \end{aligned}$$

ADMM algorithm

Effectively Augmented Lagrangian with one Gauss-Seidel pass

- ① $x(k+1) = \arg \min_{x \in C_1} F_1(x) + \lambda(k)^T Ax + \frac{c}{2} \|Ax - z(k)\|^2$
- ② $z(k+1) = \arg \min_{z \in C_2} F_2(z) - \lambda(k)^T z + \frac{c}{2} \|Ax(k+1) - z\|^2$
- ③ $\lambda(k+1) = \lambda(k) + c(Ax(k+1) - z(k+1))$

Theorem : Convergence of ADMM

Assume that the set of optimizers is non-empty, and either C_1 is bounded or $A^T A$ is invertible. We then have that

- ① $\lambda(k)$ converges to an optimal dual variable.
- ② $(x(k), z(k))$ achieves the optimal value
If $A^T A$ invertible then it converges to an optimal primal pair

Decision coupled problems as a special case again

Original problem

$$\begin{aligned} & \text{minimize } \sum_i f_i(x) \\ & \text{subject to : } x \in X_i, \forall i \end{aligned}$$

ADMM set-up

$$\begin{aligned} & \text{minimize } F_1(\mathbf{x}) + F_2(\mathbf{z}) \\ & \text{subject to : } \mathbf{x} \in C_1, \mathbf{z} \in C_2 \\ & \quad A\mathbf{x} = \mathbf{z} \end{aligned}$$

- Can be obtained as a special case of the ADMM set-up

- To see this, let $\mathbf{z} = (z_1, \dots, z_m)$ and define $A = \begin{bmatrix} I \\ \vdots \\ I \end{bmatrix}$ (stack of identity matrices), hence $A\mathbf{x} = \begin{bmatrix} \mathbf{x} \\ \vdots \\ \mathbf{x} \end{bmatrix}$ and $A\mathbf{x} = \mathbf{z} \Leftrightarrow \begin{bmatrix} \mathbf{x} \\ \vdots \\ \mathbf{x} \end{bmatrix} = \begin{bmatrix} z_1 \\ \vdots \\ z_m \end{bmatrix}$

Decision coupled problems (cont'd)

- Perform also the following assignments

$$\begin{aligned} F_1(\mathbf{x}) &= 0, \quad C_1 = \mathbb{R}^n \\ F_2(\mathbf{z}) &= \sum_i f_i(z_i), \quad C_2 = X_1 \times \dots \times X_m \end{aligned}$$

- For each block constraint, i.e. $\mathbf{x} = z_i$ assign the dual vector λ_i , and let $\lambda = (\lambda_1, \dots, \lambda_m)$
- The three ADMM steps become then

- ① $\mathbf{x}(k+1) = \arg \min_{\mathbf{x} \in \mathbb{R}^n} \lambda(k)^\top A\mathbf{x} + \frac{c}{2} \|A\mathbf{x} - \mathbf{z}(k)\|^2$
- ② $\mathbf{z}(k+1) = \arg \min_{z_1 \in X_1, \dots, z_m \in X_m} \sum_i f_i(z_i) - \lambda(k)^\top \mathbf{z} + \frac{c}{2} \|A\mathbf{x}(k+1) - \mathbf{z}\|^2$
- ③ $\lambda(k+1) = \lambda(k) + c(A\mathbf{x}(k+1) - \mathbf{z}(k+1))$

Constraint coupled problems

Affine coupling :

$$\begin{aligned} & \text{minimize } \sum_i f_i(x_i) \\ & \text{subject to : } x_i \in X_i, \forall i \\ & \quad \sum_i x_i = 0 \end{aligned}$$

- Affine coupling constraint : equality with zero for simplicity
- We could have general coupling constraints $Ax = b$; see Example 4.4, Chapter 3 in [Bertsekas & Tsitsiklis 1989]
- We can still treat as an ADMM example

Decision coupled problems (cont'd)

... or equivalently (compare with slide 5 !)

- ① $\mathbf{x}(k+1) = \arg \min_{\mathbf{x} \in \mathbb{R}^n} \sum_i \lambda_i(k)^\top \mathbf{x} + \frac{c}{2} \sum_i \|\mathbf{x} - z_i(k)\|^2$

- Unconstrained quadratic optimization
- Setting the gradient with respect to \mathbf{x} equal to zero we obtain

$$\begin{aligned} & \sum_i \lambda_i(k) + c \sum_i (\mathbf{x}(k+1) - z_i(k)) = 0 \\ \Rightarrow \mathbf{x}(k+1) &= \frac{1}{m} \sum_i z_i(k) - \frac{1}{mc} \sum_i \lambda_i(k) \end{aligned}$$

- ② $\mathbf{z}(k+1) = \arg \min_{z_1 \in X_1, \dots, z_m \in X_m} \sum_i (f_i(z_i) - \lambda_i(k)^\top z_i + \frac{c}{2} \|\mathbf{x}(k+1) - z_i\|^2)$

- Since $\mathbf{x}(k+1)$ is fixed, fully separable across i . Minimizing the "sum" is equivalent to minimizing each individual component. Hence, for all i ,

$$z_i(k+1) = \arg \min_{z_i \in X_i} f_i(z_i) - \lambda_i(k)^\top z_i + \frac{c}{2} \|\mathbf{x}(k+1) - z_i\|^2$$

- ③ $\lambda_i(k+1) = \lambda_i(k) + c(\mathbf{x}(k+1) - z_i(k+1))$ (due to the structure of A)

Constraint coupled problems

Original problem

$$\begin{aligned} & \text{minimize } \sum_i f_i(x_i) \\ & \text{subject to : } x_i \in X_i, \forall i \\ & \quad \sum_i x_i = 0 \end{aligned}$$

- To see this, let $\mathbf{x} = (x_1, \dots, x_m)$, $\mathbf{z} = (z_1, \dots, z_m)$ and $A = \text{identity matrix}$
- Separate *complicated* objective from *complicated* constraints

$$\begin{aligned} F_1(\mathbf{x}) &= \sum_i f_i(x_i), \quad C_1 = X_1 \times \dots \times X_m \\ F_2(\mathbf{z}) &= 0, \quad C_2 = \{\mathbf{z} \mid \sum_i z_i = 0\} \end{aligned}$$

◀ □ ▶ ⏪ ⏩ ⏴ ⏵ ⏹ ⏸ ⏹ ⏸

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

17 / 28

Constraint coupled problems

ADMM algorithm for constraint coupled problems

- ① Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \lambda_i^\top(k)x_i + \frac{c}{2}\|x_i - z_i(k)\|^2$$

- ② Primal update for z information from central authority

$$z(k+1) = \arg \min_{\{z: \sum_i z_i = 0\}} -\sum_i \lambda_i^\top(k)z_i + \frac{c}{2} \sum_i \|x_i(k+1) - z_i\|^2$$

- ③ Dual update $\lambda_i(k+1) = \lambda_i(k) + c(x_i(k+1) - z_i(k+1))$

Question 6, Example paper : Solve the z -minimization analytically

- Find unconstraint minimizer and project on $\sum_i z_i = 0$
- Notice that $\lambda_1(k) = \dots = \lambda_m(k)$ for all $k \geq 1$

◀ □ ▶ ⏪ ⏩ ⏴ ⏵ ⏹ ⏸ ⏹ ⏸

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

18 / 28

Part II.A : Distributed algorithms

Decision coupled problems

$$\begin{aligned} & \text{minimize } \sum_i f_i(x) \\ & \text{subject to} \\ & \quad x \in X_i, \forall i = 1, \dots, m \end{aligned}$$

◀ □ ▶ ⏪ ⏩ ⏴ ⏵ ⏹ ⏸ ⏹ ⏸


Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

19 / 28

Recall electric vehicle charging control problem

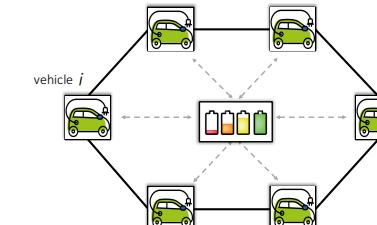

Decision coupled problem

$$\begin{aligned} & \text{minimize } \sum_i f_i(x) \\ & \text{subject to} \\ & \quad x \in X_i, \forall i = 1, \dots, m \end{aligned}$$

◀ □ ▶ ⏪ ⏩ ⏴ ⏵ ⏹ ⏸ ⏹ ⏸

Hilary Term 2020-21

C20 Distributed Systems


February 9, 2021

20 / 28

Distributed proximal minimization

General architecture

Step 1 : Local problem of agent i

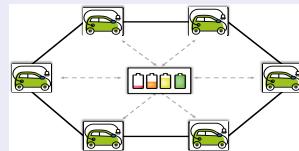


$$\left. \begin{array}{l} \text{minimize } f_i(x_i) + g_i(x_i, z_i) \\ \text{subject to} \\ x_i \in X_i \end{array} \right\} \Rightarrow x_i^*(z_i)$$

- x_i : "copy" of x maintained by agent i NOT an element of x
- X_i : local constraint set of agent i
- z_i : information vector – constructed based on the info of agent's i neighbors
- Objective function
 $f_i(x_i)$: local cost/utility of agent i
 $g_i(x_i, z_i)$: Proxy term, penalizing disagreement with other agents

Distributed proximal minimization

General architecture

Step 1 : Local problem of agent i

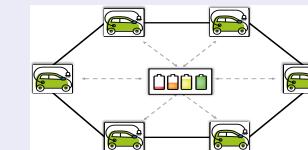


$$\left. \begin{array}{l} \text{minimize } f_i(x_i) + g_i(x_i, z_i) \\ \text{subject to} \\ x_i \in X_i \end{array} \right\} \Rightarrow x_i^*(z_i)$$

Distributed proximal minimization


General architecture

Step 1 : Local problem of agent i

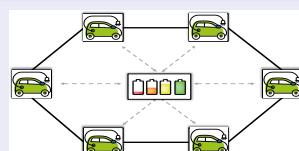


$$\left. \begin{array}{l} \text{minimize } f_i(x_i) + g_i(x_i, z_i) \\ \text{subject to} \\ x_i \in X_i \end{array} \right\} \Rightarrow x_i^*(z_i)$$

Step 2a : Broadcast $x_i^*(z_i)$ to neighbors

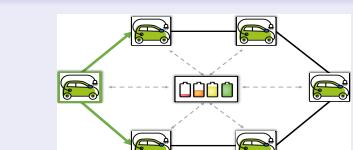


Step 2b : Receive neighbors' solutions

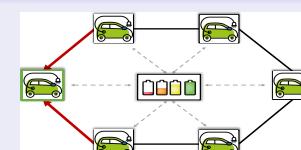

Distributed proximal minimization


General architecture

Step 1 : Local problem of agent i

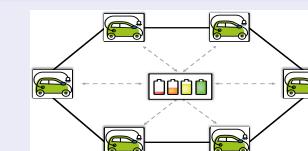


$$\left. \begin{array}{l} \text{minimize } f_i(x_i) + g_i(x_i, z_i) \\ \text{subject to} \\ x_i \in X_i \end{array} \right\} \Rightarrow x_i^*(z_i)$$

Step 2a : Broadcast $x_i^*(z_i)$ to neighbors

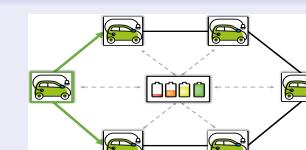

Step 2b : Receive neighbors' solutions

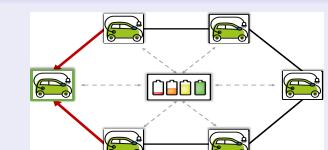


Step 3 : Update z_i on the basis of information received

Go to Step 1

Distributed proximal minimization

Local problem of agent i

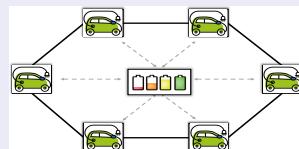


$$\begin{aligned} & \text{minimize } f_i(x_i) + g_i(x_i, z_i) \\ & \text{subject to } x_i \in X_i \end{aligned} \quad \left. \right\} \Rightarrow x_i^*(z_i)$$

- We need to specify
 - Information vector z_i
 - Proxy term $g_i(x_i, z_i)$
- Note that these terms change across algorithm iterations
 - We need to make this dependency explicit

Distributed proximal minimization

Local problem of agent i at iteration $k+1$

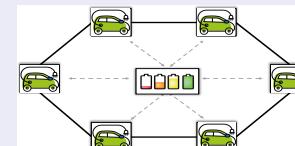

$$z_i(k) = \sum_j a_j^i(k) x_j(k)$$

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$

• Information vector

- $z_i(k) = \sum_j a_j^i(k) x_j(k)$
- $a_j^i(k)$: how agent i weights info of agent j

• Proxy term

- $\frac{1}{2c(k)} \|x_i - z_i(k)\|^2$: deviation from (weighted) average
- $c(k)$: trade-off between optimality and agents' disagreement

Proximal minimization algorithm

Proximal minimization algorithm

① Averaging step in parallel for all agents

$$z_i(k) = \sum_j a_j^i(k) x_j(k)$$

② Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$

- No dual variables introduced – primal only method
- All steps can be parallelized across agents – no central authority !

Contrast with the ADMM algorithm

ADMM algorithm

① Primal update for z information from central authority

$$z(k+1) = \frac{1}{m} \sum_i x_i(k) - \frac{1}{mc} \sum_i \lambda_i(k)$$

② Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) - \lambda_i(k)^T x_i + \frac{c}{2} \|z(k+1) - x_i\|^2$$

③ Dual update in parallel for all agents

$$\lambda_i(k+1) = \lambda_i(k) + c(z(k+1) - x_i(k+1))$$

① Averaging step in parallel for all agents

$$z_i(k) = \sum_j a_j^i(k) x_j(k)$$

② Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$

- Does this algorithm converge ?
- If yes, does it provide the same solution with the centralized problem (had we been able to solve it) ?

C20 Distributed Systems Lecture 4

Kostas Margellos

University of Oxford



ADMM algorithm

- Convergence theorem
- Decision coupled problems come as an example


Distributed algorithms

- ... for decision coupled problems
- Step-size (proxy term) is now iteration varying
- Connectivity requirements become important
- When does it converge ? [Lecture 4](#)

Recap : Distributed algorithms

Decision coupled problems

$$\begin{aligned} & \text{minimize} \sum_i f_i(x) \\ & \text{subject to} \\ & \quad x \in X_i, \forall i = 1, \dots, m \end{aligned}$$

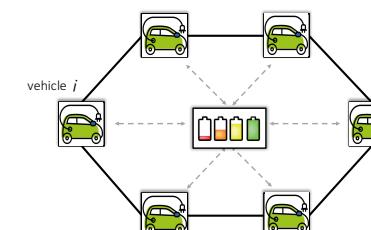

Proximal minimization algorithm

Proximal minimization algorithm

① Averaging step in parallel for all agents

$$z_i(k) = \sum_j a_j^i(k) x_j(k)$$

② Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$

- No dual variables introduced – primal only method
- All steps can be parallelized across agents – no central authority!

Distributed proximal minimization

① Averaging step in parallel for all agents

$$z_i(k) = \sum_j a_j^i(k) x_j(k)$$

② Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$

- Does this algorithm converge?
- If yes, does it provide the same solution with the centralized problem (had we been able to solve it if we had access to f_i 's and X_i 's)?

Algorithm analysis : Assumptions

① Convexity and compactness

- $f_i(\cdot)$: convex for all i
- X_i : compact, convex, non-empty interior for all i
- ⇒ There exists a Slater point, i.e. $\exists \text{Ball}(\bar{x}, \rho) \subset \cap_i X_i$

① Convexity and compactness

- $f_i(\cdot)$: convex for all i
- X_i : compact, convex, non-empty interior for all i
- ⇒ There exists a Slater point, i.e. $\exists \text{Ball}(\bar{x}, \rho) \subset \cap_i X_i$

② Information mix

- Weights $a_j^i(k)$: non-zero lower bound if link between $i - j$ present
⇒ Info mixing at a non-diminishing rate
- Weights $a_j^i(k)$: form a doubly stochastic matrix (sum of rows and columns equals one)
⇒ Agents influence each other equally in the long run

$$\sum_j a_j^i(k) = 1, \forall i$$

$$\sum_i a_j^i(k) = 1, \forall j$$

Algorithm analysis : Assumptions

③ Choice of the proxy term

- ▶ $\{c(k)\}_k$: non-increasing
- ▶ Should not decrease too fast

$$\sum_k c(k) = \infty \quad [\text{to approach set of optimizers}]$$

$$\sum_k c(k)^2 < \infty \quad [\text{to achieve convergence}]$$

- ▶ E.g., harmonic series

$$c(k) = \frac{\alpha}{k+1}, \text{ where } \alpha \text{ is any constant}$$

Notice that $\lim_{k \rightarrow \infty} c(k) = 0$, i.e. as iterations increase we penalize "disagreement" more

Algorithm analysis : Assumptions

④ Network connectivity – All information flows (eventually)


Connectivity

Let (V, E_k) be a directed graph, where V : nodes/agents, and $E_k = \{(j, i) : a_j^i(k) > 0\}$: edges Let

$$E_\infty = \{(j, i) : (j, i) \in E_k \text{ for infinitely many } k\}.$$

(V, E_∞) is strongly connected and (kind of) periodic, i.e., for any two nodes there exists a path of directed edges that connects.

- Any pair of agents communicates infinitely often,
- Intercommunication time is bounded



Algorithm analysis : Assumptions

④ Network connectivity – All information flows (eventually)


Connectivity

Let (V, E_k) be a directed graph, where V : nodes/agents, and $E_k = \{(j, i) : a_j^i(k) > 0\}$: edges Let

$$E_\infty = \{(j, i) : (j, i) \in E_k \text{ for infinitely many } k\}.$$

(V, E_∞) is strongly connected and (kind of) periodic, i.e., for any two nodes there exists a path of directed edges that connects.

- Any pair of agents communicates infinitely often,
- Intercommunication time is bounded

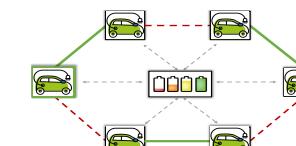

Algorithm analysis : Assumptions

- ③ Network connectivity – All information flows (eventually)


Connectivity

Let (V, E_k) be a directed graph, where V : nodes/agents, and $E_k = \{(j, i) : a_j^i(k) > 0\}$: edges Let

$$E_\infty = \{(j, i) : (j, i) \in E_k \text{ for infinitely many } k\}.$$

(V, E_∞) is strongly connected and (kind of) periodic, i.e., for any two nodes there exists a path of directed edges that connects.

- Any pair of agents communicates infinitely often,
- Intercommunication time is bounded

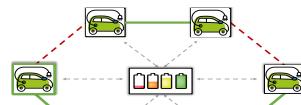

Algorithm analysis : Assumptions

- ③ Network connectivity – All information flows (eventually)


Connectivity

Let (V, E_k) be a directed graph, where V : nodes/agents, and $E_k = \{(j, i) : a_j^i(k) > 0\}$: edges Let

$$E_\infty = \{(j, i) : (j, i) \in E_k \text{ for infinitely many } k\}.$$

(V, E_∞) is strongly connected and (kind of) periodic, i.e., for any two nodes there exists a path of directed edges that connects.

- Any pair of agents communicates infinitely often,
- Intercommunication time is bounded

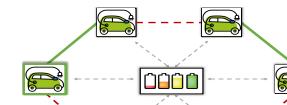

Convergence & optimality

Theorem : Convergence of distributed proximal minimization

Under the **structural + network assumptions**, the proposed proximal algorithm converges to some minimizer x^* of the centralized problem, i.e.,

$$\lim_{k \rightarrow \infty} \|x_i(k) - x^*\| = 0, \text{ for all } i$$

- Asymptotic agreement and optimality
- Rate no faster than $c(k)$ – “slow enough” to trade among the two objective terms, namely, agreement/consensus and optimality
- There are ways to speed things up : **Average gradient tracking methods**, i.e. instead of exchanging their tentative decisions, agents exchange their tentative gradients.

Example

Two-agent problem

Let $\alpha > 0$ and $1 < M < \infty$, and consider the problem :

$$\begin{aligned} & \text{minimize}_{x \in \mathbb{R}} \alpha(x+1)^2 + \alpha(x-1)^2 \\ & \text{subject to } x \in [-M, M] \end{aligned}$$

- ① What is the optimal solution ?
- ② Compute it by means of the distributed proximal minimization algorithm using
 - Time-invariant mixing weights $a_j^i(k) = \frac{1}{2}$ for all iterations k
 - Take $c(k) = \frac{1}{k+1}$
 - Initialize with $x_1(0) = -1$ and $x_2(0) = 1$
- Treat this as a two-agent decision coupled problem

Example (cont'd)

Two-agent problem equivalent reformulation

Let $\alpha > 0$ and $1 < M < \infty$, $s_1 = 1$, $s_2 = -1$, and consider

$$\min_{x \in \mathbb{R}} \quad \sum_{i=1,2} \alpha(x + s_i)^2$$

subject to $x \in [-M, M]$

- Agents' objective functions : $f_i(x) = \alpha(x + s_i)^2$, for $i = 1, 2$
- Objective function becomes : $2\alpha x^2 + 2\alpha$. Since $\alpha > 0$ its minimum is achieved at $x^* = 0$

Example (cont'd)

Main distributed proximal minimization updates

- Information mixing for $i = 1, 2$ (under our choice for mixing weights) :

$$z_i(k) = \frac{x_1(k) + x_2(k)}{2}$$

- Local computation for $i = 1, 2$:

$$x_i(k+1) = \arg \min_{x_i \in [-M, M]} \alpha(x_i + s_i)^2 + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$

- Information mixing is the same for all agents : $z_1(k) = z_2(k)$
- Local computation : Constrained quadratic problem \Rightarrow Find unconstrained minimizer and project it on $[-M, M]$
- Unconstrained minimizer :

$$\frac{z_i(k) - s_i 2\alpha c(k)}{2\alpha c(k) + 1}$$

Example (cont'd)

We will show by means of induction that $z_1(k) = z_2(k) = 0$

- Step 1** : For $k = 0$, and since $x_1(0) = -1$ and $x_2(0) = 1$, we have that

$$z_i(0) = \frac{x_1(0) + x_2(0)}{2} = 0, \text{ for } i = 1, 2$$

- Step 2** : Induction hypothesis $z_1(k) = z_2(k) = 0$

- Step 3** : Show that $z_i(k+1) = 0$

$$\begin{aligned} x_i(k+1) &= \begin{cases} \min\left(\frac{-s_i 2\alpha c(k)}{2\alpha c(k)+1}, M\right), & \text{if } \frac{-s_i 2\alpha c(k)}{2\alpha c(k)+1} \geq 0 \\ \max\left(\frac{-s_i 2\alpha c(k)}{2\alpha c(k)+1}, -M\right), & \text{otherwise,} \end{cases} \\ &= -s_i \frac{2\alpha c(k)}{2\alpha c(k)+1}, \end{aligned}$$

where the first equality is due to the induction hypothesis, and the second is due to the fact that $\left|\frac{-s_i 2\alpha c(k)}{2\alpha c(k)+1}\right| < 1$ and $M > 1$, so the argument is never "clipped" to $\pm M$

Example (cont'd)

Main distributed proximal minimization updates

- Information mixing for $i = 1, 2$ (under our choice for mixing weights) :

$$z_i(k) = \frac{x_1(k) + x_2(k)}{2}$$

- Local computation for $i = 1, 2$:

$$\begin{aligned} x_i(k+1) &= \Pi_{[-M, M]} \left[\frac{z_i(k) - s_i 2\alpha c(k)}{2\alpha c(k) + 1} \right] \\ &= \begin{cases} \min\left(\frac{z_i(k) - s_i 2\alpha c(k)}{2\alpha c(k)+1}, M\right), & \text{if } \frac{z_i(k) - s_i 2\alpha c(k)}{2\alpha c(k)+1} \geq 0 \\ \max\left(\frac{z_i(k) - s_i 2\alpha c(k)}{2\alpha c(k)+1}, -M\right), & \text{otherwise,} \end{cases} \end{aligned}$$

- What happens to $z_i(k)$ under our initialization choice ?

Distributed projected gradient algorithm

Relationship with distributed proximal minimization

- Proximal algorithms can be equivalently written as a gradient step

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$
$$\Leftrightarrow x_i(k+1) = \Pi_{X_i}[z_i(k) - c(k)\nabla f_i(x_i(k+1))]$$

- Notice that this is no a recursion but an identity satisfied by $x_i(k+1)$ as this appears on both sides of the last equality
- What happens if we replace in the right-hand side the most updated information available to agent i at iteration k , i.e. $z_i(k)$?

$$x_i(k+1) = \Pi_{X_i}[z_i(k) - c(k)\nabla f_i(z_i(k))]$$

- ... we obtain the distributed projected gradient algorithm !

Summary

Distributed algorithms for decision coupled problems

- Distributed proximal minimization
 - Step-size (proxy term) is now iteration varying
 - Convergence under assumptions on step-size, mixing weights and network connectivity
- Distributed projected gradient
 - Rather than "best response" performs projected gradient step
 - Same convergence assumptions with proximal minimization

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

18 / 21

Hilary Term 2020-21


C20 Distributed Systems

February 9, 2021

19 / 21

True optimization is the revolutionary contribution of modern research to decision processes.

– George Dantzig, November 8, 1914 – May 13, 2005

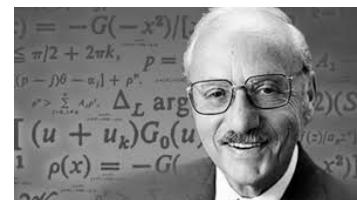

C20 Distributed Systems Appendix

Kostas Margellos

University of Oxford



Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

20 / 21

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

1 / 13

Decentralized & Distributed algorithms

Cost coupled problems

minimize $F(x_1, \dots, x_m)$

subject to

$$x_i \in X_i, \forall i = 1, \dots, m$$

The Jacobi algorithm

Main update steps :

- ① Collect $x(k) = (x_1(k), \dots, x_m(k))$ from central authority

- ② Agents update their local decision in parallel

$$x_i(k+1) = \arg \min_{x_i \in X_i} F(x_1(k), \dots, x_{i-1}(k), x_i, x_{i+1}(k), \dots, x_m(k))$$

Convergence :

- F strongly convex and differentiable
- X_i 's are all convex

The regularized Jacobi algorithm

Main update steps :

- ① Collect $x(k) = (x_1(k), \dots, x_m(k))$ from central authority

- ② Agents update their local decision in parallel

$$x_i(k+1) = \arg \min_{x_i \in X_i} F(x_1(k), \dots, x_{i-1}(k), x_i, x_{i+1}(k), \dots, x_m(k)) + c \|x_i - x_i(k)\|_2^2$$

Convergence :

- F convex and differentiable and c big enough
- X_i 's are all convex

The Gauss-Seidel algorithm

Main update steps (sequential algorithm) :

① Collect $x(k) = (x_1(k+1), \dots, x_{i-1}(k+1), x_i(k), \dots, x_m(k))$

② Agent i updates

$$x_i(k+1) = \arg \min_{x_i \in X_i} F(x_1(k+1), \dots, x_{i-1}(k+1), x_i, x_{i+1}(k), \dots, x_m(k))$$

Convergence :

- F is strongly convex with respect to each individual argument, and differentiable
- X_i 's are all convex

Part I.B : Decentralized algorithms

Decision coupled problems

Decision coupled problems

$$\text{minimize } \sum_i f_i(x)$$

subject to

$$x \in X_i, \forall i = 1, \dots, m$$

The Alternating Direction Method of Multipliers (ADMM)

Main update steps :

① Primal update for z information from central authority

$$z(k+1) = \frac{1}{m} \sum_i x_i(k) - \frac{1}{mc} \sum_i \lambda_i(k)$$

② Primal update for x_i in parallel for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) - \lambda_i(k)^T x_i + \frac{c}{2} \|z(k+1) - x_i\|^2$$

③ Dual update in parallel for all agents

$$\lambda_i(k+1) = \lambda_i(k) + c(z(k+1) - x_i(k+1))$$

- Augmented Lagrangian with one Gauss-Seidel pass of the inner loop

ADMM algorithm (more general form)

Applicable to problems with two groups of variables :

$$\text{minimize } F_1(x) + F_2(z)$$

subject to : $x \in C_1, z \in C_2$

$$Ax = z$$

Main update steps :

$$① x(k+1) = \arg \min_{x \in C_1} F_1(x) + \lambda(k)^T Ax + \frac{c}{2} \|Ax - z(k)\|^2$$

$$② z(k+1) = \arg \min_{z \in C_2} F_2(z) - \lambda(k)^T z + \frac{c}{2} \|Ax(k+1) - z\|^2$$

$$③ \lambda(k+1) = \lambda(k) + c(Ax(k+1) - z(k+1))$$

Convergence :

- All functions and sets are convex, and $A^T A$ is invertible

Part II.A : Distributed algorithms

Decision coupled problems

Decision coupled problems

$$\begin{aligned} & \text{minimize } \sum_i f_i(x) \\ & \text{subject to} \\ & x \in X_i, \forall i = 1, \dots, m \end{aligned}$$

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

10 / 13

Distributed proximal minimization

Main update steps :

- ➊ Averaging step **in parallel** for all agents

$$z_i(k) = \sum_j a_j^i(k) x_j(k)$$

- ➋ Primal update for x_i **in parallel** for all agents

$$x_i(k+1) = \arg \min_{x_i \in X_i} f_i(x_i) + \frac{1}{2c(k)} \|x_i - z_i(k)\|^2$$

Convergence :

- Convexity of all functions and sets + Network connectivity (slide 7)
- Mixing weights sum up to one, forming a doubly stochastic matrix
- Step-size choice : $c(k) = \frac{\alpha}{k+1}$, $\alpha > 0$

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

11 / 13

Distributed projected gradient algorithm

Main update steps :

- ➊ Averaging step **in parallel** for all agents

$$z_i(k) = \sum_j a_j^i(k) x_j(k)$$

- ➋ Primal update for x_i **in parallel** for all agents (projection step)

$$x_i(k+1) = \Pi_{X_i} [z_i(k) - c(k) \nabla f_i(z_i(k))]$$

Thank you for your attention !
Questions ?

Contact at :

kostas.margellos@eng.ox.ac.uk

Convergence :

- Same assumptions with distributed proximal minimization algorithm

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

12 / 13

Hilary Term 2020-21

C20 Distributed Systems

February 9, 2021

13 / 13